


7 RAG Architecture

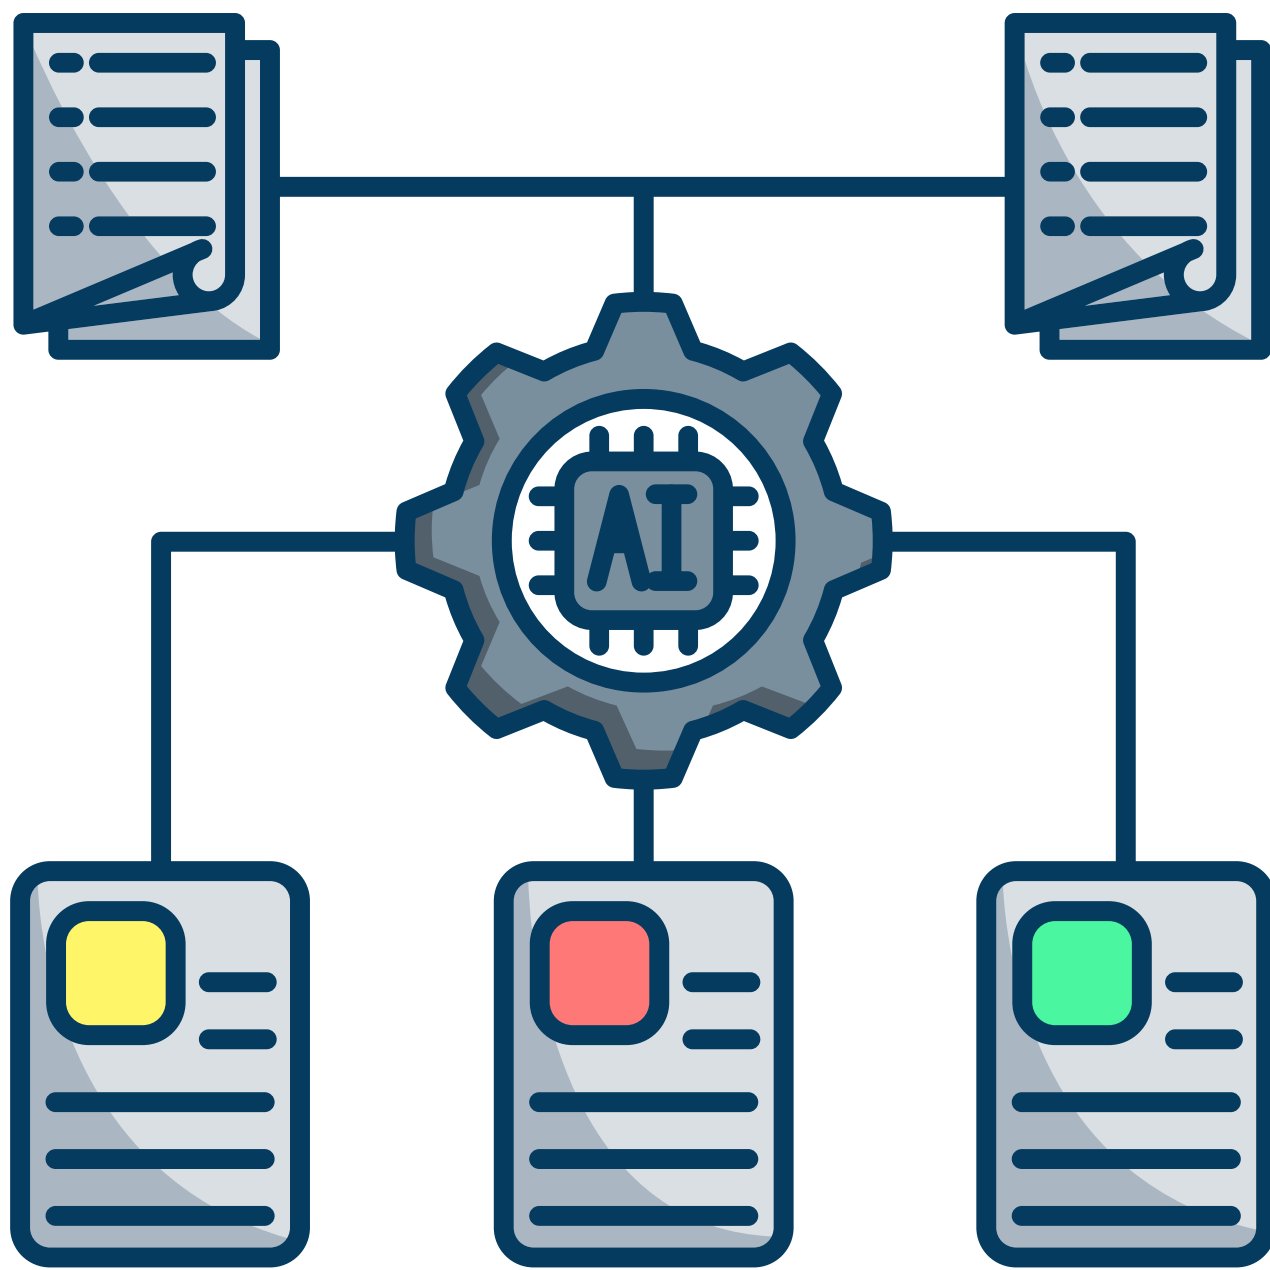

1. Naive RAG

Breaks docs into chunks, retrieves closest ones, then answers.

- Analogy: Googling, clicking the first link, summarizing.
- Use case: FAQs, wikis. Limitation: May still pull irrelevant chunks.



By **SHAILESH SHAKYA**



POWERED BY:
BEGINNERSBLOG.ORG



2. Retrieve-and-Rerank RAG

- Adds a reranker to improve relevance.
- Analogy: Googling, but a friend sorts results for you.
- Use case: Customer support, legal search.
- Limitation: Extra cost/time.

