


1 - instantiate, open, readObject, writeObject, close

2 - instantiate, , getType, getLuggage, getN, getPass, getSeats, getOcc, getIdx, getSituation, getState, getNcollected, getPorterState, getDriverState

3 - instantiate, start, join

4 - instantiate

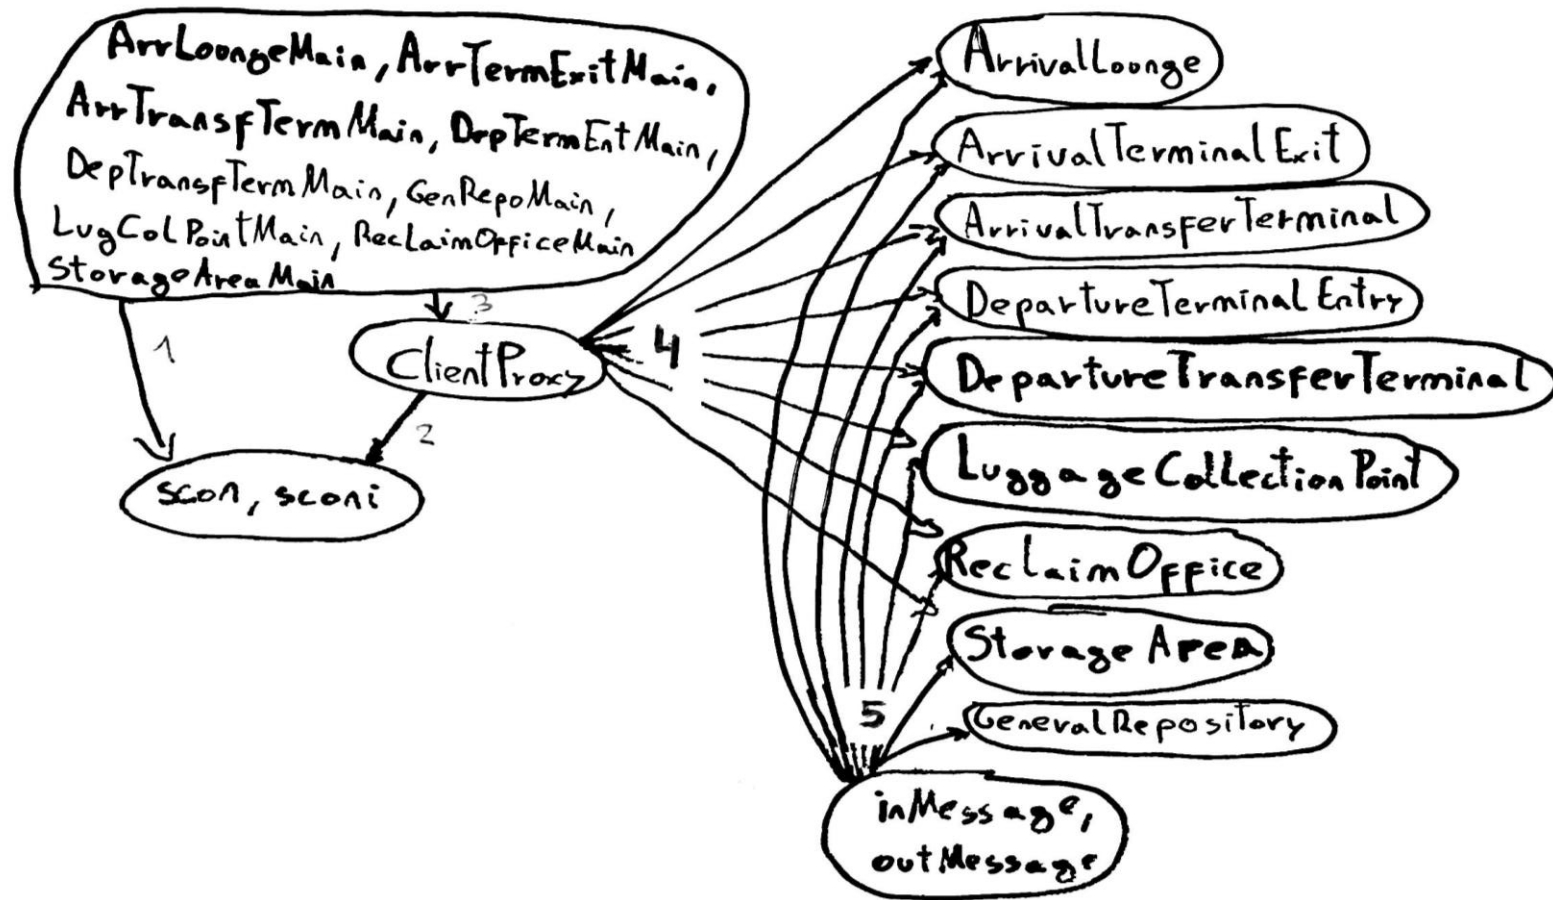

1 - instantiate, start, accept

2 - readObject, writeObject, close

3 - instantiate, start

4 - processAndReply

5 - instantiate, getType, getLuggage, getN, getPass, getSeats, getOcc, getIdx, getSituation, getState, getNcollected, getPorterState, getDriverState