




# VaultSpeed Studio

SCD2 dimension on a HUB with multi-  
active SAT filter

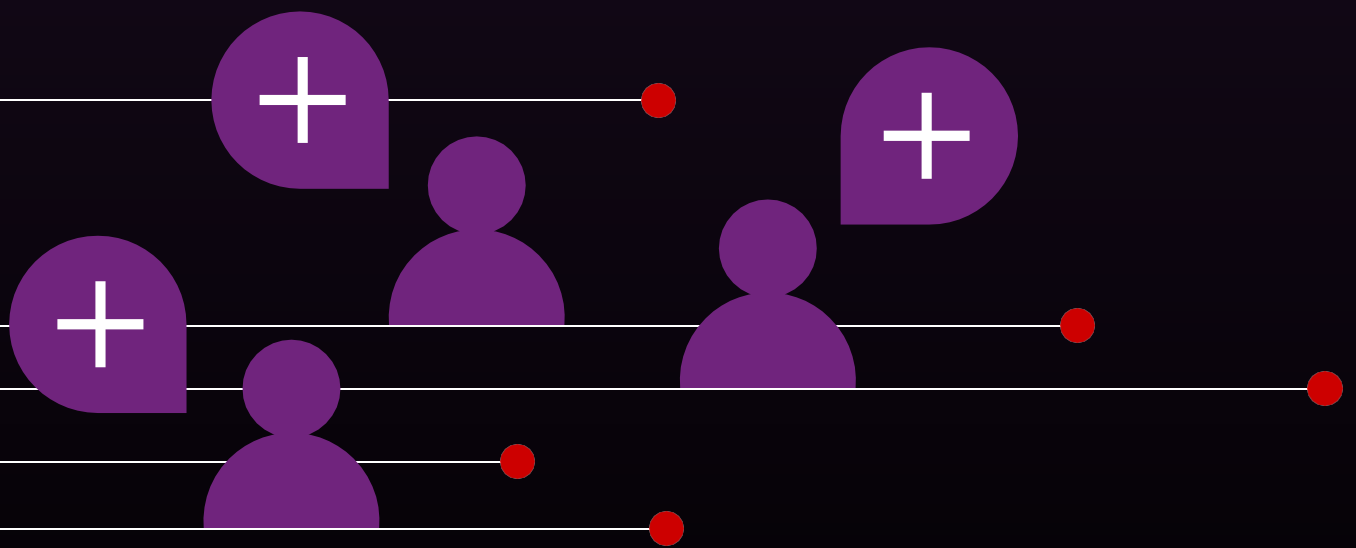

# USE CASE FOR THIS TEMPLATE

---

This document describes how a user can configure a template in the VaultSpeed Studio to generate an SCD Type 2 dimension based on an insert only RDV on a single HUB based on the transaction timestamp. On the HUB is a multi-active SAT with a language on which we need to filter.

In the setup there is the possibility to limit the fields which should show up in the dimension. The generated query will also remove unnecessary records (no changes in the combination of selected fields).

**Before you explore and use this example template, ensure that you understand the example SQL attached to understand what the template does and that it covers your needs.**


This template is designed for:

- DIMENSION creation based on a HUB
- Slowly Changing Type 2 Dimension
- Versions in the dimension will be compressed
- PIT table must exist on the HUB
- Dimension\_hkey will be calculated based on the BK's of the MAIN\_HUB in combination with the date
- A filter must be implemented on a multi-active SAT

# Example

The example that is used in this document is based on the products.

In the Raw Data Vault model this is a HUB\_PRODUCT.

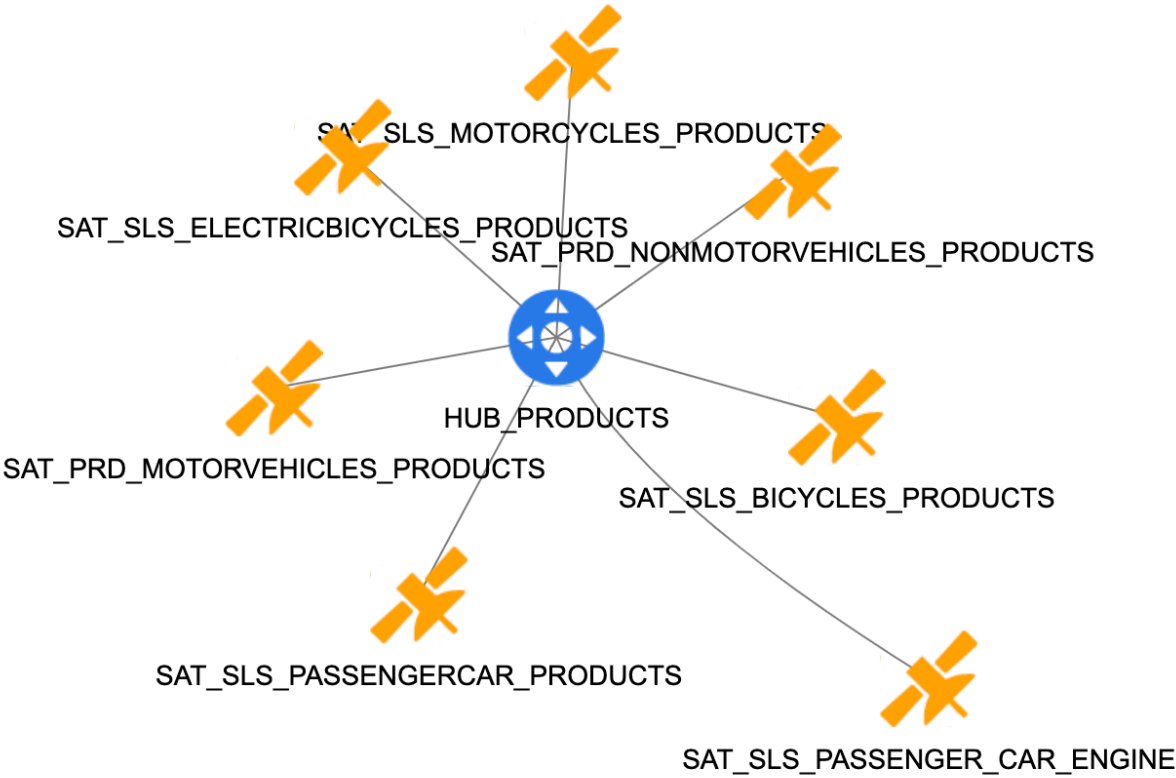

# Components of the implementation



- PIT table on the HUB of choice
- Signature objects
- Assign Signature objects to the correct tables
- Create a Signature attribute type and assign it to the requested fields
- Create the Template
- Create Target Definition
- Fill in the Dependency


## PIT table is created on the HUB

The Dimension is an SCD2-type dimension. For this, we need to have a detailed PIT implementation on the HUB based on the TRANS\_TIMESTAMP

The PIT setup is like the following:

PIT Name	PIT Type ↑	Snapshot Interval	Interval Unit	Timestamp Signature Attribute
DETAIL_TRANS	detail			TRANS_TIMESTAMP

After that, the PIT is applied to the HUBs

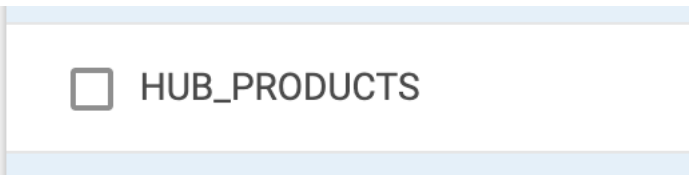

## Create Signature objects

For this template implementation, there is no need for specific signature objects.

## Signature objects are assigned

For this template implementation, there is no need for specific signature objects.

# Create Signature attribute type and flag the usage in the requested fields

Management

Search...

Signature Attribute

DIM\_ATTRIBUTE

Assignment

☒ OR ☐ AND

Signature Attribute

Set

Object Name	Signature Object	Attribute Name	Signature Attribute
Filter...	Filter...	Filter...	Filter...
			DIM_ATTRIBUTE
<input checked="" type="checkbox"/> ^ SAT_VST_CUSTOMERS	Satellites on Hubs		
		PERSON_ID	BUSINESS_SRC_KEY, DIM_ATTRIBUTE
		CUSTOMER_MEMBER_CARD_NO	OTHER_ATTR, DIM_ATTRIBUTE
<input checked="" type="checkbox"/> ^ SAT_SLS_CUSTOMERS_GDPR	Satellites on Hubs		
		FIRSTNAME	OTHER_ATTR, DIM_ATTRIBUTE
		LASTNAME	OTHER_ATTR, DIM_ATTRIBUTE
		BIRTHDATE	OTHER_ATTR, START_DATE, DIM_ATTRIB...
		GENDER	OTHER_ATTR, DIM_ATTRIBUTE
		FIRST_PURCHASE	OTHER_ATTR, START_DATE, DIM_ATTRIB...

## Create the template

Template definition, according to the standard that you want to use. Important element here is the Signature Object naming. That name comes back in the .dvt file that contains the definition of the dimension template. If you have multiple implementations, you might want to go for a different name. But then you will need to adapt the template file accordingly and replace all the <signature object name> references with your chosen name.

In the example, we use SCD2\_DIM\_HUB\_MAS, because this is an SCD Type 2 dimension on a HUB template.

Take the dim\_etl\_template.dvt file and upload it for the ETL template of this view.

# Fill in the Target Definition

The target definition is very specific to the template:

Existing Attributes

New Attributes

Overview

Search...

Signature Object	Signature Attribute
SAT	DIM_ATTRIBUTE
PIT	SNAPSHOT_TIMESTAMP
PIT	SUBSEQUENCE_ATTRIBUTE
HUB	BUSINESS_KEY
HUB	OBJECT_H_KEY
HUB	CONCAT_BUSINESS_KEY

- Add new attributes for the:
- calculated snapshot
  - calculated end snapshot
  - dim\_<entity>\_hkey

Be careful; there are 2 \_ between snapshot and timestamp.

Unique	Name	Prefix	Suffix	Signature Object	Signature Attribute	Data Type
<input checked="" type="checkbox"/>	snapshot_timestamp					TIMESTAMP_TZ
<input checked="" type="checkbox"/>	end_snapshot_timestamp					TIMESTAMP_TZ
<input type="checkbox"/>		DIM		HUB	OBJECT_H_KEY	VARCHAR

## Fill in the Dependency

Define on which HUB table this template must be implemented.

Example:

☐ Object Name (Linked)

☐ HUB\_CUSTOMERS (HUB)