A PROJECT REPORT ON
QUIZ MASTER'S WEB APPLICATION

USING HTML, CSS, PHP AND MYSQL

LITTLE FLOWER DEGREE & PG COLLEGE, UPPAL

DEPARTMENT OF COMPUTER
2023-2024
SUBMITTED BY

- V.AKSHIT (201021467020)
- T. ARUN KUMAR (201021467038)
- K. VAMSHI (201021467039)

UNDER THE GUIDANCE OF

MR. S. VIJAY REDDY

DEPARTMENT OF COMPUTER SCIENCE

SUBMITTED TO:

A. BHAVANI

Coordinator, DEPARTMENT OF COMPUTER SCIENCE

DEPARTMENT OF COMPUTER SCIENCE
LITTLE FLOWER DEGREE & PG COLLEGE
UPPAL, HYDERABAD

CERTIFICATE

This is to certify that the project on QUIZ MASTER'S (ONLINE QUIZ SYSTEM) using HTML, CSS, PHP and MYSQL being submitted by

V.AKSHIT (201021467020)

T. ARUN KUMAR (201021467038)

K. VAMSHI (201021467039)

in partial fulfilment of the requirement for the award of the degree of Bachelor of Science is a bonafied record of the project work done by Department of Science, Little Flower Degree & PG College, Uppal, Hyderabad.

(A. BHAVANI)

INTERNAL EXAMINAR

COORDINATOR, FACULTY OF COMPUTER SCIENCE DEPARTMENT

EXTERNAL EXAMINAR

S. VIJAY REDDY

HEAD OF THE DEPARTMENT

DECLARATION

We undersign, hereby declare that the project **"QUIZ MASTERS"** using HTML, CSS, PHP and MYSQL submitted in partial fulfilment for the award of Bachelor of Computer Science of Osmania University is a bonafide record of work done by us under the guidance of VIJAY REDD, Department of Computer Science, Little Flower Degree & PG College, Uppal, Hyderabad. This Project has previously formalised the basis for the award of any degree, diploma or similar title by any University.

DATE: 11/05/2024

V.AKSHIT (201021467020)

T. ARUN KUMAR (201021467038)

K. VAMSHI (201021467039)

ACKNOWLEDGEMENT

Through this acknowledgement we express our sincere gratitude towards all those people who helped us in this project, which has been a learning experience.

This page would not be enough to extend our gratitude towards our project guide Mr. Vijay for his efforts in coordination with our work and guiding in the right direction. A heartfelt regard to our institution management principal Mrs. Jayanthi Ma'am for giving us the essential hand in concluding this project.

It would be injustice to proceed without acknowledging the vital support I received from my beloved classmates and friends. I also use this page to offer my sincere love to my parents and all others who had been there to help this project.

ABSTRACT

Quiz Master is a online platform designed to revolutionize the way students learn and assess their knowledge. Tailored specifically for the academic community, this innovative website offers a comprehensive collection of quizzes spanning a wide range of subjects and educational levels.

Quiz Master, students can embark on an engaging and interactive learning journey. The platform& user-friendly interface allows them to seamlessly navigate through a vast library of meticulously crafted quizzes, each one carefully curated by subject matter experts. From mathematics and sciences to literature and history, Quiz Master covers a diverse array of disciplines, ensuring a rich and well-rounded educational experience.

Quiz Master encourages critical thinking and problem-solving skills. The platform employs various question formats, including multiple-choice, true/false, fill-in-the-blanks, and short answer questions, challenging students to apply their knowledge in practical scenarios.

Quiz Master incorporates multimedia elements such as images, videos, and diagrams, one of the standout features of Quiz Master is its adaptive learning algorithm.

As students' progress through the quizzes, the platform intelligently analyzes their performance and adjusts the difficulty level accordingly. This personalized approach ensures that each student receives a tailored learning experience that matches their abilities and promotes continuous growth.

Additionally, Quiz Master offers a comprehensive reporting system, allowing students to track their progress, identify strengths and weaknesses, and monitor their overall performance over time. This invaluable feedback mechanism empowers students to take control of their learning journey and make informed decisions about their educational pursuits.

Whether preparing for exams, reinforcing classroom concepts, or simply exploring new areas of interest, Quiz Master is poised to become the go-to online quiz platform for students worldwide. With its innovative features, user-friendly interface, and commitment to academic excellence, Quiz Master is set to revolutionize the way students learn, engage, and excel.

INTRODUCTION

In today's rapidly evolving educational landscape, the integration of technology has become paramount in enhancing the learning experience for students of all ages. With the advent of online platforms, the traditional boundaries of the classroom have been transcended, paving the way for innovative and engaging learning tools. One such groundbreaking platform is "Quiz Master," a comprehensive online quiz website designed to revolutionize the way students acquire, reinforce, and assess their knowledge.

Learning is a multifaceted process that extends far beyond the mere acquisition of facts and figures. It involves critical thinking, problem-solving, and the ability to apply knowledge in practical scenarios. Recognizing this, Quiz Master has been meticulously crafted to foster an interactive and immersive learning environment that caters to diverse learning styles and preferences.

Through the seamless integration of multimedia elements such as images, videos, and diagrams, Quiz Master creates a multisensory experience that engages students on multiple levels. This approach not only enhances understanding and retention but also cultivates a genuine enthusiasm for learning, transforming the experience from a mere academic exercise into an exciting intellectual adventure.

One of the most remarkable features of Quiz Master is its adaptive learning algorithm. This cutting-edge technology analyzes a student's performance in real-time, adjusting the difficulty level and content accordingly. By tailoring the learning experience to individual strengths and weaknesses, Quiz Master ensures that each student receives a personalized educational journey that challenges them at the appropriate level, fostering continuous growth and development.

Moreover, Quiz Master's adaptive learning capabilities extend beyond mere difficulty adjustment. The platform intelligently identifies areas where a student may be struggling and provides targeted resources and supplementary materials to reinforce those concepts. This proactive approach empowers students to take control of their learning, addressing knowledge gaps before they become insurmountable obstacles.

Quiz Master's extensive library of quizzes encompasses a vast array of subjects and educational levels, ensuring a rich and well-rounded learning

experience. From foundational concepts in mathematics and sciences to the nuances of literature and history, the platform's content is meticulously curated by subject matter experts, guaranteeing accuracy and academic rigor.

This comprehensive subject coverage not only caters to students' core academic needs but also encourages exploration and intellectual curiosity. By exposing learners to a diverse range of disciplines, Quiz Master nurtures a holistic understanding of the interconnectedness of knowledge, preparing students for the multidisciplinary challenges they may encounter in their future academic and professional pursuits.

Recognizing the power of gamification in fostering motivation and engagement, Quiz Master incorporates elements of friendly competition and achievement recognition. Students can participate in quiz challenges, earning points and badges for their accomplishments. This gamified approach taps into the inherent human desire for achievement and progress, transforming the learning process into an exciting and rewarding experience.

Furthermore, Quiz Master fosters a sense of community by enabling students to connect with peers, share their achievements, and engage in healthy academic rivalries. This social aspect not only enhances motivation but also cultivates a collaborative learning environment where students can support and learn from one another.

FRONT END:

HTML, CSS, JavaScript HTML: HTML is used to create web document.
CSS: (Cascading Style Sheets) Create attractive layout.
JavaScript: It is a programming language commonly used with web browsers.

BACK END:

PHP, MYSQL PHP: Hypertext pre-processor (PHP) isa technology that allows software developers to create dynamically generated web pages, in HTML, XML, or other document types, as per client request. PHP is open source. MYSQL: MySQL is a database, widely used for accessing querying, updating and managing data in databases.

Link of our website:
Localhost/online_quiz/index.php

PHP CODE

HOME PAGE :

```
<?php
session_start();
if(isset($_SESSION['username']) && (!isset($_SESSION['key']))){
  header('location:account.php?q=1');
}
else if(isset($_SESSION['username']) && isset($_SESSION['key']) &&
$_SESSION['key'] ==
'54585c506829293a2d4c3b68543b316e2e7a2d277858545a36362e5f
39'){
  header('location:dash.php?q=0');
}
else{}
?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<link rel="icon" href="favicon.ico" type="image/icon" sizes="16x16">
<meta http-equiv="Content-Type" content="text/html; charset=iso-
8859-1" />
<meta name="viewport" content="width=device-width, initial-
scale=1">
```

```
<title> ONLINE QUIZ  </title>

 <link rel="stylesheet" href="css/main.css">
 <link  rel="stylesheet" href="css/font.css">
 <script src="js/jquery.js" type="text/javascript"></script>
<link  rel="stylesheet" href="css/bootstrap.min.css"/>
 <link  rel="stylesheet" href="css/bootstrap-theme.min.css"/>
  <script src="js/bootstrap.min.js"  type="text/javascript"></script>
  <link
href='http://fonts.googleapis.com/css?family=Roboto:400,700,300'
rel='stylesheet' type='text/css'>
<?php
if (@$_GET['w']) {
   echo '<script>alert("' . @$_GET['w'] . '");</script>';
}
?>
<script>
function validateForm() {

  var name = document.forms["form"]["name"].value;
  if (name == null || name == "") {
    document.getElementById("errormsg").innerHTML="Name must
be filled out.";
    return false;
  }
  var rollno = document.forms["form"]["rollno"].value;
  if (rollno.length != 12) {
    document.getElementById("errormsg").innerHTML="Roll number
must be 12 digits long.";
    return false;
  }
  var phno = document.forms["form"]["phno"].value;
  if (phno.length != 10) {
```

```
    document.getElementById("errormsg").innerHTML="Mobile
number must be 10 digits long.";
    return false;
  }
  var password = document.forms["form"]["password"].value;
  if(password == null || password == "" || password.length < 4 ||
password.length > 15){
    document.getElementById("errormsg").innerHTML="Password
must be between 4 and 15 characters long.";
    return false;
  }
  var cpassword = document.forms["form"]["cpassword"].value;
  if (password != cpassword) {
    document.getElementById("errormsg").innerHTML="Passwords
must match.";
    return false;
  }
  return true;
}

  var y = document.forms["form"]["name"].value;
  if (y == null || y == "") {
    document.getElementById("errormsg").innerHTML="Name must
be filled out.";
    return false;
  }
  var br = document.forms["form"]["branch"].value;
  if (br == "") {
    document.getElementById("errormsg").innerHTML="Please select
your branch";
    return false;
  }
  if (m.length < 10) {
```

```
    document.getElementById("errormsg").innerHTML="Passwordr
must be 12 digits long";
    return false;
  }
  var g = document.forms["form"]["gender"].value;
  if (g==="") {
    document.getElementById("errormsg").innerHTML="Please select
your gender";
    return false;
  }
  var x = document.forms["form"]["username"].value;
  if (x.length == 0) {
    document.getElementById("errormsg").innerHTML="Please enter
a valid username";
    return false;
  }
  if (x.length < 4) {
    document.getElementById("errormsg").innerHTML="Username
must be at least 4 characters long";
    return false;
  }
  var m = document.forms["form"]["phno"].value;
  if (m.length != 10) {
    document.getElementById("errormsg").innerHTML="Phone
number must be 10 digits long";
    return false;
  }
  var a = document.forms["form"]["password"].value;
  if(a == null || a == ""){
    document.getElementById("errormsg").innerHTML="Password
must be filled out";
    return false;
  }
```

```
  if(a.length<4 || a.length>15){
    document.getElementById("errormsg").innerHTML="Passwords
must be 4 to 15 characters long.";
    return false;
  }
  var b = document.forms["form"]["cpassword"].value;
  if (a!=b){
    document.getElementById("errormsg").innerHTML="Passwords
must match.";
    return false;
  }
}
</script>
</head>
<style>
  .navbar-custom .navbar-nav > li > a {
    padding-top: 20px;
    padding-bottom: 20px;
    font-size: 18px;
    border-radius: 0px;
    margin-top: 0px;
    margin-bottom: 0px;
    padding-left: 30px;
    padding-right: 30px;
}

.login {
    font-size: 15px;
    padding-left: 40px;
    padding-right: 40px;
}

.feedback {
```

```
    font-size: 20px;
    padding-left: -50px;
    padding-right: 40px;

}
.login {
    font-size: 20px;
    padding-left: 40px;
    padding-right: 40px;
}

.btn-primary {
    padding-top: 10px;
    padding-bottom: 10px;
    font-size: 15px;
    margin-top: 0px;
    margin-bottom: 0px;
    padding-left: 50px;
    padding-right: 50px;
}

.navbar-right {
    margin-right: -500px;
}
.navbar-top {
  margin-top: -40px;
}

</style>
<body>
<div class="header">
<div class="row">
<div class="col-lg-6">
```

```
<span class="logo"><font face="arial black" color="yellow" ><i>QUIZ
MASTERS</i></font></span></div>

<div class= "login">
<div class="col-md-3 box">
<a href="#" data-toggle="modal" data-target="#login"
style="color:lightyellow"><b>Admin Login</a></div></div>

<div class= "login">
<div class="col-md-3 box">
<a href="about.html"  style="color:lightyellow;"
onmouseover="this.style('color:yellow')" target="new">About
us</a></div></div>

<div class="col-md-3 box">
<div class="feedback">

<a href="feedback.php" style="color:lightyellow;"
onmouseover="this.style('color:yellow')"
target="new">Feedback</a> </div>

<div class="col-md-2 col-md-offset-4">
  <div class="title1">
  <div class="navbar-right">
  <div class="navbar-top">
<a href="#" button type ="button" class="btn btn-primary logb "
data-toggle="modal" data-target="#myModal"> <span
class="glyphicon glyphicon-log-in" aria-
hidden="true"></span> <span class="title1"><big> <b>USER
LOGIN</b> </big> </span></button></a></div></div></div></div>
<div class="modal fade" id="myModal">
  <div class="modal-dialog">
    <div class="modal-content title1">
```

```
    <div class="modal-header">
      <button type="button" class="close" data-dismiss="modal" aria-
label="Close"><span aria-hidden="true">&times;</span></button>
      <h4 class="modal-title title1"><span style="color:darkblue;font-
size:12px;font-weight: bold">Login to your Account</span></h4>
    </div>
    <div class="modal-body">
      <form class="form-horizontal" action="login.php?q=index.php"
method="POST">
<fieldset>
<div class="form-group">
  <label class="col-md-3 control-label" for="username"></label>
  <div class="col-md-6">
  <input id="username" name="username" placeholder="E-mail"
class="form-control input-md" type="username">

  </div>
</div>
<div class="form-group">
  <label class="col-md-3 control-label" for="password"></label>
  <div class="col-md-6">
    <input id="password" name="password" placeholder="Enter your
Password" class="form-control input-md" type="password">

  </div>
</div>

    </div>
    <div class="modal-footer">
      <button type="button" class="btn btn-default" data-
dismiss="modal">Close</button>
      <button type="submit" class="btn btn-primary">Log in</button>
   </fieldset>
```

```
</form>
     </div>
   </div>
  </div>
</div>
</div>
</div>

<div class="bg1">
<div class="row">

<div class="col-md-7"></div>
<div class="col-md-4 panel">
  <form class="form-horizontal" name="form"
action="sign.php?q=account.php" onSubmit="return validateForm()"
method="POST">
<fieldset>
<div class="form-group">
  <label class="col-md-12 control-label" for="name"></label>
  <div class="col-md-12">
  <h3 align="center"><b>Registration Form</b></h3>

  </div>
</div>
<strong>
<div class="form-group">
  <label class="col-md-12 control-label" for="name"></label>
  <div class="col-md-12">
  <div id="errormsg" style="font-size:16px;font-family:calibri;font-
weight:normal;color:red"><?php
if (@$_GET['q7']) {
   echo '<p style="color:red;font-size:15px;">' . @$_GET['q7'];
}
```

```
?></div>

  </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="name"></label>
  <div class="col-md-12">
  <input id="name" name="name" placeholder="Enter your name"
class="form-control input-md" required  type="text" value="<?php
if (isset($_GET['name']))
{
echo $_GET['name'];
}?>">

  </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="rollno" ></label>
  <div class="col-md-12">
  <input id="rollno" name="rollno" placeholder="Enter your Roll no "
class="form-control input-md" maxlength="12" required type="text"
value="<?php
if (isset($_GET['rollno']))
{
echo $_GET['rollno'];
}?>">

  </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="gender"></label>
  <div class="col-md-12">
```

```
   <select id="gender" name="gender" placeholder="Select your
gender" class="form-control input-md" required >
  <option value="" <?php
if (!isset($_GET['gender']))
   echo "selected";
?>>Select Gender</option>
 <option value="M" <?php
 if (isset($_GET['gender']))
 {
if ($_GET['gender'] == "M")
   echo "selected";
 }
?>>Male</option>
 <option value="F" <?php
 if (isset($_GET['gender']))
 {
if ($_GET['gender'] == "F")
   echo "selected";
 }
?>>Female</option> </select>
 </div>
</div>
<div class="form-group">
 <label class="col-md-12 control-label" for="branch"></label>
 <div class="col-md-12">
   <select id="branch" name="branch" placeholder="Select your
branch" class="form-control input-md"   required>
  <option value="" <?php
if (!isset($_GET['branch']))
   echo "selected";
?>>Select Branch</option>
 <option value="B.COM" <?php
 if (isset($_GET['branch']))
```

```
  {
if ($_GET['branch'] == "B.COM")
    echo "selected";
  }
  ?>>B.COM</option>
  <option value="BSC.MECS" <?php
  if (isset($_GET['branch']))
  {
if ($_GET['branch'] == "BSC.MECS")
    echo "selected";
  }
?>>BSC.MECS</option>
  <option value="BSC.MSCS" <?php
  if (isset($_GET['branch']))
  {
if ($_GET['branch'] == "BSC.MSCS")
    echo "selected";
  }
?>>BSC.MSCS</option>
  <option value="BZC" <?php
  if (isset($_GET['branch']))
  {
  if ($_GET['branch'] == "BZC")
    echo "selected";
  }
?>>BZC</option>
  <option value="BSC.MPC" <?php
  if (isset($_GET['branch']))
  {
if ($_GET['branch'] == "BSC.MPC")
    echo "selected";
  }
?>>BSC.MPC</option>
```

```
  <option value="BSC.MPCS" <?php
  if (isset($_GET['branch']))
  {
if ($_GET['branch'] == "BSC.MPCS")
    echo "selected";
  }
?>>BSC.MPCS</option>
  <option value="BTMC" <?php
  if (isset($_GET['branch']))
  {
if ($_GET['branch'] == "BTMC")
    echo "selected";
  }
?>>BTMC</option>
  <option value="BA" <?php
  if (isset($_GET['branch']))
  {
if ($_GET['branch'] == "BA")
    echo "selected";
  }
?>>BA</option>
  <option value="BBA" <?php
  if (isset($_GET['branch']))
  {
if ($_GET['branch'] == "BBA")
    echo "selected";
  }
?>>BBA</option> </select>
  </input>
  </div>
</div>
<div class="form-group">
```

```
  <label class="col-md-12 control-label title1"
for="username"></label>
  <div class="col-md-12">
    <input type=email id="username" name="username"
placeholder="Enter Your E-mail id " class="form-control input-
md"  required type="username" value="<?php
if (isset($_GET['username']))
{
echo $_GET['username'];
};
?>" style="<?php
if (isset($_GET['q7']))
    echo "border-color:red";
?>">

  </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="phno"></label>
  <div class="col-md-12">
  <input type="text" id="phno" name="phno" placeholder="Enter
your mobile number"  maxlength="10" class="form-control input-
md"   required  value="<?php
if (isset($_GET['phno']))
{
echo $_GET['phno'];
}
?>">

  </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="password"></label>
```

```
  <div class="col-md-12">
    <input type="password" id="password" name="password"
placeholder="Enter your password"  class="form-control input-md"
required >

  </div>
</div>

<div class="form-group">
  <label class="col-md-12control-label" for="cpassword"></label>
  <div class="col-md-12">
    <input type="password" id="cpassword" name="cpassword"
placeholder="Confirm Password" class="form-control input-md"
required >

  </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for=""></label>
  <div class="col-md-12" style="text-align: center">
    <input  type="submit" value=" Register Now " class="btn btn-
primary" required style="text-align:center" />
  </div>
</div>

</fieldset>
</form>
</div>
</div></div>
</div>

   <div class="modal fade" id="login">
  <div class="modal-dialog">
```

```
   <div class="modal-content">
     <div class="modal-header">
       <button type="button" class="close" data-
dismiss="modal"><span aria-hidden="true">&times;</span><span
class="sr-only">Close</span></button>
       <h4 class="modal-title"><span style="color:darkblue;font-
size:12px;font-weight: bold">Login to Server</span></h4>
     </div>
     <div class="modal-body title1">
<div class="row">
<div class="col-md-3"></div>
<div class="col-md-6">
<form role="form" method="post"
action="admin.php?q=index.php">
<div class="form-group">
<input type="text" name="uname" maxlength="20"  placeholder="E-
mail id" class="form-control"/>
</div>
<div class="form-group">
<input type="password" name="password" maxlength="30"
placeholder="Password" class="form-control"/>
</div>
<div class="form-group" align="center">
<input type="submit" name="login" value="Login" class="btn btn-
primary" />
</div>
</form>
</div><div class="col-md-3"></div></div>
     </div>
   </div>
  </div>
</div>
</body></html>
```

REGISTRATION FORM

```
<?php
include_once 'dbConnection.php';
ob_start();
$name     = $_POST['name'];
$name     = ucwords(strtolower($name));
$gender   = $_POST['gender'];
$username = $_POST['username'];
$phno     = $_POST['phno'];
$password = $_POST['password'];
$branch   = $_POST['branch'];
$rollno   = $_POST['rollno'];
$name     = stripslashes($name);
$name     = addslashes($name);
$name     = ucwords(strtolower($name));
$gender   = stripslashes($gender);
$gender   = addslashes($gender);
$username = stripslashes($username);
$username = addslashes($username);
$phno     = stripslashes($phno);
$phno     = addslashes($phno);
$password = stripslashes($password);
$password = addslashes($password);
$password = md5($password);

$q3 = mysqli_query($con, "INSERT INTO user VALUES  (NULL,'$name',
'$rollno','$branch','$gender' ,'$username' ,'$phno', '$password')");
if ($q3) {
   session_start();
   $_SESSION["username"] = $username;
   $_SESSION["name"]     = $name;

   header("location:account.php?q=1");
} else {
```

```
   header("location:index.php?q7=Username already exists. Please choose
another&name=$name&username=$username&gender=$gender&phno=$phn
o&branch=$branch&rollno=$rollno");
}
ob_end_flush();
?>
```

➢ USER LOGIN FORM:

```
<?php
session_start();
if (isset($_SESSION["username"])) {
   session_destroy();
}
include_once 'dbConnection.php';
$ref      = @$_GET['q'];
$username = $_POST['username'];
$password = $_POST['password'];
$username = stripslashes($username);
$username = addslashes($username);
$password = stripslashes($password);
$password = addslashes($password);
$password = md5($password);
$result = mysqli_query($con, "SELECT name FROM user WHERE username =
'$username' and password = '$password'") or die('Error');
$count = mysqli_num_rows($result);
if ($count == 1) {
   while ($row = mysqli_fetch_array($result)) {
      $name = $row['name'];
   }
   $_SESSION["name"]     = $name;
   $_SESSION["username"] = $username;
   header("location:account.php?q=1");
} else
   header("location:$ref?w=Wrong Username or Password");

?>
```

➢ USER PAGE CODE:

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<link rel="icon" href="favicon.ico" type="image/icon" sizes="16x16">
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
<meta name="viewport" content="width=device-width, initial-scale=1">

<title>QUIZ MASTERS</title>
<link  rel="stylesheet" href="css/bootstrap.min.css"/>
 <link  rel="stylesheet" href="css/bootstrap-theme.min.css"/>
 <link rel="stylesheet" href="css/main.css">
 <link  rel="stylesheet" href="css/font.css">
 <script src="js/jquery.js" type="text/javascript"></script>


  <script src="js/bootstrap.min.js"  type="text/javascript"></script>
<link href='http://fonts.googleapis.com/css?family=Roboto:400,700,300'
rel='stylesheet' type='text/css'>
<?php
if (@$_GET['w']) {
   echo '<script>alert("' . @$_GET['w'] . '");</script>';
}
?>

</head>
<?php
include_once 'dbConnection.php';
?>
<style>
.pull-right top title1 {
   float: right;
   padding-left: 30px;
  }
</style>
```

```
<body>
<div class="header">
<div class="row">
<div class="col-lg-6">
<span class="logo"><font color="yellow"   size=10><i>QUIZ
MASTERS</i></font></span></div>
<div class="col-md-4 col-md-offset-2">
 <?php
include_once 'dbConnection.php';
session_start();
if (!(isset($_SESSION['username']))) {
   header("location:index.php");
} else {
   $name     = $_SESSION['name'];
   $username = $_SESSION['username'];
    include_once 'dbConnection.php';
   echo '<span class="pull-right top title1" ><span style="color:white;float:
right; margin-right: 180px;"><font size=7><span class="glyphicon glyphicon-
user" aria-hidden="true"></span>    Hello,</span>
<span class="log log1" style="color:lightyellow;float: right; margin-right:-
590px;"> <font size=6>' . $name . '  |  <a
href="logout.php?q=account.php" style="color:lightyellow;"><span
class="glyphicon glyphicon-log-out" aria-
hidden="true"></span> Logout</button></a></span>';
}
?>
</div>
</div></div>
<div class="bg">
<nav class="navbar navbar-default title1">
  <div class="container-fluid">
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-
toggle="collapse" data-target="#bs-example-navbar-collapse-1" aria-
expanded="false">
        <span class="sr-only">Toggle navigation</span>
```

```
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>
      <a class="navbar-brand"
href="#"><b>         
           
     </b></a>
    </div>
    <div class="collapse navbar-collapse" id="bs-example-navbar-collapse-
1"><font size=5>
      <ul class="nav navbar-nav">
        <li <?php
if (@$_GET['q'] == 1)
    echo 'class="active"';
?> ><a href="account.php?q=1"><span class="glyphicon glyphicon-home" aria-
hidden="true"></span><b> Home</b><span class="sr-
only">(current)</span></a></li>
        <li <?php
if (@$_GET['q'] == 2)
    echo 'class="active"';
?>><a href="account.php?q=2"><span class="glyphicon glyphicon-list-alt" aria-
hidden="true"></span><b> My History</b></a></li>
    <li <?php
if (@$_GET['q'] == 3)
    echo 'class="active"';
?>><a href="account.php?q=3"><span class="glyphicon glyphicon-stats" aria-
hidden="true"></span><b> Leaderboard</b></a></li></ul>

      </div>
  </div>
</nav>
<div class="container">
<div class="row">
<div class="col-md-12">
<?php
if (@$_GET['q'] == 1) {
```

```
    $result = mysqli_query($con, "SELECT * FROM quiz WHERE status =
'enabled' ORDER BY date DESC") or die('Error');
   echo '<div class="panel"><table class="table table-striped
title1"  style="vertical-align:middle">
<tr><td style="vertical-align:middle"><b>S.N.</b></td><td style="vertical-
align:middle"><b>Name</b></td><td style="vertical-align:middle"><b>Total
question</b></td><td style="vertical-align:middle"><b>Correct
Answer</b></td><td style="vertical-align:middle"><b>Wrong
Answer</b></td><td style="vertical-align:middle"><b>Total
Marks</b></td><td style="vertical-align:middle"><b>Time limit</b></td><td
style="vertical-align:middle"><b>Action</b></td></tr>';
   $c = 1;
   while ($row = mysqli_fetch_array($result)) {
      $title   = $row['title'];
      $total   = $row['total'];
      $correct = $row['correct'];
      $wrong   = $row['wrong'];
      $time    = $row['time'];
      $eid     = $row['eid'];
      $q12 = mysqli_query($con, "SELECT score FROM history WHERE eid='$eid'
AND username='$username'") or die('Error98');
      $rowcount = mysqli_num_rows($q12);
      if ($rowcount == 0) {
         echo '<tr><td style="vertical-align:middle">' . $c++ . '</td><td
style="vertical-align:middle">' . $title . '</td><td style="vertical-align:middle">'
. $total . '</td><td style="vertical-align:middle">+' . $correct . '</td><td
style="vertical-align:middle">-' . $wrong . '</td><td style="vertical-
align:middle">' . $correct * $total . '</td><td style="vertical-align:middle">' .
$time . ' min</td>
  <td style="vertical-align:middle"><b><a
href="account.php?q=quiz&step=2&eid=' . $eid . '&n=1&t=' . $total .
'&start=start" class="btn" style="color:#FFFFFF;background:darkgreen;font-
size:18px;padding:7px;padding-left:10px;padding-right:15px"><span
class="glyphicon glyphicon-new-window" aria-
hidden="true"></span> <span><b>Start</b></span></a></b></td></tr>
';
      } else {
```

```
        $q = mysqli_query($con, "SELECT * FROM history WHERE
username='$_SESSION[username]' AND eid='$eid' ") or die('Error197');
        while ($row = mysqli_fetch_array($q)) {
            $timec  = $row['timestamp'];
            $status = $row['status'];
        }
        $q = mysqli_query($con, "SELECT * FROM quiz WHERE eid='$eid' ") or
die('Error197');
        while ($row = mysqli_fetch_array($q)) {
            $ttimec  = $row['time'];
            $qstatus = $row['status'];
        }
        $remaining = (($ttimec * 60) - ((time() - $timec)));
        if ($remaining > 0 && $qstatus == "enabled" && $status == "ongoing") {
            echo '<tr style="color:darkgreen"><td style="vertical-align:middle">' .
$c++ . '</td><td style="vertical-align:middle">' . $title . ' <span
title="This quiz is already solve by you" class="glyphicon glyphicon-ok" aria-
hidden="true"></span></td><td style="vertical-align:middle">' . $total .
'</td><td style="vertical-align:middle">+' . $correct . '</td><td style="vertical-
align:middle">-' . $wrong . '</td><td style="vertical-align:middle">' . $correct *
$total . '</td><td style="vertical-align:middle">' . $time . ' min</td>
  <td style="vertical-align:middle"><b><a
href="account.php?q=quiz&step=2&eid=' . $eid . '&n=1&t=' . $total .
'&start=start" class="btn"
style="margin:0px;background:darkorange;color:white"> <span
class="title1"><b>Continue</b></span></a></b></td></tr>';
        } else {
            echo '<tr style="color:darkgreen"><td style="vertical-align:middle">' .
$c++ . '</td><td style="vertical-align:middle">' . $title . ' <span
title="This quiz is already solve by you" class="glyphicon glyphicon-ok" aria-
hidden="true"></span></td><td style="vertical-align:middle">' . $total .
'</td><td style="vertical-align:middle">+' . $correct . '</td><td style="vertical-
align:middle">-' . $wrong . '</td><td style="vertical-align:middle">' . $correct *
$total . '</td><td style="vertical-align:middle">' . $time . ' min</td>
  <td style="vertical-align:middle"><b><a href="account.php?q=result&eid=' .
$eid . '" class="btn"
```

```
style="margin:0px;background:darkred;color:white"> <span
class="title1"><b>View Result</b></span></a></b></td></tr>';
            }
        }
    }
    $c = 0;
    echo '</table></div><div class="panel" style="padding-top:1px;padding-
left:15%;padding-right:15%;word-wrap:break-word"><h3 align="center"
style="font-family:times new roman">:: General Instructions ::</h3><br /><ul
type="circle"><font style="font-size:20px;font-family:times new roman">';
    $file = fopen("instructions.txt", "r");
    while (!feof($file)) {
        echo '<li>';
        $string = fgets($file);
        $num    = strlen($string) - 1;
        $c      = str_split($string);
        for ($i = 0; $i < $num; $i++) {
            $last = $c[$i];
            if ($c[$i] == ' ' && $last == ' ') {
                echo ' ';
            } else {
                echo $c[$i];
            }
        }
        echo "</li><br />";
    }

    fclose($file);
    echo '</font></ul></div>';

}
?>
<?php
if (@$_GET['q'] == 'quiz' && @$_GET['step'] == 2 &&
isset($_SESSION['6e447159425d2d']) && $_SESSION['6e447159425d2d'] ==
"6e447159425d2d" && isset($_GET['endquiz'])== 'end') {
    unset($_SESSION['6e447159425d2d']);
```

```
   $q = mysqli_query($con, "UPDATE history SET status='finished' WHERE
username='$_SESSION[username]' AND eid='$_GET[eid]' ") or die('Error197');
      $q = mysqli_query($con, "SELECT * FROM history WHERE eid='$_GET[eid]'
AND username='$_SESSION[username]'") or die('Error156');
            while ($row = mysqli_fetch_array($q)) {
               $s = $row['score'];
               $scorestatus = $row['score_updated'];
            }
             if($scorestatus=="false"){
               $q = mysqli_query($con, "UPDATE history SET score_updated='true'
WHERE username='$_SESSION[username]' AND eid='$_GET[eid]' ") or
die('Error197');
               $q = mysqli_query($con, "SELECT * FROM rank WHERE
username='$username'") or die('Error161');
               $rowcount = mysqli_num_rows($q);
               if ($rowcount == 0) {
                  $q2 = mysqli_query($con, "INSERT INTO rank
VALUES(NULL,'$username','$s',NOW())") or die('Error165');
               } else {
                  while ($row = mysqli_fetch_array($q)) {
                     $sun = $row['score'];
                  }

                  $sun = $s + $sun;
                  $q = mysqli_query($con, "UPDATE `rank` SET `score`=$sun
,time=NOW() WHERE username= '$username'") or die('Error174');
               }
            }
         header('location:account.php?q=result&eid=' . $_GET['eid']);

}

if (@$_GET['q'] == 'quiz' && @$_GET['step'] == 2 && isset($_GET['start']) &&
$_GET['start'] == "start" && (!isset($_SESSION['6e447159425d2d']))) {
   $q = mysqli_query($con, "SELECT * FROM history WHERE
username='$username' AND eid='$_GET[eid]' ") or die('Error197');
```

```
    if (mysqli_num_rows($q) > 0) {
        $q = mysqli_query($con, "SELECT * FROM history WHERE
username='$_SESSION[username]' AND eid='$_GET[eid]' ") or die('Error197');
        while ($row = mysqli_fetch_array($q)) {
            $timel  = $row['timestamp'];
            $status = $row['status'];
        }
        $q = mysqli_query($con, "SELECT * FROM quiz WHERE eid='$_GET[eid]' ")
or die('Error197');
        while ($row = mysqli_fetch_array($q)) {
            $ttimel  = $row['time'];
            $qstatus = $row['status'];
        }
        $remaining = (($ttimel * 60) - ((time() - $timel)));
        if ($status == "ongoing" && $remaining > 0 && $qstatus == "enabled") {
            $_SESSION['6e447159425d2d'] = "6e447159425d2d";
            header('location:account.php?q=quiz&step=2&eid=' . $_GET[eid] . '&n='
. $_GET[n] . '&t=' . $_GET[t]);

        } else {
                $q = mysqli_query($con, "UPDATE history SET status='finished' WHERE
username='$_SESSION[username]' AND eid='$_GET[eid]' ") or die('Error197');
        $q = mysqli_query($con, "SELECT * FROM history WHERE eid='$_GET[eid]'
AND username='$_SESSION[username]'") or die('Error156');
                while ($row = mysqli_fetch_array($q)) {
                    $s = $row['score'];
                    $scorestatus = $row['score_updated'];
                }
                 if($scorestatus=="false"){
                    $q = mysqli_query($con, "UPDATE history SET score_updated='true'
WHERE username='$_SESSION[username]' AND eid='$_GET[eid]' ") or
die('Error197');
                    $q = mysqli_query($con, "SELECT * FROM rank WHERE
username='$username'") or die('Error161');
                    $rowcount = mysqli_num_rows($q);
                    if ($rowcount == 0) {
```

```
                    $q2 = mysqli_query($con, "INSERT INTO rank
VALUES(NULL,'$username','$s',NOW())") or die('Error165');
                } else {
                    while ($row = mysqli_fetch_array($q)) {
                        $sun = $row['score'];
                    }

                    $sun = $s + $sun;
                    $q = mysqli_query($con, "UPDATE `rank` SET `score`=$sun
,time=NOW() WHERE username= '$username'") or die('Error174');
                }
            }
        header('location:account.php?q=result&eid=' . $_GET[eid]);
    }

  } else {
    $time = time();
    $q = mysqli_query($con, "INSERT INTO history
VALUES(NULL,'$username','$_GET[eid]'
,'0','0','0','0',NOW(),'$time','ongoing','false')") or die('Error137');
    $_SESSION['6e447159425d2d'] = "6e447159425d2d";
    header('location:account.php?q=quiz&step=2&eid=' . $_GET["eid"] . '&n='
. $_GET["n"] . '&t=' . $_GET["t"]);
  }
}

if (@$_GET['q'] == 'quiz' && @$_GET['step'] == 2 &&
isset($_SESSION['6e447159425d2d']) && $_SESSION['6e447159425d2d'] ==
"6e447159425d2d") {
  $q = mysqli_query($con, "SELECT * FROM history WHERE
username='$username' AND eid='$_GET[eid]' ") or die('Error197');

  if (mysqli_num_rows($q) > 0) {
    $q = mysqli_query($con, "SELECT * FROM history WHERE
username='$_SESSION[username]' AND eid='$_GET[eid]' ") or die('Error197');
    while ($row = mysqli_fetch_array($q)) {
      $time   = $row['timestamp'];
```

```
            $status = $row['status'];
        }
        $q = mysqli_query($con, "SELECT * FROM quiz WHERE eid='$_GET[eid]' ")
or die('Error197');
        while ($row = mysqli_fetch_array($q)) {
            $ttime   = $row['time'];
            $qstatus = $row['status'];
        }
        $remaining = (($ttime * 60) - ((time() - $time)));
        if ($status == "ongoing" && $remaining > 0 && $qstatus == "enabled") {
            $q = mysqli_query($con, "SELECT * FROM history WHERE
username='$_SESSION[username]' AND eid='$_GET[eid]' ") or
die('Error197');
            while ($row = mysqli_fetch_array($q)) {
                $time = $row['timestamp'];
            }
            $q = mysqli_query($con, "SELECT * FROM quiz WHERE
eid='$_GET[eid]' ") or die('Error197');
            while ($row = mysqli_fetch_array($q)) {
                $ttime = $row['time'];
            }
            $remaining = (($ttime * 60) - ((time() - $time)));
            echo '<script>
var seconds = ' . $remaining . ' ;
function end(){
  data = confirm("Are you sure want to end this Quiz? Remember, once
finished, you wont be able to change and final results will be displayed. If
you want to Finish quiz then click on OK and also please fill the feedback
form");

    window.location ="account.php?q=quiz&step=2&eid=' . $_GET["eid"] .
'&n=' . $_GET["n"] . '&t=' . isset($_GET["total"]) . '&endquiz=end";

}
function enable(){
  document.getElementById("sbutton").removeAttribute("disabled");

}
function frmreset(){
```

```
  document.getElementById("sbutton").setAttribute("disabled","true");
  document.getElementById("qform").reset();
}
   function secondPassed() {
   var minutes = Math.round((seconds - 30)/60);
   var remainingSeconds = seconds % 60;
   if (remainingSeconds < 10) {
      remainingSeconds = "0" + remainingSeconds;
   }
   document.getElementById(\'countdown\').innerHTML = minutes + ":"
+   remainingSeconds;
   if (seconds <= 0) {
      clearInterval(countdownTimer);
      document.getElementById(\'countdown\').innerHTML = "Buzz
Buzz...";
      window.location ="account.php?q=quiz&step=2&eid=' . $_GET["eid"] .
'&n=' . $_GET["n"] . '&t=' . isset($_GET["total"]) . '&endquiz=end";
   } else {
      seconds--;
   }
   }
var countdownTimer = setInterval(\'secondPassed()\', 1000);
</script>';
         echo '<font size="3" style="margin-left:100px;font-family:\'typo\'
font-size:20px; font-weight:bold;color:darkred">Time Left : </font><span
class="timer btn btn-default" style="margin-left:20px;"><font style="font-
family:\'typo\';font-size:20px;font-weight:bold;color:darkblue"
id="countdown"></font></span><span class="timer btn btn-primary"
style="margin-left:50px" onclick="end()"><span class=" glyphicon
glyphicon-off"></span>  <font style="font-size:16px;font-
weight:bold">Finish Quiz</font></span>';
         $eid   = @$_GET['eid'];
         $sn    = @$_GET['n'];
         $total = @$_GET['t'];
         $q     = mysqli_query($con, "SELECT * FROM questions WHERE
eid='$eid' AND sn='$sn' ");
         echo '<div class="panel" style="margin-right:5%;margin-
left:5%;margin-top:10px;border-radius:10px">';
         while ($row = mysqli_fetch_array($q)) {
```

```
            $qns = stripslashes($row['qns']);
            $qid = $row['qid'];
            echo '<b><pre style="background-color:white"><div style="font-
size:20px;font-weight:bold;font-family:calibri;margin:10px">' . $sn . ' : ' .
$qns . '</div></pre></b>';
        }

        echo '<form id="qform" action="update.php?q=quiz&step=2&eid=' .
$eid . '&n=' . $sn . '&t=' . $total . '&qid=' . $qid . '"
method="POST"  class="form-horizontal">
<br />';
        $q = mysqli_query($con, "SELECT * FROM user_answer WHERE
qid='$qid' AND username='$_SESSION[username]' AND eid='$_GET[eid]'")
or die("Error222");
        if (mysqli_num_rows($q) > 0) {
            $row = mysqli_fetch_array($q);
            $ans = $row['ans'];
            $q = mysqli_query($con, "SELECT * FROM options WHERE
qid='$qid' AND optionid='$ans'") or die("Error222");
            $row = mysqli_fetch_array($q);
            $ans = $row['option'];
        } else {
            $ans = "";
        }
        if (strlen($ans) > 0) {
            echo "<font style=\"color:green;font-size:18px;font-
weight:bold\">Selected answer: </font><font style=\"color:#565252;font-
size:18px;\">" . $ans . "</font>  <a
href=update.php?q=quiz&step=2&eid=$eid&n=$sn&t=$total&qid=$qid&de
lanswer=delanswer></a><br /><br />";
        }
        echo '<div class="funkyradio">';
        $q = mysqli_query($con, "SELECT * FROM options WHERE qid='$qid'
");
        while ($row = mysqli_fetch_array($q)) {
            $option   = stripslashes($row['option']);
            $optionid = $row['optionid'];
            echo '<div class="funkyradio-success"><input type="radio" id="' .
$optionid . '" name="ans" value="' . $optionid . '" onclick="enable()"> <label
```

```
for="' . $optionid . '" style="width:50%"><div style="color:black;font-
size:12px;word-wrap:break-word">  ' . $option .
'</div></label></div>';
        }
        echo '</div>';
        if ($_GET["t"] > $_GET["n"] && $_GET["n"] != 1) {
            echo '<br /><a href="account.php?q=quiz&step=2&eid=' . $eid .
'&n=' . ($sn - 1) . '&t=' . $total . '" class="btn btn-primary"
style="height:30px"><span class="glyphicon glyphicon-arrow-left" aria-
hidden="true"  style="font-
size:18px"></span></a>    
<button type="submit" class="btn btn-default" disabled="true"
id="sbutton" style="height:30px"><span class="glyphicon glyphicon-lock"
style="font-size:16px" aria-hidden="true"></span><font style="font-
size:16px;font-weight:bold">
Lock</font></button>    <button type="button"
class="btn btn-default" onclick="frmreset()"
style="height:30px"></span><font style="font-size:16px;font-
weight:bold">Reset</font></button>    <a
href="account.php?q=quiz&step=2&eid=' . $eid . '&n=' . ($sn + 1) . '&t=' .
$total . '" class="btn btn-primary" style="height:30px"><span
class="glyphicon glyphicon-arrow-right" aria-hidden="true"  style="font-
size:16px"></span></a></form><br><br>';
        } else if ($_GET["t"] == $_GET["n"]) {
            echo '<br /><a href="account.php?q=quiz&step=2&eid=' . $eid .
'&n=' . ($sn - 1) . '&t=' . $total . '" class="btn btn-primary"
style="height:30px"><span class="glyphicon glyphicon-arrow-left" aria-
hidden="true"  style="font-
size:18px"></span></a>    <button
type="submit" class="btn btn-default" disabled="true" id="sbutton"
style="height:30px"><span class="glyphicon glyphicon-lock" style="font-
size:16px" aria-hidden="true"></span><font style="font-size:16px;font-
weight:bold"> Lock</font></button>    <button
type="button" class="btn btn-default" onclick="frmreset()"
style="height:30px"></span><font style="font-size:16px;font-
weight:bold">Reset</font></button>    </form>
<br><br>';
        } else if ($_GET["t"] > $_GET["n"] && $_GET["n"] == 1) {
```

```
            echo '<br />    <button type="submit"
class="btn btn-default" disabled="true" id="sbutton"
style="height:30px"><span class="glyphicon glyphicon-lock" style="font-
size:12px" aria-hidden="true"></span><font style="font-size:16px;font-
weight:bold"> Lock<font></button>    <button
type="button" class="btn btn-default" onclick="frmreset()"
style="height:30px"></span><font style="font-size:16px;font-
weight:bold">Reset</font></button>    <a
href="account.php?q=quiz&step=2&eid=' . $eid . '&n=' . ($sn + 1) . '&t=' .
$total . '" class="btn btn-primary" style="height:30px"><span
class="glyphicon glyphicon-arrow-right" aria-hidden="true"  style="font-
size:12px"></span></a></form><br><br>';
        } else {
        }
        echo '</div>';
        echo '<div class="panel" style="text-align:center">';
        $q = mysqli_query($con, "SELECT * FROM questions WHERE
eid='$_GET[eid]'") or die("Error222");
        $i = 1;
        while ($row = mysqli_fetch_array($q)) {
            $ques[$row['qid']] = $i;
            $i++;
        }
        $q = mysqli_query($con, "SELECT * FROM user_answer WHERE
eid='$_GET[eid]' AND username='$_SESSION[username]'") or
die("Error222a");
        $i = 1;
        while ($row = mysqli_fetch_array($q)) {
            if (isset($ques[$row['qid']])) {
                $quesans[$ques[$row['qid']]] = true;
            }
        }
        for ($i = 1; $i <= $total; $i++) {
            echo '<a href="account.php?q=quiz&step=2&eid=' . $eid . '&n=' . $i .
'&t=' . $total . '"  style="margin:5px;padding:5px;background-color:';
            if ($quesans[$i]) {
                echo "darkgreen";
            } else {
                echo "darkred";
```

```
            }
            echo ';color:white;font-size:16px;font-family:calibri;border-
radius:4px"> ' . $i . ' </a>';
        }
    } else {
        unset($_SESSION['6e447159425d2d']);
        $q = mysqli_query($con, "UPDATE history SET status='finished'
WHERE username='$_SESSION[username]' AND eid='$_GET[eid]' ") or
die('Error197');
    $q = mysqli_query($con, "SELECT * FROM history WHERE
eid='$_GET[eid]' AND username='$_SESSION[username]'") or
die('Error156');
            while ($row = mysqli_fetch_array($q)) {
                $s = $row['score'];
                $scorestatus = $row['score_updated'];
            }
             if($scorestatus=="false"){
                $q = mysqli_query($con, "UPDATE history SET
score_updated='true' WHERE username='$_SESSION[username]' AND
eid='$_GET[eid]' ") or die('Error197');
                $q = mysqli_query($con, "SELECT * FROM rank WHERE
username='$username'") or die('Error161');
                $rowcount = mysqli_num_rows($q);
                if ($rowcount == 0) {
                    $q2 = mysqli_query($con, "INSERT INTO rank
VALUES(NULL,'$username','$s',NOW())") or die('Error165');
                } else {
                    while ($row = mysqli_fetch_array($q)) {
                        $sun = $row['score'];
                    }

                    $sun = $s + $sun;
                    $q = mysqli_query($con, "UPDATE `rank` SET `score`=$sun
,time=NOW() WHERE username= '$username'") or die('Error174');
                }
            }
        header('location:account.php?q=result&eid=' . $_GET[eid]);
    }
  } else {
```

```
        unset($_SESSION['6e447159425d2d']);
        $q = mysqli_query($con, "UPDATE history SET status='finished'
WHERE username='$_SESSION[username]' AND eid='$_GET[eid]' ") or
die('Error197');
        $q = mysqli_query($con, "SELECT * FROM history WHERE
eid='$_GET[eid]' AND username='$_SESSION[username]'") or
die('Error156');
            while ($row = mysqli_fetch_array($q)) {
                $s = $row['score'];
                $scorestatus = $row['score_updated'];
            }
            if($scorestatus=="false"){
                $q = mysqli_query($con, "UPDATE history SET
score_updated='true' WHERE username='$_SESSION[username]' AND
eid='$_GET[eid]' ") or die('Error197');
                $q = mysqli_query($con, "SELECT * FROM rank WHERE
username='$username'") or die('Error161');
                $rowcount = mysqli_num_rows($q);
                if ($rowcount == 0) {
                    $q2 = mysqli_query($con, "INSERT INTO rank
VALUES(NULL,'$username','$s',NOW())") or die('Error165');
                } else {
                    while ($row = mysqli_fetch_array($q)) {
                        $sun = $row['score'];
                    }

                    $sun = $s + $sun;
                    $q = mysqli_query($con, "UPDATE `rank` SET `score`=$sun
,time=NOW() WHERE username= '$username'") or die('Error174');
                }
            }
        header('location:account.php?q=result&eid=' . $_GET[eid]);
    }
}
if (@$_GET['q'] == 'result' && @$_GET['eid']) {
    $eid = @$_GET['eid'];
    $q = mysqli_query($con, "SELECT * FROM quiz WHERE eid='$eid' ") or
die('Error157');
    while ($row = mysqli_fetch_array($q)) {
```

```
        $total = $row['total'];
    }
    $q = mysqli_query($con, "SELECT * FROM history WHERE eid='$eid' AND
username='$username' ") or die('Error157');

    while ($row = mysqli_fetch_array($q)) {
        $s      = $row['score'];
        $w      = $row['wrong'];
        $r      = $row['correct'];
        $status = $row['status'];
    }
    if ($status == "finished") {
        echo '<div class="panel">
<center><h1 class="title" style="color:#660033">Result</h1><center><br
/><table class="table table-striped title1" style="font-size:20px;font-
weight:1000;">';
        echo '<tr style="color:darkblue"><td style="vertical-
align:middle">Total Questions</td><td style="vertical-align:middle">' .
$total . '</td></tr>
      <tr style="color:darkgreen"><td style="vertical-align:middle">Correct
Answer <span class="glyphicon glyphicon-ok-arrow" aria-
hidden="true"></span></td><td style="vertical-align:middle">' . $r .
'</td></tr>
    <tr style="color:red"><td style="vertical-align:middle">Wrong
Answer <span class="glyphicon glyphicon-remove-arrow" aria-
hidden="true"></span></td><td style="vertical-align:middle">' . $w .
'</td></tr>
    <tr style="color:orange"><td style="vertical-
align:middle">Unattempted <span class="glyphicon glyphicon-ban-
arrow" aria-hidden="true"></span></td><td style="vertical-
align:middle">' . ($total - $r - $w) . '</td></tr>
    <tr style="color:darkblue"><td style="vertical-
align:middle">Score <span class="glyphicon glyphicon-star" aria-
hidden="true"></span></td><td style="vertical-align:middle">' . $s .
'</td></tr>';
        $q = mysqli_query($con, "SELECT * FROM rank
WHERE  username='$username' ") or die('Error157');
        while ($row = mysqli_fetch_array($q)) {
            $s = $row['score'];
```

```
        echo '<tr style="color:#990000"><td style="vertical-
align:middle">Overall Score <span class="glyphicon glyphicon-stats"
aria-hidden="true"></span></td><td style="vertical-align:middle">' . $s .
'</td></tr>';
    }
    echo '<tr></tr></table></div><div class="panel"><br /><h3
align="center" style="font-family:calibri">:: Detailed Analysis ::</h3><br
/><ol style="font-size:20px;font-weight:bold;font-family:calibri;margin-
top:20px">';
    $q = mysqli_query($con, "SELECT * FROM questions WHERE
eid='$_GET[eid]'") or die('Error197');
    while ($row = mysqli_fetch_array($q)) {
        $question = $row['qns'];
        $qid      = $row['qid'];
        $q2 = mysqli_query($con, "SELECT * FROM user_answer WHERE
eid='$_GET[eid]' AND qid='$qid' AND username='$_SESSION[username]'")
or die('Error197');
        if (mysqli_num_rows($q2) > 0) {
            $row1        = mysqli_fetch_array($q2);
            $ansid       = $row1['ans'];
            $correctansid = $row1['correctans'];
            $q3 = mysqli_query($con, "SELECT * FROM options WHERE
optionid='$ansid'") or die('Error197');
            $q4 = mysqli_query($con, "SELECT * FROM options WHERE
optionid='$correctansid'") or die('Error197');
            $row2      = mysqli_fetch_array($q3);
            $row3      = mysqli_fetch_array($q4);
            $ans       = $row2['option'];
            $correctans = $row3['option'];
        } else {
            $q3 = mysqli_query($con, "SELECT * FROM answer WHERE
qid='$qid'") or die('Error197');
            $row1        = mysqli_fetch_array($q3);
            $correctansid = $row1['ansid'];
            $q4 = mysqli_query($con, "SELECT * FROM options WHERE
optionid='$correctansid'") or die('Error197');
            $row2      = mysqli_fetch_array($q4);
            $correctans = $row2['option'];
            $ans       = "Unanswered";
```

```
        }
        if ($correctans == $ans && $ans != "Unanswered") {
            echo '<li><div style="font-size:16px;font-weight:bold;font-
family:calibri;margin-top:20px;background-
color:lightgreen;padding:10px;word-wrap:break-word;border:2px solid
darkgreen;border-radius:10px;">' . $question . ' <span class="glyphicon
glyphicon-ok" style="color:darkgreen"></span></div><br />';
            echo '<font style="font-size:14px;color:darkgreen"><b>Your
Answer: </b></font><font style="font-size:14px;">' . $ans . '</font><br
/>';
            echo '<font style="font-size:14px;color:darkgreen"><b>Correct
Answer: </b></font><font style="font-size:14px;">' . $correctans .
'</font><br />';
        }
        else if ($ans == "Unanswered") {
            echo '<li><div style="font-size:16px;font-weight:bold;font-
family:calibri;margin-top:20px;background-
color:#f7f576;padding:10px;word-wrap:break-word;border:2px solid
#b75a0e;border-radius:10px;">' . $question . ' </div><br />';
            echo '<font style="font-size:14px;color:darkgreen"><b>Correct
Answer: </b></font><font style="font-size:14px;">' . $correctans .
'</font><br />';
        }
        else {
            echo '<li><div style="font-size:16px;font-weight:bold;font-
family:calibri;margin-top:20px;background-
color:#f99595;padding:10px;word-wrap:break-word;border:2px solid
darkred;border-radius:10px;">' . $question . ' <span class="glyphicon
glyphicon-remove" style="color:red"></span></div><br />';
            echo '<font style="font-size:14px;color:darkgreen"><b>Your
Answer: </b></font><font style="font-size:14px;">' . $ans . '</font><br
/>';
            echo '<font style="font-size:14px;color:red"><b>Correct Answer:
</b></font><font style="font-size:14px;">' . $correctans . '</font><br />';

        }
        echo "<br /></li>";
    }
    echo '</ol>';
```

```
        echo "</div>";
    } else {
        die("Thats a 404 Error bro. You are trying to access a wrong page");
    }
}
if (@$_GET['q'] == 2) {
    $q = mysqli_query($con, "SELECT * FROM history WHERE
username='$username' AND status='finished' ORDER BY date DESC ") or
die('Error197');
    echo '<div class="panel title">
<table class="table table-striped title1" >
<tr><td style="vertical-align:middle"><b>S.N.</b></td><td
style="vertical-align:middle"><b>Quiz</b></td><td style="vertical-
align:middle"><b>Total Questions</b></td><td style="vertical-
align:middle"><b>Right</b></td><td style="vertical-
align:middle"><b>Wrong<b></td><td style="vertical-
align:middle"><b>Unattempted<b></td><td style="vertical-
align:middle"><b>Score</b></td><td style="vertical-
align:middle"><b>Action<b></td></tr>';
    $c = 0;
    while ($row = mysqli_fetch_array($q)) {
        $eid = $row['eid'];
        $s   = $row['score'];
        $w   = $row['wrong'];
        $r   = $row['correct'];
        $q23 = mysqli_query($con, "SELECT * FROM quiz WHERE  eid='$eid' ")
or die('Error208');
        while ($row = mysqli_fetch_array($q23)) {
            $title = $row['title'];
            $total = $row['total'];
        }
        $c++;
        echo '<tr><td style="vertical-align:middle">' . $c . '</td><td
style="vertical-align:middle">' . $title . '</td><td style="vertical-
align:middle">' . $total . '</td><td style="vertical-align:middle">' . $r .
'</td><td style="vertical-align:middle">' . $w . '</td><td style="vertical-
align:middle">' . ($total - $r - $w) . '</td><td style="vertical-align:middle">'
. $s . '</td><td style="vertical-align:middle"><b><a
href="account.php?q=result&eid=' . $eid . '" class="btn"
```

```
style="margin:0px;background:darkred;color:white"> <span
class="title1"><b>View Result</b></td></tr>';
   }
   echo '</table></div>';
}
if (@$_GET['q'] == 3) {
   if(isset($_GET['show'])){
      $show = $_GET['show'];
      $showfrom = (($show-1)*10) + 1;
      $showtill = $showfrom + 9;
   }
   else{
      $show = 1;
      $showfrom = 1;
      $showtill = 10;
   }
   $q = mysqli_query($con, "SELECT * FROM rank") or die('Error223');
   echo '<div class="panel title">
<table class="table table-striped title1" >
<tr><td style="vertical-align:middle"><b>Rank</b></td><td
style="vertical-align:middle"><b>Name</b></td><td style="vertical-
align:middle"><b>Branch</b></td><td style="vertical-
align:middle"><b>E-mail id</b></td><td style="vertical-
align:middle"><b>Score</b></td></tr>';
   $c = $showfrom-1;
   $total = mysqli_num_rows($q);
   if($total >= $showfrom){
      $q = mysqli_query($con, "SELECT * FROM rank ORDER BY score DESC,
time ASC LIMIT ".($showfrom-1).",10") or die('Error223');
      while ($row = mysqli_fetch_array($q)) {
         $e = $row['username'];
         $s = $row['score'];
         $q12 = mysqli_query($con, "SELECT * FROM user WHERE
username='$e' ") or die('Error231');
         while ($row = mysqli_fetch_array($q12)) {
            $name     = $row['name'];
            $branch   = $row['branch'];
            $username = $row['username'];
         }
```

```
            $c++;
            echo '<tr><td style="color:#99cc32"><b>' . $c . '</b></td><td
style="vertical-align:middle">' . $name . '</td><td style="vertical-
align:middle">' . $branch . '</td><td style="vertical-align:middle">' .
$username . '</td><td style="vertical-align:middle">' . $s . '</td><td
style="vertical-align:middle">';
        }
    }
    else{
    }
    echo '</table></div>';
    echo '<div class="panel title"><table class="table table-striped title1"
><tr>';
    $total = round($total/10) + 1;
    if(isset($_GET['show'])){
        $show = $_GET['show'];
    }
    else{
        $show = 1;
    }
    if($show == 1 && $total==1){
    }
    else if($show == 1 && $total!=1){
        $i = 1;
        while($i<=$total){
            echo '<td style="vertical-align:middle;text-align:center"><a
style="font-size:14px;font-family:typo;font-weight:bold"
href="account.php?q=3&show='.$i.'"> '.$i.' </a></td>';
            $i++;
        }
        echo '<td style="vertical-align:middle;text-align:center"><a
style="font-size:14px;font-family:typo;font-weight:bold"
href="account.php?q=3&show='.($show+1).'"> >> </a></td>';
    }
    else if($show != 1 && $show==$total){
        echo '<td style="vertical-align:middle;text-align:center"><a
style="font-size:14px;font-family:typo;font-weight:bold"
href="account.php?q=3&show='.($show-1).'"> << </a></td>';
```

```
        $i = 1;
        while($i<=$total){
            echo '<td style="vertical-align:middle;text-align:center"><a
style="font-size:14px;font-family:typo;font-weight:bold"
href="account.php?q=3&show='.$i.'"> '.$i.' </a></td>';
            $i++;
        }
    }
    else{
        echo '<td style="vertical-align:middle;text-align:center"><a
style="font-size:14px;font-family:typo;font-weight:bold"
href="account.php?q=3&show='.($show-1).'"> << </a></td>';
        $i = 1;
        while($i<=$total){
            echo '<td style="vertical-align:middle;text-align:center"><a
style="font-size:14px;font-family:typo;font-weight:bold"
href="account.php?q=3&show='.$i.'"> '.$i.' </a></td>';
            $i++;
        }
        echo '<td style="vertical-align:middle;text-align:center"><a
style="font-size:14px;font-family:typo;font-weight:bold"
href="account.php?q=3&show='.($show+1).'"> >> </a></td>';
    }
    echo '</tr></table></div>';
}
?>
</div></div></div></div>
<div class="row footer">
 <div class="col-md-2 box"></div>
<div class="col-md-3 box">
<a href="#" data-toggle="modal" data-target="#developers" s
style="color:lightyellow;" onmouseover="this.style('color:yellow')"
target="new">DEVELOPED BY</a>
</div>
<!-- Modal For Developers-->
<div class="modal fade title1" id="developers">
  <div class="modal-dialog">
    <div class="modal-content">
      <div class="modal-header">
```

```
      <button type="button" class="close" data-dismiss="modal"><span aria-
hidden="true">&times;</span><span class="sr-
only">Close</span></button>
      <h4 class="modal-title" style="font-family:'typo' "><span
style="color:orange">DEVELOPED BY</span></h4>
     </div>
     <div class="modal-body">
      <p>
      <div class="row">
      <div class="col-md-4">
       <img src="image/new1.jpg" width=100 height=100 alt="AKSHIT"
class="img-rounded">
       </div>
       <div class="col-md-5">
      <a href="" style="color:#202020; font-family:'typo' ; font-size:18px"
title="">V.AKSHIT</a>
      <h4 style="color:#202020; font-family:'typo' ;font-size:16px"
class="title1">+91 7896542312</h4>
      <h4 style="font-family:'typo' ">vautreyakshit@gmail.com</h4>
      <h4 style="font-family:'typo' ">LITTLE FLOWER DEGREE COLLEGE
</h4></div></div>
      </p>
     </div>
    </div><!-- /.modal-content -->
  </div><!-- /.modal-dialog -->
</div><!-- /.modal -->
<div class="col-md-2 box">
<a href="feedback.php" style="color:lightyellow;text-decoration:underline"
onmouseover="this.style('color:yellow')"
target="new">Feedback</a></div>
</body>
</html>
```

➢ LOGOUT CODE:

```
<?php
session_start();
if (isset($_SESSION['username'])) {
   session_destroy();
}
$ref = @$_GET['q'];
header("location:index.php");
?>
```

➢ ADMIN LOGIN:

```
<?php
include_once 'dbConnection.php';
$ref      = @$_GET['q'];
$username = $_POST['uname'];
$password = $_POST['password'];

$username = stripslashes($username);
$username = addslashes($username);
$password = stripslashes($password);
$password = addslashes($password);
$result = mysqli_query($con, "SELECT username FROM admin WHERE
username = '$username' and password = '$password'") or die('Error');
$count = mysqli_num_rows($result);
if ($count == 1) {
   session_start();
   if (isset($_SESSION['username'])) {
      session_unset();
   }
   $_SESSION["name"]     = 'Admin';
   $_SESSION["key"]      =
'54585c506829293a2d4c3b68543b316e2e7a2d277858545a36362e5f39';
   $_SESSION["username"] = $username;
   header("location:dash.php?q=0");
} else
   header("location:$ref?w=Warning : Access denied");
?>
```

ADMIN PAGE CODE :

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<link rel="icon" href="favicon.ico" type="image/icon" sizes="16x16">
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
<meta name="viewport" content="width=device-width, initial-scale=1">
<title> Admin || QUIZ MASTERS</title>
<link  rel="stylesheet" href="css/bootstrap.min.css"/>
 <link  rel="stylesheet" href="css/bootstrap-theme.min.css"/>
 <link rel="stylesheet" href="css/main.css">
 <link  rel="stylesheet" href="css/font.css">
 <script src="js/jquery.js" type="text/javascript"></script>
 <script src="js/bootstrap.min.js"  type="text/javascript"></script>
  <link href='http://fonts.googleapis.com/css?family=Roboto:400,700,300'
rel='stylesheet' type='text/css'>
<script>
$(function () {
   $(document).on( 'scroll', function(){
      console.log('scroll top : ' + $(window).scrollTop());
      if($(window).scrollTop()>=$(".logo").height())
      {
          $(".navbar").addClass("navbar-fixed-top");
      }

      if($(window).scrollTop()<$(".logo").height())
      {
          $(".navbar").removeClass("navbar-fixed-top");
      }
   });
});</script>
</head>
<body  style="background:#eee;">
<body  style="background:#eee;">
<div class="header">
```

```
<div class="row">
<div class="col-lg-6">
<span class="logo"><font size=10 color="yellow"><i>QUIZ
MASTERS</i></font></span></div>
<?php
include_once 'dbConnection.php';
session_start();
if (!(isset($_SESSION['username']))  || ($_SESSION['key']) !=
'54585c506829293a2d4c3b68543b316e2e7a2d277858545a36362e5f39') {
   session_destroy();
   header("location:index.php");
} else {
   $name     = $_SESSION['name'];
   $username = $_SESSION['username'];
   include_once 'dbConnection.php';
   echo '<span class="pull-right top title1" ><span style="color:white"><font
size=5><b><span class="glyphicon glyphicon-user" aria-
hidden="true"></span>    Hello,</span> <span
class="log log1" style="color:lightyellow"><font size=5><b>' . $name .
'  |  <a href="logout.php?q=account.php"
style="color:lightyellow"><span class="glyphicon glyphicon-log-out" aria-
hidden="true"></span> Logout</button></a></span>';
}
?>
</div></div>
<nav class="navbar navbar-default title1">
  <div class="container-fluid">
   <div class="navbar-header">
     <button type="button" class="navbar-toggle collapsed" data-
toggle="collapse" data-target="#bs-example-navbar-collapse-1" aria-
expanded="false">
       <span class="sr-only">Toggle navigation</span>
       <span class="icon-bar"></span>
       <span class="icon-bar"></span>
       <span class="icon-bar"></span>
     </button> <a class="navbar-brand" href="dash.php?q=0"><font
size=5><b>Dashboard</a>
```

```
    </div>
    <div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
      <ul class="nav navbar-nav">
        <li <?php
if (@$_GET['q'] == 0)
    echo 'class="active"';
?>><a href="dash.php?q=0">Home<span class="sr-
only">(current)</span></a></li>
        <li <?php
if (@$_GET['q'] == 1)
    echo 'class="active"';
?>><a href="dash.php?q=1">Users</a></li>
    <li <?php
if (@$_GET['q'] == 2)
    echo 'class="active"';
?>><a href="dash.php?q=2">Leaderboard</a></li>
    <li <?php
if (@$_GET['q'] == 3)
    echo 'class="active"';
?>><a href="dash.php?q=3">Feedback</a></li>
        <li <?php
if (@$_GET['q'] == 4)
    echo 'class="active"';
?>><a href="dash.php?q=4">Add Quiz</a></li>
        <li <?php
if (@$_GET['q'] == 5)
    echo 'class="active"';
?>><a href="dash.php?q=5">Remove Quiz</a></li>
      </ul>
          </div>
  </div>
</nav>
<div class="container">
<div class="row">
<div class="col-md-12">
<?php
if (@$_GET['q'] == 0) {
```

```
   $result = mysqli_query($con, "SELECT * FROM quiz ORDER BY date DESC") or
die('Error');
   echo '<div class="panel"><table class="table table-striped
title1"  style="vertical-align:middle">
<tr><td style="vertical-align:middle"><b>S.N.</b></td><td style="vertical-
align:middle"><b>Name</b></td><td style="vertical-align:middle"><b>Total
question</b></td><td style="vertical-align:middle"><b>Marks</b></td><td
style="vertical-align:middle"><b>Time limit</b></td><td style="vertical-
align:middle"><b>Status</b></td><td style="vertical-
align:middle"><b>Action</b></td></tr>';
   $c = 1;
   while ($row = mysqli_fetch_array($result)) {
      $title   = $row['title'];
      $total   = $row['total'];
      $correct = $row['correct'];
      $time    = $row['time'];
      $eid     = $row['eid'];
      $status  = $row['status'];
      if ($status == "enabled") {
         echo '<tr><td style="vertical-align:middle">' . $c++ . '</td><td
style="vertical-align:middle">' . $title . '</td><td style="vertical-align:middle">'
. $total . '</td><td style="vertical-align:middle">' . $correct * $total . '</td><td
style="vertical-align:middle">' . $time . ' min</td><td style="vertical-
align:middle">Enabled</td>
  <td style="vertical-align:middle"><b><a href="update.php?deidquiz=' . $eid .
'" class="btn logb" style="color:#FFFFFF;background:#ff0000;font-
size:12px;padding:5px;"> <span><b>Disable</b></span></a></b></td><
/tr>';
      } else {
         echo '<tr><td style="vertical-align:middle">' . $c++ . '</td><td
style="vertical-align:middle">' . $title . '</td><td style="vertical-align:middle">'
. $total . '</td><td style="vertical-align:middle">' . $correct * $total . '</td><td
style="vertical-align:middle">' . $time . ' min</td><td style="vertical-
align:middle">Disabled</td>
  <td style="vertical-align:middle">><b><a href="update.php?eeidquiz=' . $eid .
'" class="btn logb" style="color:#FFFFFF;background:darkgreen;font-
```

```
size:12px;padding:5px;"> <span><b>Enable</b></span></a></b></td><
/tr>';
        }
    }
}
if (@$_GET['q'] == 2) {
    if(isset($_GET['show'])){
        $show = $_GET['show'];
        $showfrom = (($show-1)*10) + 1;
        $showtill = $showfrom + 9;
    }
    else{
        $show = 1;
        $showfrom = 1;
        $showtill = 10;
    }
    $q = mysqli_query($con, "SELECT * FROM rank") or die('Error223');
    echo '<div class="panel title">
<table class="table table-striped title1" >
<tr><td style="vertical-align:middle"><b>Rank</b></td><td style="vertical-
align:middle"><b>Name</b></td><td style="vertical-
align:middle"><b>Branch</b></td><td style="vertical-
align:middle"><b>Username</b></td><td style="vertical-
align:middle"><b>Roll number</b></td><td style="vertical-
align:middle"><b>Gender</b></td><td style="vertical-
align:middle"><b>Score</b></td></tr>';
    $c = $showfrom-1;
    $total = mysqli_num_rows($q);
    if($total >= $showfrom){
        $q = mysqli_query($con, "SELECT * FROM rank ORDER BY score DESC, time
ASC LIMIT ".($showfrom-1).",10") or die('Error223');
        while ($row = mysqli_fetch_array($q)) {
            $e = $row['username'];
            $s = $row['score'];
            $q12 = mysqli_query($con, "SELECT * FROM user WHERE username='$e'
") or die('Error231');
            while ($row = mysqli_fetch_array($q12)) {
```

```
            $name     = $row['name'];
            $branch   = $row['branch'];
            $username = $row['username'];
            $rollno     = $row['rollno'];
            $gender   = $row['gender'];
        }
        $c++;
        echo '<tr><td style="color:#99cc32"><b>' . $c . '</b></td><td
style="vertical-align:middle">' . $name . '</td><td style="vertical-
align:middle">' . $branch . '</td><td style="vertical-align:middle">' .
$username . '</td><td style="vertical-align:middle">' . $rollno . '</td><td
style="vertical-align:middle">' . $gender . '</td><td style="vertical-
align:middle">' . $s . '</td><td style="vertical-align:middle">';
    }
  }
  else{
  }
  echo '</table></div>';
  echo '<div class="panel title"><table class="table table-striped title1" ><tr>';
  $total = round($total/10) + 1;
  if(isset($_GET['show'])){
    $show = $_GET['show'];
  }
  else{
    $show = 1;
  }
  if($show == 1 && $total==1){
  }
  else if($show == 1 && $total!=1){
    $i = 1;
    while($i<=$total){
        echo '<td style="vertical-align:middle;text-align:center"><a style="font-
size:14px;font-family:typo;font-weight:bold"
href="dash.php?q=2&show='.$i.'"> '.$i.' </a></td>';
        $i++;
    }
```

```
        echo '<td style="vertical-align:middle;text-align:center"><a style="font-
size:14px;font-family:typo;font-weight:bold"
href="dash.php?q=2&show='.($show+1).'"> >> </a></td>';
    }
    else if($show != 1 && $show==$total){
        echo '<td style="vertical-align:middle;text-align:center"><a style="font-
size:14px;font-family:typo;font-weight:bold"
href="dash.php?q=2&show='.($show-1).'"> << </a></td>';

        $i = 1;
        while($i<=$total){
            echo '<td style="vertical-align:middle;text-align:center"><a style="font-
size:14px;font-family:typo;font-weight:bold"
href="dash.php?q=2&show='.$i.'"> '.$i.' </a></td>';
            $i++;
        }
    }
    else{
        echo '<td style="vertical-align:middle;text-align:center"><a style="font-
size:14px;font-family:typo;font-weight:bold"
href="dash.php?q=2&show='.($show-1).'"> << </a></td>';
        $i = 1;
        while($i<=$total){
            echo '<td style="vertical-align:middle;text-align:center"><a style="font-
size:14px;font-family:typo;font-weight:bold"
href="dash.php?q=2&show='.$i.'"> '.$i.' </a></td>';
            $i++;
        }
        echo '<td style="vertical-align:middle;text-align:center"><a style="font-
size:14px;font-family:typo;font-weight:bold"
href="dash.php?q=2&show='.($show+1).'"> >> </a></td>';
    }
    echo '</tr></table></div>';
}
if (@$_GET['q'] == 1) {

    $result = mysqli_query($con, "SELECT * FROM user") or die('Error');
```

```
   echo '<div class="panel"><table class="table table-striped title1">
<tr><td style="vertical-align:middle"><b>S.N.</b></td><td style="vertical-
align:middle"><b>Name</b></td><td style="vertical-
align:middle"><b>Gender</b></td><td style="vertical-
align:middle"><b>Rollno</b></td><td style="vertical-
align:middle"><b>Branch</b></td><td style="vertical-
align:middle"><b>Username</b></td><td style="vertical-
align:middle"><b>Phno</b></td><td style="vertical-align:middle"></td></tr>';
   $c = 1;
   while ($row = mysqli_fetch_array($result)) {
      $name      = $row['name'];
      $phno      = $row['phno'];
      $gender    = $row['gender'];
      $rollno    = $row['rollno'];
      $branch    = $row['branch'];
      $username1 = $row['username'];

      echo '<tr><td style="vertical-align:middle">' . $c++ . '</td><td
style="vertical-align:middle">' . $name . '</td><td style="vertical-
align:middle">' . $gender . '</td><td style="vertical-align:middle">' . $rollno .
'</td><td style="vertical-align:middle">' . $branch . '</td><td style="vertical-
align:middle">' . $username1 . '</td><td style="vertical-align:middle">' . $phno
. '</td>
  <td style="vertical-align:middle"><a title="Delete User"
href="update.php?dusername=' . $username1 . '"><b><span class="glyphicon
glyphicon-trash" aria-hidden="true"></span></b></a></td></tr>';
   }
   $c = 0;
   echo '</table></div>';
   }
if (@$_GET['q'] == 3) {
   $result = mysqli_query($con, "SELECT * FROM `feedback` ORDER BY
`feedback`.`date` DESC") or die('Error');
   echo '<div class="panel"><table class="table table-striped title1">
<tr><td style="vertical-align:middle"><b>S.N.</b></td><td style="vertical-
align:middle"><b>Subject</b></td><td style="vertical-
align:middle"><b>Username</b></td><td style="vertical-
```

```
align:middle"><b>Date</b></td><td style="vertical-
align:middle"><b>Time</b></td><td style="vertical-
align:middle"><b>By</b></td><td style="vertical-align:middle"></td><td
style="vertical-align:middle"><b>Action</b></td></tr>';
   $c = 1;
   while ($row = mysqli_fetch_array($result)) {
      $date     = $row['date'];
      $date     = date("d-m-Y", strtotime($date));
      $time     = $row['time'];
      $subject   = $row['subject'];
      $name      = $row['name'];
      $username1 = $row['username'];
      $id       = $row['id'];
      echo '<tr><td style="vertical-align:middle">' . $c++ . '</td>';
      echo '<td style="vertical-align:middle"><a title="Click to open feedback"
href="dash.php?q=3&fid=' . $id . '">' . $subject . '</a></td><td style="vertical-
align:middle">' . $username1 . '</td><td style="vertical-align:middle">' . $date
. '</td><td style="vertical-align:middle">' . $time . '</td><td style="vertical-
align:middle">' . $name . '</td>
  <td style="vertical-align:middle"><a title="Open Feedback"
href="dash.php?q=3&fid=' . $id . '"><b><span class="glyphicon glyphicon-
folder-open" aria-hidden="true"></span></b></a></td>';
      echo '<td style="vertical-align:middle"><a title="Delete Feedback"
href="update.php?fdid=' . $id . '"><b><span class="glyphicon glyphicon-trash"
aria-hidden="true"></span></b></a></td>
 </tr>';
   }
   echo '</table></div>';
}
if (@$_GET['fid']) {
   echo '<br />';
   $id = @$_GET['fid'];
   $result = mysqli_query($con, "SELECT * FROM feedback WHERE id='$id' ") or
die('Error');
   while ($row = mysqli_fetch_array($result)) {
      $name     = $row['name'];
      $subject  = $row['subject'];
```

```
        $date     = $row['date'];
        $date     = date("d-m-Y", strtotime($date));
        $time     = $row['time'];
        $feedback = $row['feedback'];
         echo '<div class="panel"<a title="Back to Archive"
href="update.php?q1=2"><b><span class="glyphicon glyphicon-level-up" aria-
hidden="true"></span></b></a><h2 style="text-align:center; margin-top:-
15px;font-family: "Ubuntu", sans-serif;"><b>' . $subject . '</b></h1>';
        echo '<div class="mCustomScrollbar" data-mcs-theme="dark"
style="margin-left:10px;margin-right:10px; max-height:450px; line-
height:35px;padding:5px;"><span style="line-height:35px;padding:5px;">-
 <b>DATE:</b> ' . $date . '</span>
<span style="line-height:35px;padding:5px;"> <b>Time:</b> ' .
$time . '</span><span style="line-
height:35px;padding:5px;"> <b>By:</b> ' . $name . '</span><br
/>' . $feedback . '</div></div>';
    }
}
if (@$_GET['q'] == 4 && !(@$_GET['step'])) {
    echo '
<div class="row">
<span class="title1" style="margin-left:30%;font-size:30px;"><b>Enter Quiz
Details</b></span><br /><br />
 <div class="col-md-3"></div><div class="col-md-6">   <form class="form-
horizontal title1" name="form"
action="update.php?q=addquiz"  method="POST">
<fieldset>
<div class="form-group">
  <label class="col-md-12 control-label" for="name"></label>
  <div class="col-md-12">
  <input id="name" name="name" placeholder="Enter Quiz title" class="form-
control input-md" type="text">
  </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="total"></label>
  <div class="col-md-12">
```

```
  <input id="total" name="total" placeholder="Enter total number of
questions" class="form-control input-md" type="number">
    </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="right"></label>
  <div class="col-md-12">
  <input id="right" name="right" placeholder="Enter marks on right answer"
class="form-control input-md" min="0" type="number">
    </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="wrong"></label>
  <div class="col-md-12">
  <input id="wrong" name="wrong" placeholder="Enter minus marks on wrong
answer without sign" class="form-control input-md" min="0" type="number">
    </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="time"></label>
  <div class="col-md-12">
  <input id="time" name="time" placeholder="Enter time limit for test in
minute" class="form-control input-md" min="1" type="number">
    </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for=""></label>
  <div class="col-md-12">
<input  type="submit" style="margin-left:45%" class="btn btn-primary"
value="Submit" class="btn btn-primary"/>
  </div>
</div>
</fieldset>
</form></div>';
}
if (@$_GET['q'] == 4 && (@$_GET['step']) == 2) {
    echo '
```

```
<div class="row">
<span class="title1" style="margin-left:40%;font-size:30px;"><b>Enter Question
Details</b></span><br /><br />
 <div class="col-md-3"></div><div class="col-md-6"><form class="form-
horizontal title1" name="form" action="update.php?q=addqns&n=' .
@$_GET['n'] . '&eid=' . @$_GET['eid'] . '&ch=4 "  method="POST">
<fieldset>
';
    for ($i = 1; $i <= @$_GET['n']; $i++) {
       echo '<b>Question number ' . $i . ' :</><br /><!-- Text input-->
<div class="form-group">
  <label class="col-md-12 control-label" for="qns' . $i . ' "></label>
  <div class="col-md-12">
  <textarea rows="3" cols="5" name="qns' . $i . '" class="form-control"
placeholder="Write question number ' . $i . ' here..."></textarea>
  </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="' . $i . '1"></label>
  <div class="col-md-12">
  <input id="' . $i . '1" name="' . $i . '1" placeholder="Enter option a"
class="form-control input-md" type="text">
    </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="' . $i . '2"></label>
  <div class="col-md-12">
  <input id="' . $i . '2" name="' . $i . '2" placeholder="Enter option b"
class="form-control input-md" type="text">
   </div>
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="' . $i . '3"></label>
  <div class="col-md-12">
  <input id="' . $i . '3" name="' . $i . '3" placeholder="Enter option c"
class="form-control input-md" type="text">
   </div>
```

```
</div>
<div class="form-group">
  <label class="col-md-12 control-label" for="' . $i . '4"></label>
  <div class="col-md-12">
  <input id="' . $i . '4" name="' . $i . '4" placeholder="Enter option d"
class="form-control input-md" type="text">
    </div>
</div>
<br />
<b>Correct answer</b>:<br />
<select id="ans' . $i . '" name="ans' . $i . '" placeholder="Choose correct answer
" class="form-control input-md" >
   <option value="a">Select answer for question ' . $i . '</option>
  <option value="a">option a</option>
  <option value="b">option b</option>
  <option value="c">option c</option>
  <option value="d">option d</option> </select><br /><br />';
    }
     echo '<div class="form-group">
  <label class="col-md-12 control-label" for=""></label>
  <div class="col-md-12">
    <input  type="submit" style="margin-left:45%" class="btn btn-primary"
value="Submit" class="btn btn-primary"/>
  </div>
</div>
</fieldset>
</form></div>';
}
if (@$_GET['q'] == 5) {
     $result = mysqli_query($con, "SELECT * FROM quiz ORDER BY date DESC") or
die('Error');
    echo '<div class="panel"><table class="table table-striped title1">
<tr><td style="vertical-align:middle"><b>S.N.</b></td><td style="vertical-
align:middle"><b>Topic</b></td><td style="vertical-align:middle"><b>Total
question</b></td><td style="vertical-align:middle"><b>Marks</b></td><td
style="vertical-align:middle"><b>Time limit</b></td><td style="vertical-
align:middle"><b>Action</b></td></tr>';
```

```
    $c = 1;
    while ($row = mysqli_fetch_array($result)) {
        $title   = $row['title'];
        $total   = $row['total'];
        $correct = $row['correct'];
        $time    = $row['time'];
        $eid     = $row['eid'];
        echo '<tr><td style="vertical-align:middle">' . $c++ . '</td><td
style="vertical-align:middle">' . $title . '</td><td style="vertical-align:middle">'
. $total . '</td><td style="vertical-align:middle">' . $correct * $total . '</td><td
style="vertical-align:middle">' . $time . ' min</td>
  <td style="vertical-align:middle"><b><a href="update.php?q=rmquiz&eid=' .
$eid . '" class="btn"
style="margin:0px;background:red;color:white"> <span
class="title1"><b>Remove</b></span></a></b></td></tr>';
    }
    $c = 0;
    echo '</table></div>';
    }
?>
</div>
</div></div>
</body>
</html>
```

➢ UPDATE FORM:

```
<?php
include_once 'dbConnection.php';

session_start();
$username = $_SESSION['username'];
if (isset($_SESSION['key'])) {
   if (@$_GET['fdid'] && $_SESSION['key'] ==
'54585c506829293a2d4c3b68543b316e2e7a2d277858545a36362e5f39')
{
      $id = @$_GET['fdid'];
      $result = mysqli_query($con, "DELETE FROM feedback WHERE id='$id'
") or die('Error');
      header("location:dash.php?q=3");
   }
}
if (isset($_SESSION['key'])) {
   if (@$_GET['deidquiz'] && $_SESSION['key'] ==
'54585c506829293a2d4c3b68543b316e2e7a2d277858545a36362e5f39')
{
      $eid = @$_GET['deidquiz'];
      $r1 = mysqli_query($con, "UPDATE quiz SET status='disabled' WHERE
eid='$eid' ") or die('Error');
      $q = mysqli_query($con, "SELECT * FROM history WHERE eid='$eid'
AND status='ongoing' AND score_updated='false'");
      while($row = mysqli_fetch_array($q)){
         $user = $row['username'];
         $s = $row['score'];
         $r1 = mysqli_query($con, "UPDATE history SET
status='finished',score_updated='true' WHERE eid='$eid' AND
username='$user' ") or die('Error');
         $q1 = mysqli_query($con, "SELECT * FROM rank WHERE
username='$user'") or die('Error161');
         $rowcount = mysqli_num_rows($q1);
         if ($rowcount == 0) {
            $q2 = mysqli_query($con, "INSERT INTO rank
VALUES(NULL,'$user','$s',NOW())") or die('Error165');
         } else {
```

```
            while ($row = mysqli_fetch_array($q1)) {
               $sun = $row['score'];
            }

            $sun = $s + $sun;
            $q3 = mysqli_query($con, "UPDATE `rank` SET `score`=$sun
,time=NOW() WHERE username= '$username'") or die('Error174');
         }
      }
      header("location:dash.php?q=0");
   }
}
if (isset($_SESSION['key'])) {
   if (@$_GET['eeidquiz'] && $_SESSION['key'] ==
'54585c506829293a2d4c3b68543b316e2e7a2d277858545a36362e5f39')
{
      $eid = @$_GET['eeidquiz'];
      $r1 = mysqli_query($con, "UPDATE quiz SET status='enabled' WHERE
eid='$eid' ") or die('Error');
      header("location:dash.php?q=0");
   }
}
if (isset($_SESSION['key'])) {
   if (@$_GET['dusername'] && $_SESSION['key'] ==
'54585c506829293a2d4c3b68543b316e2e7a2d277858545a36362e5f39')
{
      $dusername = @$_GET['dusername'];
      $r1 = mysqli_query($con, "DELETE FROM rank WHERE
username='$dusername' ") or die('Error');
      $r2 = mysqli_query($con, "DELETE FROM history WHERE
username='$dusername' ") or die('Error');
      $result = mysqli_query($con, "DELETE FROM user WHERE
username='$dusername' ") or die('Error');
      header("location:dash.php?q=1");
   }
}
if (isset($_SESSION['key'])) {
```

```
   if (@$_GET['q'] == 'rmquiz' && $_SESSION['key'] ==
'54585c506829293a2d4c3b68543b316e2e7a2d277858545a36362e5f39')
{
      $eid = @$_GET['eid'];
      $result = mysqli_query($con, "SELECT * FROM questions WHERE
eid='$eid' ") or die('Error');
      while ($row = mysqli_fetch_array($result)) {
         $qid = $row['qid'];
         $r1 = mysqli_query($con, "DELETE FROM options WHERE
qid='$qid'") or die('Error');
         $r2 = mysqli_query($con, "DELETE FROM answer WHERE qid='$qid'
") or die('Error');
      }

      $r3 = mysqli_query($con, "DELETE FROM questions WHERE eid='$eid'
") or die('Error');
      $r4 = mysqli_query($con, "DELETE FROM quiz WHERE eid='$eid' ") or
die('Error');
      $r4 = mysqli_query($con, "DELETE FROM history WHERE eid='$eid' ")
or die('Error');
      header("location:dash.php?q=5");
   }
}
if (isset($_SESSION['key'])) {
   if (@$_GET['q'] == 'addquiz' && $_SESSION['key'] ==
'54585c506829293a2d4c3b68543b316e2e7a2d277858545a36362e5f39')
{
      $name    = $_POST['name'];
      $name    = ucwords(strtolower($name));
      $total   = $_POST['total'];
      $correct = $_POST['right'];
      $wrong   = $_POST['wrong'];
      $time    = $_POST['time'];
      $status  = "disabled";
      $id      = uniqid();
      $q3      = mysqli_query($con, "INSERT INTO quiz
VALUES(NULL,'$id','$name','$correct','$wrong','$total','$time',
'NOW()','$status')");
      header("location:dash.php?q=4&step=2&eid=$id&n=$total");
```

```
    }
}
if (isset($_SESSION['key'])) {
    if (@$_GET['q'] == 'addqns' && $_SESSION['key'] ==
'54585c506829293a2d4c3b68543b316e2e7a2d277858545a36362e5f39')
{
        $n   = @$_GET['n'];
        $eid = @$_GET['eid'];
        $ch  = @$_GET['ch'];
        for ($i = 1; $i <= $n; $i++) {
            $qid  = uniqid();
            $qns  = addslashes($_POST['qns' . $i]);
            $q3   = mysqli_query($con, "INSERT INTO questions
VALUES  (NULL,'$eid','$qid','$qns' , '$ch' , '$i')") or die();
            $oaid = uniqid();
            $obid = uniqid();
            $ocid = uniqid();
            $odid = uniqid();
            $a    = addslashes($_POST[$i . '1']);
            $b    = addslashes($_POST[$i . '2']);
            $c    = addslashes($_POST[$i . '3']);
            $d    = addslashes($_POST[$i . '4']);
            $qa = mysqli_query($con, "INSERT INTO options
VALUES  (NULL,'$qid','$a','$oaid')") or die('Error61');
            $qb = mysqli_query($con, "INSERT INTO options
VALUES  (NULL,'$qid','$b','$obid')") or die('Error62');
            $qb = mysqli_query($con, "INSERT INTO options
VALUES  (NULL,'$qid','$c','$ocid')") or die('Error63'.mysqli_error($con));
            $qd = mysqli_query($con, "INSERT INTO options
VALUES  (NULL,'$qid','$d','$odid')") or die('Error64');
            $e = $_POST['ans' . $i];
            switch ($e) {
                case 'a':
                    $ansid = $oaid;
                    break;

                case 'b':
                    $ansid = $obid;
                    break;
```

```
            case 'c':
               $ansid = $ocid;
               break;

            case 'd':
               $ansid = $odid;
               break;

            default:
               $ansid = $oaid;
         }

         $qans = mysqli_query($con, "INSERT INTO answer
VALUES  (NULL,'$qid','$ansid')");
      }

      header("location:dash.php?q=0");
   }
}
if (@$_GET['q'] == 'quiz' && @$_GET['step'] == 2 &&
isset($_SESSION['6e447159425d2d']) && $_SESSION['6e447159425d2d']
== "6e447159425d2d" && isset($_POST['ans']) &&
(!isset($_GET['delanswer']))) {
   $eid   = @$_GET['eid'];
   $sn    = @$_GET['n'];
   $total = @$_GET['t'];
   $ans   = $_POST['ans'];
   $qid   = @$_GET['qid'];
   $q = mysqli_query($con, "SELECT * FROM history WHERE
username='$username' AND eid='$_GET[eid]' ") or die('Error197');
   if (mysqli_num_rows($q) > 0) {
      $q = mysqli_query($con, "SELECT * FROM history WHERE
username='$_SESSION[username]' AND eid='$_GET[eid]' ") or
die('Error197');
      while ($row = mysqli_fetch_array($q)) {
         $time   = $row['timestamp'];
         $status = $row['status'];
      }
```

```
    $q = mysqli_query($con, "SELECT * FROM quiz WHERE
eid='$_GET[eid]' ") or die('Error197');
    while ($row = mysqli_fetch_array($q)) {
      $ttime   = $row['time'];
      $qstatus = $row['status'];
    }

    $remaining = (($ttime * 60) - ((time() - $time)));
    if ($status == "ongoing" && $remaining > 0 && $qstatus == "enabled") {
      $q = mysqli_query($con, "SELECT * FROM user_answer WHERE
eid='$_GET[eid]' AND username='$_SESSION[username]' AND qid='$qid' ")
or die('Error115');
      while ($row = mysqli_fetch_array($q)) {
        $prevans = $row['ans'];
      }
      $q = mysqli_query($con, "SELECT * FROM answer WHERE qid='$qid'
");
      while ($row = mysqli_fetch_array($q)) {
        $ansid = $row['ansid'];
      }
      $q = mysqli_query($con, "SELECT * FROM user_answer WHERE
username='$_SESSION[username]' AND eid='$_GET[eid]' AND qid='$qid' ")
or die('Error1977');
      if (mysqli_num_rows($q) != 0) {
        $q = mysqli_query($con, "UPDATE user_answer SET ans='$ans'
WHERE username='$_SESSION[username]' AND eid='$_GET[eid]' AND
qid='$qid' ") or die('Error197');
      } else {
        $q = mysqli_query($con, "INSERT INTO user_answer
VALUES(NULL,'$qid','$ans','$ansid','$_GET[eid]','$_SESSION[username]')");
      }

      $q = mysqli_query($con, "SELECT * FROM options WHERE qid='$qid'
AND optionid='$ans'");
      while ($row = mysqli_fetch_array($q)) {
        $option = $row['option'];
      }
```

```
        if ($ans == $ansid) {
            $q = mysqli_query($con, "SELECT * FROM quiz WHERE eid='$eid'
");
            while ($row = mysqli_fetch_array($q)) {
                $correct = $row['correct'];
                $wrong   = $row['wrong'];
            }

            $q = mysqli_query($con, "SELECT * FROM history WHERE
eid='$eid' AND username='$username' ") or die('Error115');
            while ($row = mysqli_fetch_array($q)) {
                $s = $row['score'];
                $r = $row['correct'];
                $w = $row['wrong'];
            }

            if (isset($prevans) && $prevans == $ansid) {
            } else if (isset($prevans) && $prevans != $ansid) {
                $r++;
                $w--;
                $s = $s + $correct + $wrong;
                $q = mysqli_query($con, "UPDATE `history` SET
`score`=$s,`level`=$sn,`correct`=$r,`wrong`=$w, date=
NOW()  WHERE  username = '$username' AND eid = '$eid'") or
die('Error13');
            } else {
                $r++;
                $s = $s + $correct;
                $q = mysqli_query($con, "UPDATE `history` SET
`score`=$s,`level`=$sn,`correct`=$r, date= NOW()  WHERE  username =
'$username' AND eid = '$eid'") or die('Error14');
            }
        } else {
            $q = mysqli_query($con, "SELECT * FROM quiz WHERE eid='$eid'
") or die('Error129');
            while ($row = mysqli_fetch_array($q)) {
                $wrong   = $row['wrong'];
                $correct = $row['correct'];
```

```
            }

            $q = mysqli_query($con, "SELECT * FROM history WHERE
eid='$eid' AND username='$username' ") or die('Error139');
            while ($row = mysqli_fetch_array($q)) {
               $s = $row['score'];
               $w = $row['wrong'];
               $r = $row['correct'];
            }
            if (isset($prevans) && $prevans != $ansid) {
            } else if (isset($prevans) && $prevans == $ansid) {
               $r--;
               $w++;
               $s = $s - $correct - $wrong;
               $q = mysqli_query($con, "UPDATE `history` SET
`score`=$s,`level`=$sn,`wrong`=$w,`correct`=$r, date=
NOW()  WHERE  username = '$username' AND eid = '$eid'") or
die('Error11');
            } else {
               $w++;
               $s = $s - $wrong;
               $q = mysqli_query($con, "UPDATE `history` SET
`score`=$s,`level`=$sn,`wrong`=$w,date= NOW()  WHERE  username =
'$username' AND eid = '$eid'") or die('Error12');
            }
         }
         header("location:account.php?q=quiz&step=2&eid=$eid&n=$sn&t=$
total") or die('Error152');

      } else {
         unset($_SESSION['6e447159425d2d']);
         $q = mysqli_query($con, "UPDATE history SET status='finished'
WHERE username='$_SESSION[username]' AND eid='$_GET[eid]' ") or
die('Error197');
      $q = mysqli_query($con, "SELECT * FROM history WHERE
eid='$_GET[eid]' AND username='$_SESSION[username]'") or
die('Error156');
            while ($row = mysqli_fetch_array($q)) {
               $s = $row['score'];
```

```
                $scorestatus = $row['score_updated'];
            }
            if($scorestatus=="false"){
                $q = mysqli_query($con, "UPDATE history SET
score_updated='true' WHERE username='$_SESSION[username]' AND
eid='$_GET[eid]' ") or die('Error197');
                $q = mysqli_query($con, "SELECT * FROM rank WHERE
username='$username'") or die('Error161');
                $rowcount = mysqli_num_rows($q);
                if ($rowcount == 0) {
                    $q2 = mysqli_query($con, "INSERT INTO rank
VALUES(NULL,'$username','$s',NOW())") or die('Error165');
                } else {
                    while ($row = mysqli_fetch_array($q)) {
                        $sun = $row['score'];
                    }

                    $sun = $s + $sun;
                    $q = mysqli_query($con, "UPDATE `rank` SET `score`=$sun
,time=NOW() WHERE username= '$username'") or die('Error174');
                }
            }
        header('location:account.php?q=result&eid=' . $_GET[eid]);
    }
  } else {
    unset($_SESSION['6e447159425d2d']);
    $q = mysqli_query($con, "UPDATE history SET status='finished'
WHERE username='$_SESSION[username]' AND eid='$_GET[eid]' ") or
die('Error197');
    $q = mysqli_query($con, "SELECT * FROM history WHERE
eid='$_GET[eid]' AND username='$_SESSION[username]'") or
die('Error156');
            while ($row = mysqli_fetch_array($q)) {
                $s = $row['score'];
                $scorestatus = $row['score_updated'];
            }
            if($scorestatus=="false"){
```

```
                $q = mysqli_query($con, "UPDATE history SET
score_updated='true' WHERE username='$_SESSION[username]' AND
eid='$_GET[eid]' ") or die('Error197');
                $q = mysqli_query($con, "SELECT * FROM rank WHERE
username='$username'") or die('Error161');
                $rowcount = mysqli_num_rows($q);
                if ($rowcount == 0) {
                    $q2 = mysqli_query($con, "INSERT INTO rank
VALUES(NULL,'$username','$s',NOW())") or die('Error165');
                } else {
                    while ($row = mysqli_fetch_array($q)) {
                        $sun = $row['score'];
                    }

                    $sun = $s + $sun;
                    $q = mysqli_query($con, "UPDATE `rank` SET `score`=$sun
,time=NOW() WHERE username= '$username'") or die('Error174');
                }
            }
        header('location:account.php?q=result&eid=' . $_GET[eid]);
    }
}

if (@$_GET['q'] == 'quiz' && @$_GET['step'] == 2 &&
isset($_SESSION['6e447159425d2d']) && $_SESSION['6e447159425d2d']
== "6e447159425d2d" && (!isset($_POST['ans'])) &&
(isset($_GET['delanswer'])) && $_GET['delanswer'] == "delanswer") {
    $eid   = @$_GET['eid'];
    $sn    = @$_GET['n'];
    $total = @$_GET['t'];
    $qid   = @$_GET['qid'];
    $q = mysqli_query($con, "SELECT * FROM history WHERE
username='$username' AND eid='$_GET[eid]' ") or die('Error197');
    if (mysqli_num_rows($q) > 0) {
        $q = mysqli_query($con, "SELECT * FROM history WHERE
username='$_SESSION[username]' AND eid='$_GET[eid]' ") or
die('Error197');
        while ($row = mysqli_fetch_array($q)) {
            $time   = $row['timestamp'];
```

```
        $status = $row['status'];
    }

    $q = mysqli_query($con, "SELECT * FROM quiz WHERE
eid='$_GET[eid]' ") or die('Error197');
    while ($row = mysqli_fetch_array($q)) {
        $ttime   = $row['time'];
        $qstatus = $row['status'];
    }

    $remaining = (($ttime * 60) - ((time() - $time)));
    if ($status == "ongoing" && $remaining > 0 && $qstatus == "enabled") {
        $q = mysqli_query($con, "SELECT * FROM answer WHERE qid='$qid'
");
        while ($row = mysqli_fetch_array($q)) {
            $ansid = $row['ansid'];
        }
        $q = mysqli_query($con, "SELECT * FROM user_answer WHERE
eid='$_GET[eid]' AND username='$_SESSION[username]' AND qid='$qid' ")
or die('Error115');
        $row = mysqli_fetch_array($q);
        $ans = $row['ans'];
        $q = mysqli_query($con, "DELETE FROM user_answer WHERE
qid='$qid' AND username='$_SESSION[username]' AND eid='$_GET[eid]' ")
or die("Error2222");
        if ($ans == $ansid) {
            $q = mysqli_query($con, "SELECT * FROM quiz WHERE eid='$eid'
") or die('Error129');
            while ($row = mysqli_fetch_array($q)) {
                $wrong   = $row['wrong'];
                $correct = $row['correct'];
            }

            $q = mysqli_query($con, "SELECT * FROM history WHERE
eid='$eid' AND username='$username' ") or die('Error139');
            while ($row = mysqli_fetch_array($q)) {
                $s = $row['score'];
                $w = $row['wrong'];
                $r = $row['correct'];
```

```
            }
            $r--;
            $s = $s - $correct;
            $q = mysqli_query($con, "UPDATE `history` SET
`score`=$s,`level`=$sn,`correct`=$r, date= NOW()  WHERE  username =
'$username' AND eid = '$eid'") or die('Error11');
        } else {
            $q = mysqli_query($con, "SELECT * FROM quiz WHERE eid='$eid'
") or die('Error129');
            while ($row = mysqli_fetch_array($q)) {
               $wrong   = $row['wrong'];
               $correct = $row['correct'];
            }

            $q = mysqli_query($con, "SELECT * FROM history WHERE
eid='$eid' AND username='$username' ") or die('Error139');
            while ($row = mysqli_fetch_array($q)) {
               $s = $row['score'];
               $w = $row['wrong'];
               $r = $row['correct'];
            }
            $w--;
            $s = $s + $wrong;
            $q = mysqli_query($con, "UPDATE `history` SET
`score`=$s,`level`=$sn,`wrong`=$w, date= NOW()  WHERE  username =
'$username' AND eid = '$eid'") or die('Error11');
        }
        header('location:account.php?q=quiz&step=2&eid=' . $_GET[eid] .
'&n=' . $_GET[n] . '&t=' . $total);

      } else {
        unset($_SESSION['6e447159425d2d']);
        $q = mysqli_query($con, "UPDATE history SET status='finished'
WHERE username='$_SESSION[username]' AND eid='$_GET[eid]' ") or
die('Error197');
      $q = mysqli_query($con, "SELECT * FROM history WHERE
eid='$_GET[eid]' AND username='$_SESSION[username]'") or
die('Error156');
            while ($row = mysqli_fetch_array($q)) {
```

```
                $s = $row['score'];
                $scorestatus = $row['score_updated'];
            }
            if($scorestatus=="false"){
                $q = mysqli_query($con, "UPDATE history SET
score_updated='true' WHERE username='$_SESSION[username]' AND
eid='$_GET[eid]' ") or die('Error197');
                $q = mysqli_query($con, "SELECT * FROM rank WHERE
username='$username'") or die('Error161');
                $rowcount = mysqli_num_rows($q);
                if ($rowcount == 0) {
                    $q2 = mysqli_query($con, "INSERT INTO rank
VALUES(NULL,'$username','$s',NOW())") or die('Error165');
                } else {
                    while ($row = mysqli_fetch_array($q)) {
                        $sun = $row['score'];
                    }

                    $sun = $s + $sun;
                    $q = mysqli_query($con, "UPDATE `rank` SET `score`=$sun
,time=NOW() WHERE username= '$username'") or die('Error174');
                }
            }
        header('location:account.php?q=result&eid=' . $_GET[eid]);
    }
  } else {
    unset($_SESSION['6e447159425d2d']);
    $q = mysqli_query($con, "UPDATE history SET status='finished'
WHERE username='$_SESSION[username]' AND eid='$_GET[eid]' ") or
die('Error197');
    $q = mysqli_query($con, "SELECT * FROM history WHERE
eid='$_GET[eid]' AND username='$_SESSION[username]'") or
die('Error156');
            while ($row = mysqli_fetch_array($q)) {
                $s = $row['score'];
                $scorestatus = $row['score_updated'];
            }
            if($scorestatus=="false"){
```

```
                $q = mysqli_query($con, "UPDATE history SET
score_updated='true' WHERE username='$_SESSION[username]' AND
eid='$_GET[eid]' ") or die('Error197');
                $q = mysqli_query($con, "SELECT * FROM rank WHERE
username='$username'") or die('Error161');
                $rowcount = mysqli_num_rows($q);
                if ($rowcount == 0) {
                    $q2 = mysqli_query($con, "INSERT INTO rank
VALUES(NULL,'$username','$s',NOW())") or die('Error165');
                } else {
                    while ($row = mysqli_fetch_array($q)) {
                        $sun = $row['score'];
                    }

                    $sun = $s + $sun;
                    $q = mysqli_query($con, "UPDATE `rank` SET `score`=$sun
,time=NOW() WHERE username= '$username'") or die('Error174');
                }
            }
        header('location:account.php?q=result&eid=' . $_GET[eid]);
    }
}
?>
```

➢ ABOUT US PAGE :

```
<!DOCTYPE html>
<html lang="en">
   <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<link rel="icon" href="favicon.ico" type="image/icon" sizes="16x16">
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1"
/>
<meta name="viewport" content="width=device-width, initial-scale=1">

<title>  QUIZ MASTER  </title>
```

```
<link rel="stylesheet" href="css/main.css">
<link  rel="stylesheet" href="css/font.css">
<script src="js/jquery.js" type="text/javascript"></script>

<link  rel="stylesheet" href="css/bootstrap-theme.min.css"/>
 <script src="js/bootstrap.min.js"  type="text/javascript"></script>
 <link href='http://fonts.googleapis.com/css?family=Roboto:400,700,300'
rel='stylesheet' type='text/css'>

   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width, initial-
scale=1.0">
   <title>About Us - QUIZ MASTERS</title>
   <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/5.15.3/css/all.min.css" integrity="sha512-
iBBXm8fW90+nuLcSKlbmrPcLa0OT92xO1BIsZ+ywDWZCvqsWgccV3gFoRB
v0z+8dLJgyAHIhR35VZc2oM/gI1w==" crossorigin="anonymous"
referrerpolicy="no-referrer" />
   <style>
      /* Google Fonts */
      @import
url('https://fonts.googleapis.com/css2?family=Poppins:wght@400;600&di
splay=swap');
 body {
         font-family: 'Poppins', sans-serif;
         margin: 0;
         padding: 0;
         background: radial-gradient(circle,violet, #FFA500);
         color: #333;
         background-size: 200% 200%;
         animation: gradientAnimation 10s ease infinite;
      }
 @keyframes gradientAnimation {
         0% {
            background-position: 0% 50%;
         }
         50% {
            background-position: 100% 50%;
         }
```

```
        100% {
            background-position: 0% 50%;
        }
    }
header {
        position: fixed;
        top: 0;
        left: 0;
        width: 100%;
        background-color: rgba(255, 255, 255, 0.8);
        box-shadow: 0 2px 4px rgba(0, 0, 0, 0.1);
        z-index: 999;
    }
 .header-container {
        display: flex;
        justify-content: space-between;
        align-items: center;
        padding: 10px 20px;
    }
 .header-left h1 {
        margin: 0;
        font-size: 29px;
        color: #333;
    }
.header-right {
        display: flex;
    }
.btn {
        display: inline-block;
        padding: 8px 16px;
        margin-left: 10px;
        background-color: #FFA500;
        color: #fff;
        text-decoration: none;
        border-radius: 4px;
        transition: background-color 0.3s ease;
    }
 .btn:hover {
        background-color: #FF8C00;
```

```
        }
main {
        padding: 120px 20px 20px;
        }
.section-container {
        max-width: 800px;
        margin: 0 auto;
        background-color: rgba(255, 255, 255, 0.8);
        padding: 20px;
        border-radius: 8px;
        box-shadow: 0 2px 4px rgba(0, 0, 0, 0.1);
        margin-bottom: 40px;
        }
 .section-container h2 {
        color: #FFA500;
        margin-top: 0;
        }
 .team-member {
        display: flex;
        align-items: center;
        margin-bottom: 20px;
        }
.team-member img {
        width: 180px;
        height: 200px;
        border-radius: 50%;
        margin-right: 20px;
        }
.contact-info {
        margin-bottom: 10px;
        display: flex;
        align-items: center;
        }
.contact-info i {
        margin-right: 10px;
        color: #FFA500;
        font-size: 28px;
        }
   </style>
```

```
</head>
<body>
  <header>
    <div class="header-container">
      <div class="header-left">
        <font size="7" face="arial black" color="orange"><i> QUIZ
MASTERS</i></font>
      </div>
      <div class="header-right">
        <a href="index.php" class="btn">Home</a>
       </div>
    </div>
  </header>
<main>
    <div class="section-container">
      <h2>About Us</h2>
      <p>We are an online quiz platform dedicated to providing engaging
and educational quizzes on various topics. Our mission is to make learning
fun and accessible to everyone.</p>
    </div>
<div class="section-container">
      <h2>OUR TEAM</h2>
      <div class="team-member">
        <img src="image/new1.jpg" alt="Team Member 1">
        <div>
          <h3>V.AKSHIT</h3>
          <p>CEO and Founder</p>
          <p>Akshay is the driving force behind our online quiz platform,
with a passion for education and technology.</p>
        </div>
      </div>
      <div class="team-member">
        <img src="image/new1.jpg" alt="Team Member 2">
        <div>
          <h3>K.VAMSHI</h3>
          <p>Content Manager</p>
          <p>Vamshi oversees the creation and curation of our engaging
quiz content, ensuring a diverse and educational experience.</p>
        </div>
```

```
        </div>
        <div class="team-member">
          <img src="image/new1.jpg" alt="Team Member 3">
          <div>
            <h3>T.ARUN</h3>
            <p>Technical Lead</p>
            <p>Arun leads our technical team, ensuring a smooth and
seamless user experience on our platform.</p>
          </div>
        </div>
      </div>
<div class="section-container">
        <h2>CONTACT US</h2>
        <div class="contact-info">
          <i class="fas fa-phone-alt"></i> +91 123-456-7890
        </div>
        <div class="contact-info">
          <i class="fas fa-envelope"></i> lfdc@onlinequiz.com
        </div>
        <div class="contact-info">
          <i class="fas fa-map-marker-alt"></i>LITTLE FLOWER DEGREE
COLLEGE,UPPAL.
        </div>
      </div>
   </main>
</body>
</html>
```

➢ FEEDBACK FORM:

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<link rel="icon" href="favicon.ico" type="image/icon" sizes="16x16">
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1"
/>
<title>ONLINE QUIZ </title>
```

```
 <link rel="stylesheet" href="css/main.css">
 <link  rel="stylesheet" href="css/font.css">
 <script src="js/jquery.js" type="text/javascript"></script>
<link  rel="stylesheet" href="css/bootstrap.min.css"/>
 <link  rel="stylesheet" href="css/bootstrap-theme.min.css"/>
  <script src="js/bootstrap.min.js"  type="text/javascript"></script>
  <link href='http://fonts.googleapis.com/css?family=Roboto:400,700,300'
rel='stylesheet' type='text/css'>
<?php
if (@$_GET['w']) {
    echo '<script>alert("' . @$_GET['w'] . '");</script>';
}
?>
</head>
<style>
  .feedback-form {
  margin-left: 450px;
  margin-right: 10px;
}

.small-button {


  font-size: 20px;
  padding: 5px 25px;
}

.logb {
  margin-left: auto;
    margin-right: -200px;
    margin-left: 250px;
  }

</style>
<body >
<div class="row header">
<div class="col-lg-6">
<span class="logo"><font  face="arial black" color="yellow"><i> QUIZ
MASTERS</i></font></span></div>
```

```
<div class="col-md-2">
</div>
<div class="col-md-4">
<?php
include_once 'dbConnection.php';
session_start();
if ((!isset($_SESSION['username']))) {
   echo '<a href="#" class="pull-right logb btn btn-primary small-button"
data-toggle="modal" data-target="#myModal" style="color:white"><span
class="glyphicon glyphicon-log-in" aria-
hidden="true"></span> <font style="font-size:18px;font-
weight:bold">Login</font></a> ';
} else {
   echo '<a href="logout.php?q=feedback.php" class="pull-right logb btn
btn-primary" style="color:white"><span class="glyphicon glyphicon-log-
out" aria-hidden="true"></span> <font style="font-size:12px;font-
weight:bold">Logout</font></a> ';
}
?>
<a href="index.php" class="pull-right btn logb btn-primary small-button"
style="color:white"><span class="glyphicon glyphicon-home" aria-
hidden="true"></span> <font style="font-size:18px;font-
weight:bold">Home</font></a> 
</div></div>
<div class="modal fade" id="myModal">
  <div class="modal-dialog">
   <div class="modal-content title1">
     <div class="modal-header">
       <button type="button" class="close" data-dismiss="modal" aria-
label="Close"><span aria-hidden="true">&times;</span></button>
       <h4 class="modal-title title1"><span style="color:darkblue;font-
size:12px;font-weight:bold">Login to your Account</span></h4>
     </div>
     <div class="modal-body">
       <form class="form-horizontal" action="login.php?q=index.php"
method="POST">
<fieldset>
<div class="form-group">
  <label class="col-md-3 control-label" for="username"></label>
```

```
  <div class="col-md-6">
  <input id="username" name="username" placeholder="Enter your E-mail
id" class="form-control input-md" type="username">
    </div>
</div>
<div class="form-group">
  <label class="col-md-3 control-label" for="password"></label>
  <div class="col-md-6">
    <input id="password" name="password" placeholder="Enter your
Password" class="form-control input-md" type="password">
     </div>
</div>
 </div>
      <div class="modal-footer">
        <button type="button" class="btn btn-default" data-
dismiss="modal">Close</button>
        <button type="submit" class="btn btn-primary">Login</button>
    </fieldset>
</form>
      </div>
    </div>
  </div>
</div>
<div class="bg1">
<div class="row">
<div class="col-md-3"></div>
<div class="col-md-6 panel feedback-form" style="background-
color:lightblue; min-height:430px;">
<h2 align="center" style="font-family:'typo';
color:black"><b>FEEDBACK</h2>
<div style="font-size:14px;margin-top:20px"><br />
<?php
if (@$_GET['q'])
    echo '<span style="font-size:18px;"><span class="glyphicon glyphicon-
ok" aria-hidden="true"></span> ' . @$_GET['q'] . '</span>';
else {
    echo '
<form role="form"  method="post" action="feed.php?q=feedback.php">
<div class="row">
```

```
<div class="col-md-3"><b>Name:</b><br /><br /><br
/><b>Subject:</b></div>
<div class="col-md-9">
<!-- Text input-->
<div class="form-group">
  <input id="name" name="name" placeholder="Enter your name"
class="form-control input-md" type="text"><br />
   <input id="name" name="subject" placeholder="Enter short description
of your feedback" class="form-control input-md" type="text">
</div>
</div>
</div><!--End of row-->
<div class="row">
<div class="col-md-3"><b>E-Mail ID:</b></div>
<div class="col-md-9">
<!-- Text input-->
<div class="form-group">
  <input id="email" name="email" placeholder="Enter your e-mail"
class="form-control input-md" type="email">
 </div>
</div>
</div><!--End of row-->
<div class="form-group">
<textarea rows="5" cols="8" name="feedback" class="form-control"
placeholder="Write feedback here. Keep it clean and simple."></textarea>
</div>
<div class="form-group" align="center">
<font style="font-size:12px;font-weight:bold"><input type="submit"
name="submit" value="Send My Feedback" class="btn btn-primary"
/></font>
</div>
</form>';
}
?>
</div>
<div class="col-md-3"></div></div>
</div></div>
</div>
<div class="row footer">
```

```
  <div class="col-md-2 box"></div>
<div class="col-md-6 box">
<span href="#" data-target="#login"
style="color:lightyellow"><br><br></span></div>
<div class="col-md-2 box">
<span href="feedback.php" style="color:lightyellow;text-
decoration:underline"
onmouseover="this.style('color:yellow')"></span></div>
</div>
</div>
</body>
</html>
```

➢ FEEDBACK CONNECTION:

```
<?php
include_once 'dbConnection.php';
$ref=@$_GET['q'];
$name = $_POST['name'];
$email = $_POST['email'];
$subject = $_POST['subject'];
$id=uniqid();
$date=date("Y-m-d");
$time=date("h:i:sa");
$feedback = $_POST['feedback'];
$q=mysqli_query($con,"INSERT INTO feedback VALUES  ('$id' , '$name',
'$email' , '$subject', '$feedback' , '$date' , '$time')")or die ("Error");
header("location:$ref?q=Thank you for your valuable feedback");
?>
```

➢ CSS

```
@font-face {
  font-family: 'Open Sans';
  font-style: normal;
  font-weight: 400;
```

```
  src: local('Open Sans'), local('OpenSans'),
url(http://themes.googleusercontent.com/static/fonts/opensans/v8/cJZKeOuBrn4kERxqtaUH3T8E0i7KZn-EPnyo3HZu7kw.woff) format('woff');
}

@font-face {
  font-family: 'Ubuntu';
  font-style: normal;
  font-weight: 400;
  src: local('Ubuntu'),
url(http://themes.googleusercontent.com/static/fonts/ubuntu/v5/_xyN3apAT_yRRDeqB3sPRg.woff) format('woff');
}

@font-face {
  font-family: 'Droid Serif';
  font-style: normal;
  font-weight: 400;
  src: local('Droid Serif'), local('DroidSerif'),
url(http://themes.googleusercontent.com/static/fonts/droidserif/v4/0AKsP294HTD-nvJgucYTaIbN6UDyHWBl620a-IRfuBk.woff) format('woff');
}
```

➢ HOME.CSS

```
body {overflow-x:hidden;width:100%;font: 30px "Century Gothic", "Times Roman", sans-serif;background:#eee;min-height:600px;background-attachment:fixed;}
.bg{min-height:540px;}
.bg1{background:url(../image/bg.jpg);min-height:535px;background-repeat: repeat-x;background-color: #202020;-webkit-background-size:cover;-moz-background-size:cover;-o-background-size:cover;background-size:cover;}
@font-face {font-family: 'typo';src: url('../fonts/typo.ttf');}
@font-face {font-family: 'gothic';src: url('../fonts/gothics.ttf');}
.panel{border-color:#eee;margin:40px;padding:20px;font: 15px "Century Gothic", "Times Roman", sans-serif;}
.title{font-family:'typo';}
```

```
.header{background:#202020;height:120px;}
.logo{font-family:'typo';font-size:35px;color:#ffffff;margin:15px;}
.title1{font: 15px "Century Gothic", "Times Roman", sans-serif;}
.title2{font-family: 'Ubuntu', sans-serif;font-size:20px;}
.sub1{color:#FFFFFF;background:#0000ff;font-
size:15px;margin:20px;padding:8px;}
.logb{color:#FFFFFF;background:#0000ff;font-
size:20px;margin:40px;padding:10px;}
.logb:hover{color:lightyellow;}
.sub{color:#FFFFFF;background:#0000ff;font-
size:15px;margin:20px;padding:8px;}
.sub:hover{background-color:#000066;}
.footer{font-size:15px;text-align:center;border-top:1px solid;border-
color:#323232;background-color:#202020;}
.footer a{margin:25px;color:#0000ff;text-decoration:none;font: 15px "Century
Gothic", "Times Roman", sans-serif;}
.box{padding:9px;}
hr{color:#000000;}
.top{margin-top:20px;}
.log1{font: 15px 'Ubuntu', sans-serif;color:#0000ff;margin-left:10px;}
.log{margin:10px;margin-right:60px;margin-left:5px;color:#ffffb3;text-
decoration:none;font-size:20px;font-size:15px;}
.log:hover{color:#ffffff;border-top:2px solid;border-color:#000000;text-
decoration:none;}
.funkyradio div {clear: both;}
.funkyradio label {border-radius: 3px;border: 1px solid #D1D3D4;font-weight:
normal;}
.funkyradio input[type="radio"]:empty,.funkyradio
input[type="checkbox"]:empty {display: none;}
.funkyradio input[type="radio"]:empty ~ label,.funkyradio
input[type="checkbox"]:empty ~ label {position: relative;line-height:
2.5em;text-indent: 3.25em;cursor: pointer;-webkit-user-select: none;-moz-
user-select: none;-ms-user-select: none;user-select: none;}
.funkyradio input[type="radio"]:empty ~ label:before,.funkyradio
input[type="checkbox"]:empty ~ label:before {position: absolute;top:
0;bottom: 0;left: 0;content: '';width: 2.5em;background: #D1D3D4;border-
radius: 3px 0 0 3px;}
```

```
.funkyradio input[type="radio"]:hover:not(:checked) ~ label,
.funkyradio input[type="checkbox"]:hover:not(:checked) ~ label {color: #888;}
.funkyradio input[type="radio"]:hover:not(:checked) ~ label:before,
.funkyradio input[type="checkbox"]:hover:not(:checked) ~ label:before
{content: '\2714';text-indent: .9em;color: #C2C2C2;}
.funkyradio input[type="radio"]:checked ~ label,
.funkyradio input[type="checkbox"]:checked ~ label {color: #777;}
.funkyradio input[type="radio"]:checked ~ label:before,
.funkyradio input[type="checkbox"]:checked ~ label:before {content:
'\2714';text-indent: .9em;color: #333;background-color: #ccc;}
.funkyradio input[type="radio"]:focus ~ label:before,.funkyradio
input[type="checkbox"]:focus ~ label:before {box-shadow: 0 0 0 3px #999;}
.funkyradio-success input[type="radio"]:checked ~ label:before,.funkyradio-
success input[type="checkbox"]:checked ~ label:before {color: #fff;background-
color: #5cb85c;}
```

➢ CSS BOOTSTRAPS:

```
.btn-danger,.btn-default,.btn-info,.btn-primary,.btn-success,.btn-warning{text-
shadow:0 -1px 0 rgba(0,0,0,.2);
-webkit-box-shadow:inset 0 1px 0 rgba(255,255,255,.15),0 1px 1px
rgba(0,0,0,.075);
box-shadow:inset 0 1px 0 rgba(255,255,255,.15),0 1px 1px
rgba(0,0,0,.075)}.btn-danger.active,.btn-danger:active,.btn-default.active,.btn-
default:active,.btn-info.active,.btn-info:active,.btn-primary.active,.btn-
primary:active,.btn-success.active,.btn-success:active,.btn-warning.active,.btn-
warning:active{-webkit-box-shadow:inset 0 3px 5px rgba(0,0,0,.125);
box-shadow:inset 0 3px 5px rgba(0,0,0,.125)}.btn-danger .badge,.btn-default
.badge,.btn-info .badge,.btn-primary .badge,.btn-success .badge,.btn-warning
.badge{text-shadow:none}.btn.active,.btn:active{background-image:none}.btn-
default{text-shadow:0 1px 0 #fff;
background-image:-webkit-linear-gradient(top,#fff 0,#e0e0e0 100%);
background-image:-o-linear-gradient(top,#fff 0,#e0e0e0 100%);background-
image:-webkit-gradient(linear,left top,left
bottom,from(#fff),to(#e0e0e0));background-image:linear-gradient(to
bottom,#fff 0,#e0e0e0 100%);
```

filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ffffffff', endColorstr='#ffe0e0e0', GradientType=0);
filter:progid:DXImageTransform.Microsoft.gradient(enabled=false);background-repeat:repeat-x;border-color:#dbdbdb;border-color:#ccc}.btn-default:focus,.btn-default:hover{background-color:#e0e0e0;
background-position:0 -15px}.btn-default.active,.btn-default:active{background-color:#e0e0e0;border-color:#dbdbdb}.btn-default.disabled,.btn-default:disabled,.btn-default[disabled]{background-color:#e0e0e0;
background-image:none}.btn-primary{background-image:-webkit-linear-gradient(top,#337ab7 0,#265a88 100%);
background-image:-o-linear-gradient(top,#337ab7 0,#265a88 100%);background-image:-*webkit-gradient*(linear,left top,left bottom,*from*(#337ab7),*to*(#265a88));
background-image:linear-gradient(to bottom,#337ab7 0,#265a88 100%);
filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ff337ab7', endColorstr='#ff265a88', GradientType=0);
filter:progid:DXImageTransform.Microsoft.gradient(enabled=false);background-repeat:repeat-x;border-color:#245580}.btn-primary:focus,.btn-primary:hover{background-color:#265a88;background-position:0 -15px}.btn-primary.active,.btn-primary:active{background-color:#265a88;border-color:#245580}.btn-primary.disabled,.btn-primary:disabled,.btn-primary[disabled]{background-color:#265a88;background-image:none}.btn-success{background-image:-webkit-linear-gradient(top,#5cb85c 0,#419641 100%);
background-image:-o-linear-gradient(top,#5cb85c 0,#419641 100%);
background-image:-*webkit-gradient*(linear,left top,left bottom,*from*(#5cb85c),*to*(#419641));background-image:linear-gradient(to bottom,#5cb85c 0,#419641 100%);
filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ff5cb85c', endColorstr='#ff419641', GradientType=0);
filter:progid:DXImageTransform.Microsoft.gradient(enabled=false);background-repeat:repeat-x;border-color:#3e8f3e}.btn-success:focus,.btn-success:hover{background-color:#419641;background-position:0 -15px}.btn-success.active,.btn-success:active{background-color:#419641;border-color:#3e8f3e}.btn-success.disabled,.btn- 100%);background-image:-*webkit-*

gradient(linear,left top,left bottom,*from*(#f0ad4e),*to*(#eb9316));background-image:linear-gradient(to bottom,#f0ad4e 0,#eb9316 100%);
filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#fff0ad4e', endColorstr='#ffeb9316',
GradientType=0);filter:progid:DXImageTransform.Microsoft.gradient(enabled=false);
background-repeat:repeat-x;border-color:#e38d13}.btn-warning:focus,.btn-warning:hover{background-color:#eb9316;background-position:0 -15px}.btn-warning.active,.btn-warning:active{background-color:#eb9316;border-color:#e38d13}.btn-warning.disabled,.btn-warning:disabled,.btn-warning[disabled]{background-color:#eb9316;background-image:none}.btn-danger{background-image:-webkit-linear-gradient(top,#d9534f 0,#c12e2a 100%);
background-image:-o-linear-gradient(top,#d9534f 0,#c12e2a 100%);
background-image:-*webkit-gradient*(linear,left top,left bottom,*from*(#d9534f),*to*(#c12e2a));background-image:linear-gradient(to bottom,#d9534f 0,#c12e2a 100%);
filter:progid:DXImageTransform.Microsoft.gradient(startColorstr=’#ffd9534f’, endColorstr=’#ffc12e2a’, GradientType=0);
filter:progid:DXImageTransform.Microsoft.gradient(enabled=false);background-repeat:repeat-x;border-color:#b92c28}.btn-danger:focus,.btn-danger:hover{background-color:#c12e2a;background-position:0 -15px}.btn-danger.active,.btn-danger:active{background-color:#c12e2a;border-color:#b92c28}.btn-danger.disabled,.btn-danger:disabled,.btn-danger[disabled]{background-color:#c12e2a;background-image:none}.img-thumbnail,.thumbnail{-webkit-box-shadow:0 1px 2px rgba(0,0,0,.075);box-shadow:0 1px 2px rgba(0,0,0,.075)}.dropdown-menu>li>a:focus,.dropdown-menu>li>a:hover{background-color:#e8e8e8;background-image:-webkit-linear-gradient(top,#f5f5f5 0,#e8e8e8 100%);background-image:-o-linear-gradient(top,#f5f5f5 0,#e8e8e8 100%);background-image:-*webkit-gradient*(linear,left top,left bottom,*from*(#f5f5f5),*to*(#e8e8e8));background-image:linear-gradient(to bottom,#f5f5f5 0,#e8e8e8 100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#fff5f5f5', endColorstr='#ffe8e8e8', GradientType=0);background-repeat:repeat-x}.dropdown-menu>.active>a,.dropdown-menu>.active>a:focus,.dropdown-menu>.active>a:hover{background-color:#2e6da4;background-image:-webkit-linear-gradient(top,#337ab7 0,#2e6da4 100%);background-image:-o-linear-

gradient(top,#337ab7 0,#2e6da4 100%);background-image:-*webkit-gradient*(linear,left top,left bottom,*from*(#337ab7),*to*(#2e6da4));background-image:linear-gradient(to bottom,#337ab7 0,#2e6da4 100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ff337ab7', endColorstr='#ff2e6da4', GradientType=0);background-repeat:repeat-x}.navbar-default{background-image:-webkit-linear-gradient(top,#fff 0,#f8f8f8 100%);background-image:-o-linear-gradient(top,#fff 0,#f8f8f8 100%);background-image:-*webkit-gradient*(linear,left top,left bottom,*from*(#fff),*to*(#f8f8f8));background-image:linear-gradient(to bottom,#fff 0,#f8f8f8 100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ffffffff', endColorstr='#fff8f8f8', GradientType=0);filter:progid:DXImageTransform.Microsoft.gradient(enabled=false);background-repeat:repeat-x;border-radius:4px;-webkit-box-shadow:inset 0 1px 0 rgba(255,255,255,.15),0 1px 5px rgba(0,0,0,.075);box-shadow:inset 0 1px 0 rgba(255,255,255,.15),0 1px 5px rgba(0,0,0,.075)}.navbar-default .navbar-nav>.active>a,.navbar-default .navbar-nav>.open>a{background-image:-webkit-linear-gradient(top,#dbdbdb 0,#e2e2e2 100%);background-image:-o-linear-gradient(top,#dbdbdb 0,#e2e2e2 100%);background-image:-*webkit-gradient*(linear,left top,left bottom,*from*(#dbdbdb),*to*(#e2e2e2));background-image:linear-gradient(to bottom,#dbdbdb 0,#e2e2e2 100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ffdbdbdb', endColorstr='#ffe2e2e2', GradientType=0);background-repeat:repeat-x;-webkit-box-shadow:inset 0 3px 9px rgba(0,0,0,.075);box-shadow:inset 0 3px 9px rgba(0,0,0,.075)}.navbar-brand,.navbar-nav>li>a{text-shadow:0 1px 0 rgba(255,255,255,.25)}.navbar-inverse{background-image:-webkit-linear-gradient(top,#3c3c3c 0,#222 100%);background-image:-o-linear-gradient(top,#3c3c3c 0,#222 100%);background-image:-*webkit-gradient*(linear,left top,left bottom,*from*(#3c3c3c),*to*(#222));background-image:linear-gradient(to bottom,#3c3c3c 0,#222 100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ff3c3c3c', endColorstr='#ff222222', GradientType=0);filter:progid:DXImageTransform.Microsoft.gradient(enabled=false);
background-repeat:repeat-x}.navbar-inverse .navbar-nav>.active>a,.navbar-inverse .navbar-nav>.open>a{background-image:-webkit-linear-gradient(top,#080808 0,#0f0f0f 100%);

background-image:-o-linear-gradient(top,#080808 0,#0f0f0f
100%);background-image:-*webkit-gradient*(linear,left top,left
bottom,*from*(#080808),*to*(#0f0f0f));background-image:linear-gradient(to
bottom,#080808 0,#0f0f0f 100%);
filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ff080808',
endColorstr='#ff0f0f0f', GradientType=0);
background-repeat:repeat-x;-webkit-box-shadow:inset 0 3px 9px
rgba(0,0,0,.25);
box-shadow:inset 0 3px 9px rgba(0,0,0,.25)}.navbar-inverse .navbar-
brand,.navbar-inverse .navbar-nav>li>a{text-shadow:0 -1px 0
rgba(0,0,0,.25)}.navbar-fixed-bottom,.navbar-fixed-top,.navbar-static-
top{border-radius:0}@media (max-width:767px){.navbar .navbar-nav .open
.dropdown-menu>.active>a,.navbar .navbar-nav .open .dropdown-
menu>.active>a:focus,.navbar .navbar-nav .open .dropdown-
menu>.active>a:hover{color:#fff;background-image:-webkit-linear-
gradient(top,#337ab7 0,#2e6da4 100%);background-image:-o-linear-
gradient(top,#337ab7 0,#2e6da4 100%);background-image:-*webkit-*
gradient(linear,left top,left bottom,*from*(#337ab7),*to*(#2e6da4));background-
image:linear-gradient(to bottom,#337ab7 0,#2e6da4
100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ff337
ab7', endColorstr='#ff2e6da4', GradientType=0);
background-repeat:repeat-x}}.alert{text-shadow:0 1px 0 rgba(255,255,255,.2);-
webkit-box-shadow:inset 0 1px 0 rgba(255,255,255,.25),0 1px 2px
rgba(0,0,0,.05);box-shadow:inset 0 1px 0 rgba(255,255,255,.25),0 1px 2px
rgba(0,0,0,.05)}.alert-success{background-image:-webkit-linear-
gradient(top,#dff0d8 0,#c8e5bc 100%);
background-image:-o-linear-gradient(top,#dff0d8 0,#c8e5bc 100%);
background-image:-*webkit-gradient*(linear,left top,left
bottom,*from*(#dff0d8),*to*(#c8e5bc));
background-image:linear-gradient(to bottom,#dff0d8 0,#c8e5bc
100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ffdff0
d8', endColorstr='#ffc8e5bc', GradientType=0);background-repeat:repeat-
x;border-color:#b2dba1}.alert-info{background-image:-webkit-linear-
gradient(top,#d9edf7 0,#b9def0 100%);
background-image:-o-linear-gradient(top,#d9edf7 0,#b9def0 100%);
background-image:-*webkit-gradient*(linear,left top,left
bottom,*from*(#d9edf7),*to*(#b9def0));

background-image:linear-gradient(to bottom,#d9edf7 0,#b9def0 100%);
filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ffd9edf7',
endColorstr='#ffb9def0', GradientType=0);background-repeat:repeat-x;border-
color:#9acfea}.alert-warning{background-image:-webkit-linear-
gradient(top,#fcf8e3 0,#f8efc0 100%);background-image:-o-linear-
gradient(top,#fcf8e3 0,#f8efc0 100%);background-image:-*webkit-
gradient*(linear,left top,left bottom,*from*(#fcf8e3),*to*(#f8efc0));background-
image:linear-gradient(to bottom,#fcf8e3 0,#f8efc0
100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#fffcf8
e3', endColorstr='#fff8efc0', GradientType=0);background-repeat:repeat-
x;border-color:#f5e79e}.alert-danger{background-image:-webkit-linear-
gradient(top,#f2dede 0,#e7c3c3 100%);background-image:-o-linear-
gradient(top,#f2dede 0,#e7c3c3 100%);background-image:-*webkit-
gradient*(linear,left top,left bottom,*from*(#f2dede),*to*(#e7c3c3));background-
image:linear-gradient(to bottom,#f2dede 0,#e7c3c3
100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#fff2d
ede', endColorstr='#ffe7c3c3', GradientType=0);background-repeat:repeat-
x;border-color:#dca7a7}.progress{background-image:-webkit-linear-
gradient(top,#ebebeb 0,#f5f5f5 100%);background-image:-o-linear-
gradient(top,#ebebeb 0,#f5f5f5 100%);background-image:-*webkit-
gradient*(linear,left top,left bottom,*from*(#ebebeb),*to*(#f5f5f5));background-
image:linear-gradient(to bottom,#ebebeb 0,#f5f5f5
100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ffebe
beb', endColorstr='#fff5f5f5', GradientType=0);background-repeat:repeat-
x}.progress-bar{background-image:-webkit-linear-gradient(top,#337ab7
0,#286090 100%);background-image:-o-linear-gradient(top,#337ab7
0,#286090 100%);background-image:-*webkit-gradient*(linear,left top,left
bottom,*from*(#337ab7),*to*(#286090));background-image:linear-gradient(to
bottom,#337ab7 0,#286090
100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ff337
ab7', endColorstr='#ff286090', GradientType=0);background-repeat:repeat-
x}.progress-bar-success{background-image:-webkit-linear-gradient(top,#5cb85c
0,#449d44 100%);background-image:-o-linear-gradient(top,#5cb85c 0,#449d44
100%);background-image:-*webkit-gradient*(linear,left top,left
bottom,*from*(#5cb85c),*to*(#449d44));background-image:linear-gradient(to
bottom,#5cb85c 0,#449d44
100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ff5cb

85c', endColorstr='#ff449d44', GradientType=0);background-repeat:repeat-x}.progress-bar-info{background-image:-webkit-linear-gradient(top,#5bc0de 0,#31b0d5 100%);background-image:-o-linear-gradient(top,#5bc0de 0,#31b0d5 100%);background-image:-*webkit-gradient*(linear,left top,left bottom,*from*(#5bc0de),*to*(#31b0d5));background-image:linear-gradient(to bottom,#5bc0de 0,#31b0d5 100%); shadow:0 1px 2px rgba(0,0,0,.05)}.panel-default>.panel-heading{background-image:-webkit-linear-gradient(top,#f5f5f5 (startColorstr='#ff337ab7', endColorstr='#ff2e6da4', GradientType=0);background-repeat:repeat-x}.panel-success>.panel-heading{background-image:-webkit-linear-gradient(top,#dff0d8 0,#d0e9c6 100%);background-image:-o-linear-gradient(top,#dff0d8 0,#d0e9c6 100%);background-image:-*webkit-gradient*(linear,left top,left bottom,*from*(#dff0d8),*to*(#d0e9c6));background-image:linear-gradient(to bottom,#dff0d8 0,#d0e9c6 100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ffdff0d8', endColorstr='#ffd0e9c6', GradientType=0);background-repeat:repeat-x}.panel-info>.panel-heading{background-image:-webkit-linear-gradient(top,#d9edf7 0,#c4e3f3 100%);background-image:-o-linear-gradient(top,#d9edf7 0,#c4e3f3 100%);background-image:-*webkit-gradient*(linear,left top,left bottom,*from*(#d9edf7),*to*(#c4e3f3));background-image:linear-gradient(to bottom,#d9edf7 0,#c4e3f3 100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ffd9edf7', endColorstr='#ffc4e3f3', GradientType=0);background-repeat:repeat-x}.panel-warning>.panel-heading{background-image:-webkit-linear-gradient(top,#fcf8e3 0,#faf2cc 100%);background-image:-o-linear-gradient(top,#fcf8e3 0,#faf2cc 100%);background-image:-webkit-gradient(linear,left top,left bottom,from(#fcf8e3),to(#faf2cc));background-image:linear-gradient(to bottom,#fcf8e3 0,#faf2cc 100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#fffcf8e3', endColorstr='#fffaf2cc', GradientType=0);background-repeat:repeat-x}.panel-danger>.panel-heading{background-image:-webkit-linear-gradient(top,#f2dede 0,#ebcccc 100%);background-image:-o-linear-gradient(top,#f2dede 0,#ebcccc 100%);background-image:-webkit-gradient(linear,left top,left bottom,from(#f2dede),to(#ebcccc));background-image:linear-gradient(to bottom,#f2dede 0,#ebcccc 100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#fff2dede', endColorstr='#ffebcccc', GradientType=0);background-repeat:repeat-

```
x}.well{background-image:-webkit-linear-gradient(top,#e8e8e8 0,#f5f5f5
100%);background-image:-o-linear-gradient(top,#e8e8e8 0,#f5f5f5
100%);background-image:-webkit-gradient(linear,left top,left
bottom,from(#e8e8e8),to(#f5f5f5));background-image:linear-gradient(to
bottom,#e8e8e8 0,#f5f5f5
100%);filter:progid:DXImageTransform.Microsoft.gradient(startColorstr='#ffe8e
8e8', endColorstr='#fff5f5f5', GradientType=0);background-repeat:repeat-
x;border-color:#dcdcdc;-webkit-box-shadow:inset 0 1px 3px rgba(0,0,0,.05),0
1px 0 rgba(255,255,255,.1);box-shadow:inset 0 1px 3px rgba(0,0,0,.05),0 1px 0
rgba(255,255,255,.1)}
```

➢ JAVASCRIPT BOOTSTRAP:

```
if (typeof jQuery === 'undefined') {
  throw new Error('Bootstrap\'s JavaScript requires jQuery')
}
+function ($) {
  'use strict';
  var version = $.fn.jquery.split(' ')[0].split('.')
  if ((version[0] < 2 && version[1] < 9) || (version[0] == 1 && version[1] ==
9 && version[2] < 1)) {
    throw new Error('Bootstrap\'s JavaScript requires jQuery version 1.9.1
or higher')
  }
}(jQuery);
+function ($) {
  'use strict';
function transitionEnd() {
    var el = document.createElement('bootstrap')
 var transEndEventNames = {
      WebkitTransition : 'webkitTransitionEnd',
      MozTransition    : 'transitionend',
      OTransition      : 'oTransitionEnd otransitionend',
      transition       : 'transitionend'
    }
 for (var name in transEndEventNames) {
      if (el.style[name] !== undefined) {
        return { end: transEndEventNames[name] }
```

```
      }
    }
  return false // explicit for ie8 (  ._.)
  }
  // http://blog.alexmaccaw.com/css-transitions
   $.fn.emulateTransitionEnd = function (duration) {
    var called = false
    var $el = this
    $(this).one('bsTransitionEnd', function () { called = true })
    var callback = function () { if (!called)
$($el).trigger($.support.transition.end) }
    setTimeout(callback, duration)
    return this
  }
  $(function () {
    $.support.transition = transitionEnd()
if (!$.support.transition) return
  $.event.special.bsTransitionEnd = {
      bindType: $.support.transition.end,
      delegateType: $.support.transition.end,
      handle: function (e) {
        if ($(e.target).is(this)) return e.handleObj.handler.apply(this,
arguments)
      }
    }
  })
}(jQuery);
+function ($) {
  'use strict';
// ALERT CLASS DEFINITION
  // ======================

  var dismiss = '[data-dismiss="alert"]'
  var Alert   = function (el) {
    $(el).on('click', dismiss, this.close)
  }
  Alert.VERSION = '3.3.4'
Alert.TRANSITION_DURATION = 150
```

```
  Alert.prototype.close = function (e) {
    var $this    = $(this)
    var selector = $this.attr('data-target')
if (!selector) {
      selector = $this.attr('href')
      selector = selector && selector.replace(/.*(?=#[^\s]*$)/, '') // strip for
ie7
    }
var $parent = $(selector)
    if (e) e.preventDefault()
    if (!$parent.length) {
      $parent = $this.closest('.alert')
    }
$parent.trigger(e = $.Event('close.bs.alert'))
 if (e.isDefaultPrevented()) return
 $parent.removeClass('in')
 function removeElement() {
      // detach from parent, fire event then clean up data
      $parent.detach().trigger('closed.bs.alert').remove()
    }
 $.support.transition && $parent.hasClass('fade') ?
      $parent
        .one('bsTransitionEnd', removeElement)
        .emulateTransitionEnd(Alert.TRANSITION_DURATION) :
      removeElement()
  }
 function Plugin(option) {
    return this.each(function () {
      var $this = $(this)
      var data  = $this.data('bs.alert')
  if (!data) $this.data('bs.alert', (data = new Alert(this)))
      if (typeof option == 'string') data[option].call($this)
    })
  }
 var old = $.fn.alert
 $.fn.alert = Plugin
  $.fn.alert.Constructor = Alert
 // ALERT NO CONFLICT
  // =================
```

```
  $.fn.alert.noConflict = function () {
    $.fn.alert = old
    return this
  }
$(document).on('click.bs.alert.data-api', dismiss, Alert.prototype.close)
}(jQuery);
+function ($) {
  'use strict';
  var Button = function (element, options) {
    this.$element  = $(element)
    this.options   = $.extend({}, Button.DEFAULTS, options)
    this.isLoading = false
  }
  Button.VERSION  = '3.3.4'
 Button.DEFAULTS = {
    loadingText: 'loading...'
  }
Button.prototype.setState = function (state) {
    var d    = 'disabled'
    var $el  = this.$element
    var val  = $el.is('input') ? 'val' : 'html'
    var data = $el.data()
   state = state + 'Text'
 if (data.resetText == null) $el.data('resetText', $el[val]())
 // push to event loop to allow forms to submit
    setTimeout($.proxy(function () {
      $el[val](data[state] == null ? this.options[state] : data[state])

      if (state == 'loadingText') {
        this.isLoading = true
        $el.addClass(d).attr(d, d)
      } else if (this.isLoading) {
        this.isLoading = false
        $el.removeClass(d).removeAttr(d)
      }
    }, this), 0)
  }
Button.prototype.toggle = function () {
```

```
    var changed = true
    var $parent = this.$element.closest('[data-toggle="buttons"]')
  if ($parent.length) {
      var $input = this.$element.find('input')
      if ($input.prop('type') == 'radio') {
        if ($input.prop('checked') && this.$element.hasClass('active')) changed
= false
        else $parent.find('.active').removeClass('active')
      }
      if (changed) $input.prop('checked',
!this.$element.hasClass('active')).trigger('change')
    } else {
      this.$element.attr('aria-pressed', !this.$element.hasClass('active'))
    }
 if (changed) this.$element.toggleClass('active')
  }
 // BUTTON PLUGIN DEFINITION
  // ========================
function Plugin(option) {
    return this.each(function () {
      var $this   = $(this)
      var data    = $this.data('bs.button')
      var options = typeof option == 'object' && option

      if (!data) $this.data('bs.button', (data = new Button(this, options)))

      if (option == 'toggle') data.toggle()
      else if (option) data.setState(option)
    })
  }
var old = $.fn.button
 $.fn.button             = Plugin
  $.fn.button.Constructor = Button
 // BUTTON NO CONFLICT
  // ===================
 $.fn.button.noConflict = function () {
    $.fn.button = old
    return this
  }
```

```
 // BUTTON DATA-API
  // ===============
$(document)
   .on('click.bs.button.data-api', '[data-toggle^="button"]', function (e) {
     var $btn = $(e.target)
     if (!$btn.hasClass('btn')) $btn = $btn.closest('.btn')
     Plugin.call($btn, 'toggle')
     e.preventDefault()
   })
   .on('focus.bs.button.data-api blur.bs.button.data-api', '[data-
toggle^="button"]', function (e) {
     $(e.target).closest('.btn').toggleClass('focus', /^focus(in)?$/.test(e.type))
   })
}(jQuery);
+function ($) {
  'use strict';

  // CAROUSEL CLASS DEFINITION
  // =========================

  var Carousel = function (element, options) {
    this.$element    = $(element)
    this.$indicators = this.$element.find('.carousel-indicators')
    this.options     = options
    this.paused      = null
    this.sliding     = null
    this.interval    = null
    this.$active     = null
    this.$items      = null

    this.options.keyboard && this.$element.on('keydown.bs.carousel',
$.proxy(this.keydown, this))

    this.options.pause == 'hover' && !('ontouchstart' in
document.documentElement) && this.$element
      .on('mouseenter.bs.carousel', $.proxy(this.pause, this))
      .on('mouseleave.bs.carousel', $.proxy(this.cycle, this))
  }
Carousel.VERSION  = '3.3.4'
```

```
Carousel.TRANSITION_DURATION = 600
  Carousel.DEFAULTS = {
    interval: 5000,
    pause: 'hover',
    wrap: true,
    keyboard: true
  }
Carousel.prototype.keydown = function (e) {
    if (/input|textarea/i.test(e.target.tagName)) return
    switch (e.which) {
      case 37: this.prev(); break
      case 39: this.next(); break
      default: return
    }
 e.preventDefault()
  }
Carousel.prototype.cycle = function (e) {
    e || (this.paused = false)
this.interval && clearInterval(this.interval)
 this.options.interval
      && !this.paused
      && (this.interval = setInterval($.proxy(this.next, this),
this.options.interval))
 return this
  }
Carousel.prototype.getItemIndex = function (item) {
    this.$items = item.parent().children('.item')
    return this.$items.index(item || this.$active)
  }

  Carousel.prototype.getItemForDirection = function (direction, active) {
    var activeIndex = this.getItemIndex(active)
    var willWrap = (direction == 'prev' && activeIndex === 0)
                || (direction == 'next' && activeIndex == (this.$items.length - 1))
    if (willWrap && !this.options.wrap) return active
    var delta = direction == 'prev' ? -1 : 1
    var itemIndex = (activeIndex + delta) % this.$items.length
    return this.$items.eq(itemIndex)
  }
```

```
Carousel.prototype.to = function (pos) {
   var that       = this
   var activeIndex = this.getItemIndex(this.$active =
this.$element.find('.item.active'))
if (pos > (this.$items.length - 1) || pos < 0) return
if (this.sliding)      return this.$element.one('slid.bs.carousel', function () {
that.to(pos) }) // yes, "slid"
   if (activeIndex == pos) return this.pause().cycle()
return this.slide(pos > activeIndex ? 'next' : 'prev', this.$items.eq(pos))
 }
Carousel.prototype.pause = function (e) {
   e || (this.paused = true)

   if (this.$element.find('.next, .prev').length && $.support.transition) {
     this.$element.trigger($.support.transition.end)
     this.cycle(true)
   }

   this.interval = clearInterval(this.interval)

   return this
 }

 Carousel.prototype.next = function () {
   if (this.sliding) return
   return this.slide('next')
 }

 Carousel.prototype.prev = function () {
   if (this.sliding) return
   return this.slide('prev')
 }
Carousel.prototype.slide = function (type, next) {
   var $active   = this.$element.find('.item.active')
   var $next     = next || this.getItemForDirection(type, $active)
   var isCycling = this.interval
   var direction = type == 'next' ? 'left' : 'right'
   var that      = this
```

```
    if ($next.hasClass('active')) return (this.sliding = false)

    var relatedTarget = $next[0]
    var slideEvent = $.Event('slide.bs.carousel', {
      relatedTarget: relatedTarget,
      direction: direction
    })
    this.$element.trigger(slideEvent)
    if (slideEvent.isDefaultPrevented()) return
this.sliding = true
    isCycling && this.pause()
    if (this.$indicators.length) {
      this.$indicators.find('.active').removeClass('active')
      var $nextIndicator =
$(this.$indicators.children()[this.getItemIndex($next)])
      $nextIndicator && $nextIndicator.addClass('active')
    }
   var slidEvent = $.Event('slid.bs.carousel', { relatedTarget: relatedTarget,
direction: direction }) // yes, "slid"
    if ($.support.transition && this.$element.hasClass('slide')) {
      $next.addClass(type)
      $next[0].offsetWidth // force reflow
      $active.addClass(direction)
      $next.addClass(direction)
      $active
        .one('bsTransitionEnd', function () {
          $next.removeClass([type, direction].join(' ')).addClass('active')
          $active.removeClass(['active', direction].join(' '))
          that.sliding = false
          setTimeout(function () {
            that.$element.trigger(slidEvent)
          }, 0)
        })
        .emulateTransitionEnd(Carousel.TRANSITION_DURATION)
    } else {
      $active.removeClass('active')
      $next.addClass('active')
      this.sliding = false
      this.$element.trigger(slidEvent)
```

```
    }
  isCycling && this.cycle()
    return this
  }
function Plugin(option) {
    return this.each(function () {
      var $this   = $(this)
      var data    = $this.data('bs.carousel')
      var options = $.extend({}, Carousel.DEFAULTS, $this.data(), typeof
option == 'object' && option)
      var action  = typeof option == 'string' ? option : options.slide

      if (!data) $this.data('bs.carousel', (data = new Carousel(this, options)))
      if (typeof option == 'number') data.to(option)
      else if (action) data[action]()
      else if (options.interval) data.pause().cycle()
    })
  }
  var old = $.fn.carousel
  $.fn.carousel             = Plugin
  $.fn.carousel.Constructor = Carousel
  $.fn.carousel.noConflict = function () {
    $.fn.carousel = old
    return this
  }
 // CAROUSEL DATA-API
  // ==================

  var clickHandler = function (e) {
    var href
    var $this   = $(this)
    var $target = $($this.attr('data-target') || (href = $this.attr('href')) &&
href.replace(/.*(?=#[^\s]+$)/, ''))) // strip for ie7
    if (!$target.hasClass('carousel')) return
    var options = $.extend({}, $target.data(), $this.data())
    var slideIndex = $this.attr('data-slide-to')
    if (slideIndex) options.interval = false
 Plugin.call($target, options)
    if (slideIndex) {
```

```
      $target.data('bs.carousel').to(slideIndex)
    }
e.preventDefault()
  }
$(document)
    .on('click.bs.carousel.data-api', '[data-slide]', clickHandler)
    .on('click.bs.carousel.data-api', '[data-slide-to]', clickHandler)
$(window).on('load', function () {
    $('[data-ride="carousel"]').each(function () {
      var $carousel = $(this)
      Plugin.call($carousel, $carousel.data())
    })
  })
}(jQuery);
+function ($) {
  'use strict';

  // COLLAPSE PUBLIC CLASS DEFINITION
  // ================================

  var Collapse = function (element, options) {
    this.$element      = $(element)
    this.options       = $.extend({}, Collapse.DEFAULTS, options)
    this.$trigger      = $('[data-toggle="collapse"][href="#' + element.id + '"],' +
                          '[data-toggle="collapse"][data-target="#' + element.id + '"]')
    this.transitioning = null
 if (this.options.parent) {
      this.$parent = this.getParent()
    } else {
      this.addAriaAndCollapsedClass(this.$element, this.$trigger)
    }
 if (this.options.toggle) this.toggle()
  }
Collapse.VERSION  = '3.3.4'
Collapse.TRANSITION_DURATION = 350
Collapse.DEFAULTS = {
    toggle: true
  }
 Collapse.prototype.dimension = function () {
```

```
    var hasWidth = this.$element.hasClass('width')
    return hasWidth ? 'width' : 'height'
  }
 Collapse.prototype.show = function () {
    if (this.transitioning || this.$element.hasClass('in')) return
var activesData
    var actives = this.$parent && this.$parent.children('.panel').children('.in,
.collapsing')
if (actives && actives.length) {
      activesData = actives.data('bs.collapse')
      if (activesData && activesData.transitioning) return
    }
 var startEvent = $.Event('show.bs.collapse')
    this.$element.trigger(startEvent)
    if (startEvent.isDefaultPrevented()) return
if (actives && actives.length) {
      Plugin.call(actives, 'hide')
      activesData || actives.data('bs.collapse', null)
    }
 var dimension = this.dimension()
this.$element
      .removeClass('collapse')
      .addClass('collapsing')[dimension](0)
      .attr('aria-expanded', true)
this.$trigger
      .removeClass('collapsed')
      .attr('aria-expanded', true)
 this.transitioning = 1
var complete = function () {
      this.$element
        .removeClass('collapsing')
        .addClass('collapse in')[dimension]('')
      this.transitioning = 0
      this.$element
        .trigger('shown.bs.collapse')
    }
 if (!$.support.transition) return complete.call(this)
var scrollSize = $.camelCase(['scroll', dimension].join('-'))
 this.$element
```

```
      .one('bsTransitionEnd', $.proxy(complete, this))
.emulateTransitionEnd(Collapse.TRANSITION_DURATION)[dimension](this
.$element[0][scrollSize])
  }
Collapse.prototype.hide = function () {
    if (this.transitioning || !this.$element.hasClass('in')) return
var startEvent = $.Event('hide.bs.collapse')
    this.$element.trigger(startEvent)
    if (startEvent.isDefaultPrevented()) return

    var dimension = this.dimension()
this.$element[dimension](this.$element[dimension]())[0].offsetHeight
    this.$element
      .addClass('collapsing')
      .removeClass('collapse in')
      .attr('aria-expanded', false)
    this.$trigger
      .addClass('collapsed')
      .attr('aria-expanded', false)
    this.transitioning = 1
    var complete = function () {
      this.transitioning = 0
      this.$element
        .removeClass('collapsing')
        .addClass('collapse')
        .trigger('hidden.bs.collapse')
    }
    if (!$.support.transition) return complete.call(this)
    this.$element
      [dimension](0)
      .one('bsTransitionEnd', $.proxy(complete, this))
      .emulateTransitionEnd(Collapse.TRANSITION_DURATION)
  }
  Collapse.prototype.toggle = function () {
    this[this.$element.hasClass('in') ? 'hide' : 'show']()
  }
Collapse.prototype.getParent = function () {
    return $(this.options.parent)
```

```
    .find('[data-toggle="collapse"][data-parent="' + this.options.parent +
'"]')
    .each($.proxy(function (i, element) {
      var $element = $(element)
      this.addAriaAndCollapsedClass(getTargetFromTrigger($element),
$element)
    }, this))
    .end()
  }
  Collapse.prototype.addAriaAndCollapsedClass = function ($element,
$trigger) {
    var isOpen = $element.hasClass('in')
$element.attr('aria-expanded', isOpen)
    $trigger
      .toggleClass('collapsed', !isOpen)
      .attr('aria-expanded', isOpen)
  }
function getTargetFromTrigger($trigger) {
    var href
    var target = $trigger.attr('data-target')
      || (href = $trigger.attr('href')) && href.replace(/.*(?=#[^\s]+$)/, '') //
strip for ie7
    return $(target)
  }
 // COLLAPSE PLUGIN DEFINITION
  // ==========================
  function Plugin(option) {
    return this.each(function () {
      var $this   = $(this)
      var data    = $this.data('bs.collapse')
      var options = $.extend({}, Collapse.DEFAULTS, $this.data(), typeof option
== 'object' && option)

      if (!data && options.toggle && /show|hide/.test(option)) options.toggle
= false
      if (!data) $this.data('bs.collapse', (data = new Collapse(this, options)))
      if (typeof option == 'string') data[option]()
    })
  }
```

```
var old = $.fn.collapse
$.fn.collapse            = Plugin
  $.fn.collapse.Constructor = Collapse
  // COLLAPSE NO CONFLICT
  // ====================
  $.fn.collapse.noConflict = function () {
    $.fn.collapse = old
    return this
  }
// COLLAPSE DATA-API
  // ==================
  $(document).on('click.bs.collapse.data-api', '[data-toggle="collapse"]',
function (e) {
    var $this   = $(this)
 if (!$this.attr('data-target')) e.preventDefault()
var $target = getTargetFromTrigger($this).
  var data    = $target.data('bs.collapse')
    var option  = data ? 'toggle' : $this.data()
 Plugin.call($target, option)
  })
}(jQuery);
/*
+function ($) {
  'use strict';

  // DROPDOWN CLASS DEFINITION
  // =========================

  var backdrop = '.dropdown-backdrop'
  var toggle   = '[data-toggle="dropdown"]'
  var Dropdown = function (element) {
    $(element).on('click.bs.dropdown', this.toggle)
  }
Dropdown.VERSION = '3.3.4'
Dropdown.prototype.toggle = function (e) {
    var $this = $(this)

    if ($this.is('.disabled, :disabled')) return
var $parent  = getParent($this)
```

```
    var isActive = $parent.hasClass('open')
clearMenus()
if (!isActive) {
      if ('ontouchstart' in document.documentElement &&
!$parent.closest('.navbar-nav').length) {
        // if mobile we use a backdrop because click events don't delegate
        $('<div class="dropdown-backdrop"/>').insertAfter($(this)).on('click',
clearMenus)
      }
var relatedTarget = { relatedTarget: this }
      $parent.trigger(e = $.Event('show.bs.dropdown', relatedTarget))
 if (e.isDefaultPrevented()) return
 $this
        .trigger('focus')
        .attr('aria-expanded', 'true')
$parent
        .toggleClass('open')
        .trigger('shown.bs.dropdown', relatedTarget)
    }
return false
  }

  Dropdown.prototype.keydown = function (e) {
    if (!/(38|40|27|32)/.test(e.which) ||
/input|textarea/i.test(e.target.tagName)) return

    var $this = $(this)

    e.preventDefault()
    e.stopPropagation()

    if ($this.is('.disabled, :disabled')) return

    var $parent  = getParent($this)
    var isActive = $parent.hasClass('open')

    if ((!isActive && e.which != 27) || (isActive && e.which == 27)) {
      if (e.which == 27) $parent.find(toggle).trigger('focus')
      return $this.trigger('click')
    }
```

```
    var desc = ' li:not(.disabled):visible a'
    var $items = $parent.find('[role="menu"]' + desc + ', [role="listbox"]' +
desc)

    if (!$items.length) return

    var index = $items.index(e.target)

    if (e.which == 38 && index > 0)                index--                        // up
    if (e.which == 40 && index < $items.length - 1) index++                       //
down
    if (!~index)                                   index = 0

    $items.eq(index).trigger('focus')
  }

  function clearMenus(e) {
    if (e && e.which === 3) return
    $(backdrop).remove()
    $(toggle).each(function () {
      var $this         = $(this)
      var $parent       = getParent($this)
      var relatedTarget = { relatedTarget: this }

      if (!$parent.hasClass('open')) return

      $parent.trigger(e = $.Event('hide.bs.dropdown', relatedTarget))

      if (e.isDefaultPrevented()) return

      $this.attr('aria-expanded', 'false')
      $parent.removeClass('open').trigger('hidden.bs.dropdown',
relatedTarget)
    })
  }
  function getParent($this) {
    var selector = $this.attr('data-target')

    if (!selector) {
```

```
      selector = $this.attr('href')
      selector = selector && /#[A-Za-z]/.test(selector) &&
selector.replace(/.*(?=#[^\s]*$)/, '') // strip for ie7
    }
    var $parent = selector && $(selector)
    return $parent && $parent.length ? $parent : $this.parent()
  }
  // DROPDOWN PLUGIN DEFINITION
  // ==========================

  function Plugin(option) {
    return this.each(function () {
      var $this = $(this)
      var data  = $this.data('bs.dropdown')

      if (!data) $this.data('bs.dropdown', (data = new Dropdown(this)))
      if (typeof option == 'string') data[option].call($this)
    })
  }
  var old = $.fn.dropdown
  $.fn.dropdown             = Plugin
  $.fn.dropdown.Constructor = Dropdown
  $.fn.dropdown.noConflict = function () {
    $.fn.dropdown = old
    return this
  }
  // APPLY TO STANDARD DROPDOWN ELEMENTS
  // ===================================
  $(document)
    .on('click.bs.dropdown.data-api', clearMenus)
    .on('click.bs.dropdown.data-api', '.dropdown form', function (e) {
e.stopPropagation() })
    .on('click.bs.dropdown.data-api', toggle, Dropdown.prototype.toggle)
    .on('keydown.bs.dropdown.data-api', toggle,
Dropdown.prototype.keydown)
    .on('keydown.bs.dropdown.data-api', '[role="menu"]',
Dropdown.prototype.keydown)
    .on('keydown.bs.dropdown.data-api', '[role="listbox"]',
Dropdown.prototype.keydown)
```

```
}(jQuery);


+function ($) {
  'use strict';

  // MODAL CLASS DEFINITION
  // ======================

  var Modal = function (element, options) {
    this.options             = options
    this.$body               = $(document.body)
    this.$element            = $(element)
    this.$dialog             = this.$element.find('.modal-dialog')
    this.$backdrop           = null
    this.isShown             = null
    this.originalBodyPad     = null
    this.scrollbarWidth      = 0
    this.ignoreBackdropClick = false
    if (this.options.remote) {
      this.$element
        .find('.modal-content')
        .load(this.options.remote, $.proxy(function () {
          this.$element.trigger('loaded.bs.modal')
        }, this))
    }
  }
  Modal.VERSION  = '3.3.4'
  Modal.TRANSITION_DURATION = 300
  Modal.BACKDROP_TRANSITION_DURATION = 150
  Modal.DEFAULTS = {
    backdrop: true,
    keyboard: true,
    show: true
  }
  Modal.prototype.toggle = function (_relatedTarget) {
    return this.isShown ? this.hide() : this.show(_relatedTarget)
  }
```

```
  Modal.prototype.show = function (_relatedTarget) {
    var that = this
    var e    = $.Event('show.bs.modal', { relatedTarget: _relatedTarget })
    this.$element.trigger(e)
    if (this.isShown || e.isDefaultPrevented()) return
    this.isShown = true
    this.checkScrollbar()
    this.setScrollbar()
    this.$body.addClass('modal-open')
    this.escape()
    this.resize()

    this.$element.on('click.dismiss.bs.modal', '[data-dismiss="modal"]',
$.proxy(this.hide, this))
    this.$dialog.on('mousedown.dismiss.bs.modal', function () {
      that.$element.one('mouseup.dismiss.bs.modal', function (e) {
        if ($(e.target).is(that.$element)) that.ignoreBackdropClick = true
      })
    })

    this.backdrop(function () {
      var transition = $.support.transition && that.$element.hasClass('fade')
      if (!that.$element.parent().length) {
        that.$element.appendTo(that.$body) // don't move modals dom
position
      }
      that.$element
        .show()
        .scrollTop(0)
      that.adjustDialog()
      if (transition) {
        that.$element[0].offsetWidth // force reflow
      }
      that.$element
        .addClass('in')
        .attr('aria-hidden', false)
      that.enforceFocus()
      var e = $.Event('shown.bs.modal', { relatedTarget: _relatedTarget })
      transition ?
```

```
      that.$dialog // wait for modal to slide in
        .one('bsTransitionEnd', function () {
          that.$element.trigger('focus').trigger(e)
        })
        .emulateTransitionEnd(Modal.TRANSITION_DURATION) :
      that.$element.trigger('focus').trigger(e)
  })
}
Modal.prototype.hide = function (e) {
  if (e) e.preventDefault()

  e = $.Event('hide.bs.modal')
  this.$element.trigger(e)
  if (!this.isShown || e.isDefaultPrevented()) return
  this.isShown = false
  this.escape()
  this.resize()
  $(document).off('focusin.bs.modal')
  this.$element
    .removeClass('in')
    .attr('aria-hidden', true)
    .off('click.dismiss.bs.modal')
    .off('mouseup.dismiss.bs.modal')
  this.$dialog.off('mousedown.dismiss.bs.modal')
  $.support.transition && this.$element.hasClass('fade') ?
    this.$element
      .one('bsTransitionEnd', $.proxy(this.hideModal, this))
      .emulateTransitionEnd(Modal.TRANSITION_DURATION) :
    this.hideModal()
}
Modal.prototype.enforceFocus = function () {
  $(document)
    .off('focusin.bs.modal') // guard against infinite focus loop
    .on('focusin.bs.modal', $.proxy(function (e) {
      if (this.$element[0] !== e.target && !this.$element.has(e.target).length)
{
        this.$element.trigger('focus')
      }
    }, this))
```

```
}
Modal.prototype.escape = function () {
  if (this.isShown && this.options.keyboard) {
    this.$element.on('keydown.dismiss.bs.modal', $.proxy(function (e) {
      e.which == 27 && this.hide()
    }, this))
  } else if (!this.isShown) {
    this.$element.off('keydown.dismiss.bs.modal')
  }
}
Modal.prototype.resize = function () {
  if (this.isShown) {
    $(window).on('resize.bs.modal', $.proxy(this.handleUpdate, this))
  } else {
    $(window).off('resize.bs.modal')
  }
}
Modal.prototype.hideModal = function () {
  var that = this
  this.$element.hide()
  this.backdrop(function () {
    that.$body.removeClass('modal-open')
    that.resetAdjustments()
    that.resetScrollbar()
    that.$element.trigger('hidden.bs.modal')
  })
}
Modal.prototype.removeBackdrop = function () {
  this.$backdrop && this.$backdrop.remove()
  this.$backdrop = null
}
Modal.prototype.backdrop = function (callback) {
  var that = this
  var animate = this.$element.hasClass('fade') ? 'fade' : ''
  if (this.isShown && this.options.backdrop) {
    var doAnimate = $.support.transition && animate
    this.$backdrop = $('<div class="modal-backdrop ' + animate + '" />')
      .appendTo(this.$body)
    this.$element.on('click.dismiss.bs.modal', $.proxy(function (e) {
```

```
        if (this.ignoreBackdropClick) {
          this.ignoreBackdropClick = false
          return
        }
        if (e.target !== e.currentTarget) return
        this.options.backdrop == 'static'
          ? this.$element[0].focus()
          : this.hide()
      }, this))
      if (doAnimate) this.$backdrop[0].offsetWidth // force reflow
      this.$backdrop.addClass('in')
      if (!callback) return
      doAnimate ?
        this.$backdrop
          .one('bsTransitionEnd', callback)
          .emulateTransitionEnd(Modal.BACKDROP_TRANSITION_DURATION) :
        callback()
    } else if (!this.isShown && this.$backdrop) {
      this.$backdrop.removeClass('in')
      var callbackRemove = function () {
        that.removeBackdrop()
        callback && callback()
      }
      $.support.transition && this.$element.hasClass('fade') ?
        this.$backdrop
          .one('bsTransitionEnd', callbackRemove)
          .emulateTransitionEnd(Modal.BACKDROP_TRANSITION_DURATION) :
        callbackRemove()
    } else if (callback) {
      callback()
    }
  }
  // these following methods are used to handle overflowing modals
  Modal.prototype.handleUpdate = function () {
    this.adjustDialog()
  }
  Modal.prototype.adjustDialog = function () {
    var modalIsOverflowing = this.$element[0].scrollHeight >
document.documentElement.clientHeight
```

```
    this.$element.css({
      paddingLeft:  !this.bodyIsOverflowing && modalIsOverflowing ?
this.scrollbarWidth : '',
      paddingRight: this.bodyIsOverflowing && !modalIsOverflowing ?
this.scrollbarWidth : ''
    })
  }

  Modal.prototype.resetAdjustments = function () {
    this.$element.css({
      paddingLeft: '',
      paddingRight: ''
    })
  }
  Modal.prototype.checkScrollbar = function () {
    var fullWindowWidth = window.innerWidth
    if (!fullWindowWidth) { // workaround for missing window.innerWidth
in IE8
      var documentElementRect =
document.documentElement.getBoundingClientRect()
      fullWindowWidth = documentElementRect.right -
Math.abs(documentElementRect.left)
    }
    this.bodyIsOverflowing = document.body.clientWidth < fullWindowWidth
    this.scrollbarWidth = this.measureScrollbar()
  }

  Modal.prototype.setScrollbar = function () {
    var bodyPad = parseInt((this.$body.css('padding-right') || 0), 10)
    this.originalBodyPad = document.body.style.paddingRight || ''
    if (this.bodyIsOverflowing) this.$body.css('padding-right', bodyPad +
this.scrollbarWidth)
  }

  Modal.prototype.resetScrollbar = function () {
    this.$body.css('padding-right', this.originalBodyPad)
  }

  Modal.prototype.measureScrollbar = function () { // thx walsh
```

```
    var scrollDiv = document.createElement('div')
    scrollDiv.className = 'modal-scrollbar-measure'
    this.$body.append(scrollDiv)
    var scrollbarWidth = scrollDiv.offsetWidth - scrollDiv.clientWidth
    this.$body[0].removeChild(scrollDiv)
    return scrollbarWidth
  }
  // MODAL PLUGIN DEFINITION
  // ========================

  function Plugin(option, _relatedTarget) {
    return this.each(function () {
      var $this   = $(this)
      var data    = $this.data('bs.modal')
      var options = $.extend({}, Modal.DEFAULTS, $this.data(), typeof option
== 'object' && option)

      if (!data) $this.data('bs.modal', (data = new Modal(this, options)))
      if (typeof option == 'string') data[option](_relatedTarget)
      else if (options.show) data.show(_relatedTarget)
    })
  }
  var old = $.fn.modal
  $.fn.modal             = Plugin
  $.fn.modal.Constructor = Modal
  // MODAL NO CONFLICT
  // ==================

  $.fn.modal.noConflict = function () {
    $.fn.modal = old
    return this
  }
  // MODAL DATA-API
  // ==============

  $(document).on('click.bs.modal.data-api', '[data-toggle="modal"]',
function (e) {
    var $this   = $(this)
    var href    = $this.attr('href')
```

```
    var $target = $($this.attr('data-target') || (href &&
href.replace(/.*(?=#[^\s]+$)/, '')))  // strip for ie7
    var option  = $target.data('bs.modal') ? 'toggle' : $.extend({ remote:
!/#/.test(href) && href }, $target.data(), $this.data())
    if ($this.is('a')) e.preventDefault()
    $target.one('show.bs.modal', function (showEvent) {
      if (showEvent.isDefaultPrevented()) return // only register focus
restorer if modal will actually get shown
      $target.one('hidden.bs.modal', function () {
        $this.is(':visible') && $this.trigger('focus')
      })
    })
    Plugin.call($target, option, this)
  })

}(jQuery);


+function ($) {
  'use strict';

  // TOOLTIP PUBLIC CLASS DEFINITION
  // ================================

  var Tooltip = function (element, options) {
    this.type       = null
    this.options    = null
    this.enabled    = null
    this.timeout    = null
    this.hoverState = null
    this.$element   = null
    this.init('tooltip', element, options)
  }
  Tooltip.VERSION  = '3.3.4'
  Tooltip.TRANSITION_DURATION = 150
  Tooltip.DEFAULTS = {
    animation: true,
    placement: 'top',
    selector: false,
```

```
    template: '<div class="tooltip" role="tooltip"><div class="tooltip-
arrow"></div><div class="tooltip-inner"></div></div>',
    trigger: 'hover focus',
    title: '',
    delay: 0,
    html: false,
    container: false,
    viewport: {
      selector: 'body',
      padding: 0
    }
  }
  Tooltip.prototype.init = function (type, element, options) {
    this.enabled   = true
    this.type      = type
    this.$element  = $(element)
    this.options   = this.getOptions(options)
    this.$viewport = this.options.viewport &&
$(this.options.viewport.selector || this.options.viewport)
    if (this.$element[0] instanceof document.constructor &&
!this.options.selector) {
      throw new Error(`selector` option must be specified when initializing '
+ this.type + ' on the window.document object!')
    }
    var triggers = this.options.trigger.split(' ')
    for (var i = triggers.length; i--;) {
      var trigger = triggers[i]
      if (trigger == 'click') {
        this.$element.on('click.' + this.type, this.options.selector,
$.proxy(this.toggle, this))
      } else if (trigger != 'manual') {
        var eventIn  = trigger == 'hover' ? 'mouseenter' : 'focusin'
        var eventOut = trigger == 'hover' ? 'mouseleave' : 'focusout'
        this.$element.on(eventIn  + '.' + this.type, this.options.selector,
$.proxy(this.enter, this))
        this.$element.on(eventOut + '.' + this.type, this.options.selector,
$.proxy(this.leave, this))
      }
    }
```

```
    this.options.selector ?
      (this._options = $.extend({}, this.options, { trigger: 'manual', selector: ''
  })) :
      this.fixTitle()
  }
  Tooltip.prototype.getDefaults = function () {
    return Tooltip.DEFAULTS
  }
  Tooltip.prototype.getOptions = function (options) {
    options = $.extend({}, this.getDefaults(), this.$element.data(), options)
    if (options.delay && typeof options.delay == 'number') {
      options.delay = {
        show: options.delay,
        hide: options.delay
      }
    }
    return options
  }
  Tooltip.prototype.getDelegateOptions = function () {
    var options  = {}
    var defaults = this.getDefaults()

    this._options && $.each(this._options, function (key, value) {
      if (defaults[key] != value) options[key] = value
    })
    return options
  }
  Tooltip.prototype.enter = function (obj) {
    var self = obj instanceof this.constructor ?
      obj : $(obj.currentTarget).data('bs.' + this.type)
    if (self && self.$tip && self.$tip.is(':visible')) {
      self.hoverState = 'in'
      return
    }

    if (!self) {
      self = new this.constructor(obj.currentTarget, this.getDelegateOptions())
      $(obj.currentTarget).data('bs.' + this.type, self)
    }
```

```
    clearTimeout(self.timeout)
    self.hoverState = 'in'
    if (!self.options.delay || !self.options.delay.show) return self.show()
    self.timeout = setTimeout(function () {
      if (self.hoverState == 'in') self.show()
    }, self.options.delay.show)
  }
  Tooltip.prototype.leave = function (obj) {
    var self = obj instanceof this.constructor ?
      obj : $(obj.currentTarget).data('bs.' + this.type)
    if (!self) {
      self = new this.constructor(obj.currentTarget, this.getDelegateOptions())
      $(obj.currentTarget).data('bs.' + this.type, self)
    }
    clearTimeout(self.timeout)
    self.hoverState = 'out'
    if (!self.options.delay || !self.options.delay.hide) return self.hide()
    self.timeout = setTimeout(function () {
      if (self.hoverState == 'out') self.hide()
    }, self.options.delay.hide)
  }
  Tooltip.prototype.show = function () {
    var e = $.Event('show.bs.' + this.type)
    if (this.hasContent() && this.enabled) {
      this.$element.trigger(e)
      var inDom =
$.contains(this.$element[0].ownerDocument.documentElement,
this.$element[0])
      if (e.isDefaultPrevented() || !inDom) return
      var that = this
      var $tip = this.tip()
      var tipId = this.getUID(this.type)
      this.setContent()
      $tip.attr('id', tipId)
      this.$element.attr('aria-describedby', tipId
      if (this.options.animation) $tip.addClass('fade')
      var placement = typeof this.options.placement == 'function' ?
        this.options.placement.call(this, $tip[0], this.$element[0]) :
        this.options.placement
```

```
    var autoToken = /\s?auto?\s?/i
    var autoPlace = autoToken.test(placement)
    if (autoPlace) placement = placement.replace(autoToken, '') || 'top'
    $tip
      .detach()
      .css({ top: 0, left: 0, display: 'block' })
      .addClass(placement)
      .data('bs.' + this.type, this)
    this.options.container ? $tip.appendTo(this.options.container) :
$tip.insertAfter(this.$element)
    var pos          = this.getPosition()
    var actualWidth  = $tip[0].offsetWidth
    var actualHeight = $tip[0].offsetHeight
    if (autoPlace) {
      var orgPlacement = placement
      var $container   = this.options.container ? $(this.options.container) :
this.$element.parent()
      var containerDim = this.getPosition($container)
      placement = placement == 'bottom' && pos.bottom + actualHeight >
containerDim.bottom ? 'top'    :
                placement == 'top'    && pos.top    - actualHeight <
containerDim.top    ? 'bottom' :
                placement == 'right'  && pos.right  + actualWidth  >
containerDim.width  ? 'left'   :
                placement == 'left'   && pos.left   - actualWidth  <
containerDim.left   ? 'right'  :
                placement
      $tip
        .removeClass(orgPlacement)
        .addClass(placement)
    }

    var calculatedOffset = this.getCalculatedOffset(placement, pos,
actualWidth, actualHeight)
    this.applyPlacement(calculatedOffset, placement)
    var complete = function () {
      var prevHoverState = that.hoverState
      that.$element.trigger('shown.bs.' + that.type)
      that.hoverState = null
```

```
      if (prevHoverState == 'out') that.leave(that)
    }
    $.support.transition && this.$tip.hasClass('fade') ?
      $tip
        .one('bsTransitionEnd', complete)
        .emulateTransitionEnd(Tooltip.TRANSITION_DURATION) :
      complete()
  }
}
Tooltip.prototype.applyPlacement = function (offset, placement) {
  var $tip   = this.tip()
  var width  = $tip[0].offsetWidth
  var height = $tip[0].offsetHeight
  var marginTop = parseInt($tip.css('margin-top'), 10)
  var marginLeft = parseInt($tip.css('margin-left'), 10)
  // we must check for NaN for ie 8/9
  if (isNaN(marginTop))  marginTop  = 0
  if (isNaN(marginLeft)) marginLeft = 0
  offset.top  = offset.top  + marginTop
  offset.left = offset.left + marginLeft
  // $.fn.offset doesn't round pixel values
  // so we use setOffset directly with our own function B-0
  $.offset.setOffset($tip[0], $.extend({
    using: function (props) {
      $tip.css({
        top: Math.round(props.top),
        left: Math.round(props.left)
      })
    }
  }, offset), 0)

  $tip.addClass('in')
  // check to see if placing tip in new offset caused the tip to resize itself
  var actualWidth  = $tip[0].offsetWidth
  var actualHeight = $tip[0].offsetHeight
  if (placement == 'top' && actualHeight != height) {
    offset.top = offset.top + height - actualHeight
  }
```

```
    var delta = this.getViewportAdjustedDelta(placement, offset,
actualWidth, actualHeight)
    if (delta.left) offset.left += delta.left
    else offset.top += delta.top
    var isVertical         = /top|bottom/.test(placement)
    var arrowDelta         = isVertical ? delta.left * 2 - width + actualWidth :
delta.top * 2 - height + actualHeight
    var arrowOffsetPosition = isVertical ? 'offsetWidth' : 'offsetHeight'
    $tip.offset(offset)
    this.replaceArrow(arrowDelta, $tip[0][arrowOffsetPosition], isVertical)
  }
  Tooltip.prototype.replaceArrow = function (delta, dimension, isVertical) {
    this.arrow()
      .css(isVertical ? 'left' : 'top', 50 * (1 - delta / dimension) + '%')
      .css(isVertical ? 'top' : 'left', '')
  }
  Tooltip.prototype.setContent = function () {
    var $tip  = this.tip()
    var title = this.getTitle()
    $tip.find('.tooltip-inner')[this.options.html ? 'html' : 'text'](title)
    $tip.removeClass('fade in top bottom left right')
  }
  Tooltip.prototype.hide = function (callback) {
    var that = this
    var $tip = $(this.$tip)
    var e    = $.Event('hide.bs.' + this.type)
    function complete() {
      if (that.hoverState != 'in') $tip.detach()
      that.$element
        .removeAttr('aria-describedby')
        .trigger('hidden.bs.' + that.type)
      callback && callback()
    }
    this.$element.trigger(e)
    if (e.isDefaultPrevented()) return
    $tip.removeClass('in')
    $.support.transition && $tip.hasClass('fade') ?
      $tip
        .one('bsTransitionEnd', complete)
```

```
      .emulateTransitionEnd(Tooltip.TRANSITION_DURATION) :
    complete()
  this.hoverState = null
  return this
}
Tooltip.prototype.fixTitle = function () {
  var $e = this.$element
  if ($e.attr('title') || typeof ($e.attr('data-original-title')) != 'string') {
    $e.attr('data-original-title', $e.attr('title') || '').attr('title', '')
  }
}
Tooltip.prototype.hasContent = function () {
  return this.getTitle()
}
Tooltip.prototype.getPosition = function ($element) {
  $element   = $element || this.$element
  var el     = $element[0]
  var isBody = el.tagName == 'BODY'
  var elRect    = el.getBoundingClientRect()
  if (elRect.width == null) {
    // width and height are missing in IE8, so compute them manually; see
https://github.com/twbs/bootstrap/issues/14093
    elRect = $.extend({}, elRect, { width: elRect.right - elRect.left, height:
elRect.bottom - elRect.top })
  }
  var elOffset  = isBody ? { top: 0, left: 0 } : $element.offset()
  var scroll    = { scroll: isBody ? document.documentElement.scrollTop ||
document.body.scrollTop : $element.scrollTop() }
  var outerDims = isBody ? { width: $(window).width(), height:
$(window).height() } : null
  return $.extend({}, elRect, scroll, outerDims, elOffset)
}
Tooltip.prototype.getCalculatedOffset = function (placement, pos,
actualWidth, actualHeight) {
  return placement == 'bottom' ? { top: pos.top + pos.height,   left: pos.left +
pos.width / 2 - actualWidth / 2 } :
         placement == 'top'    ? { top: pos.top - actualHeight, left: pos.left +
pos.width / 2 - actualWidth / 2 } :
```

```
        placement == 'left'   ? { top: pos.top + pos.height / 2 - actualHeight / 2,
left: pos.left - actualWidth } :
      /* placement == 'right' */ { top: pos.top + pos.height / 2 - actualHeight
/ 2, left: pos.left + pos.width }
  }
  Tooltip.prototype.getViewportAdjustedDelta = function (placement, pos,
actualWidth, actualHeight) {
    var delta = { top: 0, left: 0 }
    if (!this.$viewport) return delta
    var viewportPadding = this.options.viewport &&
this.options.viewport.padding || 0
    var viewportDimensions = this.getPosition(this.$viewport)
    if (/right|left/.test(placement)) {
      var topEdgeOffset    = pos.top - viewportPadding -
viewportDimensions.scroll
      var bottomEdgeOffset = pos.top + viewportPadding -
viewportDimensions.scroll + actualHeight
      if (topEdgeOffset < viewportDimensions.top) { // top overflow
        delta.top = viewportDimensions.top - topEdgeOffset
      } else if (bottomEdgeOffset > viewportDimensions.top +
viewportDimensions.height) { // bottom overflow
        delta.top = viewportDimensions.top + viewportDimensions.height -
bottomEdgeOffset
      }
    } else {
      var leftEdgeOffset  = pos.left - viewportPadding
      var rightEdgeOffset = pos.left + viewportPadding + actualWidth
      if (leftEdgeOffset < viewportDimensions.left) { // left overflow
        delta.left = viewportDimensions.left - leftEdgeOffset
      } else if (rightEdgeOffset > viewportDimensions.width) { // right
overflow
        delta.left = viewportDimensions.left + viewportDimensions.width -
rightEdgeOffset
      }
    }
    return delta
  }
  Tooltip.prototype.getTitle = function () {
    var title
```

```
  var $e = this.$element
  var o  = this.options
  title = $e.attr('data-original-title')
    || (typeof o.title == 'function' ? o.title.call($e[0]) :  o.title)
  return title
}
Tooltip.prototype.getUID = function (prefix) {
  do prefix += ~~(Math.random() * 1000000)
  while (document.getElementById(prefix))
  return prefix
}
Tooltip.prototype.tip = function () {
  return (this.$tip = this.$tip || $(this.options.template))
}
Tooltip.prototype.arrow = function () {
  return (this.$arrow = this.$arrow || this.tip().find('.tooltip-arrow'))
}
Tooltip.prototype.enable = function () {
  this.enabled = true
}
Tooltip.prototype.disable = function () {
  this.enabled = false
}

Tooltip.prototype.toggleEnabled = function () {
  this.enabled = !this.enabled
}
Tooltip.prototype.toggle = function (e) {
  var self = this
  if (e) {
    self = $(e.currentTarget).data('bs.' + this.type)
    if (!self) {
      self = new this.constructor(e.currentTarget, this.getDelegateOptions())
      $(e.currentTarget).data('bs.' + this.type, self)
    }
  }
  self.tip().hasClass('in') ? self.leave(self) : self.enter(self)
}
Tooltip.prototype.destroy = function () {
```

```
    var that = this
    clearTimeout(this.timeout)
    this.hide(function () {
      that.$element.off('.' + that.type).removeData('bs.' + that.type)
    })
  }
  // TOOLTIP PLUGIN DEFINITION
  // =========================
  function Plugin(option) {
    return this.each(function () {
      var $this   = $(this)
      var data    = $this.data('bs.tooltip')
      var options = typeof option == 'object' && option
      if (!data && /destroy|hide/.test(option)) return
      if (!data) $this.data('bs.tooltip', (data = new Tooltip(this, options)))
      if (typeof option == 'string') data[option]()
    })
  }
  var old = $.fn.tooltip
  $.fn.tooltip             = Plugin
  $.fn.tooltip.Constructor = Tooltip

  // TOOLTIP NO CONFLICT
  // ===================

  $.fn.tooltip.noConflict = function () {
    $.fn.tooltip = old
    return this
  }
}(jQuery);


+function ($) {
  'use strict';

  var Popover = function (element, options) {
    this.init('popover', element, options)
  }
```

```
  if (!$.fn.tooltip) throw new Error('Popover requires tooltip.js')

  Popover.VERSION  = '3.3.4'

  Popover.DEFAULTS = $.extend({}, $.fn.tooltip.Constructor.DEFAULTS, {
    placement: 'right',
    trigger: 'click',
    content: '',
    template: '<div class="popover" role="tooltip"><div
class="arrow"></div><h3 class="popover-title"></h3><div
class="popover-content"></div></div>'
  })
  Popover.prototype = $.extend({}, $.fn.tooltip.Constructor.prototype)
  Popover.prototype.constructor = Popover
  Popover.prototype.getDefaults = function () {
    return Popover.DEFAULTS
  }
  Popover.prototype.setContent = function () {
    var $tip    = this.tip()
    var title   = this.getTitle()
    var content = this.getContent()
    $tip.find('.popover-title')[this.options.html ? 'html' : 'text'](title)
    $tip.find('.popover-content').children().detach().end()[ // we use append
for html objects to maintain js events
      this.options.html ? (typeof content == 'string' ? 'html' : 'append') : 'text'
    ](content)
    $tip.removeClass('fade top bottom left right in')
    // IE8 doesn't accept hiding via the `:empty` pseudo selector, we have to
do
    // this manually by checking the contents.
    if (!$tip.find('.popover-title').html()) $tip.find('.popover-title').hide()
  }
  Popover.prototype.hasContent = function () {
    return this.getTitle() || this.getContent()
  }
  Popover.prototype.getContent = function () {
    var $e = this.$element
    var o  = this.options
    return $e.attr('data-content')
```

```
      || (typeof o.content == 'function' ?
          o.content.call($e[0]) :
          o.content)
  }
  Popover.prototype.arrow = function () {
    return (this.$arrow = this.$arrow || this.tip().find('.arrow'))
  }
  // POPOVER PLUGIN DEFINITION
  // =========================

  function Plugin(option) {
    return this.each(function () {
      var $this   = $(this)
      var data    = $this.data('bs.popover')
      var options = typeof option == 'object' && option
      if (!data && /destroy|hide/.test(option)) return
      if (!data) $this.data('bs.popover', (data = new Popover(this, options)))
      if (typeof option == 'string') data[option]()
    })
  }
  var old = $.fn.popover
  $.fn.popover             = Plugin
  $.fn.popover.Constructor = Popover
  // POPOVER NO CONFLICT
  // ===================
  $.fn.popover.noConflict = function () {
    $.fn.popover = old
    return this
  }
}(jQuery);
+function ($) {
  'use strict';
  // SCROLLSPY CLASS DEFINITION
  // ==========================

  function ScrollSpy(element, options) {
    this.$body          = $(document.body)
    this.$scrollElement = $(element).is(document.body) ? $(window) :
$(element)
```

```
    this.options       = $.extend({}, ScrollSpy.DEFAULTS, options)
    this.selector      = (this.options.target || '') + ' .nav li > a'
    this.offsets       = []
    this.targets       = []
    this.activeTarget   = null
    this.scrollHeight   = 0
    this.$scrollElement.on('scroll.bs.scrollspy', $.proxy(this.process, this))
    this.refresh()
    this.process()
  }
  ScrollSpy.VERSION  = '3.3.4'
  ScrollSpy.DEFAULTS = {
    offset: 10
  }
  ScrollSpy.prototype.getScrollHeight = function () {
    return this.$scrollElement[0].scrollHeight ||
Math.max(this.$body[0].scrollHeight,
document.documentElement.scrollHeight)
  }
  ScrollSpy.prototype.refresh = function () {
    var that         = this
    var offsetMethod  = 'offset'
    var offsetBase    = 0
    this.offsets      = []
    this.targets      = []
    this.scrollHeight = this.getScrollHeight()

    if (!$.isWindow(this.$scrollElement[0])) {
      offsetMethod = 'position'
      offsetBase   = this.$scrollElement.scrollTop()
    }
    this.$body
      .find(this.selector)
      .map(function () {
        var $el   = $(this)
        var href  = $el.data('target') || $el.attr('href')
        var $href = /^#./.test(href) && $(href)
        return ($href
          && $href.length
```

```
        && $href.is(':visible')
        && [[$href[offsetMethod]().top + offsetBase, href]]) || null
      })
      .sort(function (a, b) { return a[0] - b[0] })
      .each(function () {
        that.offsets.push(this[0])
        that.targets.push(this[1])
      })
  }
  ScrollSpy.prototype.process = function () {
    var scrollTop    = this.$scrollElement.scrollTop() + this.options.offset
    var scrollHeight = this.getScrollHeight()
    var maxScroll    = this.options.offset + scrollHeight -
this.$scrollElement.height()
    var offsets      = this.offsets
    var targets      = this.targets
    var activeTarget = this.activeTarget
    var i
    if (this.scrollHeight != scrollHeight) {
      this.refresh()
    }
    if (scrollTop >= maxScroll) {
      return activeTarget != (i = targets[targets.length - 1]) && this.activate(i)
    }
    if (activeTarget && scrollTop < offsets[0]) {
      this.activeTarget = null
      return this.clear()
    }
    for (i = offsets.length; i--;) {
      activeTarget != targets[i]
        && scrollTop >= offsets[i]
        && (offsets[i + 1] === undefined || scrollTop < offsets[i + 1])
        && this.activate(targets[i])
    }
  }
  ScrollSpy.prototype.activate = function (target) {
    this.activeTarget = target
    this.clear()
    var selector = this.selector +
```

```
    '[data-target="' + target + '"],' +
    this.selector + '[href="' + target + '"]'
  var active = $(selector)
    .parents('li')
    .addClass('active')
  if (active.parent('.dropdown-menu').length) {
    active = active
      .closest('li.dropdown')
      .addClass('active')
  }

  active.trigger('activate.bs.scrollspy')
}
ScrollSpy.prototype.clear = function () {
  $(this.selector)
    .parentsUntil(this.options.target, '.active')
    .removeClass('active')
}
function Plugin(option) {
  return this.each(function () {
    var $this   = $(this)
    var data    = $this.data('bs.scrollspy')
    var options = typeof option == 'object' && option
    if (!data) $this.data('bs.scrollspy', (data = new ScrollSpy(this, options)))
    if (typeof option == 'string') data[option]()
  })
}
var old = $.fn.scrollspy
$.fn.scrollspy             = Plugin
$.fn.scrollspy.Constructor = ScrollSpy
$.fn.scrollspy.noConflict = function () {
  $.fn.scrollspy = old
  return this
}
$(window).on('load.bs.scrollspy.data-api', function () {
  $('[data-spy="scroll"]').each(function () {
    var $spy = $(this)
    Plugin.call($spy, $spy.data())
  })
```

```
  })

}(jQuery);
+function ($) {
  'use strict';

  // TAB CLASS DEFINITION
  // ====================

  var Tab = function (element) {
    this.element = $(element)
  }
  Tab.VERSION = '3.3.4'
  Tab.TRANSITION_DURATION = 150
  Tab.prototype.show = function () {
    var $this    = this.element
    var $ul      = $this.closest('ul:not(.dropdown-menu)')
    var selector = $this.data('target')
    if (!selector) {
      selector = $this.attr('href')
      selector = selector && selector.replace(/.*(?=#[^\s]*$)/, '') // strip for
ie7
    }
    if ($this.parent('li').hasClass('active')) return
    var $previous = $ul.find('.active:last a')
    var hideEvent = $.Event('hide.bs.tab', {
      relatedTarget: $this[0]
    })
    var showEvent = $.Event('show.bs.tab', {
      relatedTarget: $previous[0]
    })
    $previous.trigger(hideEvent)
    $this.trigger(showEvent)
    if (showEvent.isDefaultPrevented() || hideEvent.isDefaultPrevented())
return
    var $target = $(selector)
    this.activate($this.closest('li'), $ul)
    this.activate($target, $target.parent(), function () {
      $previous.trigger({
```

```
        type: 'hidden.bs.tab',
        relatedTarget: $this[0]
      })
      $this.trigger({
        type: 'shown.bs.tab',
        relatedTarget: $previous[0]
      })
    })
  }
  Tab.prototype.activate = function (element, container, callback) {
    var $active    = container.find('> .active')
    var transition = callback
      && $.support.transition
      && (($active.length && $active.hasClass('fade')) || !!container.find('>
.fade').length)
    function next() {
      $active
        .removeClass('active')
        .find('> .dropdown-menu > .active')
          .removeClass('active')
        .end()
        .find('[data-toggle="tab"]')
          .attr('aria-expanded', false)
      element
        .addClass('active')
        .find('[data-toggle="tab"]')
          .attr('aria-expanded', true)
      if (transition) {
        element[0].offsetWidth // reflow for transition
        element.addClass('in')
      } else {
        element.removeClass('fade')
      }
      if (element.parent('.dropdown-menu').length) {
        element
          .closest('li.dropdown')
            .addClass('active')
          .end()
          .find('[data-toggle="tab"]')
```

```
        .attr('aria-expanded', true)
    }
    callback && callback()
  }
  $active.length && transition ?
    $active
      .one('bsTransitionEnd', next)
      .emulateTransitionEnd(Tab.TRANSITION_DURATION) :
    next()
  $active.removeClass('in')
}
// TAB PLUGIN DEFINITION
// =====================
function Plugin(option) {
  return this.each(function () {
    var $this = $(this)
    var data  = $this.data('bs.tab')

    if (!data) $this.data('bs.tab', (data = new Tab(this)))
    if (typeof option == 'string') data[option]()
  })
}
var old = $.fn.tab
$.fn.tab             = Plugin
$.fn.tab.Constructor = Tab
// TAB NO CONFLICT
// ===============
$.fn.tab.noConflict = function () {
  $.fn.tab = old
  return this
}
// TAB DATA-API
// ============
var clickHandler = function (e) {
  e.preventDefault()
  Plugin.call($(this), 'show')
}
$(document)
  .on('click.bs.tab.data-api', '[data-toggle="tab"]', clickHandler)
```

```
    .on('click.bs.tab.data-api', '[data-toggle="pill"]', clickHandler)
}(jQuery);
+function ($) {
  'use strict';

  // AFFIX CLASS DEFINITION
  // ======================

  var Affix = function (element, options) {
    this.options = $.extend({}, Affix.DEFAULTS, options)

    this.$target = $(this.options.target)
      .on('scroll.bs.affix.data-api', $.proxy(this.checkPosition, this))
      .on('click.bs.affix.data-api',  $.proxy(this.checkPositionWithEventLoop,
this))
    this.$element     = $(element)
    this.affixed      = null
    this.unpin        = null
    this.pinnedOffset = null
    this.checkPosition()
  }
  Affix.VERSION  = '3.3.4'
  Affix.RESET    = 'affix affix-top affix-bottom'
  Affix.DEFAULTS = {
    offset: 0,
    target: window
  }
  Affix.prototype.getState = function (scrollHeight, height, offsetTop,
offsetBottom) {
    var scrollTop    = this.$target.scrollTop()
    var position     = this.$element.offset()
    var targetHeight = this.$target.height()
    if (offsetTop != null && this.affixed == 'top') return scrollTop < offsetTop ?
'top' : false
    if (this.affixed == 'bottom') {
      if (offsetTop != null) return (scrollTop + this.unpin <= position.top) ?
false : 'bottom'
      return (scrollTop + targetHeight <= scrollHeight - offsetBottom) ? false :
'bottom'
```

```
    }
    var initializing   = this.affixed == null
    var colliderTop    = initializing ? scrollTop : position.top
    var colliderHeight = initializing ? targetHeight : height
    if (offsetTop != null && scrollTop <= offsetTop) return 'top'
    if (offsetBottom != null && (colliderTop + colliderHeight >= scrollHeight -
offsetBottom)) return 'bottom'
    return false
  }
  Affix.prototype.getPinnedOffset = function () {
    if (this.pinnedOffset) return this.pinnedOffset
    this.$element.removeClass(Affix.RESET).addClass('affix')
    var scrollTop = this.$target.scrollTop()
    var position  = this.$element.offset()
    return (this.pinnedOffset = position.top - scrollTop)
  }
  Affix.prototype.checkPositionWithEventLoop = function () {
    setTimeout($.proxy(this.checkPosition, this), 1)
  }
  Affix.prototype.checkPosition = function () {
    if (!this.$element.is(':visible')) return
    var height      = this.$element.height()
    var offset      = this.options.offset
    var offsetTop    = offset.top
    var offsetBottom = offset.bottom
    var scrollHeight = $(document.body).height()
    if (typeof offset != 'object')        offsetBottom = offsetTop = offset
    if (typeof offsetTop == 'function')    offsetTop    = offset.top(this.$element)
    if (typeof offsetBottom == 'function') offsetBottom =
offset.bottom(this.$element)
    var affix = this.getState(scrollHeight, height, offsetTop, offsetBottom)
    if (this.affixed != affix) {
      if (this.unpin != null) this.$element.css('top', '')
      var affixType = 'affix' + (affix ? '-' + affix : '')
      var e        = $.Event(affixType + '.bs.affix')
      this.$element.trigger(e)
      if (e.isDefaultPrevented()) return
      this.affixed = affix
      this.unpin = affix == 'bottom' ? this.getPinnedOffset() : null
```

```
    this.$element
      .removeClass(Affix.RESET)
      .addClass(affixType)
      .trigger(affixType.replace('affix', 'affixed') + '.bs.affix')
  }
  if (affix == 'bottom') {
    this.$element.offset({
      top: scrollHeight - height - offsetBottom
    })
  }
}
// AFFIX PLUGIN DEFINITION
// =======================

function Plugin(option) {
  return this.each(function () {
    var $this   = $(this)
    var data    = $this.data('bs.affix')
    var options = typeof option == 'object' && option

    if (!data) $this.data('bs.affix', (data = new Affix(this, options)))
    if (typeof option == 'string') data[option]()
  })
}
var old = $.fn.affix
$.fn.affix             = Plugin
$.fn.affix.Constructor = Affix
// AFFIX NO CONFLICT
// =================

$.fn.affix.noConflict = function () {
  $.fn.affix = old
  return this
}
// AFFIX DATA-API
// ==============

$(window).on('load', function () {
```

```
    $('[data-spy="affix"]').each(function () {
      var $spy = $(this)
      var data = $spy.data()
      data.offset = data.offset || {}
      if (data.offsetBottom != null) data.offset.bottom = data.offsetBottom
      if (data.offsetTop    != null) data.offset.top    = data.offsetTop
      Plugin.call($spy, data)
    })
  })
}(jQuery);
```

- **JAVASCRIPT**

```
window.Modernizr = (function( window, document, undefined ) {

    var version = '2.7.1',

    Modernizr = {},

    /*>>cssclasses*/
    // option for enabling the HTML classes to be added
    enableClasses = true,
    /*>>cssclasses*/
docElement = document.documentElement,
    /**
     * Create our "modernizr" element that we do most feature tests on.
     */
    mod = 'modernizr',
    modElem = document.createElement(mod),
    mStyle = modElem.style,

    /**
     * Create the input element for various Web Forms feature tests.
     */
    inputElem /*>>inputelem*/ = document.createElement('input')
/*>>inputelem*/ ,
    /*>>smile*/
    smile = ':)',
    /*>>smile*/
```

```
    toString = {}.toString,
    cssomPrefixes = omPrefixes.split(' '),
    domPrefixes = omPrefixes.toLowerCase().split(' '),
    /*>>domprefixes*/
    /*>>ns*/
    ns = {'svg': 'http://www.w3.org/2000/svg'},
    /*>>ns*/
    tests = {},
    inputs = {},
    attrs = {},
    classes = [],
    slice = classes.slice,
    featureName, // used in testing loop
        div = document.createElement('div'),
        // After page load injecting a fake body doesn't work so check if body
exists
        body = document.body,
        // IE6 and 7 won't return offsetWidth or offsetHeight unless it's in the
body element, so we fake it.
        fakeBody = body || document.createElement('body');

      if ( parseInt(nodes, 10) ) {
        while ( nodes-- ) {
          node = document.createElement('div');
          node.id = testnames ? testnames[nodes] : mod + (nodes + 1);
          div.appendChild(node);
        }
      }

      // <style> elements in IE6-9 are considered 'NoScope' elements and
therefore will be removed
      // when injected with innerHTML. To get around this you need to
prepend the 'NoScope' element
      // with a 'scoped' element, in our case the soft-hyphen entity as it won't
mess with our measurements.
      // msdn.microsoft.com/en-us/library/ms533897%28VS.85%29.aspx
      // Documents served as xml will throw if using &shy; so use xml friendly
encoded version. See issue #277
      style = ['&#173;','<style id="s', mod, '">', rule, '</style>'].join('');
```

```
    div.id = mod;
    // IE6 will false positive on some tests due to the style element inside
the test div somehow interfering offsetHeight, so insert it into body or
fakebody.
    // Opera will act all quirky when injecting elements in
documentElement when page is served as xml, needs fakebody too. #270
    (body ? div : fakeBody).innerHTML += style;
    fakeBody.appendChild(div);
    if ( !body ) {
        //avoid crashing IE8, if background image is used
        fakeBody.style.background = '';
        //Safari 5.13/5.1.4 OSX stops loading if ::-webkit-scrollbar is used and
scrollbars are visible
        fakeBody.style.overflow = 'hidden';
        docOverflow = docElement.style.overflow;
        docElement.style.overflow = 'hidden';
        docElement.appendChild(fakeBody);
    }

    ret = callback(div, rule);
    // If this is done after page load we don't want to remove the body so
check if body exists
    if ( !body ) {
        fakeBody.parentNode.removeChild(fakeBody);
        docElement.style.overflow = docOverflow;
    } else {
        div.parentNode.removeChild(div);
    }
    return !!ret;
  },
  /*>>teststyles*/

  /*>>mq*/
  testMediaQuery = function( mq ) {
    var matchMedia = window.matchMedia || window.msMatchMedia;
    if ( matchMedia ) {
      return matchMedia(mq).matches;
    }
    var bool;
```

```
    injectElementWithStyles('@media ' + mq + ' { #' + mod + ' { position:
absolute; } }', function( node ) {
      bool = (window.getComputedStyle ?
              getComputedStyle(node, null) :
              node.currentStyle)['position'] == 'absolute';
    });
    return bool;
   },
   /*>>mq*/
  /*>>hasevent*/
  isEventSupported = (function() {
    var TAGNAMES = {
      'select': 'input', 'change': 'input',
      'submit': 'form', 'reset': 'form',
      'error': 'img', 'load': 'img', 'abort': 'img'
    };
    function isEventSupported( eventName, element ) {
      element = element ||
document.createElement(TAGNAMES[eventName] || 'div');
      eventName = 'on' + eventName;
      // When using `setAttribute`, IE skips "unload", WebKit skips "unload"
and "resize", whereas `in` "catches" those
      var isSupported = eventName in element;
      if ( !isSupported ) {
        // If it has no `setAttribute` (i.e. doesn't implement Node interface),
try generic element
        if ( !element.setAttribute ) {
          element = document.createElement('div');
        }
        if ( element.setAttribute && element.removeAttribute ) {
          element.setAttribute(eventName, '');
          isSupported = is(element[eventName], 'function');
          // If property was created, "remove it" (by setting value to
`undefined`)
          if ( !is(element[eventName], 'undefined') ) {
            element[eventName] = undefined;
          }
          element.removeAttribute(eventName);
        }
```

```
      }
      element = null;
      return isSupported;
    }
    return isEventSupported;
  })(),
 if ( !is(_hasOwnProperty, 'undefined') && !is(_hasOwnProperty.call,
'undefined') ) {
    hasOwnProp = function (object, property) {
      return _hasOwnProperty.call(object, property);
    };
  }
  else {
    hasOwnProp = function (object, property) { /* yes, this can give false
positives/negatives, but most of the time we don't care about those */
      return ((property in object) &&
is(object.constructor.prototype[property], 'undefined'));
    };
  }
  if (!Function.prototype.bind) {
    Function.prototype.bind = function bind(that) {
      var target = this;
      if (typeof target != "function") {
          throw new TypeError();
      }
      var args = slice.call(arguments, 1),
          bound = function () {
          if (this instanceof bound) {

            var F = function(){};
            F.prototype = target.prototype;
            var self = new F();
            var result = target.apply(
                self,
                args.concat(slice.call(arguments))
            );
            if (Object(result) === result) {
                return result;
            }
```

```
            return self;
          } else {
            return target.apply(
                that,
                args.concat(slice.call(arguments))
            );
          }
        };
        return bound;
      };
    }
    function setCss( str ) {
        mStyle.cssText = str;
    }
/**
    * setCssAll extrapolates all vendor-specific css strings.
     */
    function setCssAll( str1, str2 ) {
        return setCss(prefixes.join(str1 + ';') + ( str2 || '' ));
    }
    /**
     * is returns a boolean for if typeof obj is exactly type.
     */
    function is( obj, type ) {
        return typeof obj === type;
    }

    /**
     * contains returns a boolean for if substr is found within str.
     */
    function contains( str, substr ) {
        return !!~('' + str).indexOf(substr);
    }

        injectElementWithStyles('@media (transform-3d),(-webkit-
transform-3d){#modernizr{left:9px;position:absolute;height:3px;}}',
function( node, rule ) {
          ret = node.offsetLeft === 9 && node.offsetHeight === 3;
        });
```

```
        }
        return ret;
    };
    tests['csstransitions'] = function() {
        return testPropsAll('transition');
    };
    tests['localstorage'] = function() {
        try {
            localStorage.setItem(mod, mod);
            localStorage.removeItem(mod);
            return true;
        } catch(e) {
            return false;
        }
    };
    tests['sessionstorage'] = function() {
        try {
            sessionStorage.setItem(mod, mod);
            sessionStorage.removeItem(mod);
            return true;
        } catch(e) {
            return false;
        }
    };

    tests['webworkers'] = function() {
        return !!window.Worker;
    };
    tests['applicationcache'] = function() {
        return !!window.applicationCache;
    };
    tests['svg'] = function() {
        return !!document.createElementNS &&
!!document.createElementNS(ns.svg, 'svg').createSVGRect;
    };
    // specifically for SVG inline in HTML, not within XHTML
    // test page: paulirish.com/demo/inline-svg
    tests['inlinesvg'] = function() {
      var div = document.createElement('div');
```

```
    div.innerHTML = '<svg/>';
    return (div.firstChild && div.firstChild.namespaceURI) == ns.svg;
  };
  // SVG SMIL animation
  tests['smil'] = function() {
     return !!document.createElementNS &&
/SVGAnimate/.test(toString.call(document.createElementNS(ns.svg,
'animate')));
  };
                } else {
                  // If the upgraded input compontent rejects the :) text, we got a
winner
                  bool = inputElem.value != smile;
                }
              }
              inputs[ props[i] ] = !!bool;
            }
            return inputs;
      })('search tel url email datetime date month week time datetime-local
number range color'.split(' '));
      /*>>inputtypes*/
  }
  /*>>webforms*/
      (function() {
        try {
          var a = document.createElement('a');
          a.innerHTML = '<xyz></xyz>';
          //if the hidden property is implemented we can assume, that the
browser supports basic HTML5 Styles
          supportsHtml5Styles = ('hidden' in a);
          supportsUnknownElements = a.childNodes.length == 1 || (function()
{
            // assign a false positive if unable to shiv
            (document.createElement)('a');
            var frag = document.createDocumentFragment();
            return (
              typeof frag.cloneNode == 'undefined' ||
              typeof frag.createDocumentFragment == 'undefined' ||
              typeof frag.createElement == 'undefined'
```

```
        );
      }());
    } catch(e) {
      // assign a false positive if detection fails => unable to shiv
      supportsHtml5Styles = true;
      supportsUnknownElements = true;
    }
  }());
```

➢ JAVASCRIPT MAIN :

```
jQuery(document).ready(function($){
   //open-close submenu on mobile
   $('.cd-main-nav').on('click', function(event){
      if($(event.target).is('.cd-main-nav'))
$(this).children('ul').toggleClass('is-visible');
   });
});
```

➢ DATABASE CONNECTION:

```
<?php
   $con= new mysqli('localhost','root','','quiz')or die("Could not connect to
mysql".mysqli_error($con));
?>
```

(NOTE: THIS DATABASE CONNECTION FILE IS APPLICABLE FOR ALL PHP FILES)

➢ BACKEND CODE :

```
-- phpMyAdmin SQL Dump
-- version 5.2.1
-- https://www.phpmyadmin.net/
--
-- Host: 127.0.0.1
-- Generation Time: May 06, 2024 at 09:27 AM
-- Server version: 10.4.32-MariaDB
-- PHP Version: 8.2.12

SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
START TRANSACTION;
SET time_zone = "+00:00";

/*!40101 SET
@OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET
@OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET
@OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!40101 SET NAMES utf8mb4 */;

--
-- Database: `quiz`
--

-- --------------------------------------------------------

--
-- Table structure for table `admin`
--

CREATE TABLE `admin` (
  `id` int(100) NOT NULL,
  `username` varchar(50) NOT NULL,
  `password` varchar(500) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_general_ci;
```

```
--
-- Dumping data for table `admin`
--

INSERT INTO `admin` (`id`, `username`, `password`) VALUES
(1, 'akshay@gmail.com', '123456'),
(2, 'vamshi@gmail.com', '123456');

-- --------------------------------------------------------

--
-- Table structure for table `answer`
--

CREATE TABLE `answer` (
  `id` int(100) NOT NULL,
  `qid` text NOT NULL,
  `ansid` text NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_general_ci;

--
-- Dumping data for table `answer`
--

INSERT INTO `answer` (`id`, `qid`, `ansid`) VALUES
(4, '5b85857d00f34', '5b85857d0ab77'),
(5, '5b85857d333f0', '5b85857d391b2'),
(6, '5b85857d59559', '5b85857d69efd'),
(7, '5b85857d917d6', '5b85857d97980'),
(8, '5b85857db810f', '5b85857dbd701'),
(44, '6621f1e48b3b1', '6621f1e48ba92'),
(45, '6621f1e48d951', '6621f1e48de2e'),
(46, '6621f1e48f00b', '6621f1e48f2a0'),
(47, '6621f1e490040', '6621f1e49031a'),
(48, '6621f1e491419', '6621f1e491872');

-- --------------------------------------------------------

--
```

```
-- Table structure for table `feedback`
--

CREATE TABLE `feedback` (
  `id` text NOT NULL,
  `name` varchar(50) NOT NULL,
  `username` varchar(50) NOT NULL,
  `subject` varchar(500) NOT NULL,
  `feedback` varchar(500) NOT NULL,
  `date` date NOT NULL,
  `time` varchar(50) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_general_ci;

--
-- Dumping data for table `feedback`
--

INSERT INTO `feedback` (`id`, `name`, `username`, `subject`, `feedback`,
`date`, `time`) VALUES
('66026111d8d0b', 'nizam', 'nizam@gmail.com', 'quiz', 'excellent', '2024-
03-26', '06:45:53am'),
('66027e2ced382', 'akshara', 'akshara@lfdc.edu.in', 'quiz', 'good', '2024-03-
26', '08:50:04am'),
('66266d4e1b503', 'samyuktha', 'samosa@gmail.com', 'quiz', 'Excellent,
Creative , knowledgeable, and very useful for the students .', '2024-04-22',
'03:59:42pm'),
('66266dee93a53', 'V.AKSHIT', 'akshit@gmail.com', 'quiz', 'very nice
website , very easy to use and very useful for students to improve or test
their knowledge on different topics', '2024-04-22', '04:02:22pm');

-- -------------------------------------------------------

--
-- Table structure for table `history`
--

CREATE TABLE `history` (
  `id` int(100) NOT NULL,
  `username` varchar(50) NOT NULL,
```

```
  `eid` text NOT NULL,
  `score` int(11) NOT NULL,
  `level` int(11) NOT NULL,
  `correct` int(11) NOT NULL,
  `wrong` int(11) NOT NULL,
  `date` timestamp NOT NULL DEFAULT current_timestamp() ON UPDATE
current_timestamp(),
  `timestamp` bigint(50) NOT NULL,
  `status` varchar(40) NOT NULL,
  `score_updated` varchar(10) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_general_ci;

--
-- Dumping data for table `history`
--

INSERT INTO `history` (`id`, `username`, `eid`, `score`, `level`, `correct`,
`wrong`, `date`, `timestamp`, `status`, `score_updated`) VALUES
(31, '201021468012@gmail.com', '6621ec39a76ad', 20, 5, 5, 0, '2024-04-
19 04:29:21', 1713500888, 'finished', 'true'),
(32, 'akshara@gmail.com', '6621ec39a76ad', 11, 4, 3, 1, '2024-04-19
14:18:30', 1713536244, 'finished', 'true'),
(33, 'nizam@gmail.com', '6621ec39a76ad', 15, 5, 4, 1, '2024-04-19
14:20:53', 1713536413, 'finished', 'true'),
(34, 'nizam@gmail.com', '5b85847bbe794', 3, 5, 2, 3, '2024-04-19
14:29:03', 1713536871, 'finished', 'true'),
(40, 'sam123@gmail.com', '6621ec39a76ad', 4, 2, 1, 0, '2024-04-21
05:36:36', 1713677495, 'finished', 'true'),
(41, 'sam123@gmail.com', '5b85847bbe794', -2, 2, 0, 2, '2024-04-21
05:38:57', 1713677816, 'finished', 'true'),
(42, 'ishaan@gmail.com', '6621ec39a76ad', -1, 1, 0, 1, '2024-04-21
07:45:58', 1713685257, 'finished', 'true'),
(43, 'ishaan@gmail.com', '5b85847bbe794', 2, 2, 1, 1, '2024-04-21
07:54:46', 1713685965, 'finished', 'true'),
(44, 'pavan@123gmail.com', '6621ec39a76ad', 0, 5, 1, 4, '2024-04-22
06:43:41', 1713768085, 'finished', 'true'),
(45, 'pavan@123gmail.com', '5b85847bbe794', 3, 5, 2, 3, '2024-04-22
06:46:51', 1713768290, 'finished', 'true'),
```

```
(46, 'kunal@gmail.com', '6621ec39a76ad', 15, 5, 4, 1, '2024-04-22
07:39:04', 1713771500, 'finished', 'true'),
(47, 'samosa@gmail.com', '6621ec39a76ad', 5, 5, 2, 3, '2024-04-22
07:45:08', 1713771803, 'finished', 'true'),
(48, 'akshith@gmail.com', '6621ec39a76ad', 5, 5, 2, 3, '2024-04-22
14:19:29', 1713795428, 'finished', 'true'),
(50, 'yashaswi@gmail.com', '5b85847bbe794', 7, 5, 3, 2, '2024-04-23
05:31:09', 1713850182, 'finished', 'true'),
(51, 'yashaswi@gmail.com', '6621ec39a76ad', 5, 4, 2, 3, '2024-04-23
05:34:52', 1713850412, 'finished', 'true');

-- -------------------------------------------------------

--
-- Table structure for table `options`
--

CREATE TABLE `options` (
  `id` int(100) NOT NULL,
  `qid` varchar(50) NOT NULL,
  `option` varchar(5000) NOT NULL,
  `optionid` text NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_general_ci;

--
-- Dumping data for table `options`
--

INSERT INTO `options` (`id`, `qid`, `option`, `optionid`) VALUES
(13, '5b85857d00f34', ' Hello World!Hello World!', '5b85857d0ab77'),
(14, '5b85857d00f34', ' Hello World! * 2', '5b85857d0af5f'),
(15, '5b85857d00f34', 'Hello World!', '5b85857d0b347'),
(16, '5b85857d00f34', 'None of the above.', '5b85857d0b72f'),
(17, '5b85857d333f0', '( \'abcd\', 786 , 2.23, \'john\', 70.2 )',
'5b85857d389e2'),
(18, '5b85857d333f0', 'abcd', '5b85857d38dca'),
(19, '5b85857d333f0', '(786, 2.23)', '5b85857d391b2'),
(20, '5b85857d333f0', 'None of the above.', '5b85857d3959a'),
(21, '5b85857d59559', 'int(x [,base])', '5b85857d69b15'),
```

```
(22, '5b85857d59559', 'long(x [,base] )', '5b85857d69efd'),
(23, '5b85857d59559', 'float(x)', '5b85857d6a2e5'),
(24, '5b85857d59559', 'str(x)', '5b85857d6a6cd'),
(25, '5b85857d917d6', 'unichr(x)', '5b85857d97980'),
(26, '5b85857d917d6', 'ord(x)', '5b85857d97d68'),
(27, '5b85857d917d6', 'hex(x)', '5b85857d98150'),
(28, '5b85857d917d6', 'oct(x)', '5b85857d98538'),
(29, '5b85857db810f', 'choice(seq)', '5b85857dbd701'),
(30, '5b85857db810f', 'randrange ([start,] stop [,step])', '5b85857dbdae9'),
(31, '5b85857db810f', 'random()', '5b85857dbded1'),
(32, '5b85857db810f', 'seed([x])', '5b85857dbe2b9'),
(173, '6621f1e48b3b1', 'denis ritche', '6621f1e48ba8d'),
(174, '6621f1e48b3b1', 'tim berners lee', '6621f1e48ba91'),
(175, '6621f1e48b3b1', 'james gosling', '6621f1e48ba92'),
(176, '6621f1e48b3b1', 'Guido van Rossum', '6621f1e48ba93'),
(177, '6621f1e48d951', '6', '6621f1e48de24'),
(178, '6621f1e48d951', '8', '6621f1e48de2e'),
(179, '6621f1e48d951', '5', '6621f1e48de2f'),
(180, '6621f1e48d951', '7', '6621f1e48de30'),
(181, '6621f1e48f00b', '32 and 32', '6621f1e48f29c'),
(182, '6621f1e48f00b', '64 and 32', '6621f1e48f29f'),
(183, '6621f1e48f00b', '32 and 64', '6621f1e48f2a0'),
(184, '6621f1e48f00b', '64 and 64', '6621f1e48f2a1'),
(185, '6621f1e490040', '50', '6621f1e490318'),
(186, '6621f1e490040', '10', '6621f1e490319'),
(187, '6621f1e490040', 'compile error', '6621f1e49031a'),
(188, '6621f1e490040', 'exception', '6621f1e49031b'),
(189, '6621f1e491419', 'compile error', '6621f1e49186b'),
(190, '6621f1e491419', 'I', '6621f1e491870'),
(191, '6621f1e491419', 'throws exception', '6621f1e491871'),
(192, '6621f1e491419', '24 I', '6621f1e491872');

-- -------------------------------------------------------

--
-- Table structure for table `questions`
--

CREATE TABLE `questions` (
```

```
  `id` int(100) NOT NULL,
  `eid` text NOT NULL,
  `qid` text NOT NULL,
  `qns` text NOT NULL,
  `choice` int(10) NOT NULL,
  `sn` int(11) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_general_ci;

--
-- Dumping data for table `questions`
--

INSERT INTO `questions` (`id`, `eid`, `qid`, `qns`, `choice`, `sn`) VALUES
(4, '5b85847bbe794', '5b85857d00f34', 'What is the output of print str * 2
if str = \'Hello World!\'?', 4, 1),
(5, '5b85847bbe794', '5b85857d333f0', 'What is the output of print
tuple[1:3] if tuple = ( \'abcd\', 786 , 2.23, \'john\', 70.2 )?', 4, 2),
(6, '5b85847bbe794', '5b85857d59559', 'Which of the following function
convert a string to a long in python?', 4, 3),
(7, '5b85847bbe794', '5b85857d917d6', 'Which of the following function
convert an integer to an unicode character in python?', 4, 4),
(8, '5b85847bbe794', '5b85857db810f', 'Which of the following function
returns a random item from a list, tuple, or string?', 4, 5),
(44, '6621ec39a76ad', '6621f1e48b3b1', 'who developed java ?', 4, 1),
(45, '6621ec39a76ad', '6621f1e48d951', 'number of primitive datatypes in
java ?', 4, 2),
(46, '6621ec39a76ad', '6621f1e48f00b', 'What is the size of float and
double in java?', 4, 3),
(47, '6621ec39a76ad', '6621f1e490040', 'Find the output of the following
program.\r\n\r\npublic class Solution{\r\n      public static void
main(String[] args){\r\n                  short x = 10;\r\n                  x =  x *
5;\r\n                  System.out.print(x);\r\n      }\r\n}', 4, 4),
(48, '6621ec39a76ad', '6621f1e491419', 'Find the output of the following
code.\r\n\r\nint Integer = 24;\r\nchar String  =
'I';\r\nSystem.out.print(Integer);\r\nSystem.out.print(String);', 4, 5);

-- --------------------------------------------------------

--
```

```
-- Table structure for table `quiz`
--

CREATE TABLE `quiz` (
  `id` int(100) NOT NULL,
  `eid` text NOT NULL,
  `title` varchar(100) NOT NULL,
  `correct` int(11) NOT NULL,
  `wrong` int(11) NOT NULL,
  `total` int(11) NOT NULL,
  `time` bigint(20) NOT NULL,
  `date` timestamp NOT NULL DEFAULT current_timestamp() ON UPDATE
current_timestamp(),
  `status` varchar(10) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_general_ci;

--
-- Dumping data for table `quiz`
--

INSERT INTO `quiz` (`id`, `eid`, `title`, `correct`, `wrong`, `total`, `time`, `date`,
`status`) VALUES
(2, '5b85847bbe794', 'Python', 3, 1, 5, 2, '2024-04-22 07:25:55', 'enabled'),
(14, '6621ec39a76ad', 'Java', 4, 1, 5, 5, '2024-04-22 07:45:47', 'enabled');

-- --------------------------------------------------------

--
-- Table structure for table `rank`
--

CREATE TABLE `rank` (
  `id` int(100) NOT NULL,
  `username` varchar(50) NOT NULL,
  `score` int(11) NOT NULL,
  `time` timestamp NOT NULL DEFAULT current_timestamp() ON UPDATE
current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_general_ci;
```

```
--
-- Dumping data for table `rank`
--

INSERT INTO `rank` (`id`, `username`, `score`, `time`) VALUES
(27, '201021468012@gmail.com', 20, '2024-04-19 04:29:21'),
(28, 'akshara@gmail.com', 11, '2024-04-19 14:18:30'),
(29, 'nizam@gmail.com', 18, '2024-04-19 14:29:03'),
(33, 'sam123@gmail.com', 2, '2024-04-21 05:38:57'),
(34, 'ishaan@gmail.com', 1, '2024-04-21 07:54:46'),
(35, 'pavan@123gmail.com', 3, '2024-04-22 06:46:51'),
(36, 'kunal@gmail.com', 15, '2024-04-22 07:39:04'),
(37, 'samosa@gmail.com', 5, '2024-04-22 07:45:08'),
(38, 'akshith@gmail.com', 5, '2024-04-22 14:19:29'),
(40, 'yashaswi@gmail.com', 12, '2024-04-23 05:34:52');

-- --------------------------------------------------------

--
-- Table structure for table `user`
--

CREATE TABLE `user` (
  `id` int(100) NOT NULL,
  `name` varchar(50) NOT NULL,
  `rollno` varchar(20) NOT NULL,
  `branch` varchar(20) NOT NULL,
  `gender` varchar(5) NOT NULL,
  `username` varchar(50) NOT NULL,
  `phno` bigint(10) NOT NULL,
  `password` varchar(50) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_general_ci;

--
-- Dumping data for table `user`
--

INSERT INTO `user` (`id`, `name`, `rollno`, `branch`, `gender`, `username`,
`phno`, `password`) VALUES
```

```
(52, 'Abhilash', '201021468012', 'BSC.MPCS', 'M',
'201021468012@gmail.com', 9875642319,
'e10adc3949ba59abbe56e057f20f883e'),
(10, 'Akshara', '201021467030', 'BSC.MSCS', 'F', 'akshara@gmail.com',
7894561232, 'e10adc3949ba59abbe56e057f20f883e'),
(67, 'K . Akshay', '201021467035', 'BSC.MPCS', 'M', 'akshayraj@gmail.com',
9828661442, 'e10adc3949ba59abbe56e057f20f883e'),
(69, 'V.akshith', '201021468001', 'BTMC', 'M', 'akshith@gmail.com',
9856743292, 'e10adc3949ba59abbe56e057f20f883e'),
(63, 'Ishaan', '201021468002', 'BSC.MPCS', 'M', 'ishaan@gmail.com',
6985574123, 'e10adc3949ba59abbe56e057f20f883e'),
(65, 'V.kunal', '201021468016', 'BSC.MECS', 'M', 'kunal@gmail.com',
9856743299, 'e10adc3949ba59abbe56e057f20f883e'),
(56, 'Nizam', '201021467029', 'BSC.MSCS', 'M', 'nizam@gmail.com',
9587641235, 'e10adc3949ba59abbe56e057f20f883e'),
(64, 'M Pavan', '201021474021', 'BSC.MECS', 'M', 'pavan@123gmail.com',
6303601332, '81dc9bdb52d04dc20036dbd8313ed055'),
(66, 'Samyuktha', '201021468003', 'BSC.MSCS', 'F', 'samosa@gmail.com',
9988775566, 'e10adc3949ba59abbe56e057f20f883e'),
(71, 'Yashaswi', '201021467015', 'BSC.MSCS', 'F', 'yashaswi@gmail.com',
1234567890, '827ccb0eea8a706c4c34a16891f84e7b');

-- -------------------------------------------------------


--
-- Table structure for table `user_answer`
--

CREATE TABLE `user_answer` (
  `id` int(100) NOT NULL,
  `qid` varchar(50) NOT NULL,
  `ans` varchar(50) NOT NULL,
  `correctans` varchar(50) NOT NULL,
  `eid` varchar(50) NOT NULL,
  `username` varchar(50) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;

--
-- Dumping data for table `user_answer`
```

--

INSERT INTO `user_answer` (`id`, `qid`, `ans`, `correctans`, `eid`, `username`) VALUES
(1, '58027e82e62e3', '58027e82f2412', '58027e82f2412', '5802790f793b1', 'sonudoo'),
(2, '58027e833dd54', '58027e8347514', '58027e8347514', '5802790f793b1', 'sonudoo'),
(3, '58027e8371483', '58027e838f19a', '58027e838f19a', '5802790f793b1', 'sonudoo'),
(4, '5b85857d00f34', '5b85857d0af5f', '5b85857d0ab77', '5b85847bbe794', 'pravin'),
(5, '5b85857d333f0', '5b85857d389e2', '5b85857d391b2', '5b85847bbe794', 'pravin'),
(6, '5b85857d59559', '5b85857d69efd', '5b85857d69efd', '5b85847bbe794', 'pravin'),
(7, '5b85857d917d6', '5b85857d97980', '5b85857d97980', '5b85847bbe794', 'pravin'),
(8, '5b85857db810f', '5b85857dbdae9', '5b85857dbd701', '5b85847bbe794', 'pravin'),
(9, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77', '5b85847bbe794', 'mugunth'),
(10, '5b85857d333f0', '5b85857d391b2', '5b85857d391b2', '5b85847bbe794', 'mugunth'),
(11, '5b85857d59559', '5b85857d69efd', '5b85857d69efd', '5b85847bbe794', 'mugunth'),
(12, '5b85857d917d6', '5b85857d97980', '5b85857d97980', '5b85847bbe794', 'mugunth'),
(13, '5b85857db810f', '5b85857dbded1', '5b85857dbd701', '5b85847bbe794', 'mugunth'),
(14, '5b85857d00f34', '5b85857d0af5f', '5b85857d0ab77', '5b85847bbe794', 'akshay'),
(15, '5b85857db810f', '5b85857dbdae9', '5b85857dbd701', '5b85847bbe794', 'akshay'),
(16, '5b85857db810f', '5b85857dbdae9', '5b85857dbd701', '5b85847bbe794', 'nizam'),
(17, '5b85857d00f34', '5b85857d0af5f', '5b85857d0ab77', '5b85847bbe794', 'kunal'),

(18, '5b85857d333f0', '5b85857d391b2', '5b85857d391b2',
'5b85847bbe794', 'kunal'),
(19, '5b85857d59559', '5b85857d6a6cd', '5b85857d69efd',
'5b85847bbe794', 'kunal'),
(20, '5b85857d917d6', '5b85857d97980', '5b85857d97980',
'5b85847bbe794', 'kunal'),
(21, '5b85857db810f', '5b85857dbdae9', '5b85857dbd701',
'5b85847bbe794', 'kunal'),
(22, '5b85857d00f34', '5b85857d0b347', '5b85857d0ab77',
'5b85847bbe794', 'akshara'),
(23, '5b85857d333f0', '5b85857d389e2', '5b85857d391b2',
'5b85847bbe794', 'akshara'),
(24, '5b85857d917d6', '5b85857d97d68', '5b85857d97980',
'5b85847bbe794', 'akshara'),
(25, '5b85857db810f', '5b85857dbdae9', '5b85857dbd701',
'5b85847bbe794', 'akshara'),
(26, '5b85857d59559', '5b85857d69efd', '5b85857d69efd',
'5b85847bbe794', 'akshara'),
(27, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77',
'5b85847bbe794', 'kaluri vamshi'),
(28, '5b85857d333f0', '5b85857d38dca', '5b85857d391b2',
'5b85847bbe794', 'kaluri vamshi'),
(29, '5b85857d59559', '5b85857d69efd', '5b85857d69efd',
'5b85847bbe794', 'kaluri vamshi'),
(30, '5b85857d917d6', '5b85857d97d68', '5b85857d97980',
'5b85847bbe794', 'kaluri vamshi'),
(31, '5b85857db810f', '5b85857dbe2b9', '5b85857dbd701',
'5b85847bbe794', 'kaluri vamshi'),
(32, '5b85857d00f34', '5b85857d0b347', '5b85857d0ab77',
'5b85847bbe794', 'adarsh'),
(33, '5b85857d333f0', '5b85857d389e2', '5b85857d391b2',
'5b85847bbe794', 'adarsh'),
(34, '5b85857d59559', '5b85857d69b15', '5b85857d69efd',
'5b85847bbe794', 'adarsh'),
(35, '5b85857d917d6', '5b85857d97980', '5b85857d97980',
'5b85847bbe794', 'adarsh'),
(36, '5b85857db810f', '5b85857dbd701', '5b85857dbd701',
'5b85847bbe794', 'adarsh'),

(37, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77',
'5b85847bbe794', 'addy_123'),
(38, '5b85857d333f0', '5b85857d38dca', '5b85857d391b2',
'5b85847bbe794', 'addy_123'),
(39, '5b85857d59559', '5b85857d6a2e5', '5b85857d69efd',
'5b85847bbe794', 'addy_123'),
(40, '5b85857d917d6', '5b85857d97d68', '5b85857d97980',
'5b85847bbe794', 'addy_123'),
(41, '5b85857db810f', '5b85857dbdae9', '5b85857dbd701',
'5b85847bbe794', 'addy_123'),
(42, '5b85857d00f34', '5b85857d0af5f', '5b85857d0ab77',
'5b85847bbe794', 'rajesh123'),
(43, '5b85857d333f0', '5b85857d38dca', '5b85857d391b2',
'5b85847bbe794', 'rajesh123'),
(44, '5b85857d59559', '5b85857d69b15', '5b85857d69efd',
'5b85847bbe794', 'rajesh123'),
(45, '5b85857d917d6', '5b85857d97980', '5b85857d97980',
'5b85847bbe794', 'rajesh123'),
(46, '5b85857db810f', '5b85857dbe2b9', '5b85857dbd701',
'5b85847bbe794', 'rajesh123'),
(47, '5b85857d00f34', '5b85857d0af5f', '5b85857d0ab77',
'5b85847bbe794', 'arun'),
(48, '5b85857d333f0', '5b85857d389e2', '5b85857d391b2',
'5b85847bbe794', 'arun'),
(49, '5b85857d59559', '5b85857d6a2e5', '5b85857d69efd',
'5b85847bbe794', 'arun'),
(50, '5b85857db810f', '5b85857dbd701', '5b85857dbd701',
'5b85847bbe794', 'arun'),
(51, '5b85857d917d6', '5b85857d97d68', '5b85857d97980',
'5b85847bbe794', 'arun'),
(52, '5b85857d00f34', '5b85857d0af5f', '5b85857d0ab77',
'5b85847bbe794', 'rohan'),
(53, '5b85857d333f0', '5b85857d389e2', '5b85857d391b2',
'5b85847bbe794', 'rohan'),
(54, '5b85857d59559', '5b85857d69b15', '5b85857d69efd',
'5b85847bbe794', 'rohan'),
(55, '5b85857d917d6', '5b85857d97980', '5b85857d97980',
'5b85847bbe794', 'rohan'),

(56, '5b85857db810f', '5b85857dbd701', '5b85857dbd701',
'5b85847bbe794', 'rohan'),
(57, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77',
'5b85847bbe794', 'shiva'),
(58, '5b85857d333f0', '5b85857d389e2', '5b85857d391b2',
'5b85847bbe794', 'shiva'),
(59, '5b85857d59559', '5b85857d69b15', '5b85857d69efd',
'5b85847bbe794', 'shiva'),
(60, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77',
'5b85847bbe794', 'sunny'),
(61, '5b85857d333f0', '5b85857d389e2', '5b85857d391b2',
'5b85847bbe794', 'sunny'),
(62, '5b85857d59559', '5b85857d69b15', '5b85857d69efd',
'5b85847bbe794', 'sunny'),
(63, '5b85857d917d6', '5b85857d97980', '5b85857d97980',
'5b85847bbe794', 'sunny'),
(64, '5b85857db810f', '5b85857dbd701', '5b85857dbd701',
'5b85847bbe794', 'sunny'),
(65, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77',
'5b85847bbe794', 'sam123'),
(66, '5b85857d333f0', '5b85857d3959a', '5b85857d391b2',
'5b85847bbe794', 'sam123'),
(67, '5b85857d59559', '5b85857d69b15', '5b85857d69efd',
'5b85847bbe794', 'sam123'),
(68, '5b85857d917d6', '5b85857d97980', '5b85857d97980',
'5b85847bbe794', 'sam123'),
(69, '5b85857db810f', '5b85857dbded1', '5b85857dbd701',
'5b85847bbe794', 'sam123'),
(70, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77',
'5b85847bbe794', 'bharath'),
(71, '5b85857d333f0', '5b85857d389e2', '5b85857d391b2',
'5b85847bbe794', 'bharath'),
(72, '5b85857d59559', '5b85857d69b15', '5b85857d69efd',
'5b85847bbe794', 'bharath'),
(73, '5b85857d917d6', '5b85857d98150', '5b85857d97980',
'5b85847bbe794', 'bharath'),
(74, '5b85857db810f', '5b85857dbd701', '5b85857dbd701',
'5b85847bbe794', 'bharath'),

(75, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77',
'5b85847bbe794', 'joker'),
(76, '5b85857d333f0', '5b85857d38dca', '5b85857d391b2',
'5b85847bbe794', 'joker'),
(77, '5b85857d59559', '5b85857d69b15', '5b85857d69efd',
'5b85847bbe794', 'joker'),
(78, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77',
'5b85847bbe794', 'hero'),
(79, '5b85857d00f34', '5b85857d0af5f', '5b85857d0ab77',
'5b85847bbe794', 'lll'),
(80, '5b85857d333f0', '5b85857d389e2', '5b85857d391b2',
'5b85847bbe794', 'lll'),
(81, '5b85857d59559', '5b85857d69b15', '5b85857d69efd',
'5b85847bbe794', 'lll'),
(82, '6616481f7a9b3', '6616481f7b278', '6616481f7b26f',
'66164511dee2e', 'kunal'),
(83, '6616481f7d118', '6616481f7d7c9', '6616481f7d7cd',
'66164511dee2e', 'kunal'),
(84, '6616481f7f2b7', '6616481f7f840', '6616481f7f840',
'66164511dee2e', 'kunal'),
(85, '6616481f817d3', '6616481f81e9f', '6616481f81e9f',
'66164511dee2e', 'kunal'),
(86, '6616481f83a51', '6616481f840cb', '6616481f840cb',
'66164511dee2e', 'kunal'),
(87, '6616481f7a9b3', '6616481f7b278', '6616481f7b26f',
'66164511dee2e', '201021467039@gmail.com'),
(88, '6616481f7d118', '6616481f7d7cd', '6616481f7d7cd',
'66164511dee2e', '201021467039@gmail.com'),
(89, '6616481f7f2b7', '6616481f7f840', '6616481f7f840',
'66164511dee2e', '201021467039@gmail.com'),
(90, '6616481f817d3', '6616481f81e9f', '6616481f81e9f',
'66164511dee2e', '201021467039@gmail.com'),
(91, '6616481f83a51', '6616481f840cb', '6616481f840cb',
'66164511dee2e', '201021467039@gmail.com'),
(92, '661a5cecc7087', '661a5ceccd6c5', '661a5ceccd6c5', '661a5ce14583b',
'srinivas@gmail.com'),
(93, '661a5cecd83a2', '661a5cecd8a84', '661a5cecd8a80',
'661a5ce14583b', 'srinivas@gmail.com'),

(94, '6616481f7a9b3', '6616481f7b278', '6616481f7b26f',
'66164511dee2e', 'vivek@gmail.com'),
(95, '6616481f7d118', '6616481f7d7c9', '6616481f7d7cd',
'66164511dee2e', 'vivek@gmail.com'),
(96, '6616481f7f2b7', '6616481f7f83f', '6616481f7f840',
'66164511dee2e', 'vivek@gmail.com'),
(97, '6616481f817d3', '6616481f81e9f', '6616481f81e9f',
'66164511dee2e', 'vivek@gmail.com'),
(98, '6616481f83a51', '6616481f840cb', '6616481f840cb',
'66164511dee2e', 'vivek@gmail.com'),
(99, '6616481f7a9b3', '6616481f7b278', '6616481f7b26f',
'66164511dee2e', 'tony@gmail.com'),
(100, '6616481f7d118', '6616481f7d7c9', '6616481f7d7cd',
'66164511dee2e', 'tony@gmail.com'),
(101, '6616481f7f2b7', '6616481f7f83f', '6616481f7f840',
'66164511dee2e', 'tony@gmail.com'),
(102, '6616481f817d3', '6616481f81e9f', '6616481f81e9f',
'66164511dee2e', 'tony@gmail.com'),
(103, '6616481f83a51', '6616481f840cb', '6616481f840cb',
'66164511dee2e', 'tony@gmail.com'),
(104, '6621f1e48b3b1', '6621f1e48ba92', '6621f1e48ba92',
'6621ec39a76ad', '201021468012@gmail.com'),
(105, '6621f1e48d951', '6621f1e48de2e', '6621f1e48de2e',
'6621ec39a76ad', '201021468012@gmail.com'),
(106, '6621f1e48f00b', '6621f1e48f2a0', '6621f1e48f2a0',
'6621ec39a76ad', '201021468012@gmail.com'),
(107, '6621f1e490040', '6621f1e49031a', '6621f1e49031a',
'6621ec39a76ad', '201021468012@gmail.com'),
(108, '6621f1e491419', '6621f1e491872', '6621f1e491872',
'6621ec39a76ad', '201021468012@gmail.com'),
(109, '6621f1e48b3b1', '6621f1e48ba92', '6621f1e48ba92',
'6621ec39a76ad', 'akshara@gmail.com'),
(110, '6621f1e48d951', '6621f1e48de2e', '6621f1e48de2e',
'6621ec39a76ad', 'akshara@gmail.com'),
(111, '6621f1e48f00b', '6621f1e48f2a0', '6621f1e48f2a0',
'6621ec39a76ad', 'akshara@gmail.com'),
(112, '6621f1e490040', '6621f1e49031b', '6621f1e49031a',
'6621ec39a76ad', 'akshara@gmail.com'),

(113, '6621f1e48b3b1', '6621f1e48ba92', '6621f1e48ba92',
'6621ec39a76ad', 'nizam@gmail.com'),
(114, '6621f1e48d951', '6621f1e48de24', '6621f1e48de2e',
'6621ec39a76ad', 'nizam@gmail.com'),
(115, '6621f1e48f00b', '6621f1e48f2a0', '6621f1e48f2a0',
'6621ec39a76ad', 'nizam@gmail.com'),
(116, '6621f1e490040', '6621f1e49031a', '6621f1e49031a',
'6621ec39a76ad', 'nizam@gmail.com'),
(117, '6621f1e491419', '6621f1e491872', '6621f1e491872',
'6621ec39a76ad', 'nizam@gmail.com'),
(118, '5b85857d00f34', '5b85857d0af5f', '5b85857d0ab77',
'5b85847bbe794', 'nizam@gmail.com'),
(119, '5b85857d333f0', '5b85857d389e2', '5b85857d391b2',
'5b85847bbe794', 'nizam@gmail.com'),
(120, '5b85857d59559', '5b85857d69efd', '5b85857d69efd',
'5b85847bbe794', 'nizam@gmail.com'),
(121, '5b85857d917d6', '5b85857d97980', '5b85857d97980',
'5b85847bbe794', 'nizam@gmail.com'),
(122, '5b85857db810f', '5b85857dbded1', '5b85857dbd701',
'5b85847bbe794', 'nizam@gmail.com'),
(123, '6621f1e48b3b1', '6621f1e48ba92', '6621f1e48ba92',
'6621ec39a76ad', 'saiadarshvautrey@gmail.com'),
(124, '6621f1e48d951', '6621f1e48de2e', '6621f1e48de2e',
'6621ec39a76ad', 'saiadarshvautrey@gmail.com'),
(125, '6621f1e48f00b', '6621f1e48f2a0', '6621f1e48f2a0',
'6621ec39a76ad', 'saiadarshvautrey@gmail.com'),
(126, '6621f1e490040', '6621f1e490318', '6621f1e49031a',
'6621ec39a76ad', 'saiadarshvautrey@gmail.com'),
(127, '6621f1e491419', '6621f1e491871', '6621f1e491872',
'6621ec39a76ad', 'saiadarshvautrey@gmail.com'),
(129, '6621f1e48b3b1', '6621f1e48ba92', '6621f1e48ba92',
'6621ec39a76ad', 'vijay@gmail.com'),
(130, '5b85857d00f34', '5b85857d0af5f', '5b85857d0ab77',
'5b85847bbe794', 'vijay@gmail.com'),
(131, '6621f1e48b3b1', '6621f1e48ba93', '6621f1e48ba92',
'6621ec39a76ad', 'praveen@gmail.com'),
(132, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77',
'5b85847bbe794', 'praveen@gmail.com'),

(133, '5b85857d333f0', '5b85857d3959a', '5b85857d391b2',
'5b85847bbe794', 'praveen@gmail.com'),
(135, '6621f1e48b3b1', '6621f1e48ba92', '6621f1e48ba92',
'6621ec39a76ad', 'sam123@gmail.com'),
(137, '5b85857d00f34', '5b85857d0af5f', '5b85857d0ab77',
'5b85847bbe794', 'sam123@gmail.com'),
(138, '5b85857d333f0', '5b85857d38dca', '5b85857d391b2',
'5b85847bbe794', 'sam123@gmail.com'),
(139, '6621f1e48b3b1', '6621f1e48ba91', '6621f1e48ba92',
'6621ec39a76ad', 'ishaan@gmail.com'),
(140, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77',
'5b85847bbe794', 'ishaan@gmail.com'),
(141, '5b85857d333f0', '5b85857d38dca', '5b85857d391b2',
'5b85847bbe794', 'ishaan@gmail.com'),
(142, '6621f1e48b3b1', '6621f1e48ba92', '6621f1e48ba92',
'6621ec39a76ad', 'pavan@123gmail.com'),
(143, '6621f1e48d951', '6621f1e48de24', '6621f1e48de2e',
'6621ec39a76ad', 'pavan@123gmail.com'),
(144, '6621f1e48f00b', '6621f1e48f29c', '6621f1e48f2a0',
'6621ec39a76ad', 'pavan@123gmail.com'),
(145, '6621f1e490040', '6621f1e490319', '6621f1e49031a',
'6621ec39a76ad', 'pavan@123gmail.com'),
(146, '6621f1e491419', '6621f1e491870', '6621f1e491872',
'6621ec39a76ad', 'pavan@123gmail.com'),
(147, '5b85857d00f34', '5b85857d0b347', '5b85857d0ab77',
'5b85847bbe794', 'pavan@123gmail.com'),
(148, '5b85857d333f0', '5b85857d38dca', '5b85857d391b2',
'5b85847bbe794', 'pavan@123gmail.com'),
(149, '5b85857d59559', '5b85857d69efd', '5b85857d69efd',
'5b85847bbe794', 'pavan@123gmail.com'),
(150, '5b85857d917d6', '5b85857d98150', '5b85857d97980',
'5b85847bbe794', 'pavan@123gmail.com'),
(151, '5b85857db810f', '5b85857dbd701', '5b85857dbd701',
'5b85847bbe794', 'pavan@123gmail.com'),
(152, '6621f1e48b3b1', '6621f1e48ba92', '6621f1e48ba92',
'6621ec39a76ad', 'kunal@gmail.com'),
(153, '6621f1e48d951', '6621f1e48de2e', '6621f1e48de2e',
'6621ec39a76ad', 'kunal@gmail.com'),

(154, '6621f1e48f00b', '6621f1e48f2a0', '6621f1e48f2a0',
'6621ec39a76ad', 'kunal@gmail.com'),
(155, '6621f1e490040', '6621f1e49031a', '6621f1e49031a',
'6621ec39a76ad', 'kunal@gmail.com'),
(156, '6621f1e491419', '6621f1e491871', '6621f1e491872',
'6621ec39a76ad', 'kunal@gmail.com'),
(157, '6621f1e48b3b1', '6621f1e48ba92', '6621f1e48ba92',
'6621ec39a76ad', 'samosa@gmail.com'),
(158, '6621f1e48d951', '6621f1e48de24', '6621f1e48de2e',
'6621ec39a76ad', 'samosa@gmail.com'),
(159, '6621f1e48f00b', '6621f1e48f29f', '6621f1e48f2a0',
'6621ec39a76ad', 'samosa@gmail.com'),
(160, '6621f1e490040', '6621f1e490318', '6621f1e49031a',
'6621ec39a76ad', 'samosa@gmail.com'),
(161, '6621f1e491419', '6621f1e491872', '6621f1e491872',
'6621ec39a76ad', 'samosa@gmail.com'),
(162, '6621f1e48b3b1', '6621f1e48ba92', '6621f1e48ba92',
'6621ec39a76ad', 'akshith@gmail.com'),
(163, '6621f1e48d951', '6621f1e48de2e', '6621f1e48de2e',
'6621ec39a76ad', 'akshith@gmail.com'),
(164, '6621f1e48f00b', '6621f1e48f29c', '6621f1e48f2a0',
'6621ec39a76ad', 'akshith@gmail.com'),
(165, '6621f1e490040', '6621f1e49031b', '6621f1e49031a',
'6621ec39a76ad', 'akshith@gmail.com'),
(166, '6621f1e491419', '6621f1e49186b', '6621f1e491872',
'6621ec39a76ad', 'akshith@gmail.com'),
(167, '6621f1e491419', '6621f1e491871', '6621f1e491872',
'6621ec39a76ad', 'siri@gmail.com'),
(168, '5b85857d00f34', '5b85857d0ab77', '5b85857d0ab77',
'5b85847bbe794', 'yashaswi@gmail.com'),
(169, '5b85857d333f0', '5b85857d3959a', '5b85857d391b2',
'5b85847bbe794', 'yashaswi@gmail.com'),
(170, '5b85857d59559', '5b85857d69efd', '5b85857d69efd',
'5b85847bbe794', 'yashaswi@gmail.com'),
(171, '5b85857d917d6', '5b85857d97980', '5b85857d97980',
'5b85847bbe794', 'yashaswi@gmail.com'),
(172, '5b85857db810f', '5b85857dbded1', '5b85857dbd701',
'5b85847bbe794', 'yashaswi@gmail.com'),

```
(173, '6621f1e48b3b1', '6621f1e48ba91', '6621f1e48ba92',
'6621ec39a76ad', 'yashaswi@gmail.com'),
(174, '6621f1e48d951', '6621f1e48de2e', '6621f1e48de2e',
'6621ec39a76ad', 'yashaswi@gmail.com'),
(175, '6621f1e48f00b', '6621f1e48f29f', '6621f1e48f2a0',
'6621ec39a76ad', 'yashaswi@gmail.com'),
(176, '6621f1e491419', '6621f1e491871', '6621f1e491872',
'6621ec39a76ad', 'yashaswi@gmail.com'),
(177, '6621f1e490040', '6621f1e49031a', '6621f1e49031a',
'6621ec39a76ad', 'yashaswi@gmail.com');

--
-- Indexes for dumped tables
--

--
-- Indexes for table `admin`
--
ALTER TABLE `admin`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `answer`
--
ALTER TABLE `answer`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `history`
--
ALTER TABLE `history`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `options`
--
ALTER TABLE `options`
  ADD PRIMARY KEY (`id`);
```

```
--
-- Indexes for table `questions`
--
ALTER TABLE `questions`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `quiz`
--
ALTER TABLE `quiz`
  ADD UNIQUE KEY `id` (`id`);

--
-- Indexes for table `rank`
--
ALTER TABLE `rank`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `user`
--
ALTER TABLE `user`
  ADD PRIMARY KEY (`username`),
  ADD UNIQUE KEY `username` (`username`),
  ADD UNIQUE KEY `id` (`id`);

--
-- Indexes for table `user_answer`
--
ALTER TABLE `user_answer`
  ADD PRIMARY KEY (`id`);

--
-- AUTO_INCREMENT for dumped tables
--

--
-- AUTO_INCREMENT for table `admin`
--
```

```
ALTER TABLE `admin`
  MODIFY `id` int(100) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=3;

--
-- AUTO_INCREMENT for table `answer`
--
ALTER TABLE `answer`
  MODIFY `id` int(100) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=66;

--
-- AUTO_INCREMENT for table `history`
--
ALTER TABLE `history`
  MODIFY `id` int(100) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=52;

--
-- AUTO_INCREMENT for table `options`
--
ALTER TABLE `options`
  MODIFY `id` int(100) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=261;

--
-- AUTO_INCREMENT for table `questions`
--
ALTER TABLE `questions`
  MODIFY `id` int(100) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=66;

--
-- AUTO_INCREMENT for table `quiz`
--
ALTER TABLE `quiz`
  MODIFY `id` int(100) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=19;
```

```
--
-- AUTO_INCREMENT for table `rank`
--
ALTER TABLE `rank`
  MODIFY `id` int(100) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=41;

--
-- AUTO_INCREMENT for table `user`
--
ALTER TABLE `user`
  MODIFY `id` int(100) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=73;

--
-- AUTO_INCREMENT for table `user_answer`
--
ALTER TABLE `user_answer`
  MODIFY `id` int(100) NOT NULL AUTO_INCREMENT,
AUTO_INCREMENT=178;
COMMIT;

/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT
*/;
/*!40101 SET
CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
/*!40101 SET
COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

➢ HOME PAGE:

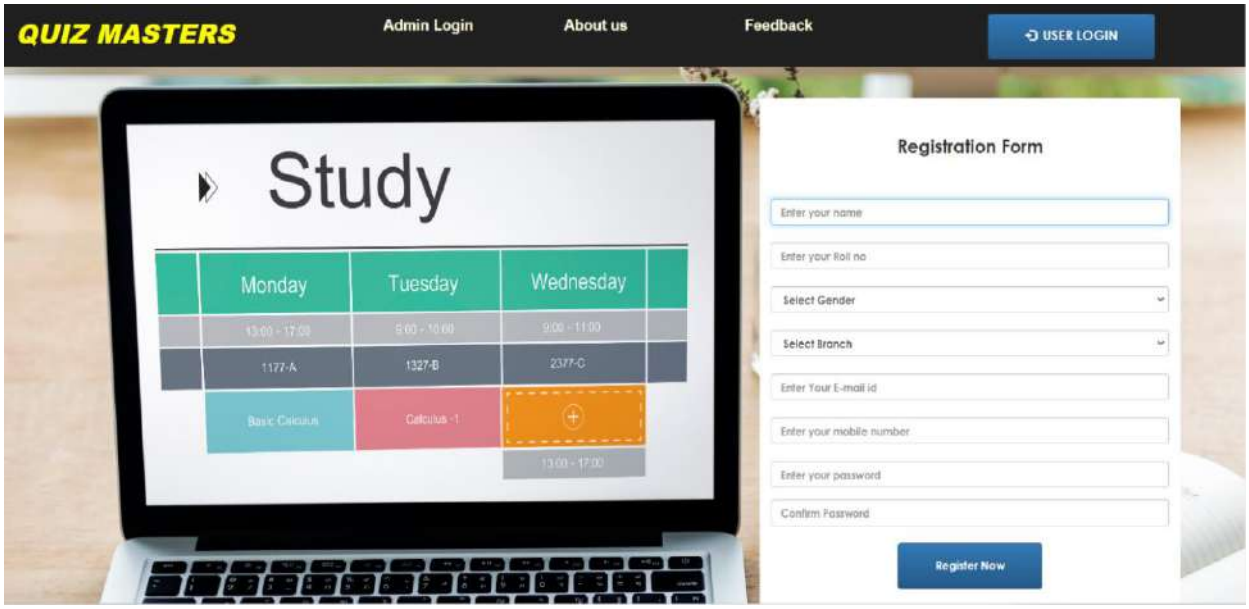

➢ REGRISTATION FORM

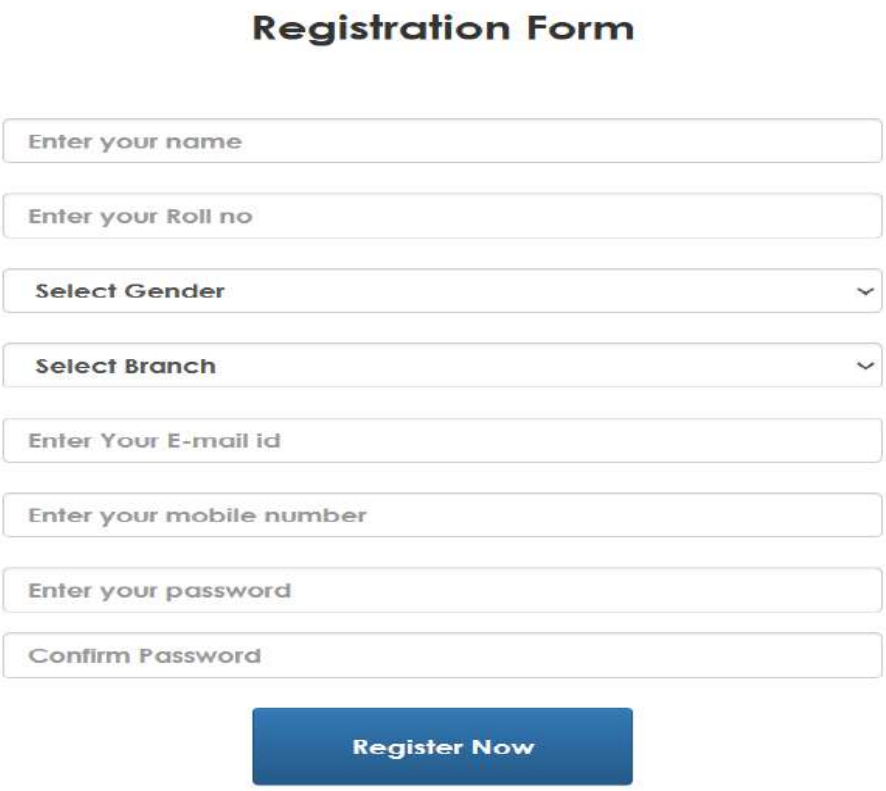

➢ USER LOGIN:

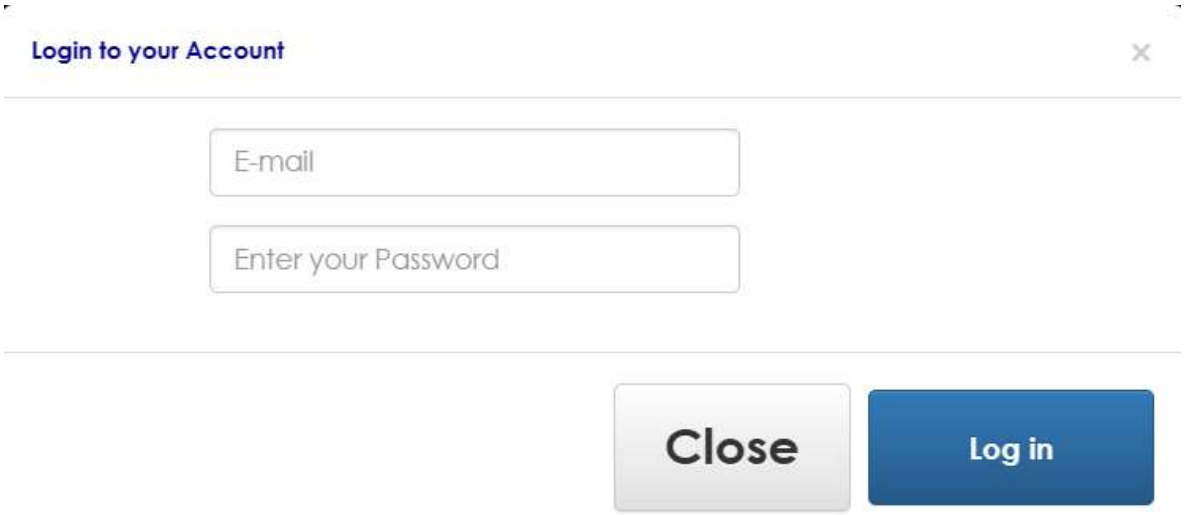

➢ USER DASHBOARD:

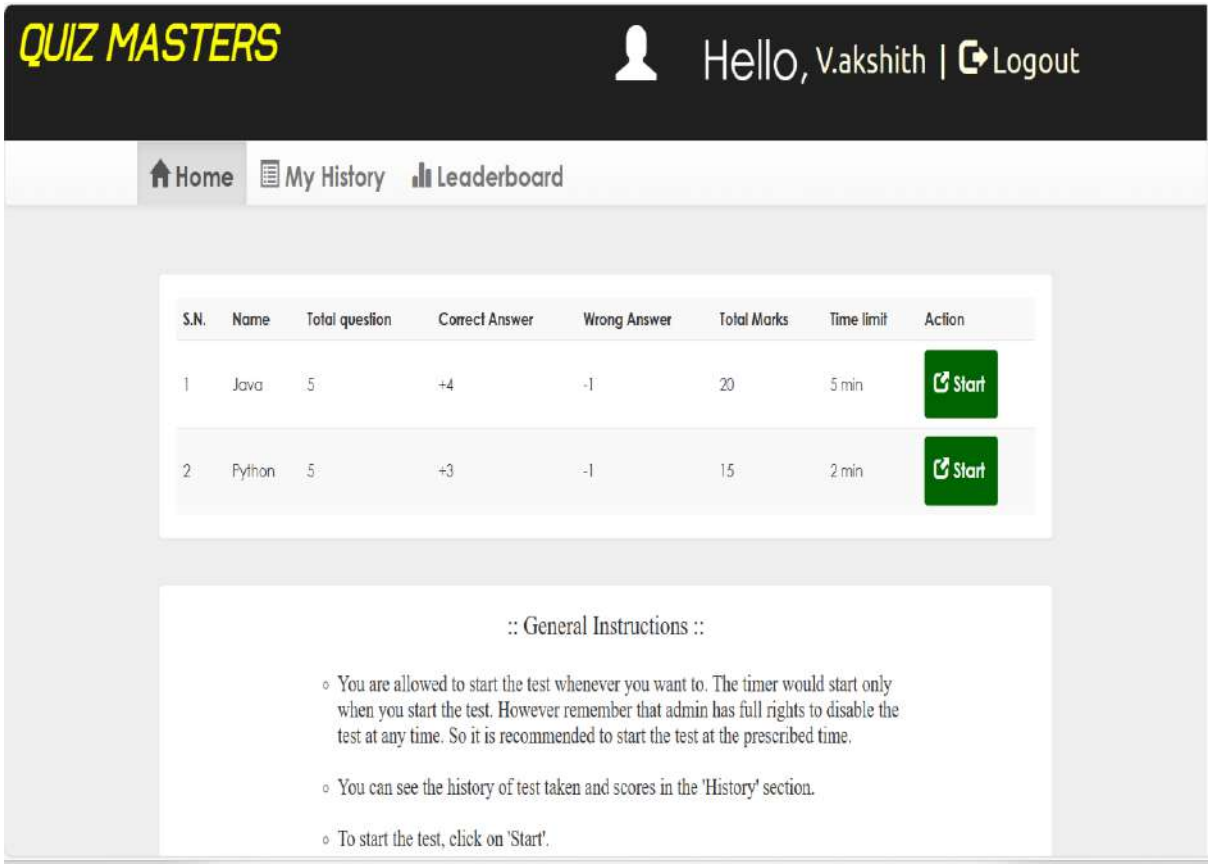

➢ QUIZ:

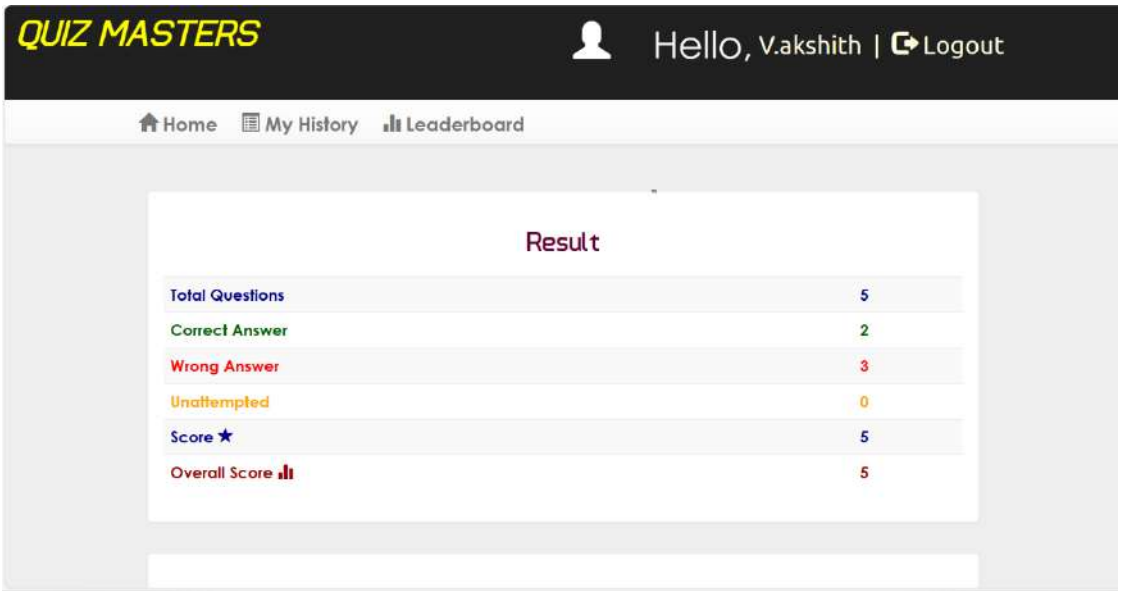

➢ QUIZ RESULT:

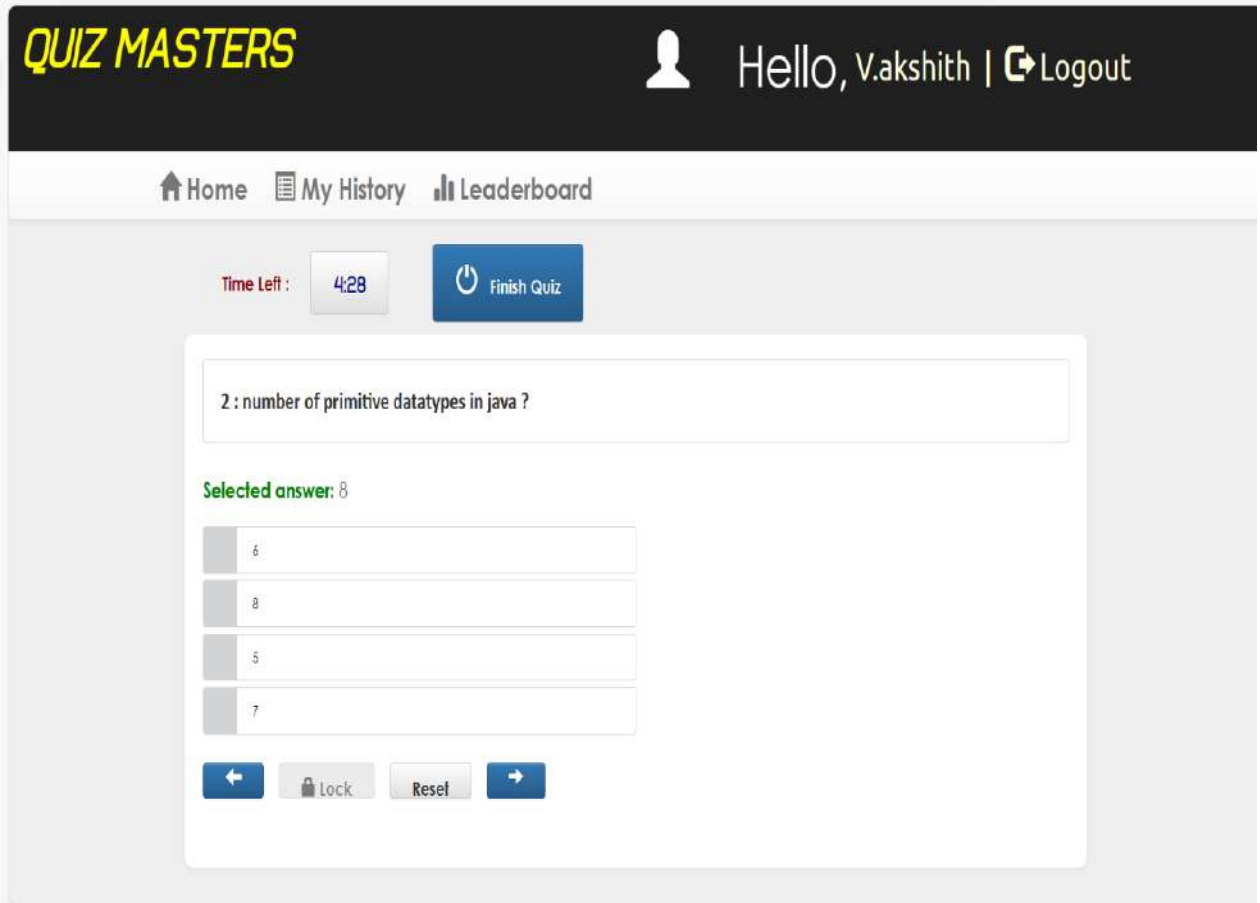

QUIZ MASTERS

Hello, V.akshith | Logout

Home | My History | Leaderboard

S.N.	Quiz	Total Questions	Right	Wrong	Unattempted	Score	Action
1	Java	5	2	3	0	5	View Result

DEVELOPED BY Feedback

QUIZ MASTERS

Hello, V.akshith | Logout

Home | My History | Leaderboard

Rank	Name	Branch	E-mail id	Score
1	Abhilash	BSC.MPCS	201021468012@gmail.com	20
2	Nizam	BSC.MSCS	nizam@gmail.com	18
3	V.kunal	BSC.MECS	kunal@gmail.com	15
4	Akshara	BSC.MSCS	akshara@gmail.com	11
5	Samyuktha	BSC.MSCS	samosa@gmail.com	5
6	V.akshith	BTMC	akshith@gmail.com	5
7	M Pavan	BSC.MECS	pavan@123gmail.com	3
8	M Pavan	BSC.MECS	pavan@123gmail.com	2
9	Ishaan	BSC.MPCS	ishaan@gmail.com	1

➢ ADMIN DASHBOARD:

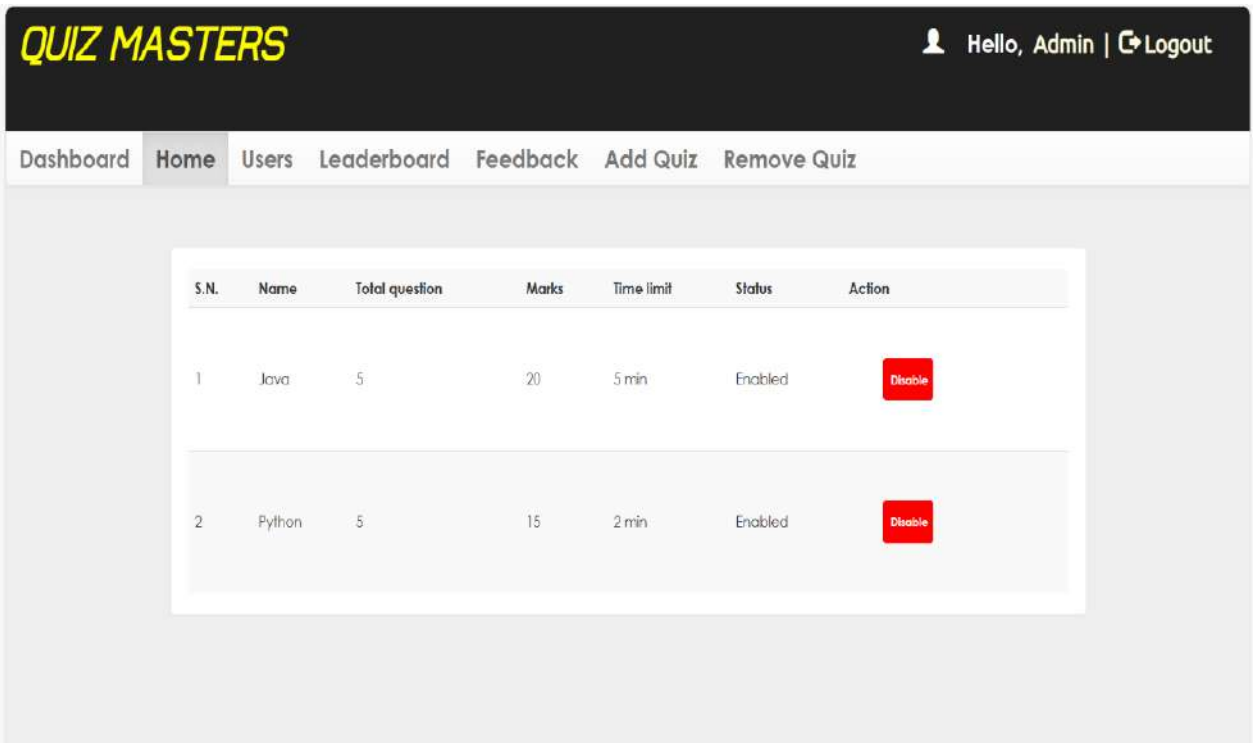

➢ USER DETAILS:

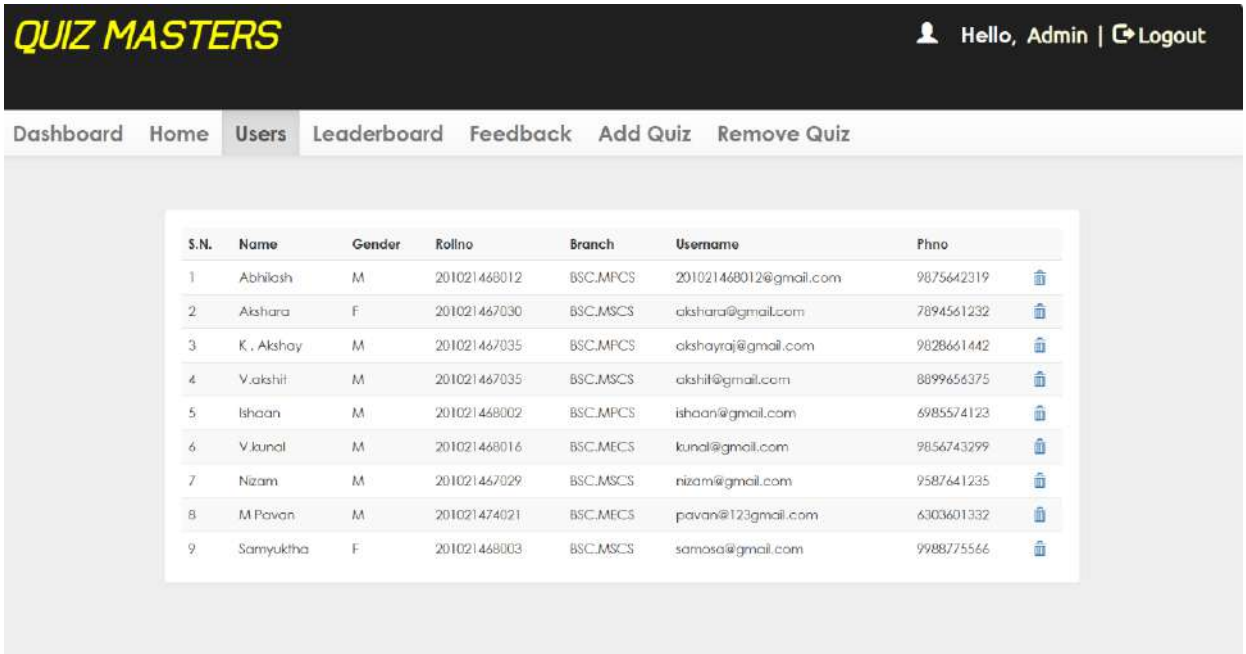

S.N.	Name	Gender	Rollno	Branch	Username	Phno
1	Abhilash	M	201021468012	BSC.MPCS	201021468012@gmail.com	9875642319
2	Akshara	F	201021467030	BSC.MSCS	akshara@gmail.com	7894561232
3	K. Akshay	M	201021467035	BSC.MPCS	akshayraj@gmail.com	9828661442
4	V.akshit	M	201021467035	BSC.MSCS	akshit@gmail.com	8899656375
5	Ishaan	M	201021468002	BSC.MPCS	ishaan@gmail.com	6985574123
6	V.kunal	M	201021468016	BSC.MECS	kunal@gmail.com	9856743299
7	Nizam	M	201021467029	BSC.MSCS	nizam@gmail.com	9587641235
8	M Pavan	M	201021474021	BSC.MECS	pavan@123gmail.com	6303601332
9	Samyuktha	F	201021468003	BSC.MSCS	samosa@gmail.com	9988775566

➢ LEADERBOARD DETAIL

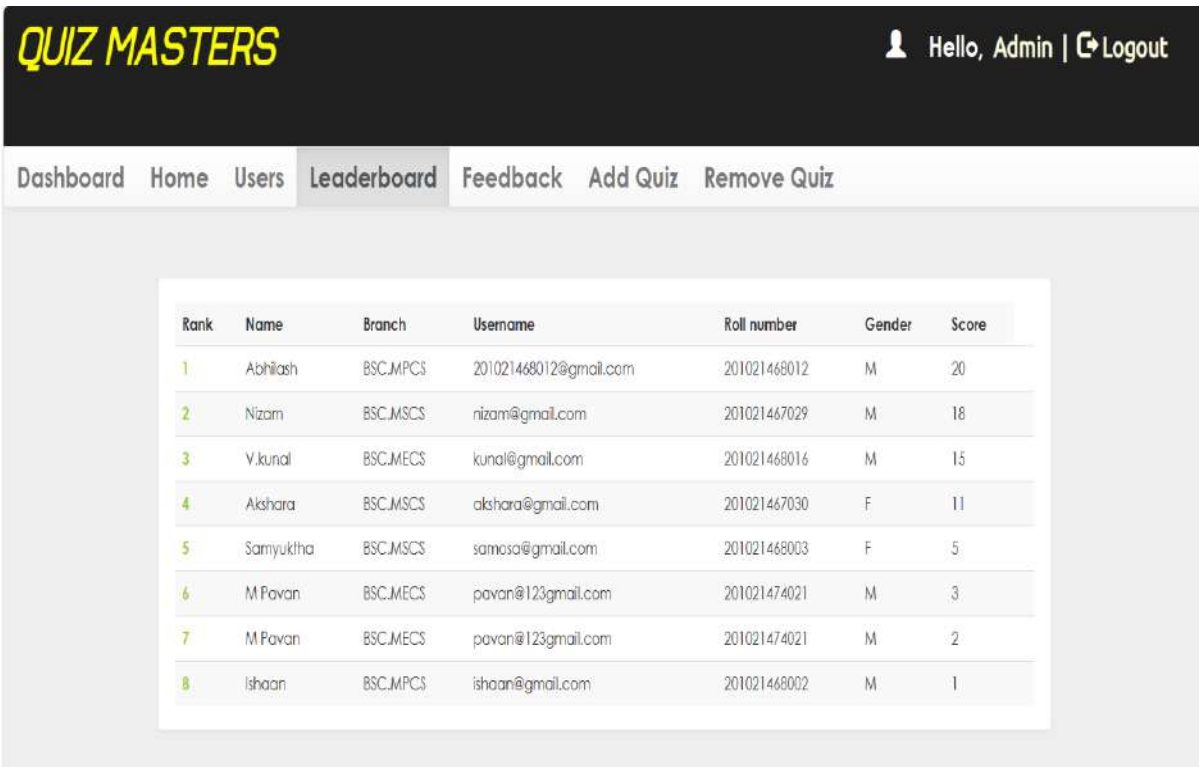

Rank	Name	Branch	Username	Roll number	Gender	Score
1	Abhilash	BSC.MPCS	201021468012@gmail.com	201021468012	M	20
2	Nizam	BSC.MSCS	nizam@gmail.com	201021467029	M	18
3	V.kunal	BSC.MECS	kunal@gmail.com	201021468016	M	15
4	Akshara	BSC.MSCS	akshara@gmail.com	201021467030	F	11
5	Samyuktha	BSC.MSCS	samosa@gmail.com	201021468003	F	5
6	M Pavan	BSC.MECS	pavan@123gmail.com	201021474021	M	3
7	M Pavan	BSC.MECS	pavan@123gmail.com	201021474021	M	2
8	Ishaan	BSC.MPCS	ishaan@gmail.com	201021468002	M	1

➢ FEEDBACK DETAILS:

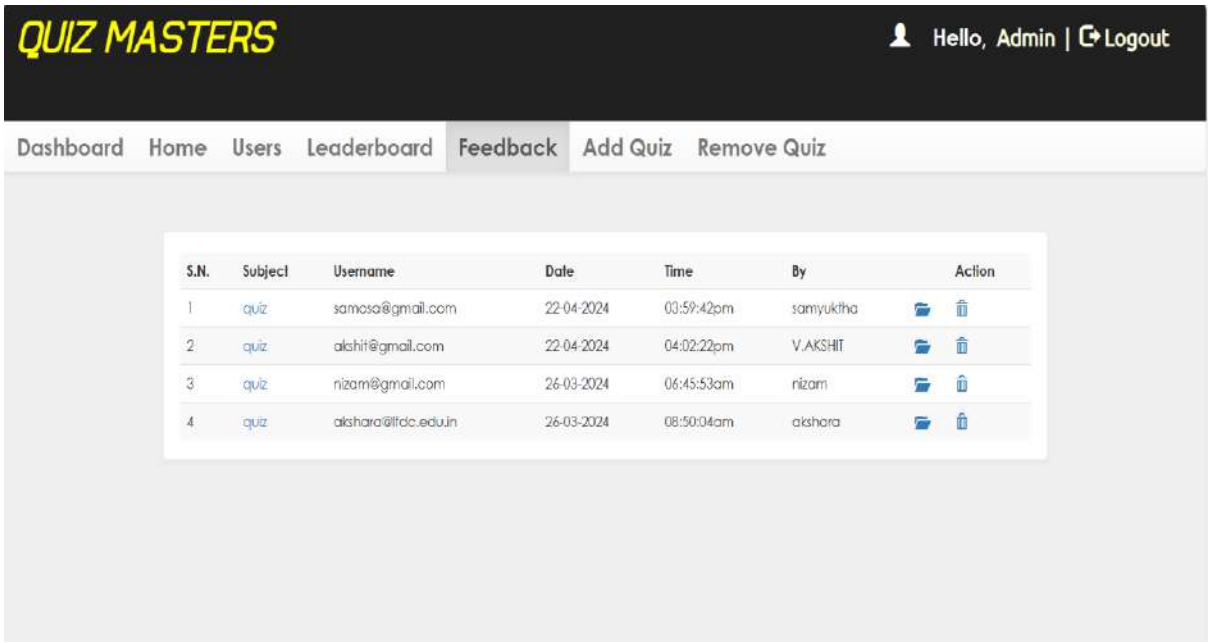

➢ ADD QUIZ:

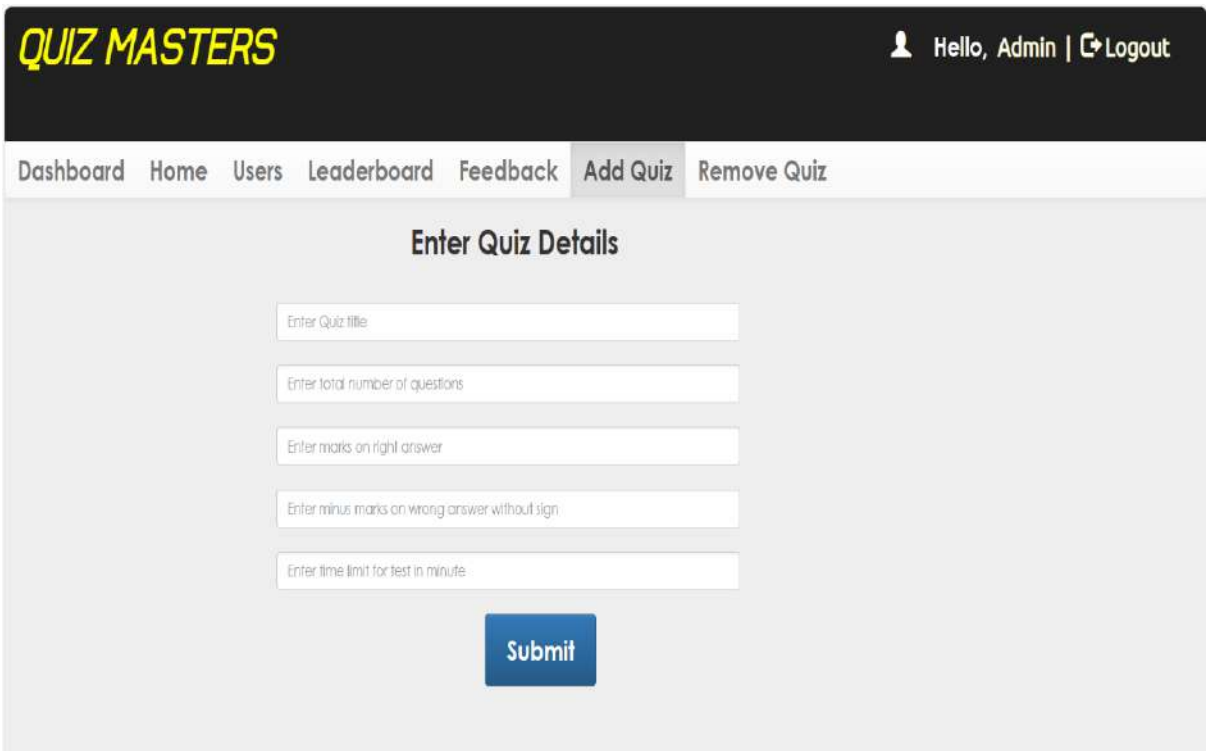

➢ REMOVE QUIZ

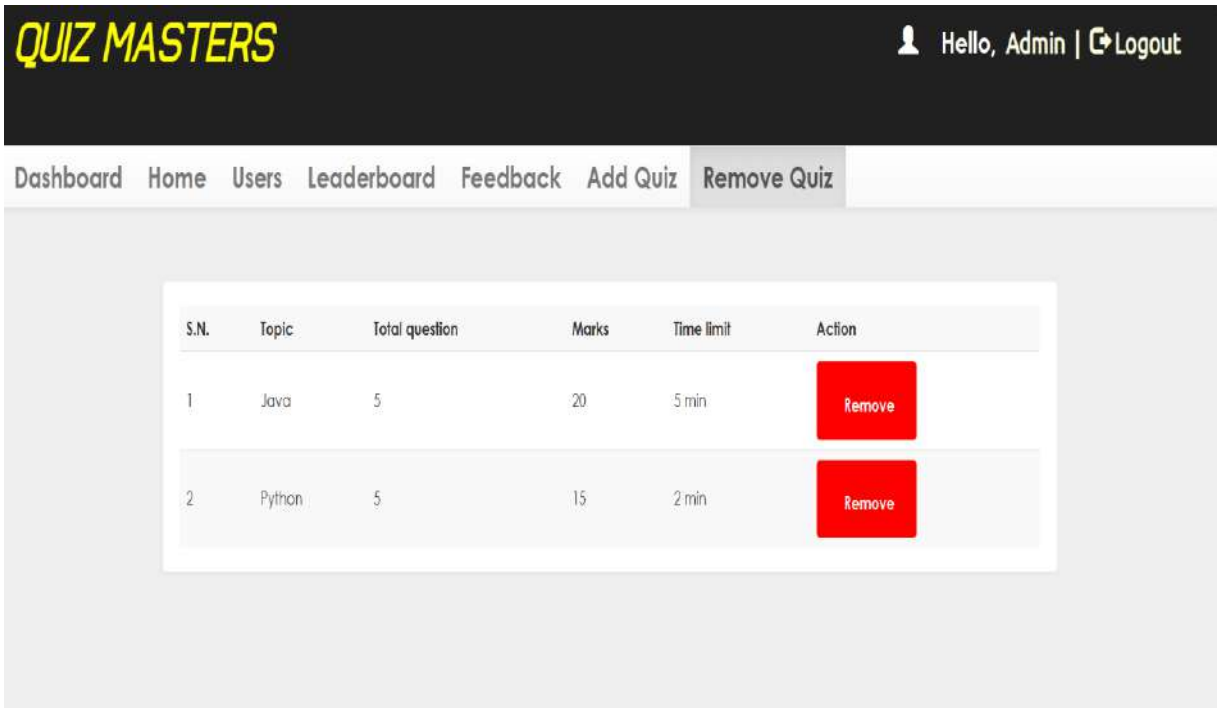

➢ ABOUT US PAGE:

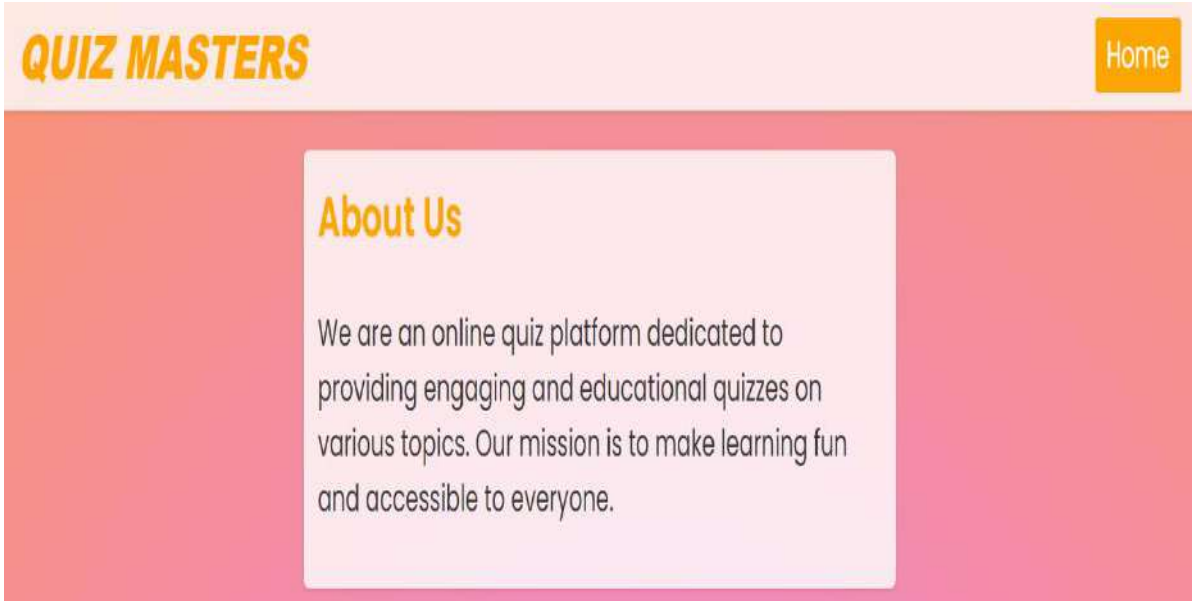

➢ FEEDBACK FORM:

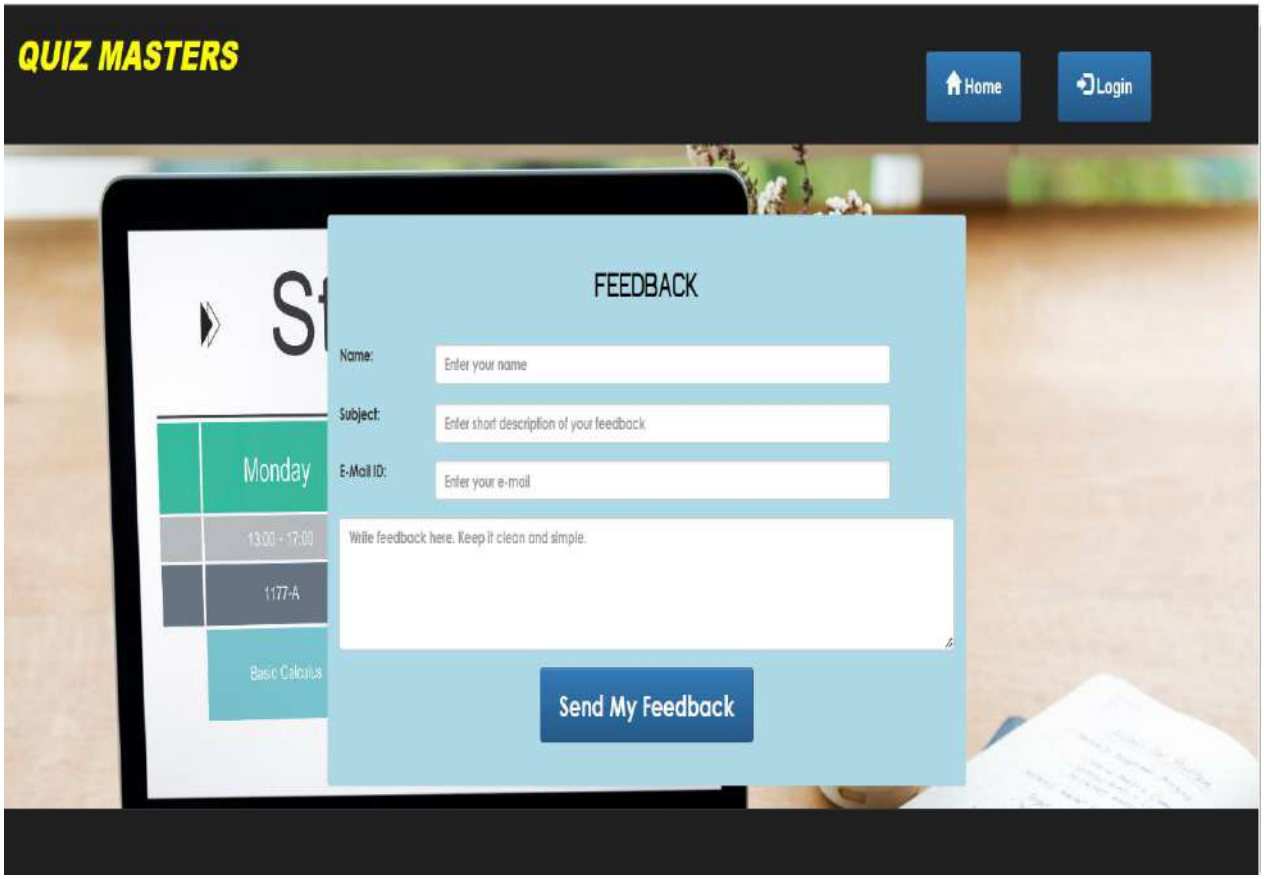

➢ DATABASE -(QUIZ)

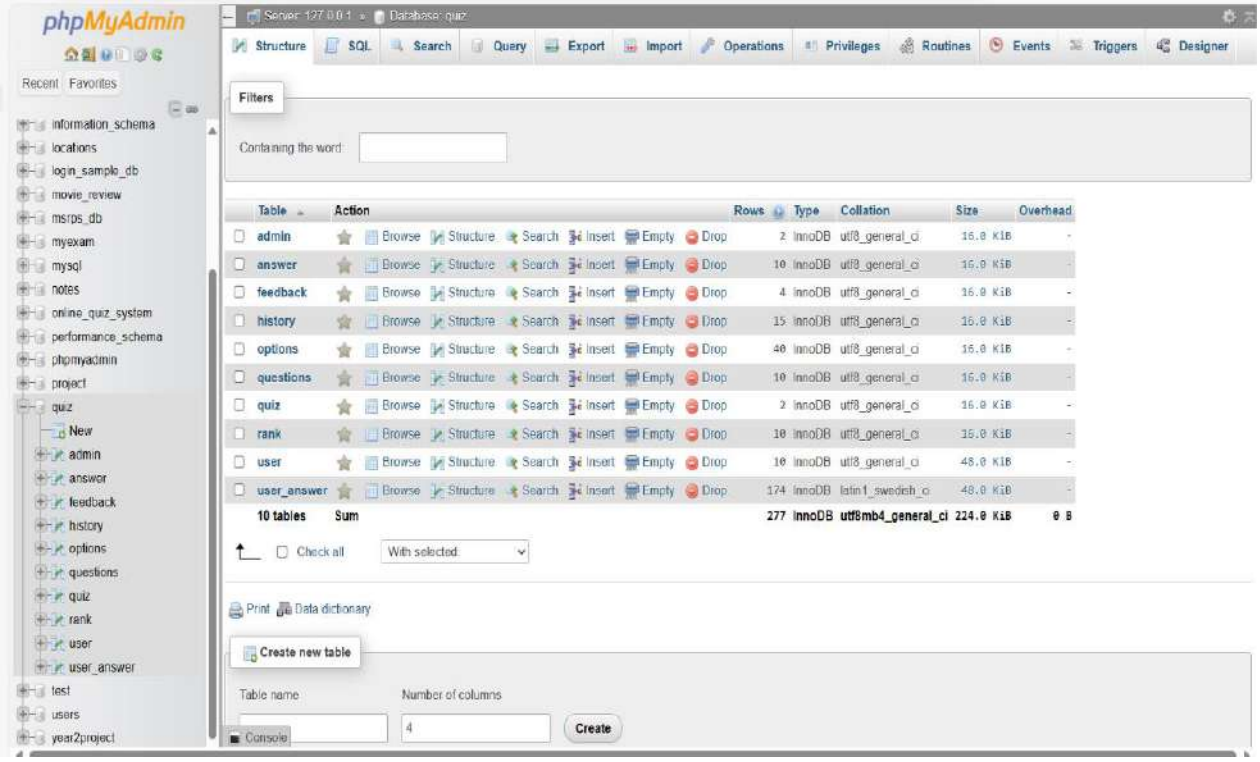

➢ <u>ADMIN TABLE:</u>

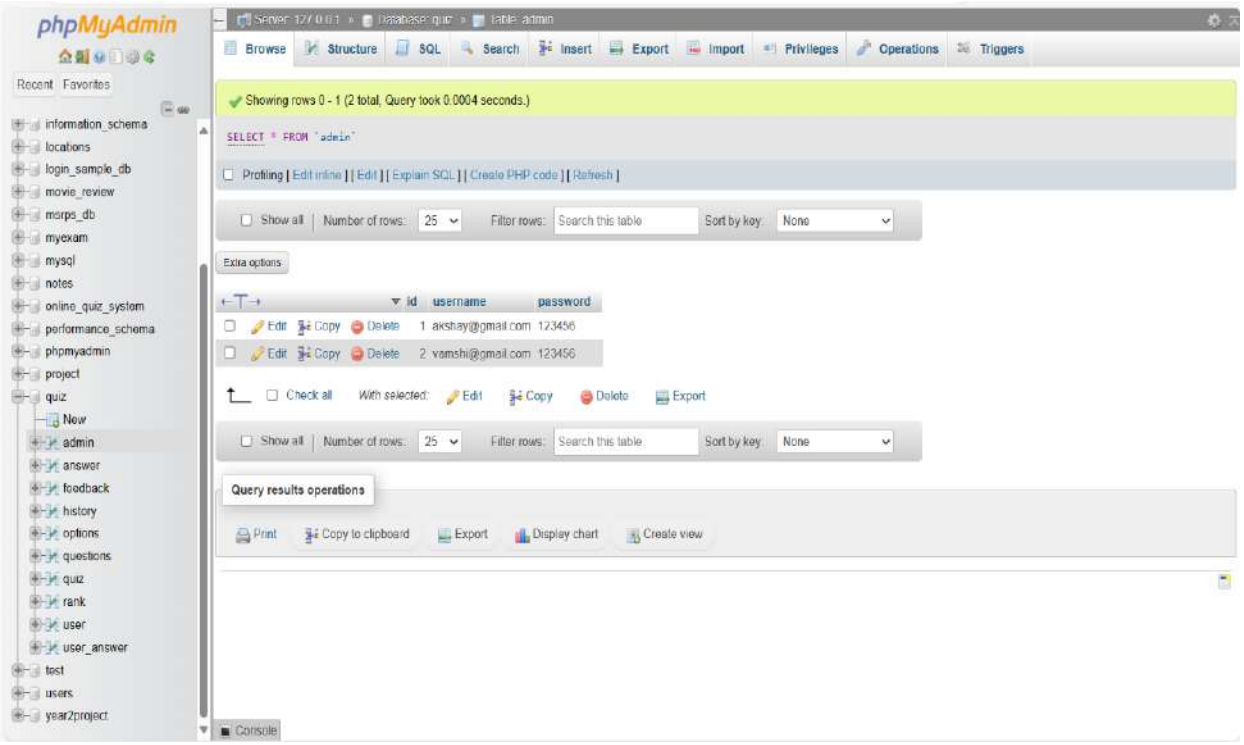

➢ ANSWER TABLE:

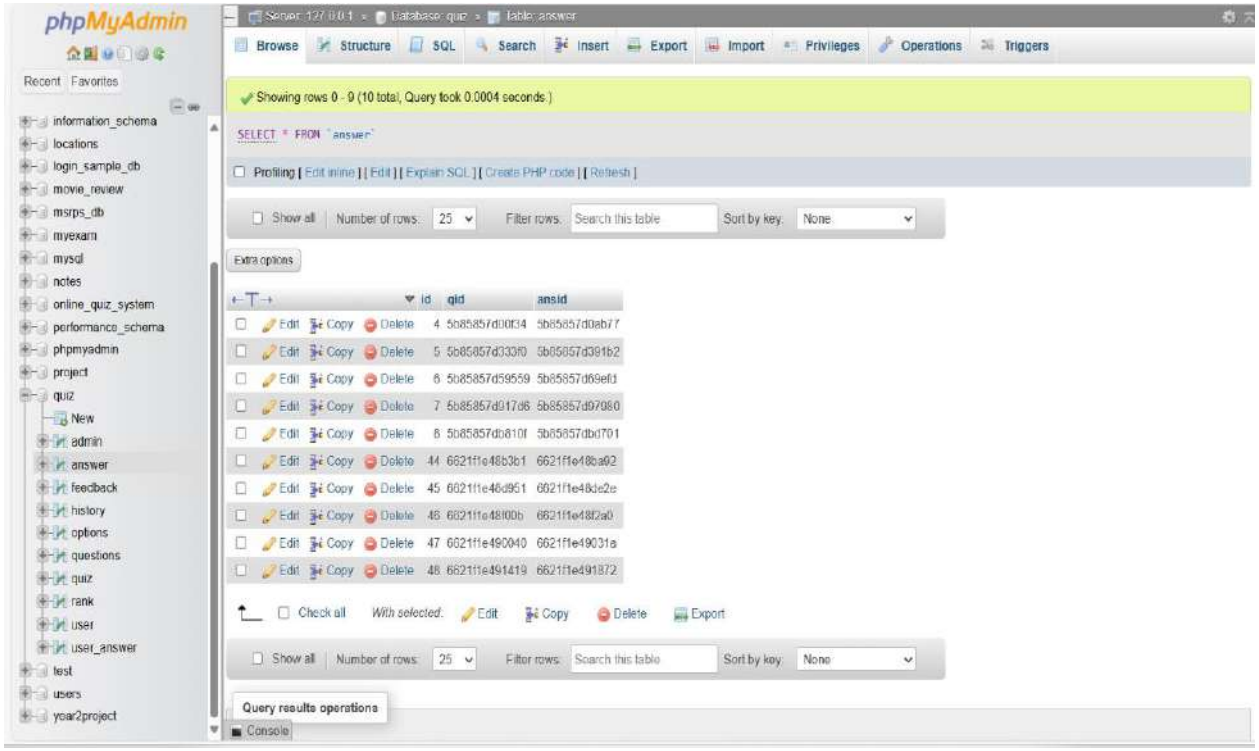

➢ FEEDBACK TABLE:

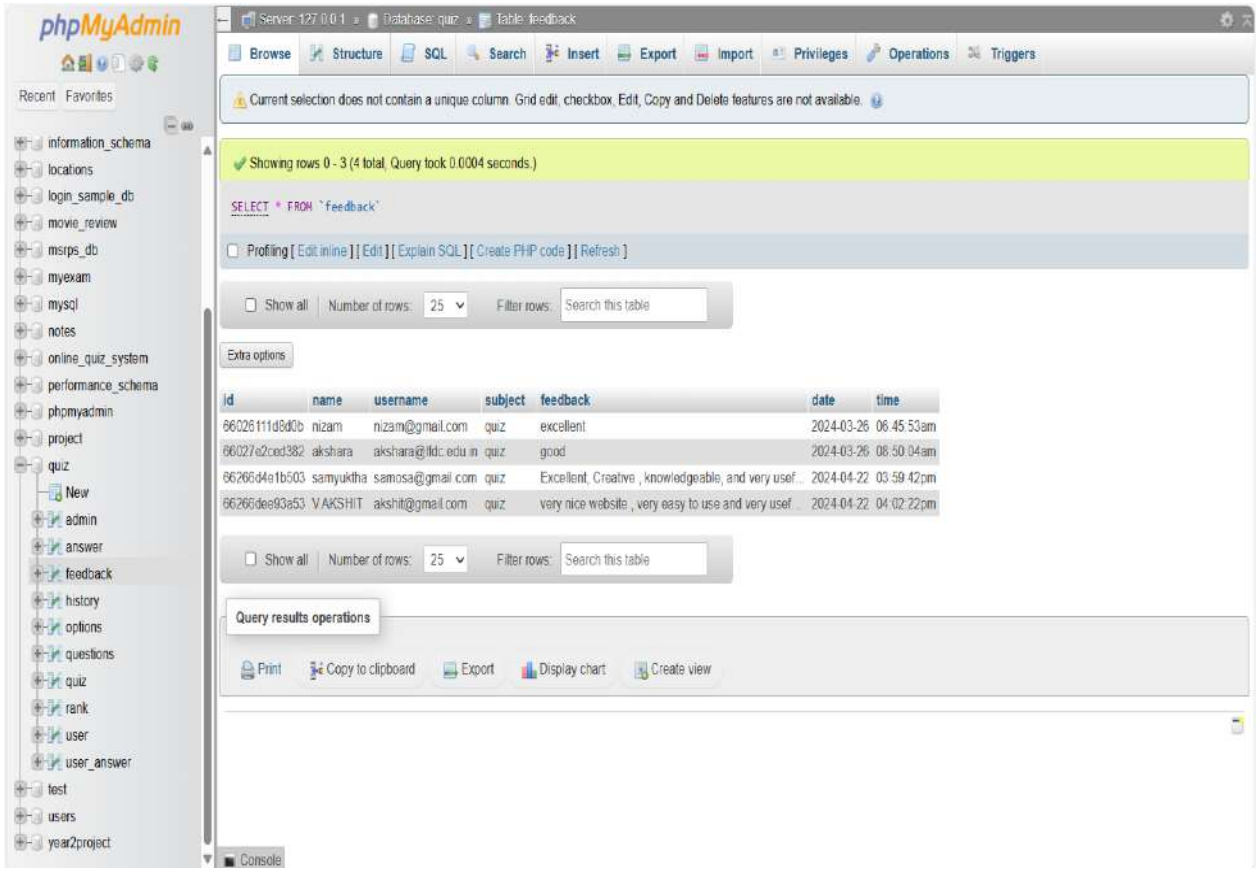

➢ HISTORY TABLE:

phpMyAdmin

Server: 127.0.0.1 » Database: quiz » Table: history

Browse | Structure | SQL | Search | Insert | Export | Import | Privileges | Operations | Triggers

Recent | Favorites

- information_schema
- locations
- login_sample_db
- movie_review
- msrps_db
- myexam
- mysql
- notes
- online_quiz_system
- performance_schema
- phpmyadmin
- project
- quiz
  - New
  - admin
  - answer
  - feedback
  - history
  - options
  - questions
  - quiz
  - rank
  - user
  - user_answer
- test
- users
- year2project

Show all | Number of rows: 25 | Filter rows: Search this table | Sort by key: None

Extra options

	id	username	eid	score	level	correct	wrong	date	timestamp	status	score_updated
Edit Copy Delete	31	2010214680 12@gmail.com	6621ec39a76ad	20	5	5	0	2024-04-19 09:50:21	1713500888	finished	true
Edit Copy Delete	32	akshara@gmail.com	6621ec39a76ad	11	4	3	1	2024-04-19 19:48:30	1713536244	finished	true
Edit Copy Delete	33	nizam@gmail.com	6621ec39a76ad	15	5	4	1	2024-04-19 19:50:53	1713536413	finished	true
Edit Copy Delete	34	nizam@gmail.com	5b85847bbe794	3	5	2	3	2024-04-19 19:59:03	1713536871	finished	true
Edit Copy Delete	40	sam123@gmail.com	6621ec39a76ad	4	2	1	0	2024-04-21 11:06:36	1713677495	finished	true
Edit Copy Delete	41	sam123@gmail.com	5b85847bbe794	-2	2	0	2	2024-04-21 11:08:57	1713677816	finished	true
Edit Copy Delete	42	ishaan@gmail.com	6621ec39a76ad	-1	1	0	1	2024-04-21 13:15:58	1713685257	finished	true
Edit Copy Delete	43	ishaan@gmail.com	5b85847bbe794	2	2	1	1	2024-04-21 13:24:46	1713685965	finished	true
Edit Copy Delete	44	pavan@123gmail.com	6621ec39a76ad	0	5	1	4	2024-04-22 12:13:41	1713768865	finished	true
Edit Copy Delete	45	pavan@123gmail.com	5b85847bbe794	3	5	2	3	2024-04-22 12:16:51	1713768290	finished	true
Edit Copy Delete	46	kunal@gmail.com	6621ec39a76ad	15	5	4	1	2024-04-22 13:09:04	1713771500	finished	true
Edit Copy Delete	47	samosa@gmail.com	6621ec39a76ad	5	5	2	3	2024-04-22 13:15:08	1713771803	finished	true
Edit Copy Delete	48	akshith@gmail.com	6621ec39a76ad	5	5	2	3	2024-04-22 19:49:29	1713795428	finished	true
Edit Copy Delete	50	yashaswi@gmail.com	5b85847bbe794	7	5	3	2	2024-04-23 11:01:09	1713850182	finished	true
Edit Copy Delete	51	yashaswi@gmail.com	6621ec39a76ad	5	4	2	3	2024-04-23 11:04:52	1713850412	finished	true

Check all | With selected: Edit | Copy | Delete | Export

Show all | Number of rows: 25 | Filter rows: Search this table | Sort by key: None

Query results operations

Console

➢ OPTIONS TABLE

phpMyAdmin

Server: 127.0.0.1 » Database: quiz » Table: options

Browse | Structure | SQL | Search | Insert | Export | Import | Privileges | Operations | Triggers

Profiling [Edit inline] [Edit] [Explain SQL] [Create PHP code] [Refresh]

Recent | Favorites

- information_schema
- locations
- login_sample_db
- movie_review
- msrps_db
- myexam
- mysql
- notes
- online_quiz_system
- performance_schema
- phpmyadmin
- project
- quiz
  - New
  - admin
  - answer
  - feedback
  - history
  - options
  - questions
  - quiz
  - rank
  - user
  - user_answer
- test
- users
- year2project

1 > >> | Show all | Number of rows: 25 | Filter rows: Search this table | Sort by key: None

Extra options

	id	qid	option	optionid
Edit Copy Delete	13	5b85857d00f34	Hello World!Hello World!	5b85857d0ab77
Edit Copy Delete	14	5b85857d00f34	Hello World! * 2	5b85857d0af5f
Edit Copy Delete	15	5b85857d00f34	Hello World!	5b85857d0b347
Edit Copy Delete	16	5b85857d00f34	None of the above.	5b85857d0b72f
Edit Copy Delete	17	5b85857d333f0	('abcd', 786 , 2.23, 'john', 70.2)	5b85857d389e2
Edit Copy Delete	18	5b85857d333f0	abcd	5b85857d38dca
Edit Copy Delete	19	5b85857d333f0	(786, 2.23)	5b85857d391b2
Edit Copy Delete	20	5b85857d333f0	None of the above.	5b85857d3959a
Edit Copy Delete	21	5b85857d59559	int(x [,base])	5b85857d69b15
Edit Copy Delete	22	5b85857d59559	long(x [,base])	5b85857d69efd
Edit Copy Delete	23	5b85857d59559	float(x)	5b85857d6a2e5
Edit Copy Delete	24	5b85857d59559	str(x)	5b85857d6a6cd
Edit Copy Delete	25	5b85857d917d6	unichr(x)	5b85857d97080
Edit Copy Delete	26	5b85857d917d6	ord(x)	5b85857d97d68
Edit Copy Delete	27	5b85857d917d6	hex(x)	5b85857d98150
Edit Copy Delete	28	5b85857d917d6	oct(x)	5b85857d98538
Edit Copy Delete	29	5b85857db810f	choice(seq)	5b85857dbd701
Edit Copy Delete	30	5b85857db810f	randrange ([start,] stop [, step])	5b85857dbdae9
Edit Copy Delete	31	5b85857db810f	random()	5b85857dbded1
Edit Copy Delete	32	5b85857db810f	seed([x])	5b85857dbe2b9

Console

➢ QUESTIONS TABLE:

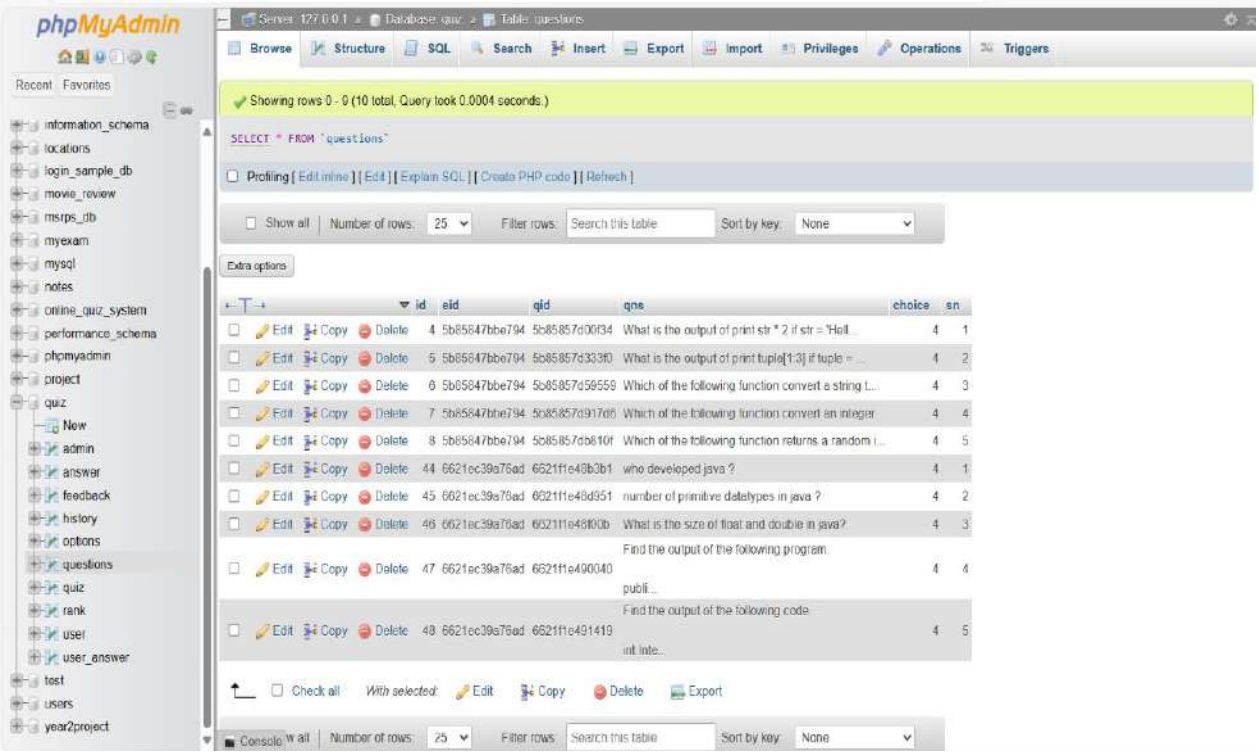

➢ QUIZ TABLE

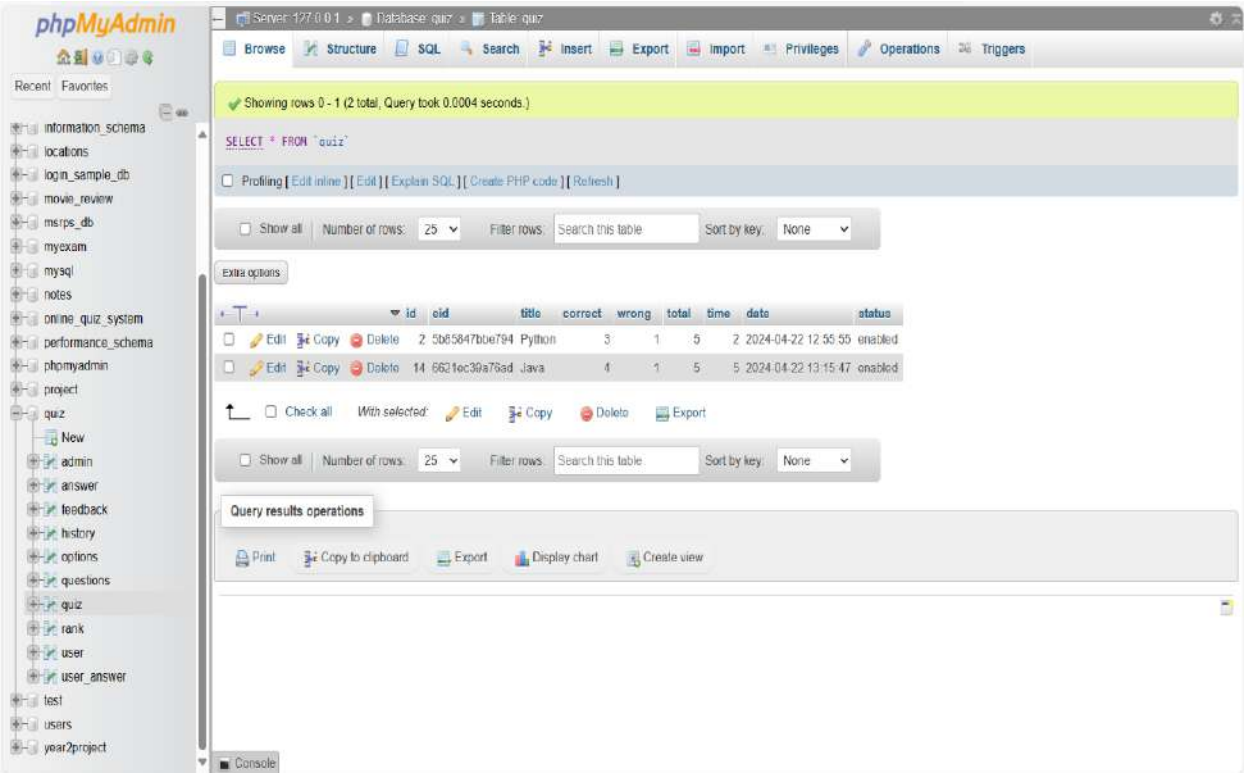

➢ RANK TABLE:

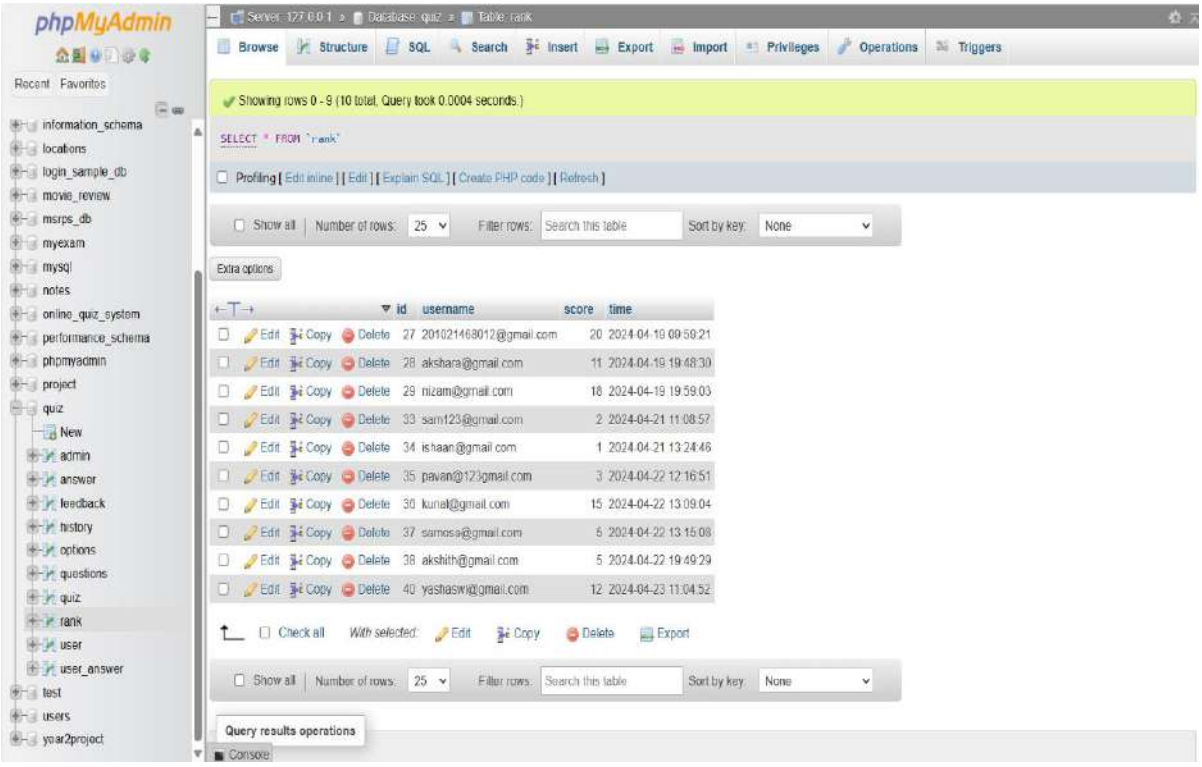

➢ USER TABLE:

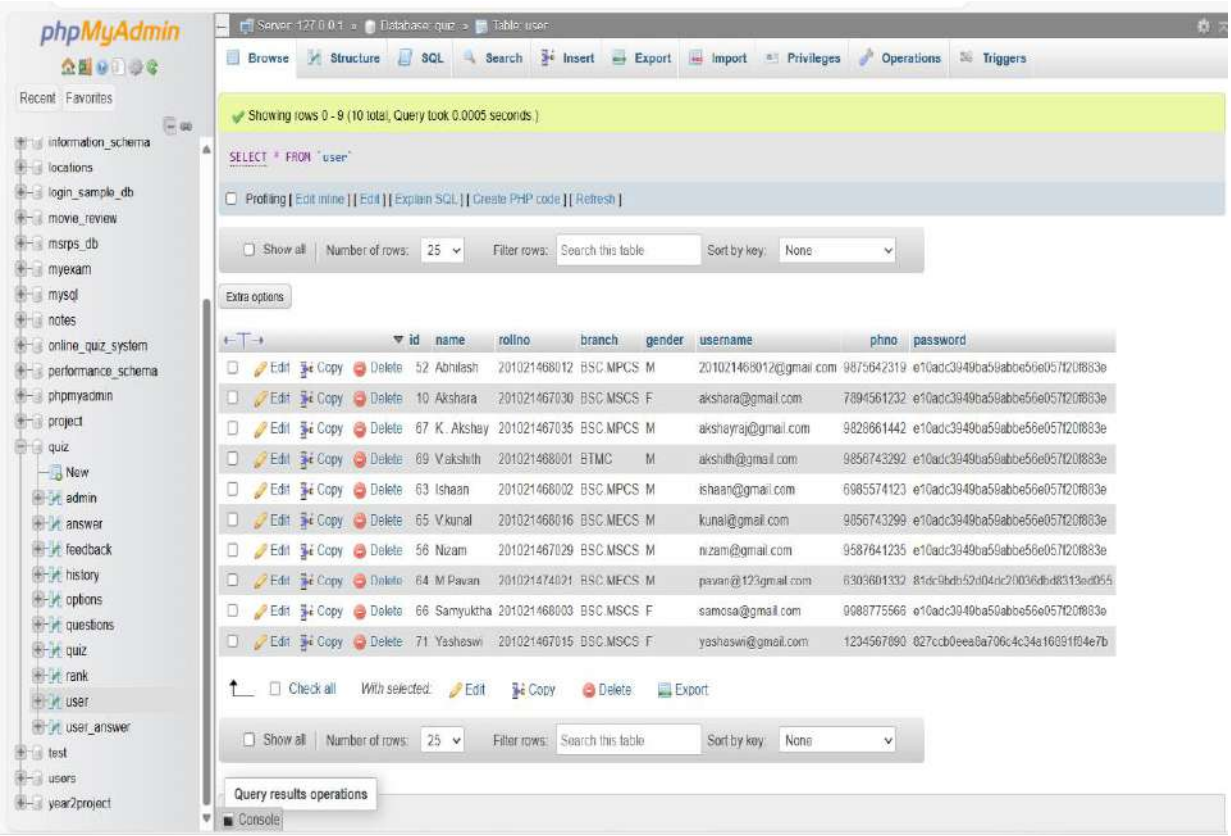

➢ USER ANSWER TABLE:

phpMyAdmin

Server: 127.0.0.1 » Database: quiz » Table: user_answer

Browse | Structure | SQL | Search | Insert | Export | Import | Privileges | Operations | Triggers

Recent | Favorites

- information_schema
- locations
- login_sample_db
- movie_review
- msrps_db
- myexam
- mysql
- notes
- online_quiz_system
- performance_schema
- phpmyadmin
- project
- quiz
  - New
  - admin
  - answer
  - feedback
  - history
  - options
  - questions
  - quiz
  - rank
  - user
  - user_answer
- test
- users
- year2project

1 > >> | Show all | Number of rows: 25 | Filter rows: Search this table | Sort by key: None

Extra options

←T→	id	qid	ans	correctans	eid	username
Edit Copy Delete	1	58027e82e62e3	58027e82f2412	58027e82f2412	5802790f793b1	sonudoo
Edit Copy Delete	2	58027e833dd54	58027e8347514	58027e8347514	5802790f793b1	sonudoo
Edit Copy Delete	3	58027e8371483	58027e838f19a	58027e838f19a	5802790f793b1	sonudoo
Edit Copy Delete	4	5b85857d00f34	5b85857d0af5f	5b85857d0ab77	5b85847bbe794	pravin
Edit Copy Delete	5	5b85857d333f0	5b85857d389e2	5b85857d391b2	5b85847bbe794	pravin
Edit Copy Delete	6	5b85857d59559	5b85857d69e1d	5b85857d69efd	5b85847bbe794	pravin
Edit Copy Delete	7	5b85857d917d6	5b85857d97980	5b85857d97980	5b85847bbe794	pravin
Edit Copy Delete	8	5b85857db810f	5b85857dbdae9	5b85857dbd701	5b85847bbe794	pravin
Edit Copy Delete	9	5b85857d00f34	5b85857d0ab77	5b85857d0ab77	5b85847bbe794	mugunth
Edit Copy Delete	10	5b85857d333f0	5b85857d391b2	5b85857d391b2	5b85847bbe794	mugunth
Edit Copy Delete	11	5b85857d59559	5b85857d69e1d	5b85857d69efd	5b85847bbe794	mugunth
Edit Copy Delete	12	5b85857d917d6	5b85857d97980	5b85857d97980	5b85847bbe794	mugunth
Edit Copy Delete	13	5b85857db810f	5b85857dbded1	5b85857dbd701	5b85847bbe794	mugunth
Edit Copy Delete	14	5b85857d00f34	5b85857d0af5f	5b85857d0ab77	5b85847bbe794	akshay
Edit Copy Delete	15	5b85857db810f	5b85857dbdae9	5b85857dbd701	5b85847bbe794	akshay
Edit Copy Delete	16	5b85857db810f	5b85857dbdae9	5b85857dbd701	5b85847bbe794	nizam
Edit Copy Delete	17	5b85857d00f34	5b85857d0af5f	5b85857d0ab77	5b85847bbe794	kunal
Edit Copy Delete	18	5b85857d333f0	5b85857d391b2	5b85857d391b2	5b85847bbe794	kunal
Edit Copy Delete	19	5b85857d59559	5b85857d6a6cd	5b85857d69efd	5b85847bbe794	kunal
Console Copy Delete	20	5b85857d917d6	5b85857d97980	5b85857d97980	5b85847bbe794	kunal

Bibliography:

- https://www.sourcecodester.com/php/16969/online-quiz-system-using-php-source-code.html
- https://www.youtube.com/watch?v=8nOg00D1uDA&t=11s
- https://www.youtube.com/watch?v=PxMjn9ii6ao&t=77s
- https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.bundle.min.js
- https://github.com/topics/php-quiz-application

➢ CONCLUSION:

- The "Quiz Master" online quiz platform offers a modern and engaging approach to learning. With its vast library of interactive quizzes across diverse subjects, it caters to students of all ages and academic backgrounds. Quiz Master's adaptive technology personalizes the experience by adjusting content difficulty based on individual performance.
- One key advantage is the use of multimedia elements like videos and images, which enhance knowledge retention. Gamification features like earning badges and points also boost motivation and make learning enjoyable.
- Looking ahead, Quiz Master has promising applications in traditional classrooms, online learning environments, self-study, corporate training, and professional development. Its flexibility allows customization for various educational needs.
- As technology reshapes education, Quiz Master stands out as an innovative platform primed to facilitate enriching and tailored learning journeys. With its user-friendly design and commitment to academic excellence, it empowers learners to maximize their potential.

THANK YOU