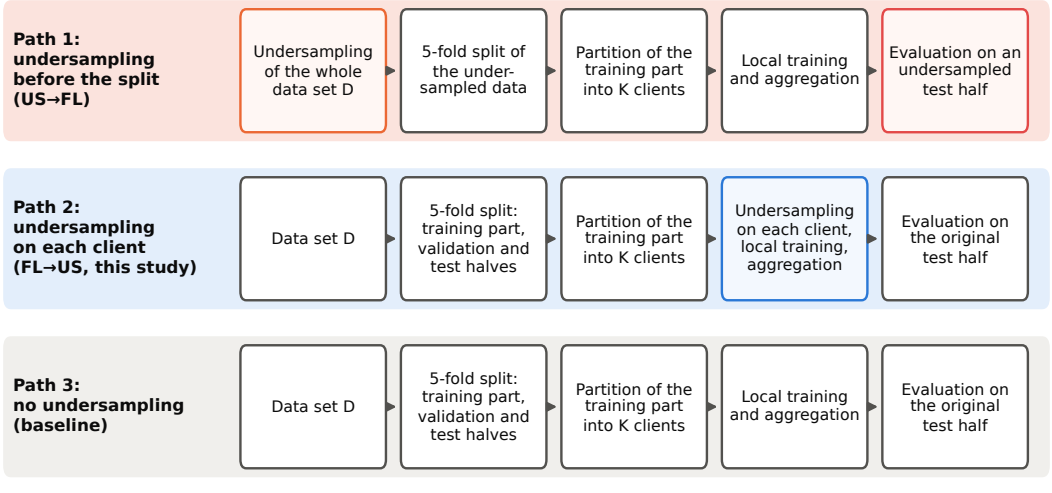
Path 1: undersampling before the split (US→FL)
Undersampling of the whole data set D
5-fold split of the under-sampled data
Partition of the training part into K clients
Local training and aggregation
Evaluation on an undersampled test half
Path 2: undersampling on each client (FL→US, this study)
Data set D
5-fold split: training part, validation and test halves
Partition of the training part into K clients
Undersampling on each client, local training, aggregation
Evaluation on the original test half
Path 3: no undersampling (baseline)
Data set D
5-fold split: training part, validation and test halves
Partition of the training part into K clients
Local training and aggregation
Evaluation on the original test half