





## Toolbar Icons

The SQLPathFinder toolbar displays various icons that allow you to immediately access application functionality. The meaning of each icon is described in Table 1

| Icon | Description                                                                                                                                                                                                                                       |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | <b>New Query:</b> Allows you to create a new SQL query                                                                                                                                                                                            |
|      | <b>Open Query:</b> Allows you to open an existing query                                                                                                                                                                                           |
|      | <b>Open Sample Queries:</b> Allows you to locate and load a sample query                                                                                                                                                                          |
|      | <b>Save Query:</b> Allows you to save a query                                                                                                                                                                                                     |
|      | <b>Run Query:</b> Executes the query                                                                                                                                                                                                              |
|      | <b>Add View or Utility:</b> Opens the Add a View or Utility dialog box allowing you to add another View, Text file object, or Utility to your query                                                                                               |
|      | <b>Create a Computed Expression:</b> Opens a dialog box that allows you to create an expression for your query.                                                                                                                                   |
|      | <b>Show Query:</b> Displays the script for the query you built, and allows you to modify the script directly                                                                                                                                      |
|      | <b>Run Job in Batch on ScriptHost:</b> Lets you run your active query on the ScriptHost servers. You may also schedule ScriptHost queries to run routinely.                                                                                       |
|      | <b>Process Multiple Queries and Schedule on Script Host (SHGUI):</b> Displays a form where you can configure multiple queries to run consecutively, and allows you to load those jobs to ScriptHost, where they can be scheduled and run offline. |
|      | <b>Show Client Session:</b> Brings the SQL Session window to the forefront of your computer screen.                                                                                                                                               |
|      | <b>Configure SQLPathFinder:</b> Opens a configuration dialog box where you can set your working directory, the Excel and JMP executable paths, your query engine, and an Oracle driver.                                                           |
|      | <b>Cancel a Query:</b> Stops a query from executing. Does this by sending a Ctrl+C or Ctrl+Break keyboard command to the SQLPathFinder SQL window.                                                                                                |

| Icon                                                                              | Description                                                                                                                                          |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>Show Excel:</b> Opens a blank workbook in Excel, and optionally loads your latest output file.                                                    |
|  | <b>Show JMP:</b> Opens the JMP application, and optionally loads your latest output file.                                                            |
|  | <b>Show Notepad:</b> Opens the Notepad application, and optionally loads your latest output file.                                                    |
|  | <b>Set Nodes:</b> Opens a dialog box where you can configure the default database nodes you wish to query.                                           |
|  | <b>Python Extract Engine:</b> Lets you decide whether to run your query using the Python Extract Engine (Orange background) or the Legacy VA engine. |
|  | <b>Help:</b> Provides help on the SQLPathFinder application.                                                                                         |
|  | <b>Exit:</b> Closes the SQLPathFinder application.                                                                                                   |

[\[Return to Top\]](#)


## The Query Window and Selecting Columns

[\[Return to Top\]](#)

SQLPathFinder views to query and associated columns are shown in the Tree control in the left panel of the Query window.

Double-clicking Columns in the Tree control adds them to the *Columns* Grid. There you can rearrange column order and assign various attributes such as a column header, a sorting option, a statistical function, a PIVOT option, or whether or not to display the column. For Sorting, the multi-level Sort order is determined by the top-down order of the Sort selection.

A picture of the SQLPathFinder query design form is shown below:

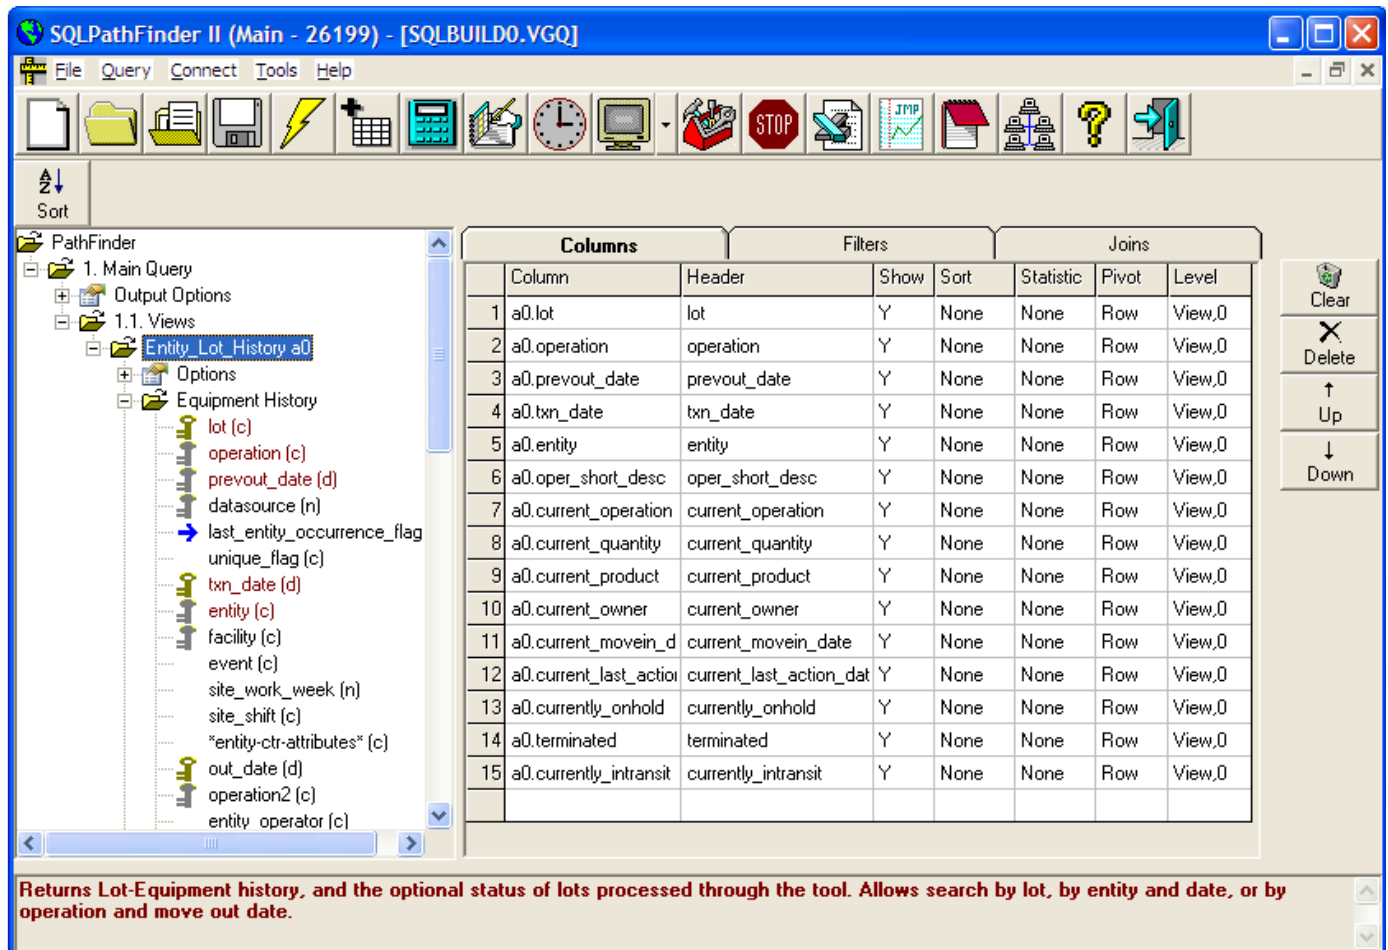

On the Tree control, icons are used to communicate information about columns. Keyed columns are indicated using a Key icon. Searching by a keyed column generally provides fast access to a table. Columns that are potentially useful to include in your report are shown in **maroon**, and columns to consider filtering on are shown with a blue arrow →. A description for each column you highlight is also shown at the bottom of the *Query* window.

## Keyed Columns


Keyed columns generally provide the fastest access to a table. Keys may be gold and open or silver and closed. In the figure above, note that

- **lot (c)** is an open-gold key. An open-gold key is the first column in an index and generally provides fast access to a table. SQLPathFinder generally requires that you include at least one open-gold key in your filter condition to ensure you get reasonable query performance. The only exception is for views containing the phrase "status" or "schema" or "master". E.g., *WIP\_Lot\_Status*. These views generally have very few rows or have no keys and do not require the use of a keyed filter by SQLPathFinder.
- **operation (c)** is a closed-silver key. Closed-silver keys denote columns that are part of a multi-column key in the underlying database table but are not the first column in that key. Searching by a closed-silver key will not afford performance benefits unless the associated open-gold key is also included in the filter.

## Blue Arrow Columns

A column that has a blue arrow to its left is an important row filter column that SQLPathFinder suggests you use in your query to facilitate the data search. In the figure above, note that column **last\_entity\_occurrence\_flag (c)**, is a blue arrow column. You should examine the column description for "blue arrow" columns to see if this would be a useful filter for you. E.g., column *Last\_Entity\_Occurrence\_Flag* in the *Entity\_Lot\_History* view will be set to Y if this is the last occurrence of the entity for this lot at an operation, and for the date the lot arrived at the operation. It returns N otherwise. Filtering on this column can avoid duplicate lot-entity associations for an operation pass.

Following are a few other shortcuts:


|                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | If you prefer to see the columns for selection in Sorted Order, click the <b>SORT</b> button at the top of the Tree Control. Clicking the same button will re-order columns as they were when the view was first loaded.                                                                                                                                                                                                                      |
|  | If you wish to add all important columns in the view or a sub-folder to the Columns grid, (i.e., columns highlighted in <b>maroon</b> ), right click over an object name (e.g., a view name or one of its sub-folders) in the Tree Control and select the <b>Add Bold Columns</b> option from the drop-down menu. Selecting the <b>Add All Columns</b> option lets you quickly add all columns in a particular subfolder to the Columns grid. |
|                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                               |

[\[Return to Top\]](#)

## Searching for a Column

[\[Return to Top\]](#)

You can search for a column pattern contained in selected views using the SQLPathFinder user interface. Enter the column pattern in the text box highlighted below and click the browse button , or click the **F3** function key. Hitting F3 or clicking the browse button again will find the next occurrence of the pattern and so on. Entering a new pattern will re-start the search from the beginning.

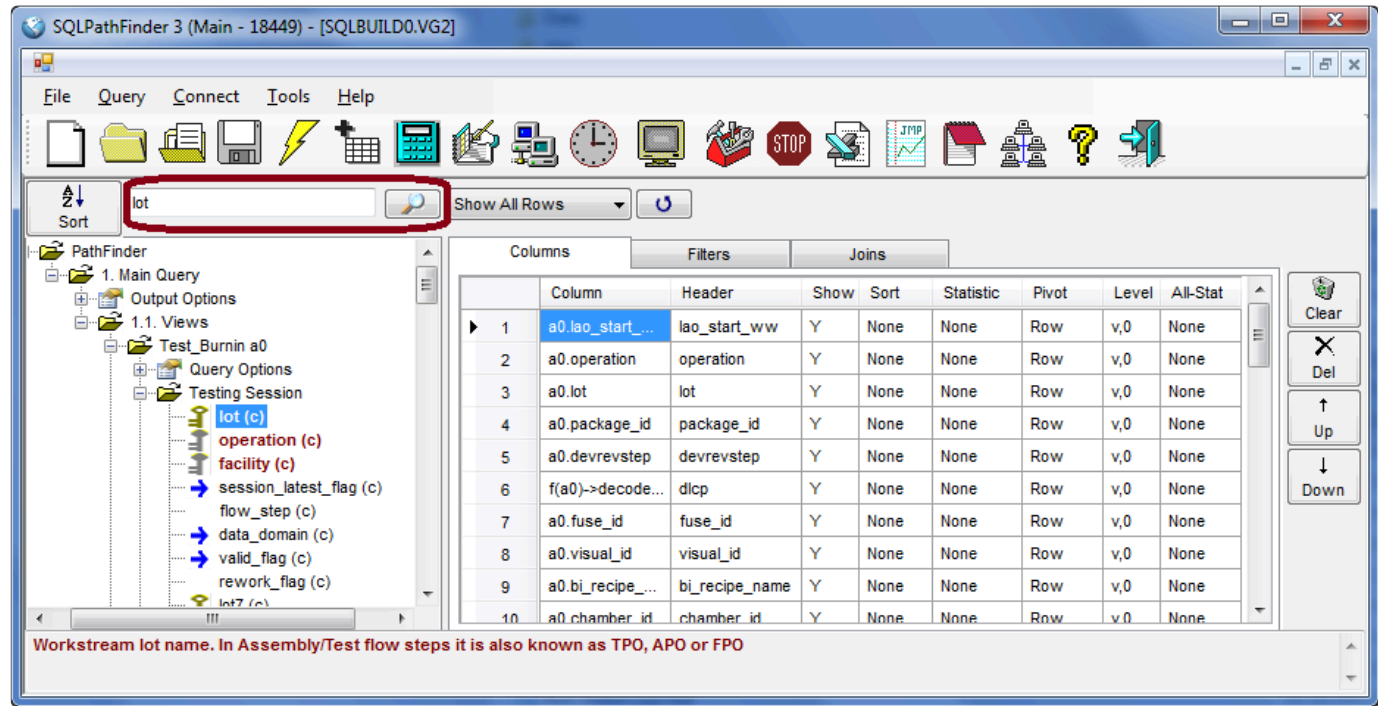

[\[Return to Top\]](#)

## Changing Column Order

[\[Return to Top\]](#)

To change the column order within the Query selection grid, first select the column you wish to move by clicking the column in the Query Selection grid. Then click the **UP** or **DOWN** button to the right of the grid to either move the column up or down in the order. You may also change column order on the Columns or Filters tab by dragging the column.

| Columns |                    | Filters         |      |      | Joins     |       |        |
|---------|--------------------|-----------------|------|------|-----------|-------|--------|
|         | Column             | Header          | Show | Sort | Statistic | Pivot | Level  |
| 1       | a0.lot             | lot             | Y    | None | None      | Row   | View,0 |
| 2       | a0.operation       | operation       | Y    | None | None      | Row   | View,0 |
| 3       | a0.prevout_date    | prevout_date    | Y    | None | None      | Row   | View,0 |
| 4       | a0.txn_date        | txn_date        | Y    | None | None      | Row   | View,0 |
| 5       | a0.entity          | entity          | Y    | None | None      | Row   | View,0 |
| 6       | a0.oper_short_desc | oper_short_desc | Y    | None | None      | Row   | View,0 |
|         |                    |                 |      |      |           |       |        |

 Clear  
 Delete  
 Up  
 Down

[\[Return to Top\]](#)

## Deleting Columns

[\[Return to Top\]](#)

To remove one or more columns (i.e., grid rows) from the Columns, Filters, or Joins selection grids, highlight the rows, using the CTRL and the SHIFT keys for multiple row selection, and click the Delete button to remove the rows. To clear the entire Query selection grid, click the **CLEAR** button to the right of the Selection Grid.

Columns

Filters

Joins

|   | Column        | Header        | Show | Sort | Statistic | Pivot | Level | All-Stat |
|---|---------------|---------------|------|------|-----------|-------|-------|----------|
| 1 | a0.code_lot   | code_lot      | Y    | None | None      | Row   | s,0   | None     |
| 2 | a0.code_o...  | code_oper...  | Y    | None | None      | Row   | s,0   | None     |
| 3 | a0.code_ty... | code_type     | Y    | None | None      | Row   | s,0   | None     |
| 4 | a0.code       | code          | Y    | None | None      | Row   | s,0   | None     |
| 5 | a0.codeqty    | codeqty       | Y    | None | None      | Row   | s,0   | None     |
| 6 | a0.code_d...  | code_desc...  | Y    | None | None      | Row   | s,0   | None     |
| 7 | a0.site_wo... | site_work_... | Y    | None | None      | Row   | s,0   | None     |
| 8 | a0.site_shift | site_shift    | Y    | None | None      | Row   | s,0   | None     |

Clear

Del

Up

Down

[\[Return to Top\]](#)

## Adding a Column Header

[\[Return to Top\]](#)

To add a column header or to change a column header for a selected column, click the cell to the right of the target column in the HEADER cell of the Query Selection grid and enter your column header string.

| Columns |                    |                 | Filters |      | Joins     |       |        | <div>Clear</div> <div>Delete</div> <div>Up</div> <div>Down</div> |
|---------|--------------------|-----------------|---------|------|-----------|-------|--------|------------------------------------------------------------------|
|         | Column             | Header          | Show    | Sort | Statistic | Pivot | Level  |                                                                  |
| 1       | a0.lot             | lot             | Y       | None | None      | Row   | View,0 |                                                                  |
| 2       | a0.operation       | operation       | Y       | None | None      | Row   | View,0 |                                                                  |
| 3       | a0.prevout_date    | prevout_date    | Y       | None | None      | Row   | View,0 |                                                                  |
| 4       | a0.txn_date        | txn_date        | Y       | None | None      | Row   | View,0 |                                                                  |
| 5       | a0.entity          | entity          | Y       | None | None      | Row   | View,0 |                                                                  |
| 6       | a0.oper_short_desc | oper_short_desc | Y       | None | None      | Row   | View,0 |                                                                  |

[\[Return to Top\]](#)

## Sorting Output

[\[Return to Top\]](#)

To order your output, click the cell to the right of the target column under the SORT column in the Columns Grid. You will be shown a drop down list box with three choices **ASC**, **DESC** and **None**. Select **ASC** to sort output by the column in ascending order, **DESC** to output results in descending order by the column or **NONE** to disable a sort on this column. For multi-level sorts , repeat the process for multiple columns. The Sort order will be determined by the Top-DOWN order of the selected columns.

| Columns |                    |                 | Filters |      | Joins     |       |        | <div>Clear</div> <div>Delete</div> <div>Up</div> <div>Down</div> |
|---------|--------------------|-----------------|---------|------|-----------|-------|--------|------------------------------------------------------------------|
|         | Column             | Header          | Show    | Sort | Statistic | Pivot | Level  |                                                                  |
| 1       | a0.lot             | lot             | Y       | None | None      | Row   | View,0 |                                                                  |
| 2       | a0.operation       | operation       | Y       | None | None      | Row   | View,0 |                                                                  |
| 3       | a0.prevout_date    | prevout_date    | Y       | None | None      | Row   | View,0 |                                                                  |
| 4       | a0.txn_date        | txn_date        | Y       | None | None      | Row   | View,0 |                                                                  |
| 5       | a0.entity          | entity          | Y       | None | None      | Row   | View,0 |                                                                  |
| 6       | a0.oper_short_desc | oper_short_desc | Y       | None | None      | Row   | View,0 |                                                                  |

[\[Return to Top\]](#)

## Choosing Not to Display a Column

[\[Return to Top\]](#)

If you click the cell under the SHOW column of the Query Selection Grid you will see a drop-down list box that allows you to specify Y to display the column or N or P to not display the column. You may , for example, wish to use a column in a computed expression but not to print that column in the output. You can use the SHOW option to control whether or not the column should be included in the report printing. Set to P to have the variable pass through all query levels and to N to prevent this. Computed columns that span multiple objects must be created in the final query. If you do not wish to show the intermediate columns, set them to P. You may also specify significant figures for numeric columns. E.g., Y:2 means display to two significant figures


| Columns |                    | Filters         |      | Joins |           |       |        |
|---------|--------------------|-----------------|------|-------|-----------|-------|--------|
|         | Column             | Header          | Show | Sort  | Statistic | Pivot | Level  |
| 1       | a0.lot             | lot             | Y    | None  | None      | Row   | View,0 |
| 2       | a0.operation       | operation       | Y    | None  | None      | Row   | View,0 |
| 3       | a0.prevout_date    | prevout_date    | Y    | None  | None      | Row   | View,0 |
| 4       | a0.txn_date        | txn_date        | Y    | None  | None      | Row   | View,0 |
| 5       | a0.entity          | entity          | Y    | None  | None      | Row   | View,0 |
| 6       | a0.oper_short_desc | oper_short_desc | Y    | None  | None      | Row   | View,0 |
| 7       | a0.newqty1         | newqty1         | Y    | None  | None      | Row   | View,0 |
|         |                    |                 | Y    |       |           |       |        |
|         |                    |                 | N    |       |           |       |        |
|         |                    |                 | P    |       |           |       |        |
|         |                    |                 | Y:1  |       |           |       |        |
|         |                    |                 | Y:2  |       |           |       |        |
|         |                    |                 | Y:3  |       |           |       |        |
|         |                    |                 | Y:4  |       |           |       |        |
|         |                    |                 | Y:5  |       |           |       |        |

[\[Return to Top\]](#)

## Selecting Distinct Output

[\[Return to Top\]](#)

To eliminate any completely duplicate rows and select distinct output, double-click option **Distinct Rows** under the Main Query **Output Options** node as illustrated below. This sets the Distinct Rows value to **Yes**. Double-click the option again to reset the Distinct Rows option and include all rows.

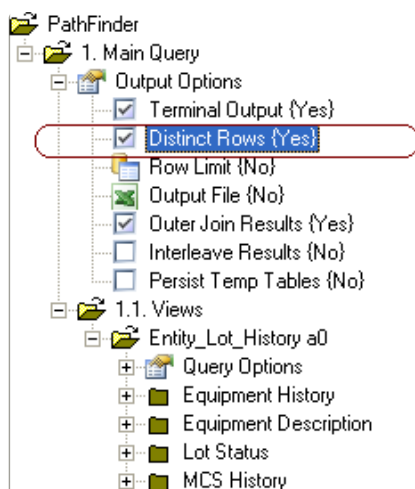


[\[Return to Top\]](#)

## Output Options

[\[Return to Top\]](#)

Under the Output Options node, you have several choices to control your output. You can double-click these options to change or set them.

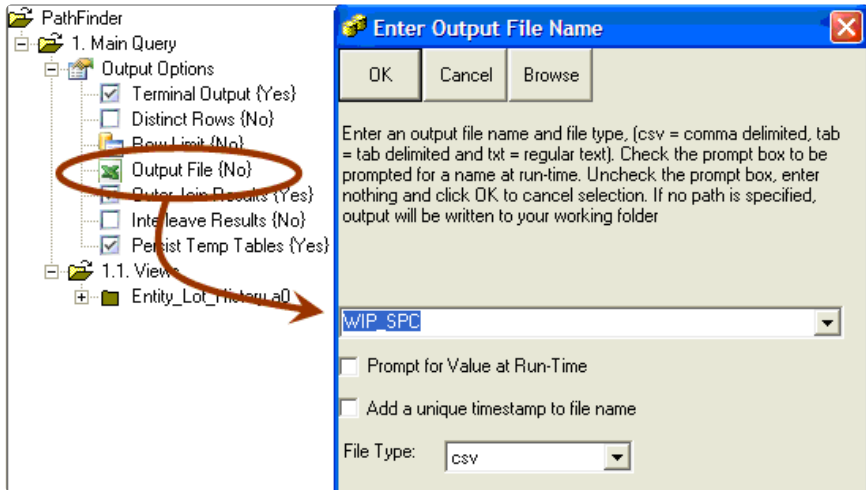

|                                  |                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Enabled</b>                   | Lets you enable or disable the Main Query. If disabled, the Main Query will not be run                                                                                                                                                                                                                                                                                              |
| <b>Terminal Output</b>           | Stores Yes if you would like output returned to the terminal.                                                                                                                                                                                                                                                                                                                       |
| <b>Distinct Rows</b>             | Returns unique rows in the output                                                                                                                                                                                                                                                                                                                                                   |
| <b>Row Limit</b>                 | Lets you limit the number of rows returned by the query. E.g., you might only want to return the first 50 rows of output.                                                                                                                                                                                                                                                           |
| <b>Output File</b>               | <p>Allows you to create an output results file, be it CSV or TAB that can be loaded to Excel, JMP or some other application. The format of this file (e.g., comma delimited, TAB delimited) is defined by the <i>File Type</i>. Double-click the <i>Output File</i> node to change or clear</p>  |
| <b>Outer Join Results</b>        | Determines whether a Left or an inner join should be applied throughout the Main Query. For outer joins, the top table serves as the driving table. For inner joins, only rows that match in all tables are returned.                                                                                                                                                               |
| <b>Interleave Results</b>        | Allows you to interleave or stack results from Views, Text Files, or Inline Views. Columns with the same names from different queries will be stacked under each other. Data will also be sorted based on the sorting applied on the Columns grid. Can be used, for example, to overlay data.                                                                                       |
| <b>Pivot Missing After Join</b>  | If you are joining two or more views and applying a pivot on the joined results, this setting lets you assign a missing value for the pivoted columns                                                                                                                                                                                                                               |
| <b>Quote Embedded Commas</b>     | For comma delimited (CSV) output from a SQLite query or output from a Join, will surround columns containing embedded commas or spaces with double-quotes                                                                                                                                                                                                                           |
| <b>Set Empty Strings to Null</b> | For SQLite or a join query, transforms any empty strings loaded to SQLite to NULL values. This ensures that any operations such as summary functions (e.g., AVG) ignore cells with NULL values                                                                                                                                                                                      |
| <b>Show SQL</b>                  | Displays the SQL query that is to be run                                                                                                                                                                                                                                                                                                                                            |
| <b>Keep Hive Temp Tables</b>     | Set to Yes to temporarily keep Hive Temporary Tables during a Hadoop-Hive join. Double-click to change. Ignored for Cross-database views                                                                                                                                                                                                                                            |

[\[Return to Top\]](#)

No labels

## 1 Comment

---



Heah, Lee Hong

Dec 03, 2018

May I know how to query this lot information, e.g. 4\_tsattrs\_FRV\_SPEC, GLK\_B2\_02\_0 please?

---

