



Vidyavardhini's College of Engineering & Technology

Department of Computer Engineering

---

Experiment No.2
To Implement the concept of authentication of sender using Digital Signature
Date of Performance: 17/08/2023
Date of Submission: 17/08/2023



**AIM:** To Implement the concept of authentication of sender using Digital Signature

**Objective:** To develop a program to create a digital signature for the sample input and verify it

**Theory:**

A digital signature is a mathematical technique used to validate the authenticity and integrity of a message, software or digital document. It's the digital equivalent of a handwritten signature or stamped seal, but it offers far more inherent security. A digital signature is intended to solve the problem of tampering and impersonation in digital communications.

Digital signatures can provide evidence of origin, identity and status of electronic documents, transactions or digital messages. Signers can also use them to acknowledge informed consent.

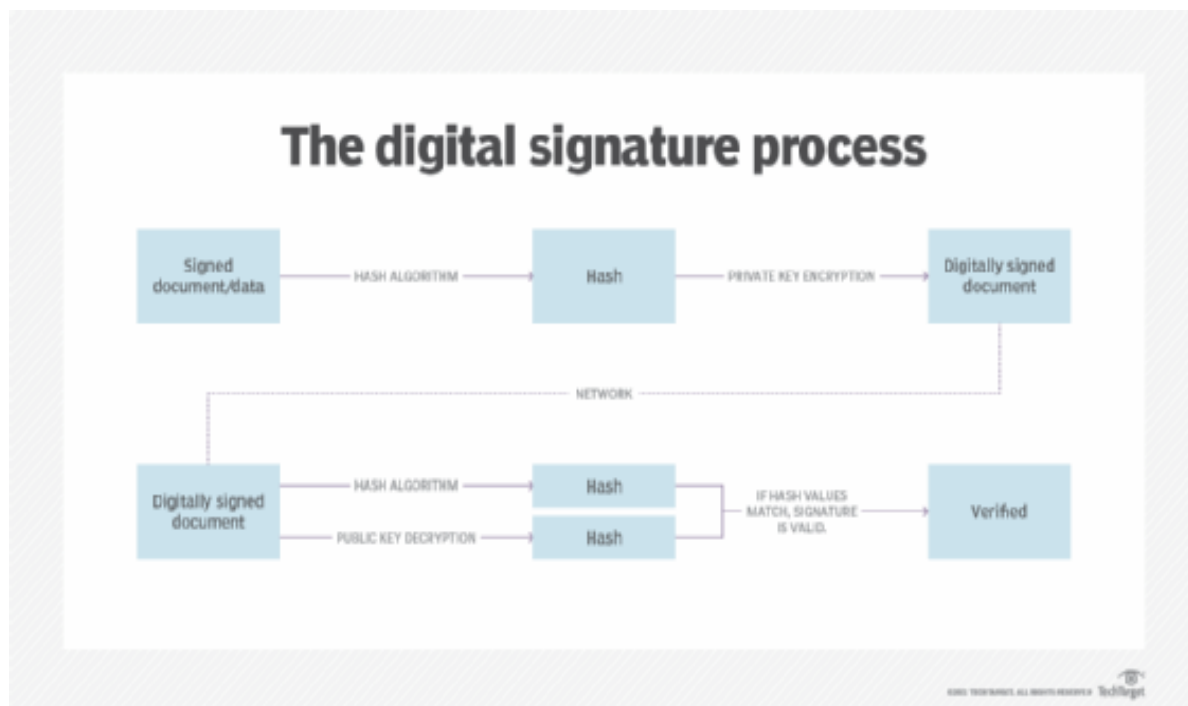


Fig. 2.1 Digital Signature Process

To create a digital signature, signing software, such as an email program, is used to provide a one-way hash of the electronic data to be signed.



# Vidyavardhini's College of Engineering & Technology

## Department of Computer Engineering

---

A hash is a fixed-length string of letters and numbers generated by an algorithm. The digital signature creator's private key is then used to encrypt the hash. The encrypted hash -- along with other information, such as the hashing algorithm -- is the digital signature.

The reason for encrypting the hash instead of the entire message or document is a hash function can convert an arbitrary input into a fixed-length value, which is usually much shorter. This saves time as hashing is much faster than signing.

The value of a hash is unique to the hashed data. Any change in the data, even a change in a single character, will result in a different value. This attribute enables others to use the signer's public key to decrypt the hash to validate the integrity of the data.

If the decrypted hash matches a second computed hash of the same data, it proves that the data hasn't changed since it was signed. If the two hashes don't match, the data has either been tampered with in some way and is compromised or the signature was created with a private key that doesn't correspond to the public key presented by the signer -- an issue with authentication.

**Role of Digital Signature in Blockchain:** Digital signatures are a fundamental building block in blockchains, used mainly to authenticate transactions. When users submit transactions, they must prove to every node in the system that they are authorized to spend those funds, while preventing other users from spending them. Every node in the network will verify the submitted transaction and check all other nodes' work to agree on a correct state.

### **Process:**

Step 1. Create a sample information on which digital signature is to be obtained

Step 2. Generate Private-public key pairs for the sender and recipients

Step 3. Create Hash of the sample information using SHA-256 algorithm

Step 4. Encrypt the Hash using private key of the sender to obtain Digital Signature

Step 5. Append Hash to the original sample information

Step 6. Encrypt the information obtained from step 5 using public key of recipient

Step 7. Send the information (Cipher text) obtained from step 6 to the recipient

Step 8. Decrypt the Cipher text using private key of the recipient



# Vidyavardhini's College of Engineering & Technology

## Department of Computer Engineering

---

Step 9. Decrypt Digital signature using public key of the sender to obtain original hash as obtained by step 3

Step 10. Recipient perform hashing of the decrypted sample information in step 8 using SHA-256 to obtain latest hash

Step 11. The latest hash obtained is then compared with the hash obtained in step 9 to authenticate the sender

### Code:

```
// Java implementation for Generating
```

```
// and verifying the digital signature
```

```
package javaapplication2;
```

```
// Imports
```

```
import java.security.KeyPair;
```

```
import java.security.KeyPairGenerator;
```

```
import java.security.PrivateKey;
```

```
import java.security.PublicKey;
```

```
import java.security.SecureRandom;
```

```
import java.security.Signature;
```

```
import java.util.Scanner;
```

```
import javax.xml.bind.DatatypeConverter;
```



```
public class JavaApplication2 {

    // Signing Algorithm

    private static final String

        SIGNING_ALGORITHM

        = "SHA256withRSA";

    private static final String RSA = "RSA";

    //private static Scanner sc;

    // Function to implement Digital signature

    // using SHA256 and RSA algorithm

    // by passing private key.

    public static byte[] Create_Digital_Signature(

        byte[] input,

        PrivateKey Key)

        throws Exception

    {

        Signature signature

            = Signature.getInstance(

                SIGNING_ALGORITHM);
```



```
signature.initSign(Key);

signature.update(input);

return signature.sign();

}

// Generating the asymmetric key pair

// using SecureRandom class

// functions and RSA algorithm.

public static KeyPair Generate_RSA_KeyPair()

    throws Exception

{

    SecureRandom secureRandom

        = new SecureRandom();

    KeyPairGenerator keyPairGenerator

        = KeyPairGenerator

            .getInstance(RSA);

    keyPairGenerator

        .initialize(

            2048, secureRandom);

    return keyPairGenerator
```



```
.generateKeyPair();

}

// Function for Verification of the
// digital signature by using the public key

public static boolean
Verify_Digital_Signature(
    byte[] input,
    byte[] signatureToVerify,
    PublicKey key)
    throws Exception
{
    Signature signature
        = Signature.getInstance(
            SIGNING_ALGORITHM);

    signature.initVerify(key);

    signature.update(input);

    return signature
        .verify(signatureToVerify);
}
```



```
// Driver Code

public static void main(String args[])

    throws Exception

{

    String input = "Delhi";

    String input1 = "Mumbai";

    KeyPair keyPair

        = Generate_RSA_KeyPair();

    // Function Call

    byte[] signature

        = Create_Digital_Signature(

            input.getBytes(),

            keyPair.getPrivate());

    System.out.println("The original message is " + input + "\n");

    System.out.println(
```





# Vidyavardhini's College of Engineering & Technology

## Department of Computer Engineering

"Signature Value:\n "

+ DatatypeConverter

.printHexBinary(signature));

System.out.println(

"Verification: "

+ Verify\_Digital\_Signature(

input1.getBytes(),

signature, keyPair.getPublic()));

}

}

### Output:

The screenshot shows the NetBeans IDE interface. The main editor window displays a Java file named `JavaApplication2.java` with the following code:

```
82 String input = "Delhi";
83
84 String input1 = "Mumbai";
85 KeyPair keyPair
86     = Generate_RSA_KeyPair();
87
88 // Function Call
89 byte[] signature
90     = Create_Digital_Signature(
91         input.getBytes(),
92         keyPair.getPrivate());
93 System.out.println("The original message is " + input + "\n");
94
95 System.out.println(
96     "Signature Value:\n "
97     + DatatypeConverter
98         .printHexBinary(signature));
99
100
101 System.out.println(
102     "Verification: "
```

The output window at the bottom shows the following text:

```
run:
The original message is Delhi
Signature Value:
8E5A51D6e9153BC2B9525855845F2cAB9D8F122104626663C6E8ED77512537F13BAE556471689B2D276BF9F48CF3BFAFE649BA63AFE7FB6822C3E409B2A727167876C4F7B7A005A096E47E7D655DF724E599AC10F80C21C90BC91
Verification: false
BUILD SUCCESSFUL (total time: 0 seconds)
```



### **Conclusion:**

Digital signatures play a pivotal role in authentication by providing a robust mechanism to ensure the integrity, authenticity, and non-repudiation of electronic documents and messages. One of their core contributions lies in maintaining data integrity. By applying a cryptographic hash function to the data being signed, any modification, no matter how minor, would result in a failed verification of the signature. This ensures that the content remains unchanged during transmission or storage. Additionally, digital signatures offer a powerful means of authentication. Through the use of asymmetric cryptography, where a private key is used to create the signature and a corresponding public key is used for verification, the identity of the signer is confirmed. This process prevents unauthorized parties from creating valid signatures.