


Azure demo deployment

A small, low-cost Azure deployment used to demonstrate the platform. It is **not** the production design (see production-deployment.md for that). It predates multi-tenancy and the three processing queues — redeploying it with the current images needs the changes listed under *Updating the demo to the current build* below.

Topology

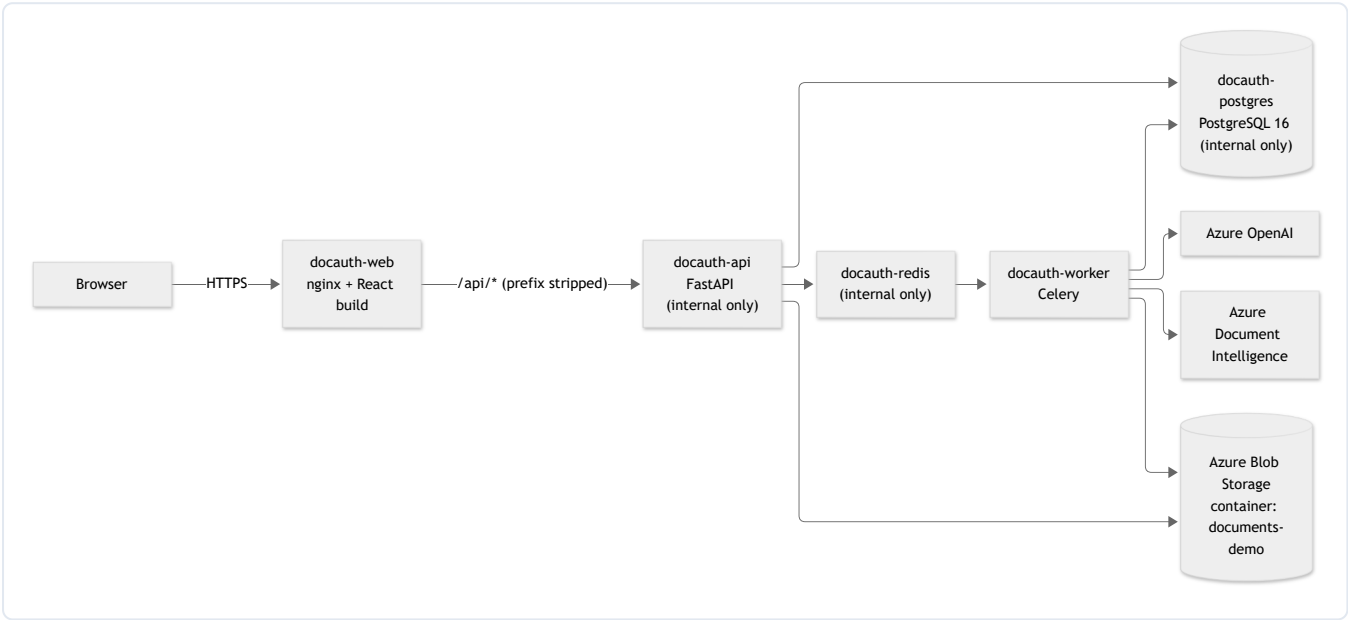

Only `docauth-web` has a public address. The API, Redis and PostgreSQL are reachable only from inside the Container Apps environment, so the database is never exposed to the internet. The browser talks to a single origin, so no CORS configuration is needed.

Resources

Resource	Purpose
Azure Container Apps: <code>docauth-web</code> , <code>docauth-api</code> , <code>docauth-worker</code> , <code>docauth-redis</code> , <code>docauth-postgres</code>	The five runtime components (1 replica each)
Azure Container Registry	Holds the backend and frontend images
Azure Blob Storage container <code>documents-demo</code>	Original documents, signature crops and report PDFs (kept separate from development data)
Azure Document Intelligence, Azure OpenAI	Existing resources, used as in development

Images

Both images are built from the repository:

Image	Source	Notes
Backend	<code>backend/Dockerfile</code>	One image for both the API (<code>start-api.sh</code>) and the worker (<code>start-worker.sh</code>)

Image	Source	Notes
Frontend	<code>frontend/Dockerfile</code> , <code>frontend/nginx.conf.template</code>	Static build served by nginx; <code>API_UPSTREAM</code> selects the backend address

`start-api.sh` applies the Alembic migrations, seeds the administrator account, then starts the API, so a new environment bootstraps itself.

Configuration

All settings are environment variables (see `environment-variables.md`). Secrets (database URL, JWT secret, storage connection string, Azure keys, seeded administrator password) are stored as Container Apps secrets and referenced by the apps; none are in the images or the repository. The seeded administrator email and password come from `SEED_ADMIN_EMAIL` / `SEED_ADMIN_PASSWORD`.

Operating notes

- **PDF viewer requirements.** The browser loads the pdf.js worker from the web app and fetches each PDF directly from Blob Storage. This needs (1) the web server to serve `.mjs` files as `application/javascript` (configured in `frontend/nginx.conf.template`) and (2) a Blob Storage CORS rule allowing `GET`, `HEAD` and `OPTIONS` from the web app's address. Add the rule again if the web app's address changes.
- The Celery worker ran the default prefork pool with two processes (Linux) when the demo was set up, before the queue split (see *Updating the demo to the current build*).
- Redis and PostgreSQL run as containers on the container's temporary disk (no persistent volume). If either restarts, in-flight jobs (Redis) or all case data (PostgreSQL) are lost. Restart the API app to re-apply the migrations and re-seed the administrator, then re-upload the sample documents.
- This deployment is intended for demonstrations. For production use `production-deployment.md` (managed PostgreSQL and Redis with private networking, persistent storage, Key Vault, monitoring).

Updating the demo to the current build

- **Workers:** the pipeline now uses three queues. A single `docauth-worker` must consume all of them: `celery -A app.tasks.celery_app worker -Q extraction_queue,vision_queue,forensics_queue,celery --pool=threads --concurrency=8` (or run `start-worker.sh extraction|vision|forensics` as three apps). `start-worker.sh` with no argument serves **only** `forensics_queue`, so documents would never be OCR'd.
- **Beat:** add one `start-beat.sh` app for the nightly usage reconciliation and queue metrics (optional for a demo).
- **Database roles:** the migrations now create `fddt_app` / `fddt_platform`; set `DATABASE_APP_PASSWORD` / `DATABASE_PLATFORM_PASSWORD` as secrets on every backend app. The Postgres container's `docauth` user is a superuser, which is fine for a demo.
- **Seeded account:** `admin@example.com` is now a **platform admin** — create a company and its users under *Platform* before submitting cases.
- **Uploads:** PDF only, per-company limits (10 MB / 300 MB zip by default); the nginx template caps request bodies at `UPLOAD_BODY_LIMIT` (11m) and bulk zips at `BULK_UPLOAD_BODY_LIMIT` (301m), both set by env vars.

Tear-down

Delete the five `docauth-*` container apps, the container registry and the `documents-demo` container. The demo creates no other resources.