


How to Create Array of Objects in Java

Array of Objects in Java

Java is an object-oriented programming language. Most of the work done with the help of **objects**. We know that an array is a collection of the same data type that dynamically creates objects and can have elements of primitive types.

Java allows us to store objects in an array. In [Java](#), the class is also a user-defined data type. An array that contains **class type elements** are known as an **array of objects**. It stores the reference variable of the object.

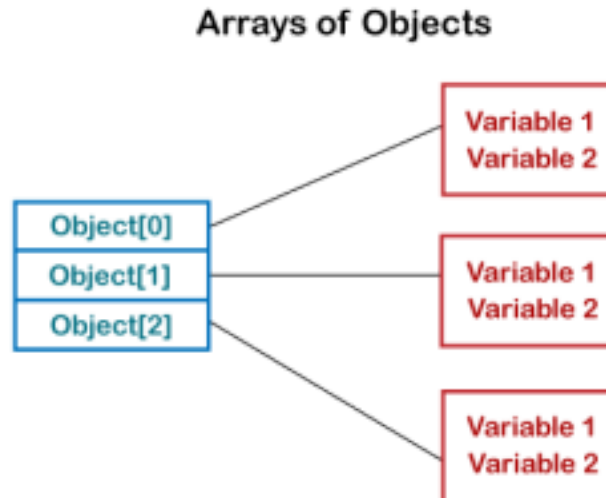

Creating an Array of Objects

Before creating an array of objects, we must create an instance of the class by using the new keyword.

ClassName obj[]=new ClassName[array_length]; //declare and instantiate an array of objects

Let's create an array of objects in a [Java program](#).

In the following program, we have created a class named Product and initialized an array of objects using the constructor. We have created a constructor of the class Product that contains product id and product name. In the main function, we have created individual objects of the class Product. After that, we have passed initial values to each of the objects using the constructor.

```
class Product
{
    int pro_Id;
    String pro_name;
    //Product class constructor
    Product(int pid, String n)
    {
```

```

        pro_Id = pid;
        pro_name = n;
    }
    public void display()
    {
        System.out.print("Product Id = "+pro_Id + " " + " Product Name = "+pro_name);
        System.out.println();
    }
}
public class ArrayOfObjects
{
    public static void main(String args[])
    {
        Product[] obj = new Product[5] ;

        obj[0] = new Product(23907,"Dell Laptop");
        obj[1] = new Product(91240,"HP 630");
        obj[2] = new Product(29823,"LG OLED TV");
        obj[3] = new Product(11908,"MI Note Pro Max 9");
        obj[4] = new Product(43590,"Kingston USB");

        //display the product object data
        System.out.println("Product Object 1:");
        obj[0].display();
        System.out.println("Product Object 2:");
        obj[1].display();
        System.out.println("Product Object 3:");
        obj[2].display();
        System.out.println("Product Object 4:");
        obj[3].display();

        System.out.println("Product Object 5:");
        obj[4].display();
    }
}

```

Example2-Array of Student

```

class Student
{
    public int id;
    public String name;

    Student(int id, String name)
    {
        this.id = id;
        this.name = name;
    }
}

```

```

    }
    public void display()
    {
        System.out.println("Student id is: " + id + " "+ "and Student name is: "+
name); System.out.println();
    }
}
class ArrayStudent
{

    public static void main(String args[])
    {

        Student[] arr;

        arr = new Student[2];

        arr[0] = new Student(1701289270, "Ram");

        arr[1] = new Student(1701289219, "Sham");

        System.out.println("Student data in student arr 0: ");
        arr[0].display();

        System.out.println("Student data in student arr 1: ");
        arr[1].display();

    }
}

```