7.1.1. Inverted Star Pattern

ALGORITHM

Step 1: Start

Step 2: Read an integer value n from the user.

Step 3: Initialize a loop from i = n down to 1 (decreasing by 1 each time). Step 4:

For each value of i, print i number of * (stars).

Step 5: Repeat Step 4 until the loop ends (when i becomes 0). Step 6:

Stop

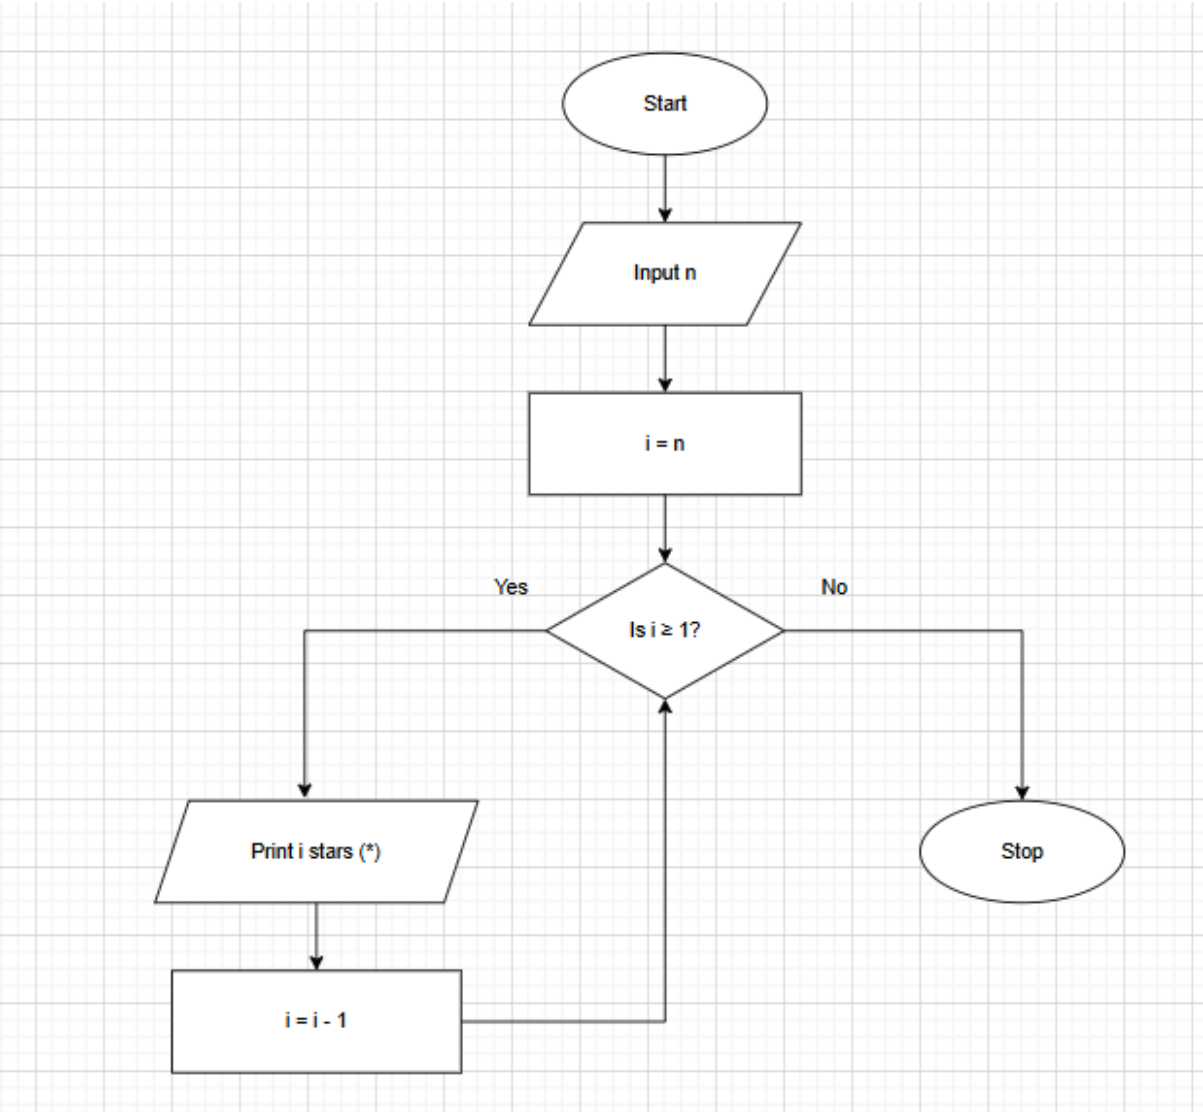

CODETANTRA Home

vedant.kubde.batch2025@sitnagpur.siu.edu.in Support Logout

7.1.1. Inverted Star Pattern

01:05

Write a Python program to print an inverted right-angled triangle star pattern.

For a given number n, the program should print n rows of stars where the first row contains n stars, the second row contains $n - 1$ stars, and each subsequent row has one less star than the previous row, ending with 1 star in the last row.

All rows should be left-aligned with no spaces between the stars.

Input Format:

- Single line contains an integer n representing the number of rows

Output Format:

- Print an inverted right-angled triangle star pattern with n rows

Note:

- Refer to sample test cases for better understanding.

Sample Test Cases +

Explorer

starPrint.py

Submit

```
n = int(input())

while n > 0 :
    print("*"*n)
    n -= 1
```

Debugger

Average time 0.004 s 3.83 ms

Maximum time 0.005 s 5.00 ms

3 out of 3 shown test case(s) passed

3 out of 3 hidden test case(s) passed

Test case 1 5 ms Debug

Expected output	Actual output
3	3
***↵	***↵
**↵	**↵
*↵	*↵

Test case 2 4 ms

Terminal Test cases

Prev Reset Submit Next