



# Vedantu: Institute System Integration APIs

Vedantu Innovations Pvt. Ltd.

16th December, 2013

Version 1.2

Last updated: 21st December, 2013



## TABLE OF CONTENTS

- [Introduction](#)
- [Institute EndPoint URL Registration](#)
- [Institute System based User Authentication Process](#)
  - [User Authentication API](#)
    - [Parameters](#)
    - [Response fields](#)
    - [Errors](#)
    - [Sample Success Response](#)
    - [Sample Error Response](#)
- [Institute Usage Data Upload Process](#)
  - [Test Attempt Data Upload Process](#)
    - [Parameters](#)
    - [Response fields](#)
    - [Errors](#)
    - [Sample Success Response](#)
    - [Sample Error Response](#)

## Introduction

Vedantu is a self-sustained platform that allows an Institute to manage their organization's:

1. Academic structure
2. People (Students, Teachers, Admins etc.)
3. Courses
4. Content
5. Devices

from its web-applications.

For Institutes that have their own User Management Systems Vedantu supports integration for:

1. User Authentication
2. Usage Data Upload

## Institute EndPoint URL Registration

In order to enable an integration with the Institute's User Management System it must register the corresponding EndPoint URL with the Vedantu system. This can be done at the time of submitting Institute creation request or subsequently using the Vedantu Admin Tool.

Note:

1. All communication will be done over secure HTTP (HTTPS). So, the Institute EndPoint must be a HTTPS URL.



## Vedantu: Institute System Integration APIs

2. There are suggestive URLs specified for various APIs. The Institute may override the URL to something of their choice, including the name of the API.  
eg. [https://<institute-endpoint-url>/instiAuth] instead of the suggested [https://<institute-endpoint-url>/authenticate]
3. The Institute may specify set of pre-defined headers or parameters (key-value pairs) to be passed with each request. This may be required for validating the authenticity of the API call at their end.

### Institute System based User Authentication Process

Refer the following figure to understand the call sequence for the User Authentication process.

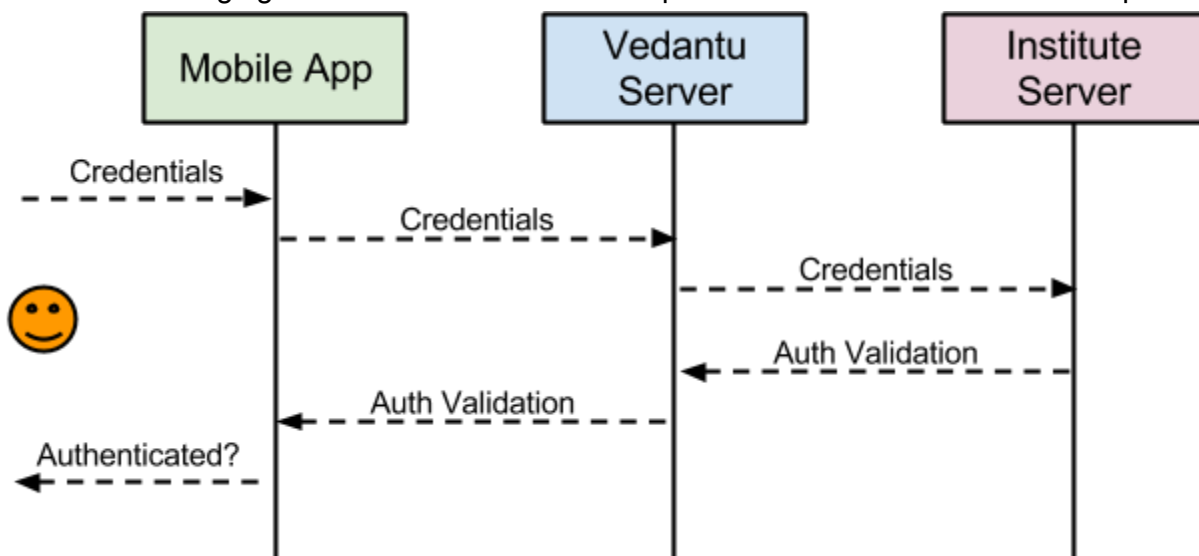


Figure 1. Sequence Diagram for User Authentication Process

Note: Vedantu Server simply acts as a proxy for the User Authentication Process. It does not log or store the user credentials in its database.

### User Authentication API

<https://<institute-endpoint-url>/authenticate>

Authenticates the User.

HTTP Method	POST
-------------	------

### Parameters



## Vedantu: Institute System Integration APIs

Parameter	Example	Description
username	MBA2013999	<b>required</b> Username to be used for authentication against the Institute's User Management System
password	somesecret	<b>required</b> Password of the user

### Response fields

Field	Example	Description
userId	654321abc	<b>required</b> UserId of the user in the User Management System.
memberId	MBA2013999	<b>optional</b> <b>default: same as userId</b> MemberId of the user as per the User Management System. This field represents Enrollment Number, Employee ID etc. of the user in the User Management System. It is recommended that this field be provided by the User Management System to allow Admin to be able to effectively do Management operations through Vedant Admin Tool, if desired. If not specified, this field will be assumed to have the value same as userId.
firstName	Anthony	<b>required</b> First name of this user. Required for profile display.
lastName	Gonsalves	<b>optional</b> Last name of this user. Required for profile display.
gender	MALE	<b>optional</b> <i>Enum: [MALE, FEMALE, UNKNOWN]</i> Gender of this user. Required for generic profile-pic display.
role	STUDENT	<b>required</b> <i>Enum: [STUDENT, TEACHER, ADMIN]</i> Role of the member in the Institute.



## Vedantu: Institute System Integration APIs

classes	[ { "classCode" : "classCode1", "expiry" : 1387196796000 }, { "classCode" : "classCode2", "expiry" : 1387196796000 }, ... ]	<b>required</b> Class-Codes (unique codes of sections created in Vedantu) of the classes of which the user is a part. Only Libraries and other resources of the authorized classes will be available to the user. If the user earlier had access to a class whose code is not present here, she would be removed from that class. If there is a class-code here for which the user did not have access earlier she will become a part of that class.
---------	---	---

### Errors

Error Code	Description
AUTHENTICATION_FAILED	User credentials could not be authenticated successfully.

### Sample Success Response

```
{
  "errorCode" : "",
  "errorMessage" : "",
  "result" : {
    "userId" : "654321abc",
    "memberId" : "MBA2013999",
    "firstName" : "Anthony",
    "lastName" : "Gonsalves",
    "role" : "STUDENT",
    "classes" : [
      { "classCode" : "classCode1", "expiry" : 1387196796000 },
      { "classCode" : "classCode2", "expiry" : 1387196796000 },
      ... ]
  }
}
```

### Sample Error Response

```
{
  "errorCode" : "AUTHENTICATION_FAILED",
```



```

    "errorMessage" : "",
    "result" : {
        "success" : false
    }
}

```

## Institute Usage Data Upload Process

Refer the following figure to understand the call sequence for the User Authentication process.

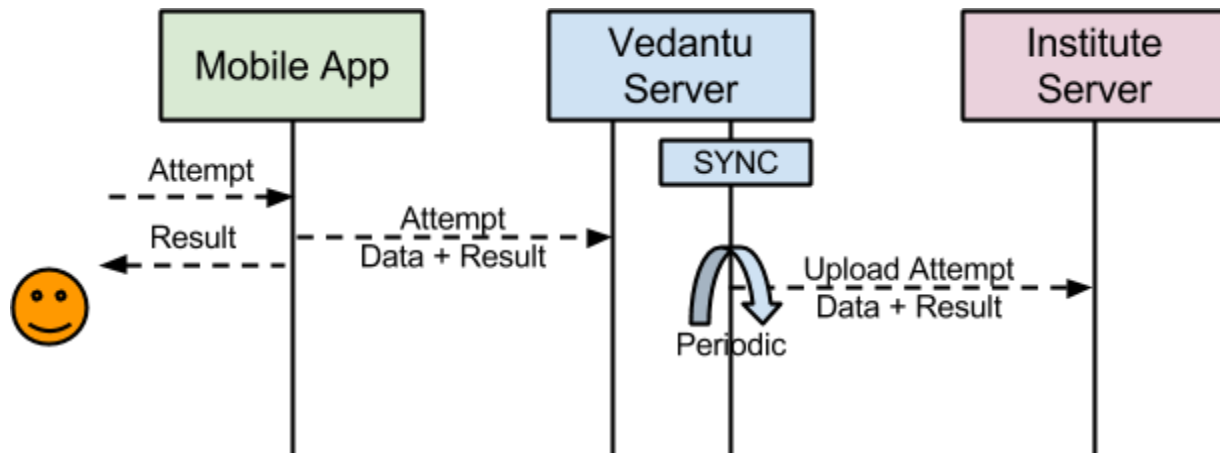


Figure 2. Sequence Diagram for Usage Data Upload Process

## Test Attempt Data Upload Process

<https://<institute-endpoint-url>/uploadTestAttemptData>

Authenticates the User.

HTTP Method	POST
-------------	------

### Parameters

Parameter	Example	Description
upload	{ "uploadId" : "6b5c4d3e", "attempts" : [] }	<b>required</b> uploadId - A unique identifier for this upload data-set in Vedantu. attempts - Explained further below.



## Vedantu: Institute System Integration APIs

attempt	<pre>{   "code" : "TEST-001",   "userId" : "654321abc",   "attemptId" : "6a5b4c3d2e1f",   "maxScore" : "100",   "userScore" : "50",   "attemptStartTime" : 1387196796000,   "attemptEndTime" : 1387196856000,   "answers" : [] }</pre>	<p><b>required</b></p> <p>code - Unique code of the test.</p> <p>userId - UserId of the user as per the Institute's User Management System.</p> <p>attemptId - A unique identifier for the attempt in Vedantu.</p> <p>maxScore - The maximum score the user could have attained in the test.</p> <p>userScore - The score attained by the user in the test.</p> <p>attemptStartTime - The time (in milliseconds since Epoch) at which the user started attempting the test.</p> <p>attemptEndTime - The time (in milliseconds since Epoch) at which the user ended attempting the test.</p> <p>answers - Explained further below.</p>
answers	<pre>[ {   "questionNumber" : 1,   "isAttempted" : true,   "userAnswer" : "some answer",   "isCorrect" : true,   "maxScore" : 4,   "userScore" : 4,   "timeTaken" : 10000 },   {     "questionNumber" : 2,     "userAnswer" : "",     "isCorrect" : false,     "maxScore" : 4,     "userScore" : -1,     "timeTaken" : 10000 }, ... ]</pre>	<p><b>required</b></p> <p>An array of answers and data thereof given with the following fields for each question:</p> <p>questionNumber - The number of the question in the test for which the data is being furnished. This will be indexed from 0.</p> <p>isAttempted - Whether the user attempted this question.</p> <p>userAnswer - Answer provided by the user.</p> <p>isCorrect - Whether the user's answer is correct.</p> <p>maxScore - The maximum score that the user could have attained for this question.</p> <p>userScore - The score attained by the user for this question.</p> <p>timeTaken - The time (in milliseconds) spent by the user on this question.</p>

### Response fields



## Vedantu: Institute System Integration APIs

Field	Example	Description
failedAttempts		<b>required</b> Only attemptId of attempts that were <i>not</i> successfully uploaded. This should be empty array in case all the attempts were uploaded successfully.

### Errors

Error Code	Description
UPLOAD_FAILED	If there was any error in the upload of data to the Institute's system.
INVALID_TEST_CODE	<i>specific to an attempt</i> If the Test Code is invalid as per the Institute's system.
INVALID_USER_ID	<i>specific to an attempt</i> If the userId is invalid as per the the Institute's system.

### Sample Success Response

```
{
  "errorCode" : "",
  "errorMessage" : "",
  "result" : {
    "failedAttempts" : [ ]
  }
}
```

### Sample Error Response

```
{
  "errorCode" : "UPLOAD_FAILED",
  "errorMessage" : "",
  "result" : {
    "failedAttempts" : [
      { "attemptId" : "6a5b4c3d2e1f3", "errorCode" : "INVALID_USER_ID" },
      { "attemptId" : "6a5b4c3d2e1f4", "errorCode" : "INVALID_TEST_CODE" },
      { "attemptId" : "6a5b4c3d2e1f5", "errorCode" : "INVALID_TEST_CODE" }
    ]
  }
}
```





## Vedantu: Institute System Integration APIs

```
{  
  },  
}
```