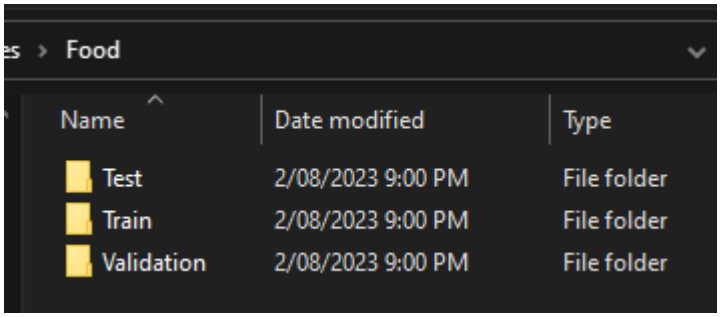

Folder structure for split images

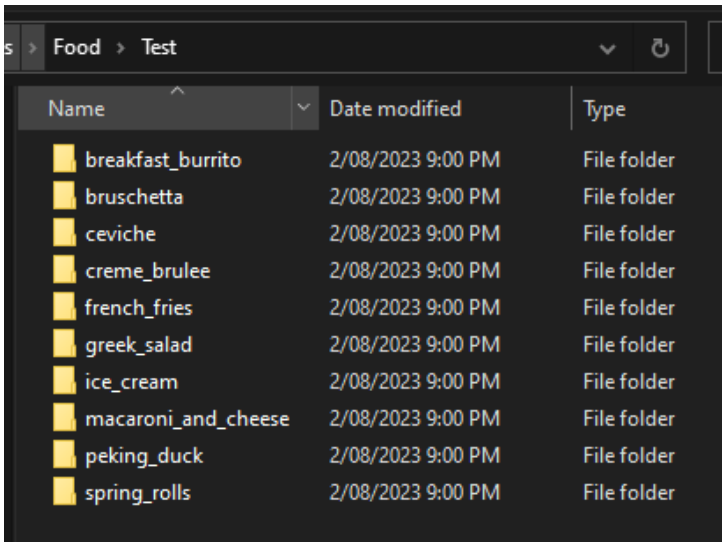

Food types (classes) used

Script output for images randomly selected. Here can be seen the syntax used for image labelling. Can be subject to change if needed (i.e., “food_breakfast_burrito_1”)

Randomly split class samples into a 40%, 30%, 30% (Train, Test, Validation respectively). The script selected image **randomly** to further reduce any type of **bias** that may be present in obtaining the 100 image samples.

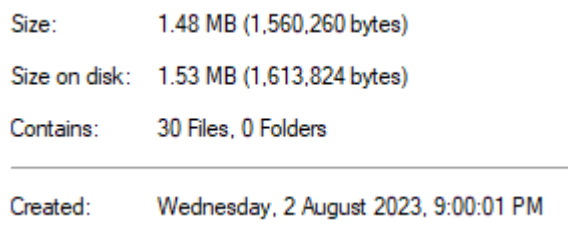

Test Folder for breakfast_burrito food class (30 images)

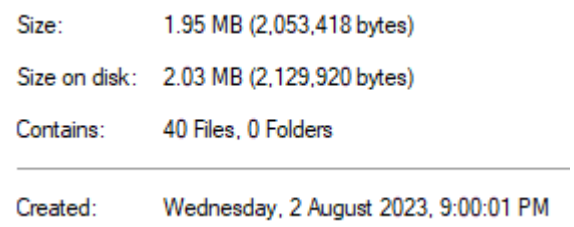

Train Folder for breakfast_burrito food class (30 images)

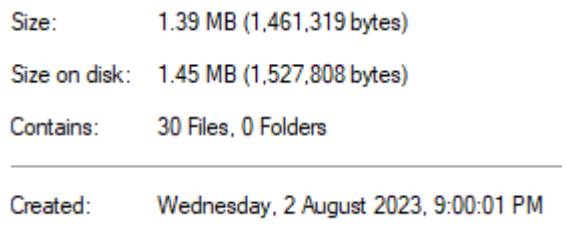

Validation Folder for breakfast_burrito food class (30 images)

Food folder with all of these results will be uploaded to the github repository for this 4.3P task.