

Autotask PSA Integration for Veeam Service Provider Console

Plugin Version 1.5.6

Guide for Service Providers

August, 2026

Applies to Veeam Service Provider Console 9.2 and 9.3. The integration uses the Datto Autotask PSA REST API v1.0. This document describes the Autotask PSA application plugin and is not part of the Veeam Service Provider Console product documentation set.

Contents

INTEGRATION WITH AUTOTASK PSA	3
Integration Features	3
How the Integration Works	4
REQUIREMENTS AND CONSIDERATIONS	6
System Requirements	6
Required Privileges	6
Ports, Files and Stored Data	7
Considerations and Limitations	7
INSTALLING THE AUTOTASK PSA PLUGIN	9
Installing the Plugin	9
Upgrading the Plugin	9
Removing the Plugin	10
ENABLING AUTOTASK PSA INTEGRATION	11
Step 1. Obtain Autotask API Credentials	11
Step 2. Configure Plugin Connection	12
Step 3. Enable Integration Features	14
CONFIGURING COMPANIES INTEGRATION	15
Prerequisites	15
Companies Page	15
Mapping Companies Automatically	16
Mapping Companies Manually	17
Removing Mapping	18
CONFIGURING CONSOLIDATED BILLING	19
Prerequisites	19
How Quantities Are Calculated	20
Step 1. Configure Product Mapping	21
Step 2. Select a Contract	22
Step 3. Enable Services for the Contract	22
Previewing and Running Synchronization	23
Billable Service Catalog	24
CONFIGURING AUTOMATED TICKETING	25
Prerequisites	25
Configuring Ticket Settings	25
Enabling Alarms	27
Ticket and Alarm Lifecycle	28
Recent Ticket Activity	28
REFRESHING DATA	30
MONITORING THE INTEGRATION	32
Plugin Status Page	32
Activity Page	32
Obtaining Plugin Logs	33
Troubleshooting	33
TERMINOLOGY	35
PLUGIN REST ENDPOINTS	36

Integration with Autotask PSA

Veeam Service Provider Console offers integration with Datto Autotask PSA to combine the functionality of both products and consolidate client data in one place.

Integration offers the following capabilities:

- **Consolidated billing.** You can consolidate information about services consumed by the clients into recurring service contracts in Autotask PSA.
- **Automated ticketing.** You can automatically create service tickets in Autotask PSA based on Veeam Service Provider Console alarms.

This solution is intended for service providers who both:

- Use Veeam Service Provider Console to manage and monitor data protection operations and services
- Use Autotask PSA as the primary business management platform

This section assumes that you have a good understanding of Autotask PSA.

Integration Features

To provide integration with Autotask PSA, Veeam Service Provider Console uses an application plugin. The plugin allows two applications to communicate with each other through integration features — integration points that allow bidirectional synchronization of data.

The Autotask PSA plugin includes the following integration features:


- **Companies** is the primary integration feature that allows you to select companies whose data you want to share between Veeam Service Provider Console and Autotask PSA. After you enable this feature, Veeam Service Provider Console retrieves a list of managed companies from Autotask PSA. You can then configure mapping to synchronize data about managed companies and enable further integration. A company that is not mapped is never billed and never generates tickets.
- **Ticketing** feature allows you to create service tickets in Autotask PSA. The tickets are based on alarms triggered in Veeam Service Provider Console for a mapped company. After you enable this feature, Veeam Service Provider Console retrieves the ticket queues, statuses, priorities, sources and ticket types available in Autotask PSA. You can then configure ticket creation parameters.
- **Billing** feature allows you to include information about type and quantity of Veeam-powered services consumed by the clients into contracts in Autotask PSA. After you enable this feature, Veeam Service Provider Console retrieves services and billing codes from the Autotask PSA service catalog and the contracts available for mapped companies. You can then configure mapping of services, and select contracts which will be used to bill measured consumption.

NOTE:

Integration features control synchronization, not navigation. All plugin pages remain available in the menu on the left whether or not the corresponding feature is enabled. A page whose feature is switched off displays an informational message at the top.

How the Integration Works

The plugin is a self-contained service that Veeam Service Provider Console starts, hosts and supervises. It is not installed separately, and it does not require Veeam Service Provider Console credentials to be specified — the plugin host provisions the plugin REST API key automatically at installation time. The only credentials you specify are the Autotask PSA ones.

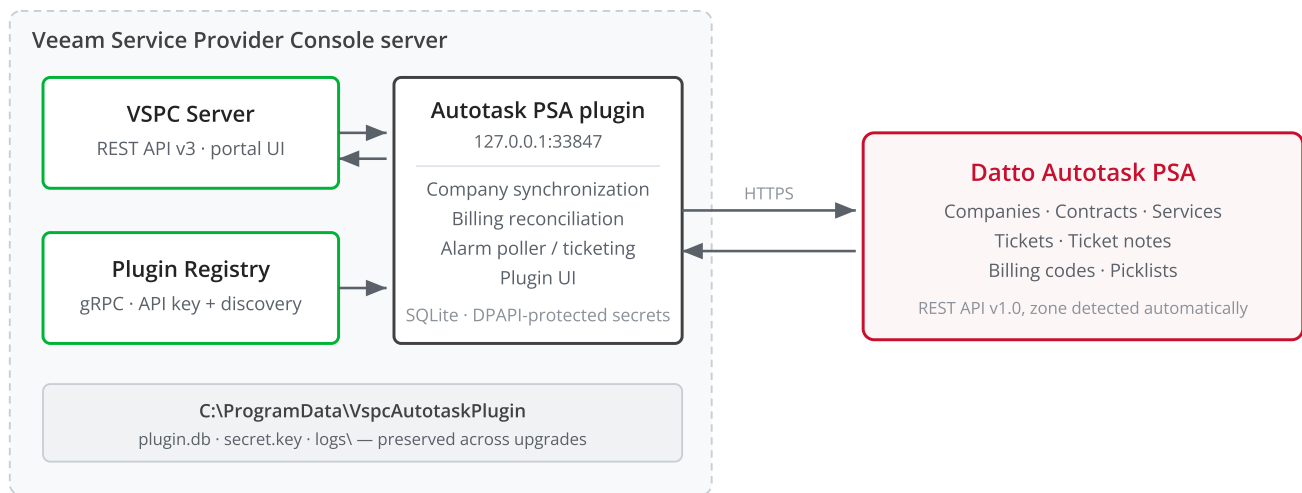

Plugin hosting. Veeam Service Provider Console launches the plugin service on the loopback interface, provisions its REST API key over gRPC, and proxies the plugin UI and API to the portal. The plugin connects to Autotask PSA outbound over HTTPS. Plugin data is stored outside the package folder so that upgrades preserve it.

In This Section

- [Requirements and Considerations](#)
- [Installing the Autotask PSA Plugin](#)
- [Enabling Autotask PSA Integration](#)
- [Configuring Companies Integration](#)
- [Configuring Consolidated Billing](#)
- [Configuring Automated Ticketing](#)
- [Refreshing Data](#)
- [Monitoring the Integration](#)

Requirements and Considerations

Before you deploy the Autotask PSA plugin, check the system requirements, the privileges required to configure the integration, and the limitations described in this section.

System Requirements

Veeam Service Provider Console	Version 9.2 or 9.3, tested and working on both. The plugin registers with the Veeam Service Provider Console plugin host and uses Veeam Service Provider Console REST API v3.
Operating system	The plugin runs on the machine that hosts the Veeam Service Provider Console Server component. Any Windows Server version supported by Veeam Service Provider Console.
.NET runtime	Not required. The plugin service is published as a self-contained <code>win-x64</code> application.
Autotask PSA	An Autotask PSA instance with REST API v1.0 available and at least one API-only user. The Autotask PSA zone is detected automatically from the API user name.
Outbound connectivity	HTTPS (TCP 443) from the Veeam Service Provider Console server to the Autotask PSA web services endpoints, including <code>webservices.autotask.net</code> for zone detection.
Web browser	Any browser supported by the Veeam Service Provider Console portal.

Required Privileges

To perform the tasks described in this document, a user must have the following roles assigned.

Task	Required role
Installing, upgrading and removing the plugin	Veeam Service Provider Console Portal Administrator
Opening plugin pages and changing plugin settings	Veeam Service Provider Console Portal Administrator or Portal Operator . The plugin verifies the portal user on every request and rejects all other roles.
Creating Autotask PSA API credentials	An Autotask PSA user allowed to create API-only users, typically a member of a security level with full administrative rights.
Autotask PSA API user	The API User (system) security level, with access to Companies, Contracts, Services, Billing Codes and Tickets.

Ports, Files and Stored Data

Item	Value
Plugin service endpoint	<code>http://127.0.0.1:33847</code> . The service listens on the loopback interface only. Veeam Service Provider Console proxies the plugin UI and API, and the port is never exposed externally. The port can be changed in the package manifest if it conflicts with another service.
Plugin identifier	<code>7A4C3E529D144F6BB7A152AE23C90D11</code> . This is the permanent identity of the plugin. It appears in the portal URL, for example <code>/plugins/7A4C3E529D144F6BB7A152AE23C90D11/companies</code> .
Data folder	<code>C:\ProgramData\VspcAutotaskPlugin</code>
Database	<code>plugin.db</code> , an SQLite database that holds company mappings, service mappings, per-company billing configuration, ticket links, billing history and the activity log.
Log files	The <code>logs</code> subfolder of the data folder.
Autotask PSA credentials	Encrypted at rest with Windows DPAPI and bound to the Veeam Service Provider Console server machine. The secret is never returned to the browser; the connection window displays (unchanged) in its place.

NOTE:

Because the credentials are bound to the machine, moving the data folder to another server invalidates the stored Autotask PSA secret. Specify the secret again in the connection window after such a move.

Considerations and Limitations

Consider the following limitations of the integration.

- **Companies must exist on both sides.** The plugin maps existing companies. It does not create company accounts in Veeam Service Provider Console, tenant accounts in Veeam Cloud Connect, or company records in Autotask PSA.
- **Configuration items are not created.** The plugin does not create Autotask PSA configuration items for computers managed in Veeam Service Provider Console. Tickets identify the affected object by name in the ticket title and description instead.
- **Contract type.** Only recurring service contracts can carry the services that the plugin maintains. Time and materials, fixed price and block-hour contracts are not supported.

- **Units are not converted.** The plugin reports a number of units. Make sure that the unit of measure of the selected Autotask PSA service matches the unit of the mapped Veeam Service Provider Console service.
- **Client notifications are not managed by the plugin.** If you want mapped companies to receive Veeam Service Provider Console alarm notifications in addition to Autotask PSA ticket notifications, configure alarm notifications in Veeam Service Provider Console.
- **Veeam Cloud Connect sites.** Sites are not part of the company mapping model. On the **Companies** page, narrow down the list of companies by company name or by mapping status.

Installing the Autotask PSA Plugin

The Autotask PSA integration is delivered as a custom application plugin. You upload the plugin package in Veeam Service Provider Console, and Veeam Service Provider Console hosts the plugin service and serves the plugin UI inside the portal.

Installing the Plugin

To install the Autotask PSA plugin:

1. Log in to Veeam Service Provider Console as a **Portal Administrator**.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click **Upload Custom Plugin** and select the `VspcAutotaskPlugin.<version>.nupkg` package.
Veeam Service Provider Console validates the package signature, deploys the plugin and starts the plugin service. Installation progress is reported in the notification area.
5. Wait until installation completes. The **Autotask PSA** plugin tile appears on the **Catalog** page.
6. Click the **Autotask PSA** plugin tile to open the plugin.

At installation time, Veeam Service Provider Console registers the plugin and issues it a Veeam Service Provider Console REST API key automatically. Veeam Service Provider Console credentials are not requested at any point.

NOTE:

The plugin package must be signed. If the upload is rejected because of the package signature, sign the package with a code signing certificate trusted by the Veeam Service Provider Console server.

Upgrading the Plugin

You can upgrade the plugin from the **Catalog** page. Upgrade preserves all plugin data.

1. Log in to Veeam Service Provider Console as a **Portal Administrator**.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click **Upload Custom Plugin** and select the newer plugin package.

Because the plugin identifier does not change between versions, Veeam Service Provider Console replaces the installed version instead of adding a second plugin.

5. Open the plugin and check the integration status. For details, see [Plugin Status Page](#).

Company mappings, service mappings, per-company billing configuration, ticket links, ticketing and billing settings, the Autotask PSA connection and the activity log are preserved during an upgrade, because they are stored in `C:\ProgramData\VspcAutotaskPlugin` and not in the package folder that the upgrade replaces.

NOTE:

Tickets that are open at the moment of the upgrade are not affected. The alarm poller resumes from the state recorded in the plugin database, so an alarm that already has a ticket does not receive a second one.

Removing the Plugin

To remove the Autotask PSA plugin:

1. Log in to Veeam Service Provider Console as a **Portal Administrator**.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Remove the **Autotask PSA** plugin.

Before the plugin is removed, Veeam Service Provider Console instructs the plugin to purge its local data. The plugin deletes its database and stored credentials in response.

NOTE:

When you remove the plugin, consider that:

- Nothing is deleted in Autotask PSA. Tickets, contracts, contract services and services created by the plugin remain in place.
- The links between Veeam Service Provider Console alarms and Autotask PSA tickets are stored in the plugin database and are lost when plugin data is purged. If you install the plugin again, previously created tickets are no longer updated.

Enabling Autotask PSA Integration

To allow Veeam Service Provider Console to communicate with Autotask PSA, you must configure the application plugin and enable integration features.

Enabling Autotask PSA Integration

To enable integration with Autotask PSA, perform the following steps:

1. [Obtain Autotask PSA API credentials.](#)
2. [Configure plugin connection.](#)
3. [Enable integration features.](#)

Step 1. Obtain Autotask API Credentials

In Autotask PSA, create an API-only user and save its user name, secret and integration code:

1. Log in to Autotask PSA with an account that is allowed to create API users.
2. In the navigation menu on the left, click **Admin** and select **Organization Settings & Users**.
In some Autotask PSA versions, this menu item is named **Account Settings & Users**.
3. Expand **Resources/Users (HR)** and click **Resources/Users**.
4. Click **New** and select **New API User**.
5. Specify the **First Name**, **Last Name** and **Email Address** of the API user.
6. From the **Security Level** drop-down list, select **API User (system)**.
7. Under **Credentials**, click **Generate Key** and **Generate Secret**.

The generated key is the API user name that you specify in the plugin. The generated secret is the password.

8. Under **API Tracking Identifier**, select **Custom (Internal Integration)** and type a name for the integration, for example `Veeam Service Provider Console`.
9. Click **Save & Close**.
10. Copy and save the user name, the secret and the tracking identifier value.

The secret cannot be displayed again after you close the form.

NOTE:

Treat the secret as a password. The plugin stores it encrypted with Windows DPAPI on the Veeam Service Provider Console server and never returns it to the browser, but anyone who holds the three values can access your Autotask PSA instance.

Autotask PSA Permissions

The API user must be able to access the following Autotask PSA entities.

Entity	Access	Used for
Companies	Read	Company list and company type for mapping
Contracts	Read	Contracts available for a mapped company
Services	Read, create	Mapping to existing services, and creating new services from Veeam Service Provider Console services
Contract services and adjustments	Read, create	Attaching services to a contract and maintaining billed quantities
Billing codes	Read	Allocation code assigned to services created by the plugin
Tickets and ticket notes	Read, create, update	Automated ticketing and ticket state synchronization

Step 2. Configure Plugin Connection

Configure Autotask PSA plugin connection in Veeam Service Provider Console:

1. Log in to Veeam Service Provider Console.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click the **Autotask PSA** plugin tile.
5. In the **Autotask PSA Integration** window, specify connection settings:
 - In the **API user (email)** field, type the user name generated for the API user at [Step 1. Obtain Autotask API Credentials](#).
 - In the **Secret** field, type the generated secret.
 - In the **Integration code** field, type the value of the custom API tracking identifier.

The **Zone** field is read-only. Veeam Service Provider Console detects the Autotask PSA zone for the specified API user automatically and fills in the field after a successful connection.

6. Click **Connect**.

7. In the **Autotask PSA Integration** window, check integration status.

A successfully established connection will show the **Healthy** integration status, and the window will close.

NOTE:

The **Autotask PSA Integration** window opens automatically the first time you open the plugin while no Autotask PSA connection is configured. You can open it at any time on the **Plugin Status** page: next to **Autotask zone**, click **Change**.

If the plugin already stores a secret, the **Secret** field displays **(unchanged)**. Leave the field empty to keep the stored secret, or type a new value to replace it.

Disconnecting Autotask PSA Plugin

If you no longer want to manage a Veeam Service Provider Console server in Autotask PSA, you can remove the plugin connection. After you disconnect the Autotask PSA plugin, all integration between Veeam Service Provider Console and Autotask PSA will be disabled: billing synchronization and ticket creation stop.

To disconnect the Autotask PSA plugin:

1. Log in to Veeam Service Provider Console.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click the **Autotask PSA** plugin tile.
5. In the menu on the left, click **Plugin Status**.
6. Next to **Autotask zone**, click **Change**.
7. In the **Autotask PSA Integration** window, click **Disconnect**.
8. In the confirmation window, click **Yes**.

Disconnecting removes the stored Autotask PSA credentials. Company mappings, service mappings and ticket links are preserved, so if you connect the same Autotask PSA instance again, the configuration is restored without remapping.

Step 3. Enable Integration Features

Select information you want to share between Veeam Service Provider Console and Autotask PSA, and enable the necessary features:

1. Log in to Veeam Service Provider Console.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click the **Autotask PSA** plugin tile.
5. In the menu on the left, click **Plugin Status**.
6. In the **Integration Settings** section, set toggles next to the necessary integration features to **On**.

You can also click the **Enable All** link to enable all integration features. For details on integration features, see [Integration Features](#).

Integration features are applied immediately. There is no separate save operation.

NOTE:

Toggles are unavailable until the Autotask PSA connection is configured. Until then, the **Integration Settings** section displays the **Connect Autotask to enable integration features** message.

Configuring Companies Integration

You can select companies whose data you want to share between Veeam Service Provider Console and Autotask PSA. To start sharing data of managed companies, you must configure mapping in Veeam Service Provider Console. Mapping enables further integration: only mapped companies are billed, and only mapped companies generate tickets.

Prerequisites

Before configuring integration of managed companies, check the following prerequisites:

- Configure Autotask PSA plugin connection. For details, see [Step 2. Configure Plugin Connection](#).
- Enable the **Companies** integration feature. For details, see [Step 3. Enable Integration Features](#).
- The companies must already exist both in Veeam Service Provider Console and in Autotask PSA. For details, see [Considerations and Limitations](#).

Companies Page

To open the page, click the **Autotask PSA** plugin tile in **Configuration > Catalog**, and then click **Companies** in the menu on the left.

Veeam Service Provider Console will display a list of all companies managed in Veeam Service Provider Console, along with the Autotask PSA company that each of them is mapped to.

Columns

Column	Description
Status	Mapping status of the company: Mapped or Unmapped .
Autotask Company	Name of the mapped Autotask PSA company. A mapping created by automatic matching is marked (auto) .
Autotask Company ID	Numeric identifier of the Autotask PSA company. Autotask PSA reserves the identifier 0 for the record of your own organization, which is a valid value.
Type	Type of the company configured in Autotask PSA, for example <i>Customer</i> or <i>Prospect</i> .
Veeam Service Provider Console Company	Name of the company configured in Veeam Service Provider Console.

Filters

To narrow down the list of companies, you can apply the following filters.

Filter	Description
Company Name	Search companies by name. The list is filtered as you type.
Status	Limit the list of companies by mapping status: Mapped, Unmapped, In progress, Error.

Commands

All mapping operations are performed on the companies that you select in the list. The list does not contain per-row action links.

Command	Description
Map to	Map the selected company. Available when exactly one unmapped company is selected.
Remove Mapping	Remove mapping of the selected companies. Available when the selection contains at least one mapped company.
Map Companies Automatically	Match unmapped companies by name. For details, see Mapping Companies Automatically .
Refresh Data	Retrieve both company lists from Veeam Service Provider Console and Autotask PSA. The command displays the time of the last synchronization.

Mapping Companies Automatically

Select this method if names of companies you manage in Veeam Service Provider Console are same or similar to their names in Autotask PSA.

To map companies automatically:

1. Log in to Veeam Service Provider Console.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click the **Autotask PSA** plugin tile.
5. In the menu on the left, click **Companies**.
6. At the top of the list, click **Map Companies Automatically**.

Veeam Service Provider Console will automatically detect companies in Autotask PSA whose names are the same as the names of companies configured in Veeam Service Provider Console, and will map them.

7. In the **Suggested Matches** window, review the companies that could not be mapped automatically, and click a candidate to map the company to it.

Each candidate is displayed with a match percentage.

How Matching Works

- Company names on both sides are normalized before they are compared, so differences in case, punctuation and spacing do not prevent a match.
- A company is mapped automatically only if exactly one unmapped Autotask PSA company matches its normalized name. Ambiguous names are never mapped automatically.
- If no exact match is found, up to five Autotask PSA candidates with a name similarity of 72 % or higher are offered for review.
- Companies that are already mapped are not processed, and an Autotask PSA company that is already mapped is not offered as a candidate.

Mapping Companies Manually

Select this method if names of companies you manage in Veeam Service Provider Console and their names in Autotask PSA do not match.

To map companies manually:

1. Log in to Veeam Service Provider Console.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click the **Autotask PSA** plugin tile.
5. In the menu on the left, click **Companies**.
6. From the list of companies, select an unmapped company.

To narrow down the list of companies, use the **Company Name** search or the **Status** filter.

7. At the top of the list, click **Map to**.
8. In the **Map Company** window, in the **Autotask company** field, start typing the name of the Autotask PSA company which you want to map, and select it from the list.

The list is searchable and is filtered as you type.

9. Click **Map Company**.
10. Repeat steps 6–9 for all companies you want to map.

NOTE:

One Veeam Service Provider Console company can be mapped to one Autotask PSA company only. Autotask PSA companies that are already mapped are not displayed in the list.

Removing Mapping

If you want to stop sending data about services consumed by the company to Autotask PSA, you can remove mapping.

NOTE:

When you remove mapping for a company, consider that:

- Billing configuration of the company in the plugin, that is the selected contract and the enabled services, will also be removed.
- Contract services and quantities that have already been reported to Autotask PSA will not be removed, and tickets that are open in Autotask PSA will not be closed. Update these records in Autotask PSA manually if necessary.

1. Log in to Veeam Service Provider Console.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click the **Autotask PSA** plugin tile.
5. In the menu on the left, click **Companies**.
6. From the list of companies, select one or more mapped companies.
7. At the top of the list, click **Remove Mapping**.
8. In the **Remove Mapping** window, click **Yes**.

Configuring Consolidated Billing

You can configure Veeam Service Provider Console to continuously send information to Autotask PSA about types and amount of services consumed by mapped companies. Autotask PSA will use this data to maintain quantities on recurring service contracts and generate consolidated invoices.

NOTE:

The amount of services is reported as the quantity of a contract service. The quantity depends on the type of service:

- For services measured by actual numbers, the quantity is equal to the actual number of managed objects or amount of consumed space as of the last day for which Veeam Service Provider Console reported data.
- For services measured for a billing period, the quantity is equal to the amount of resources consumed for the billing period.

Autotask PSA contracts will include the exact storage usage even if you have configured to round up storage usage costs in the subscription plan. The amount of services provided free of charge is defined by the selected subscription plan.

Make sure that the measurement unit of the selected Autotask PSA service is equal to the measurement unit of the mapped Veeam Service Provider Console service. For details, see [Billable Service Catalog](#).

To configure billing consolidation, perform the following steps:

1. [Configure product mapping](#).

Map services from Veeam Service Provider Console to services in the Autotask PSA service catalog.

2. [Select a contract](#).

For every mapped company, select a contract which Autotask PSA will use to bill measured consumption.

3. [Enable services for the contract](#).

Select the services that will be billed for the company.

Prerequisites


Before configuring consolidated billing, check the following prerequisites:

- Configure Autotask PSA plugin connection. For details, see [Step 2. Configure Plugin Connection](#).

- Enable the **Companies** and **Billing** integration features. For details, see [Step 3. Enable Integration Features](#).
- Configure integration for the companies for which you want to consolidate billing data. For details, see [Configuring Companies Integration](#).
- The companies for which you want to consolidate billing data must have at least one recurring service contract in Autotask PSA.
- A subscription plan must be configured in Veeam Service Provider Console. The plugin uses it as the price reference for services that it creates in Autotask PSA.

How Quantities Are Calculated

The plugin reads usage counters from Veeam Service Provider Console, converts them into billable units, and keeps the quantity of every Autotask PSA contract service aligned with the measured value. Quantities are maintained through contract service adjustments, which record the change in units rather than an absolute value.

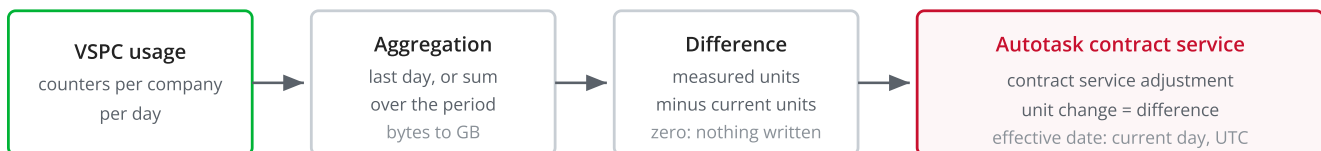

Billing reconciliation. The plugin compares the measured quantity with the quantity currently recorded on the contract service and reports only the difference, so that repeated runs on the same day do not increase the billed amount.

Two aggregation rules apply, depending on the service:

- **Services measured by actual numbers.** The quantity is the most recently reported value: the actual number of managed objects, or the amount of consumed space, as of the last day for which Veeam Service Provider Console reported data.
- **Services measured for a billing period.** The quantity is the total amount consumed during the billing period. Data transfer out is measured this way.

Storage counters are reported by Veeam Service Provider Console in bytes and are converted to gigabytes before they are sent to Autotask PSA.

NOTE:

Contracts have their own start and end dates in Autotask PSA. An adjustment whose effective date is outside the contract period is rejected by Autotask PSA, and the corresponding line is reported with the **error** status in the synchronization results.

Step 1. Configure Product Mapping

Enable Veeam Service Provider Console services that you want to bill in Autotask PSA:

1. Log in to Veeam Service Provider Console.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click the **Autotask PSA** plugin tile.
5. In the menu on the left, click **Billing**.
6. Navigate to the **Product Mapping** tab.
7. At the top of the page, from the **Use this subscription plan to define price for the service** drop-down list, select a subscription plan from which you want to obtain service prices.
8. Check the remaining billing settings and click **Apply**:
 - **Use this unit of measure for all allocated storage** — fixed to **TB** in this version.
 - **Billing period start day** — day of month the billing period starts, from 1 to 28. Default: 1.
 - **Daily sync hour (UTC)** — hour at which automatic billing synchronization runs. Default: 1.
 - **Default billing code (for created services)** — Autotask PSA allocation code assigned to services that the plugin creates.
9. Under the name of a Veeam Service Provider Console service group, set a toggle to **Enabled**.
10. For each service in the service group, select a necessary option from the **Mode** drop-down list:
 - **Existing Autotask service**

In this case, Veeam Service Provider Console will map the service to the selected active Autotask PSA service.
 - **Create new service**

In this case, Veeam Service Provider Console will create a new service in the Autotask PSA service catalog and map it to the selected service. Specify the **New service name** and **Unit price**. You can change this price at any time in the Autotask PSA catalog.

- **Do not bill**

In this case, Veeam Service Provider Console will skip the selected service and will not map it to any service in Autotask PSA.

11. Click **Save** in every service row that you have changed.

Step 2. Select a Contract

Select contracts which will be used to bill Veeam Service Provider Console services:

1. On the **Billing** page, navigate to the **Contracts** tab.
2. From the list of mapped companies, select a company for which you want to configure billing, and click **Configure** in its row.
3. In the **Contracts** window, from the **Contract** drop-down list, select a necessary contract.
If the company has no contracts in Autotask PSA, the window displays the **No contracts found for this company in Autotask** message. Create a recurring service contract in Autotask PSA, and then click **Refresh Data** on the **Contracts** tab.
4. Proceed to [Step 3. Enable Services for the Contract](#) without closing the window.

Step 3. Enable Services for the Contract

Select the services that will be billed on the selected contract:

1. In the **Contracts** window, under **Enabled Services**, select the services that you want to bill for this company.
Only the services that you have mapped on the **Product Mapping** tab are displayed. If the list is empty, return to the **Product Mapping** tab and map at least one service.
2. Click **Save**.
3. Repeat the procedure for all companies for which you want to consolidate billing data.

Veeam Service Provider Console will attach the mapped services to the selected contract and start sending information about the quantity of consumed services to Autotask PSA.

To stop billing a company without removing its company mapping, click **Disable Billing** in the company row, and then click **Yes**.

Previewing and Running Synchronization

Billing synchronization runs automatically once a day at the configured hour. You can also run it manually, and you can check what a run will do before any data is sent to Autotask PSA.

Command	Description
Preview (Dry Run)	Calculates the measured units, the current units and the resulting difference for every configured company and service, and records the outcome in the billing history without sending any data to Autotask PSA. Use this command to validate a new configuration.
Sync Now	Performs the same calculation and reports the resulting contract service adjustments to Autotask PSA. Veeam Service Provider Console will ask you to confirm the operation.
Refresh Data	Retrieves mapped companies and their Autotask PSA contracts. The command displays the time of the last synchronization.

Both commands display the **Synchronization** results list.

Column	Description
Company	Veeam Service Provider Console company.
Service	Veeam Service Provider Console service.
Current	Units currently recorded on the Autotask PSA contract service.
Measured	Units calculated from Veeam Service Provider Console usage data.
Delta	Difference that will be, or that was, reported to Autotask PSA.
Status	Result of the operation: adjusted — reported to Autotask PSA; planned — result of a dry run; no-change — the difference was zero and nothing was reported; skipped — the line was not eligible for reporting; error — Autotask PSA rejected the operation.
Message	Details for the line, including the Autotask PSA error message where applicable.

NOTE:

Adjustments are reported with the effective date set to the current day in UTC. Running synchronization twice on the same day is safe: the second run calculates a difference of zero for the lines that have not changed and reports nothing.

Billable Service Catalog

The following Veeam Service Provider Console services can be mapped to Autotask PSA services. The **Measurement** column indicates which aggregation rule applies. For details, see [How Quantities Are Calculated](#).

Service group	Service	Unit	Measurement
Managed Backup	Managed VMs	VMs	Actual number
	Backed-up VMs	VMs	Actual number
	CDP-protected VMs	VMs	Actual number
	Managed server agents	agents	Actual number
	Managed workstation agents	agents	Actual number
	Managed users	users	Actual number
Cloud Connect Backup	VM cloud backups	VMs	Actual number
	Server agent cloud backups	agents	Actual number
	Workstation agent cloud backups	agents	Actual number
	Cloud repository consumption	GB	Actual number, bytes converted to GB
	Data transfer out	GB	Billing period, bytes converted to GB
Cloud Connect Replication	VM cloud replicas	VMs	Actual number
	Replica storage consumption	GB	Actual number, bytes converted to GB
Microsoft 365 Backup	Protected Microsoft 365 users	users	Actual number
	Microsoft 365 backup size	GB	Actual number, bytes converted to GB
File Share Backup	Protected file shares	shares	Actual number
	File share backup size	GB	Actual number, bytes converted to GB
Public Cloud Backup	Public cloud backup size	GB	Actual number, bytes converted to GB

Configuring Automated Ticketing

You can configure Veeam Service Provider Console to send information about triggered alarms to Autotask PSA and to create service tickets based on alarm data.

Prerequisites

Before configuring automated ticketing, check the following prerequisites:

- Configure Autotask PSA plugin connection. For details, see [Step 2. Configure Plugin Connection](#).
- Enable the **Companies** and **Ticketing** integration features. For details, see [Step 3. Enable Integration Features](#).
- Configure integration for the companies for which you want to create tickets automatically. For details, see [Configuring Companies Integration](#). Alarms triggered for unmapped companies never create tickets.
- In Autotask PSA, the queue on which you want to create tickets automatically must exist, and the ticket statuses that you want to use for new and for closed tickets must be available.

Configuring Ticket Settings

To configure parameters of tickets created by Veeam Service Provider Console:

1. Log in to Veeam Service Provider Console.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click the **Autotask PSA** plugin tile.
5. In the menu on the left, click **Ticketing**.
6. At the top of the page, click **Ticket Settings** and configure ticketing settings as described in the table below.
7. Click **Save**.

Queue, status, priority, source and ticket type values are retrieved from your Autotask PSA instance when the window opens. Each drop-down list is searchable.

Setting	Description
Queue	Autotask PSA queue on which tickets will be created.

Setting	Description
Status for new tickets	Status assigned to a ticket when Veeam Service Provider Console creates it.
Status for closed tickets	Status assigned to a ticket when Veeam Service Provider Console closes it because the alarm used to create this ticket was resolved.
Priority — Warning alarms	Priority that must be assigned to tickets created for triggered <i>Warning</i> alarms.
Priority — Error alarms	Priority that must be assigned to tickets created for triggered <i>Error</i> alarms.
Source	Optional. Autotask PSA ticket source recorded on created tickets.
Ticket type	Optional. Autotask PSA ticket type recorded on created tickets.
Delay before ticket (minutes)	Time period after which the ticket for a triggered alarm must be created. An alarm that is resolved within this period never becomes a ticket, which suppresses tickets for transient conditions. Default: 5.
Due date offset (hours)	The ticket due date is set to the creation time plus this offset. Autotask PSA requires a due date on most ticket categories. Default: 24.
Alarm poll interval (seconds)	Period at which Veeam Service Provider Console is polled for alarm state. Default: 120. Values are limited to the range from 30 to 3600.
Close ticket when alarm resolves	When an alarm is resolved in Veeam Service Provider Console, the status of the ticket created for this alarm changes to the status for closed tickets. Enabled by default.
Resolve alarm when ticket closes	When a ticket is closed in Autotask PSA, the alarm used to create this ticket is resolved in Veeam Service Provider Console. Enabled by default.
Add note on re-trigger	When an alarm that already has an open ticket is triggered again, a ticket note is added to the existing ticket instead of creating a second ticket. Enabled by default.
Acknowledged counts as resolved	Alarms acknowledged in Veeam Service Provider Console are processed in the same way as resolved alarms when tickets are closed. Enabled by default.

NOTE:

The **Status for new tickets** and **Status for closed tickets** settings must be set to different Autotask PSA statuses. If both settings use the same status, the plugin cannot distinguish an open ticket from a closed one: every new ticket is reported as already closed, and duplicate tickets are created for the same alarm. Veeam Service Provider Console does not save such a combination, and stops the alarm poll if it is detected.

Enabling Alarms

To enable automatic creation of tickets based on Veeam Service Provider Console alarms:

1. Log in to Veeam Service Provider Console.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click the **Autotask PSA** plugin tile.
5. In the menu on the left, click **Ticketing**.

Veeam Service Provider Console will display a list of all enabled alarms, except alarms for the *Cloud Gateway*, *Internal*, *Plugin*, *Site* and *User* objects.

6. On the **Alarms** tab, from the list of alarms, select alarms for which you want to create tickets.

To narrow down the list of alarms, use the **Alarm Name** search or the **Status** filter.


7. At the top of the list, click **Enable**.

To stop creating tickets for an alarm, select the alarm and click **Disable**. To retrieve the list of alarms from Veeam Service Provider Console again, click **Refresh Data**.

NOTE:

Veeam Service Provider Console records the moment when ticketing is enabled for the first time. Alarms that were already triggered before that moment do not create tickets. This prevents a backlog of historical alarms from being reported to your Autotask PSA queue when the integration is enabled.

Ticket and Alarm Lifecycle

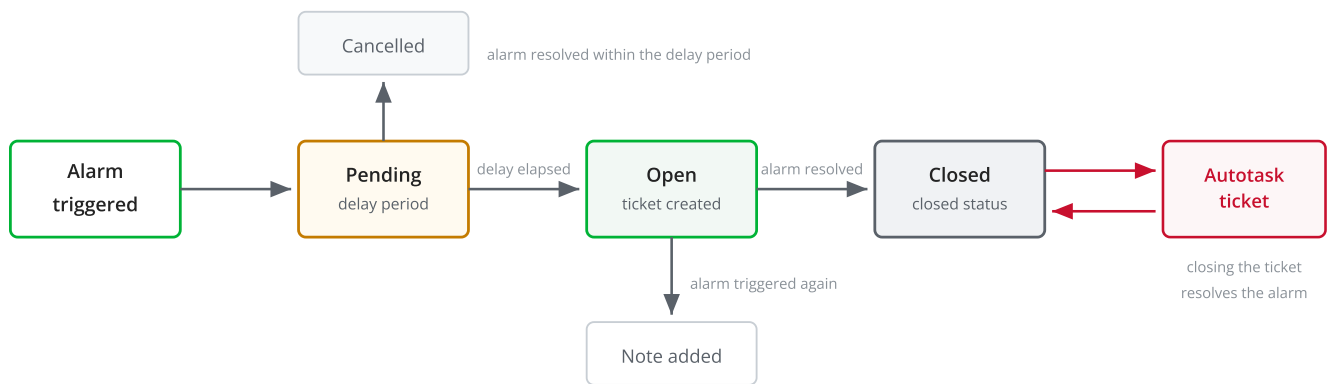

Ticket states. States are displayed on the **Recent Ticket Activity** tab. A ticket also enters the **Error** state if Autotask PSA rejects the create or update operation; Veeam Service Provider Console retries the operation at the next alarm poll.

Veeam Service Provider Console polls alarm state at the configured interval and reconciles both sides at every poll:

- An alarm triggered for a mapped company on an enabled alarm enters the **Pending** state. If the alarm is resolved before the delay period elapses, it changes to the **Cancelled** state and no ticket is created.
- After the delay period elapses, a ticket is created in the configured queue with the status for new tickets, the priority that matches the alarm severity, and a due date offset from the creation time. The ticket contains the company, the alarm name and the affected object.
- If the same alarm is triggered again while its ticket is open, a note is added to the existing ticket instead of creating a second ticket.
- When the alarm is resolved, or acknowledged if the **Acknowledged counts as resolved** setting is enabled, the status of the ticket changes to the status for closed tickets.
- Conversely, when you close the ticket in Autotask PSA, Veeam Service Provider Console resolves the alarm used to create this ticket.

The synchronization period for these actions is equal to the alarm poll interval, so a change made on either side is reflected on the other side within one poll. For details, see [Refreshing Data](#).

Recent Ticket Activity

The **Recent Ticket Activity** tab of the **Ticketing** page displays the operations performed by the ticket engine. Use this tab to check that the integration works as expected.

Column	Description
Status	State of the link between the alarm and the ticket: Pending, Open, Closed, Cancelled or Error .

Column	Description
Ticket	Number of the Autotask PSA ticket.
Company	Company for which the alarm was triggered.
Alarm	Alarm that was triggered.
Object	Managed object associated with the triggered alarm.
Updated	Time when the state last changed.
Message	Last reported status, or the error message if the state is Error .

To narrow down the list, use the search field to find a company, alarm, object or ticket number, and the **Status** filter to display a specific state. To run an alarm poll immediately instead of waiting for the configured interval, click **Poll Alarms Now**. Veeam Service Provider Console will report how many alarm events were processed and how many tickets were created, closed and updated with notes.

Refreshing Data

After you configure integration features, the data between Veeam Service Provider Console and Autotask PSA will be synchronized automatically. To synchronize the necessary data immediately, you can refresh it manually.

Synchronization Intervals

Data	Interval	Notes
Company lists from both applications	Every 4 hours	Used on the Companies page and in the mapping windows.
Alarm state and ticket reconciliation	Every 120 seconds	Configured by the Alarm poll interval (seconds) setting in the Ticket Settings window, from 30 to 3600 seconds.
Billing reconciliation	Once a day	At the hour configured by the Daily sync hour (UTC) setting on the Product Mapping tab. Default: 1.

Refreshing Data Manually

To synchronize the necessary data immediately, you can refresh it manually:

1. Log in to Veeam Service Provider Console.
2. At the top right corner of the Veeam Service Provider Console window, click **Configuration**.
3. In the configuration menu on the left, click **Catalog**.
4. Click the **Autotask PSA** plugin tile.
5. In the menu on the left, click the section for which you want to refresh data: **Companies**, **Ticketing**, **Billing (Contracts tab)**.
6. At the top of the page, click **Refresh Data**.

Every **Refresh Data** command displays the time of the last synchronization for the corresponding page.

NOTE:

Two more commands are available in addition to **Refresh Data**:

- **Poll Alarms Now** on the **Ticketing > Recent Ticket Activity** tab runs a full ticket reconciliation immediately.
- **Sync Now** on the **Billing > Contracts** tab runs billing reconciliation immediately. For details, see [Previewing and Running Synchronization](#).

Monitoring the Integration

You can check the health of the integration, review the operations performed by the plugin, and collect plugin log files.

Plugin Status Page

The **Plugin Status** page is the first page of the plugin and reports the state of the integration.

Field	Description
Status	State of the connection to Autotask PSA: • Configured — the plugin stores Autotask PSA credentials and a check against the Autotask PSA API succeeded. • Connection error — credentials are stored, but the check failed. The reason is displayed below the field. • Not configured — the connection to Autotask PSA has not been configured.
Last update	Time when the plugin last refreshed cached data or performed an alarm poll.
Autotask zone	Autotask PSA API zone detected for the configured API user. To open the connection window, click Change .
Integration Settings	Toggles for the Companies , Ticketing and Billing integration features, and the Enable All link.

NOTE:

The result of the connection check is cached for a short period, so the status reflects an actual call to Autotask PSA rather than the presence of stored credentials, without a request on every page load.

Activity Page

The **Activity** page displays the plugin event log: connection changes, company mapping operations, billing runs and their results, and ticket engine operations. Every record contains the time, severity level, functional area and message.

To narrow down the list, filter records by area (**connection**, **companies**, **billing**, **ticketing**, **system**) and by level. Check this page first if a scheduled operation did not produce the expected result.

Obtaining Plugin Logs

Required Privileges

To perform this task, a user must have the following role assigned: **Portal Administrator**.

Obtaining Plugin Logs

The plugin writes log files on the machine that hosts the Veeam Service Provider Console Server component. The log files are located in the following folder:

```
C:\ProgramData\VspcAutotaskPlugin\logs
```

The log contains records about plugin startup, every request that the portal sends to the plugin and its result, Autotask PSA API errors, and the result of every scheduled and manual synchronization. If the plugin cannot start, for example because the plugin package was deployed incompletely, the reason is written to the `startup-error.log` file in the same folder.

The plugin also provides a log archive to the Veeam Service Provider Console plugin host, which contains the activity of the last 30 days.

NOTE:

Log files may contain company names, alarm messages and Autotask PSA entity identifiers. Log files do not contain the Autotask PSA secret. Review the collected logs before you send them outside your organization.

Troubleshooting

The following table describes the most common issues and the way to resolve them.

Issue	Cause and resolution
Veeam Service Provider Console reports that a ticket is closed, but the ticket remains open in Autotask PSA, and duplicate tickets are created for the same alarm.	The Status for new tickets and Status for closed tickets settings use the same Autotask PSA status. Select two different statuses in the Ticket Settings window. For details, see Configuring Ticket Settings .
The list of companies is empty.	The company lists have not been retrieved yet, or the connection to Autotask PSA is not healthy. Click Refresh Data , and then check the status on the Plugin Status page.

Issue	Cause and resolution
The Contracts window displays no contracts for a company.	The mapped Autotask PSA company has no contracts, or none of its contracts is a recurring service contract. Create a recurring service contract in Autotask PSA, and then click Refresh Data on the Contracts tab. Note that the Autotask PSA company identifier 0 is a valid identifier: it is the record of your own organization, and its contracts are listed as usual.
Queue, status and priority lists in the Ticket Settings window are empty.	The values are retrieved from Autotask PSA when the window opens. If the connection is not healthy, the lists remain empty and the fields are unavailable. Configure the connection first.
Billing lines are reported with the error status.	Check the message in the results list. The most common causes are an effective date outside the contract period, a contract that is not a recurring service contract, and an Autotask PSA service that the API user cannot modify.
Reported quantities of a storage service are unexpectedly high or low.	Check that the measurement unit of the Autotask PSA service matches the unit of the mapped Veeam Service Provider Console service. Veeam Service Provider Console storage counters are converted to gigabytes, so an Autotask PSA service priced per terabyte will be billed incorrectly.
Opening a plugin page returns an authorization error.	The plugin admits only Portal Administrator and Portal Operator users. Log in with an account that has one of these roles assigned.

Terminology

The same entity may have different names in Veeam Service Provider Console and in Autotask PSA. The following table describes how the entities correspond to each other.

Veeam Service Provider Console	Autotask PSA
Company	Company
Service, that is a billable usage counter	Service in the service catalog
Measured consumption of a service	Contract service, whose quantity is maintained through contract service adjustments
Subscription plan	Service unit price
Alarm	Ticket
Alarm severity: <i>Warning, Error</i>	Ticket priority
Alarm object type	Reported in the ticket title and description
Plugin REST API key, provisioned automatically	API user name, secret and integration code
No equivalent	Zone, detected automatically from the API user name

Plugin Pages

Page	Description
Plugin Status	Integration status, Autotask PSA zone and the connection window; toggles for the Companies , Ticketing and Billing integration features.
Companies	Mapping between companies in Veeam Service Provider Console and Autotask PSA.
Ticketing	The Alarms tab contains the list of alarms that create tickets and the Ticket Settings window. The Recent Ticket Activity tab reports the operations performed by the ticket engine.
Billing	The Contracts tab contains per-company contract and service selection, preview and synchronization. The Product Mapping tab contains mapping of Veeam Service Provider Console services to Autotask PSA services, and billing settings.
Activity	Plugin event log.

Plugin REST Endpoints

The plugin UI uses the endpoints described in this section. They are documented for troubleshooting purposes. These endpoints are not a public API and may change in a future plugin version.

All endpoints are served by the plugin service on the loopback interface and are proxied by Veeam Service Provider Console under `/plugins/7A4C3E529D144F6BB7A152AE23C90D11/`. Requests contain the identity of the portal user, which the plugin verifies. Only **Portal Administrator** and **Portal Operator** users are admitted.

Status and Settings

Method	Path	Purpose
GET	<code>/api/status</code>	Integration status overview
GET	<code>/api/session</code>	Reports whether the portal user may administer the plugin
GET	<code>/api/health</code>	Liveness probe
GET	<code>/api/activity</code>	Activity log
GET, POST	<code>/api/settings/autotask</code>	Read the masked connection settings; test and save new settings
POST	<code>/api/settings/autotask/disconnect</code>	Remove the Autotask PSA connection
GET, POST	<code>/api/settings/features</code>	Integration features
GET, POST	<code>/api/settings/ticketing</code>	Ticket settings
GET, POST	<code>/api/settings/billing</code>	Billing settings

Companies

Method	Path	Purpose
GET	<code>/api/companies</code>	Merged company mapping view
POST	<code>/api/companies/refresh</code>	Refresh both cached company lists
POST	<code>/api/companies/automap</code>	Match companies by name
POST	<code>/api/companies/map</code>	Map a company
POST	<code>/api/companies/unmap</code>	Remove a company mapping

Billing

Method	Path	Purpose
GET, POST	/api/billing/services	Service catalog with mappings; save a service mapping
GET, POST	/api/billing/companies	Per-company billing configuration
POST	/api/billing/companies/remove	Disable billing for a company
POST	/api/billing/preview	Dry run
POST	/api/billing/run	Run synchronization
GET	/api/billing/history	Adjustment history
GET	/api/vspc/subscriptionplans	Veeam Service Provider Console subscription plans

Ticketing

Method	Path	Purpose
GET	/api/ticketing/alarms	Alarms with ticketing rules
POST	/api/ticketing/alarms/refresh	Retrieve alarms from Veeam Service Provider Console
POST	/api/ticketing/alarms/enable	Enable or disable ticketing for alarms
GET	/api/ticketing/links	Recent ticket activity
POST	/api/ticketing/poll	Poll alarms now

Autotask PSA Lookups

Method	Path	Purpose
GET	/api/autotask/picklists	Queues, statuses, priorities, sources, ticket types
GET	/api/autotask/companytypes	Company types
GET	/api/autotask/servicefields	Service field values
GET	/api/autotask/services	Active services
GET	/api/autotask/billingcodes	Active billing codes
GET	/api/autotask/contracts? companyId=	Contracts of a company

Plugin Host Endpoints

Veeam Service Provider Console calls the following endpoints directly on the plugin service port. They are not proxied to the portal.

Method	Path	Purpose
GET	/api/v1/healthcheck	Health probe
GET	/api/v1/readiness	Readiness probe
GET	/api/v1/logs	Log archive of the last 30 days
DELETE	/api/v1/localdata	Purge plugin data before the plugin is removed