Postman CLI

The **Postman CLI** is a secure command-line companion for Postman. It's signed and supported by Postman, like the Postman app.

The Postman CLI supports the following features:

- **Sign in and sign** out of Postman from the command line.
- **Run a collection** with its collection ID or path, and send the run results to the Postman cloud by default.
- Generate a local collection run report with **built-in reporters**.

*The Postman CLI requires a valid Postman **API key** and **Collection ID.**


Run Postman Collection using Postman CLI:


Steps:

1. **Install Postman CLI**
2. **Generate postman API Key or use Existing API Key.**
3. **Run the Collection in command prompt (using Postman CLI)**

1) Install Postman CLI:

Go to collection runner → Select Automate run via CLI.

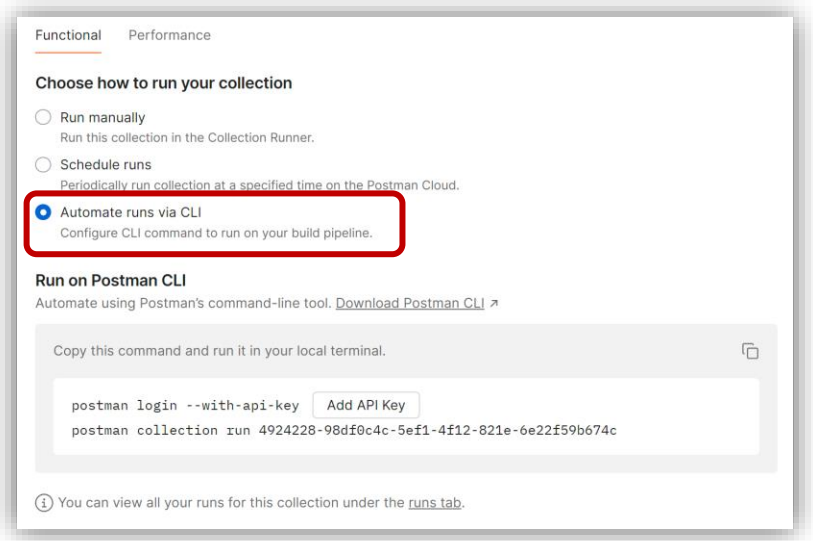

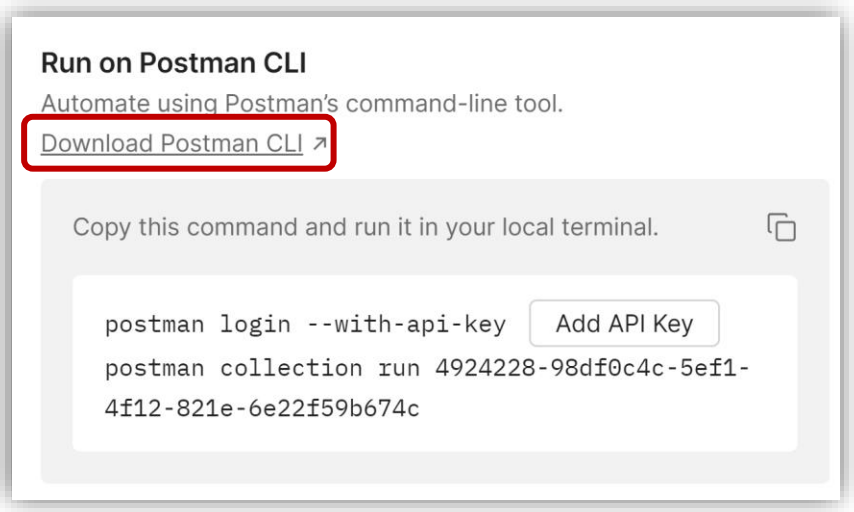

Click on Download Postman CLI → This will navigate to the following page (Or use Direct link):

https://learning.postman.com/docs/postman-cli/postman-cli-installation/#windows-installation

Windows installation


Run the below command in the command prompt/terminal.

```
powershell.exe -NoProfile -InputFormat None -ExecutionPolicy AllSigned -Command "[System.Net.ServicePointManager]::SecurityProtocol = 3072; iex ((New-Object System.Net.WebClient).DownloadString('https://dl-cli.pstmn.io/install/win64.ps1'))"
```

macOS (Apple silicon) installation


```
curl -o- "https://dl-cli.pstmn.io/install/osx_arm64.sh" | sh
```


Example:

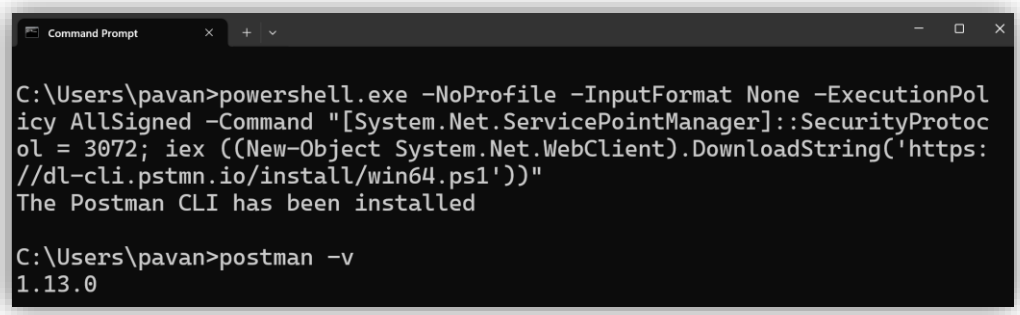

2) Generate postman API Key or use Existing API Key.


We can generate new API Key or use existing API Key.

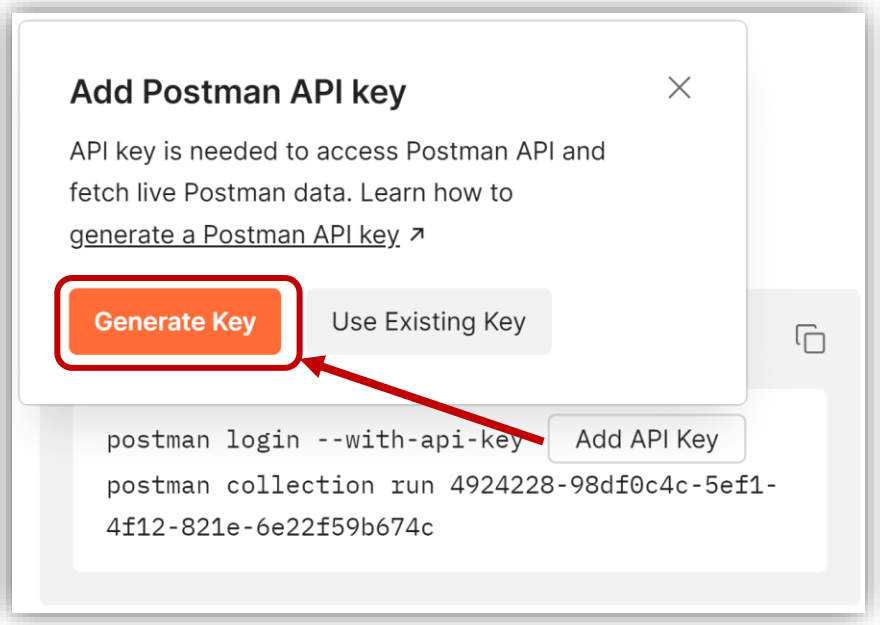

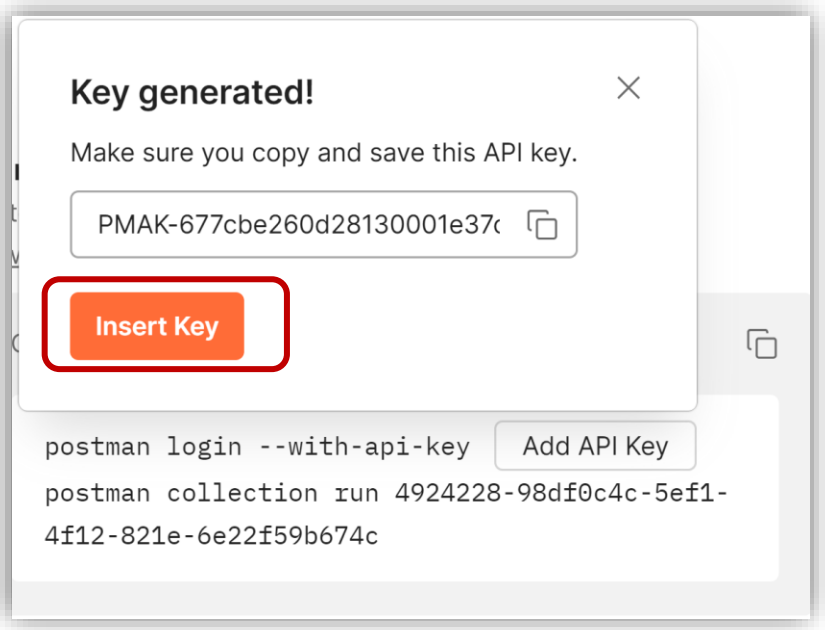

Another way to get an API key from account settings, Refer the link Generate a Postman API key.

3) Now, Run Postman Collection using Postman CLI (Commands):

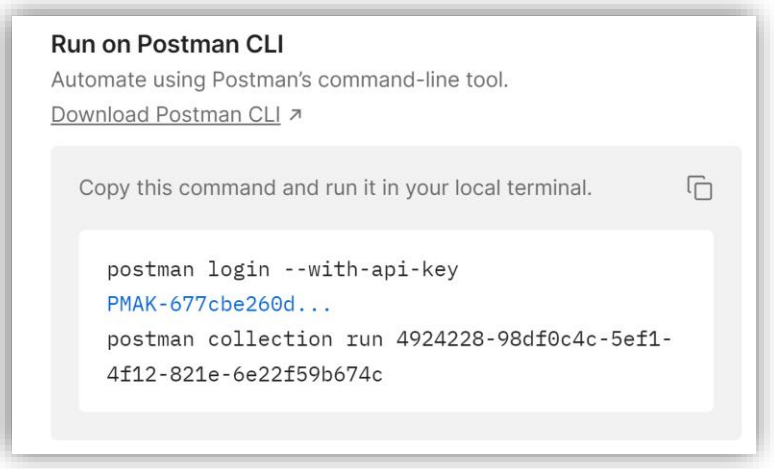

Execute below commands To Run the Collection in the command prompt(locally).

Login to postman:

```
postman login --with-api-key PMAK-677cbe260d28130001e37cf1-
de554103f40dc9d51d1087d923b3bb8268
```

Run the collection (without html report):


```
postman collection run 4924228-98df0c4c-5ef1-4f12-821e-6e22f59b674c -d
product_data.json -g workspace.postman_globals.json
```


To generate html reports:


```
postman collection run 4924228-98df0c4c-5ef1-4f12-821e-6e22f59b674c -d
product_data.json -g workspace.postman_globals.json -r html
```


Default report location: postman-cli-reports\Products-2025-01-07-12-14-56.html


Jenkins CI/CD PipeLine configuration

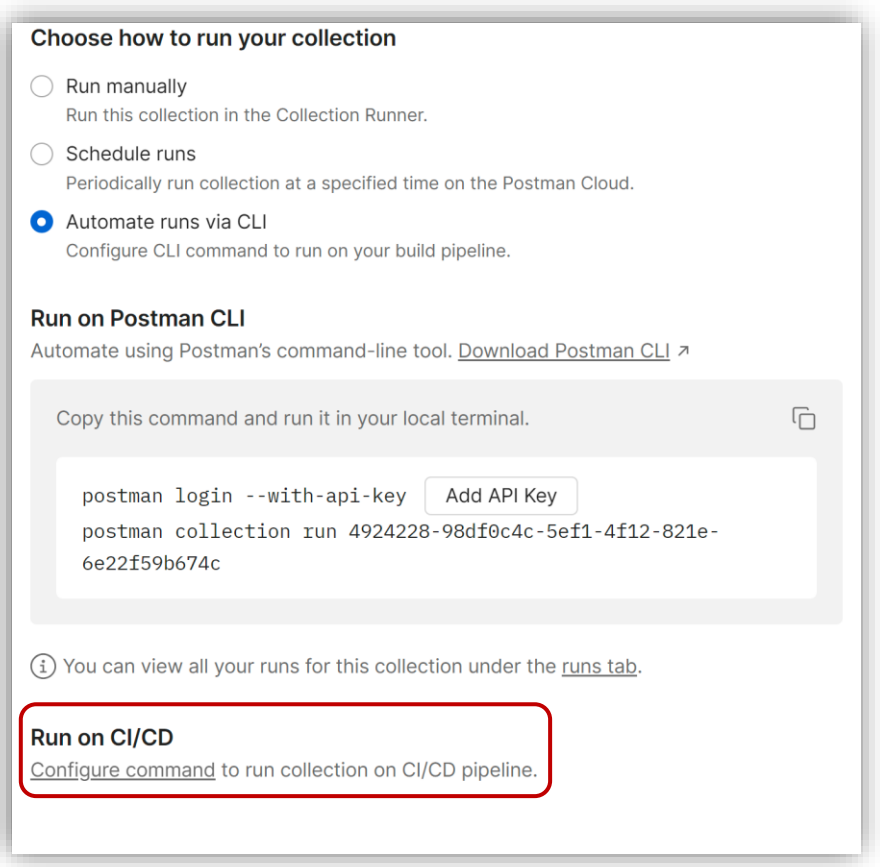

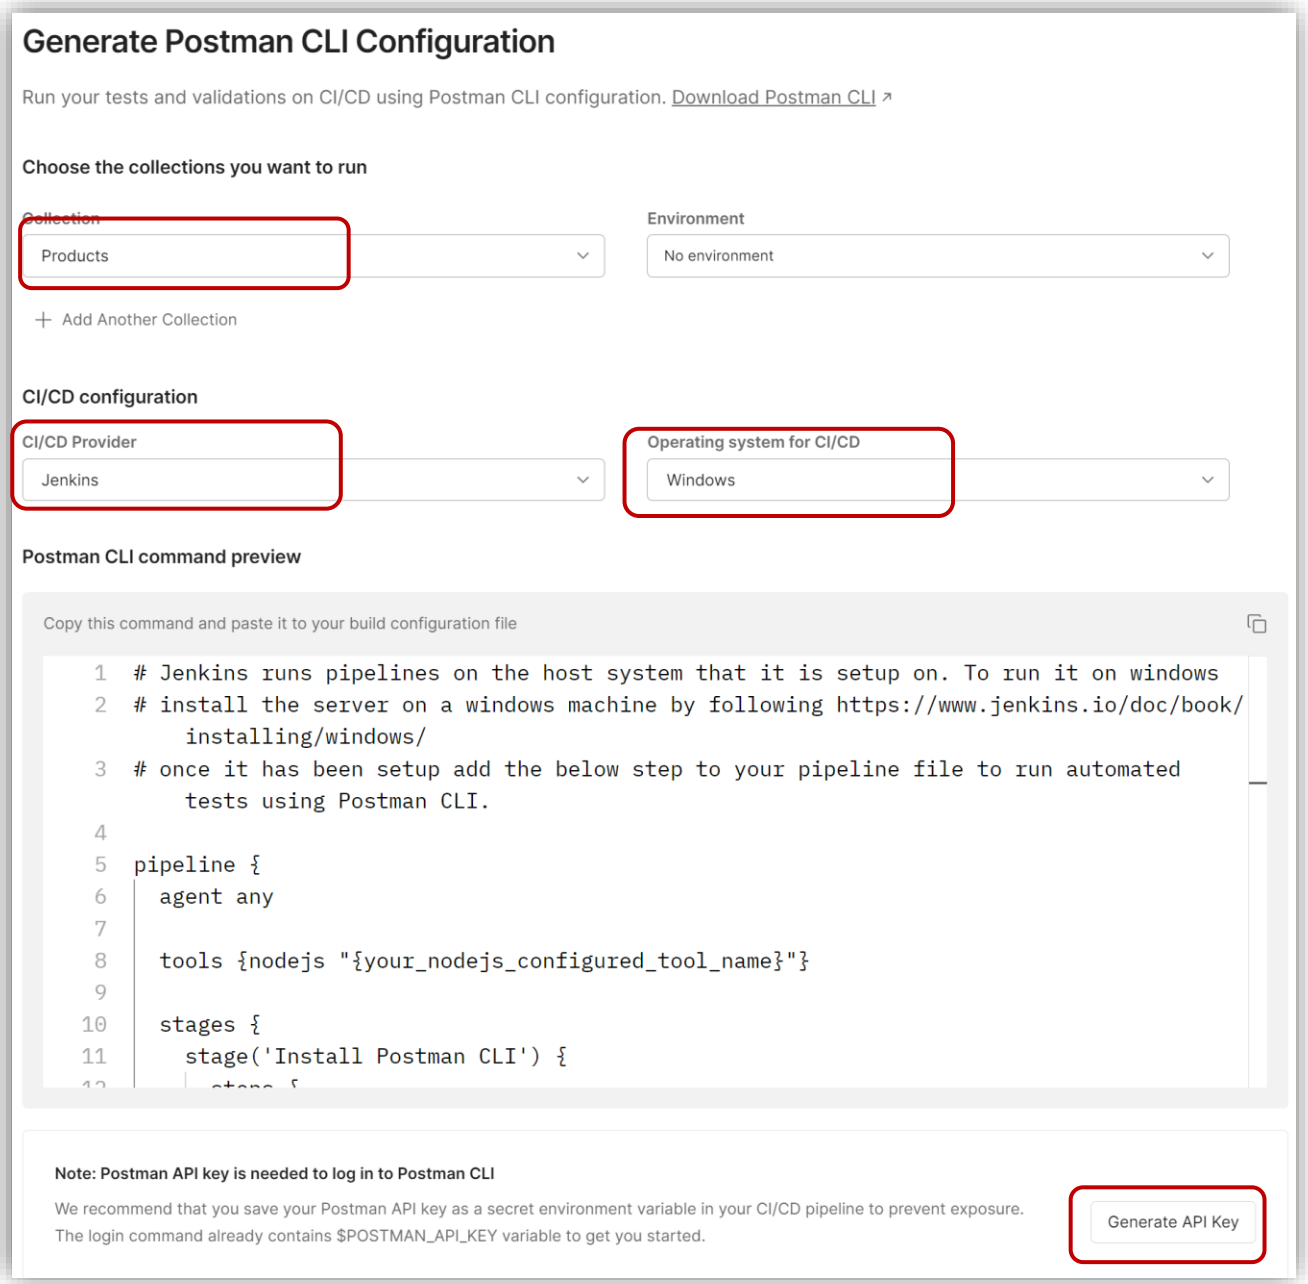
Generate Postman CLI Configuration
Run your tests and validations on CI/CD using Postman CLI configuration. Download Postman CLI
Choose the collections you want to run
Collection
Products
Environment
No environment
Add Another Collection
CI/CD configuration
CI/CD Provider
Jenkins
Operating system for CI/CD
Windows
Postman CLI command preview
Copy this command and paste it to your build configuration file
Jenkins runs pipelines on the host system that it is setup on. To run it on windows
install the server on a windows machine by following https://www.jenkins.io/doc/book/installing/windows/
once it has been setup add the below step to your pipeline file to run automated tests using Postman CLI.
pipeline {
agent any
tools {nodejs "{your_nodejs_configured_tool_name}"}
stages {
stage('Install Postman CLI') {
Note: Postman API key is needed to log in to Postman CLI
We recommend that you save your Postman API key as a secret environment variable in your CI/CD pipeline to prevent exposure.
The login command already contains $POSTMAN_API_KEY variable to get you started.
Generate API Key

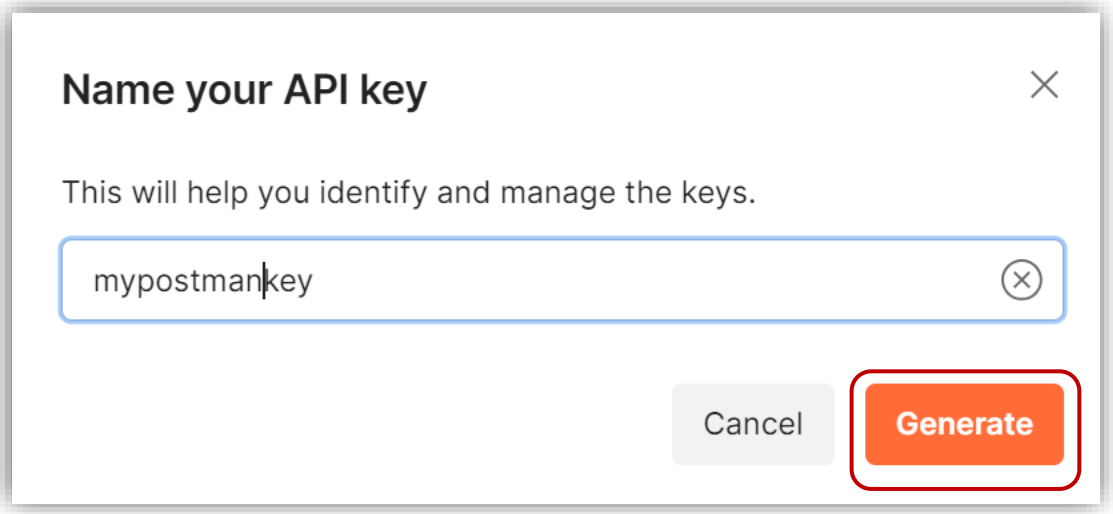
Name your API key
This will help you identify and manage the keys.
mypostmankey
Cancel
Generate

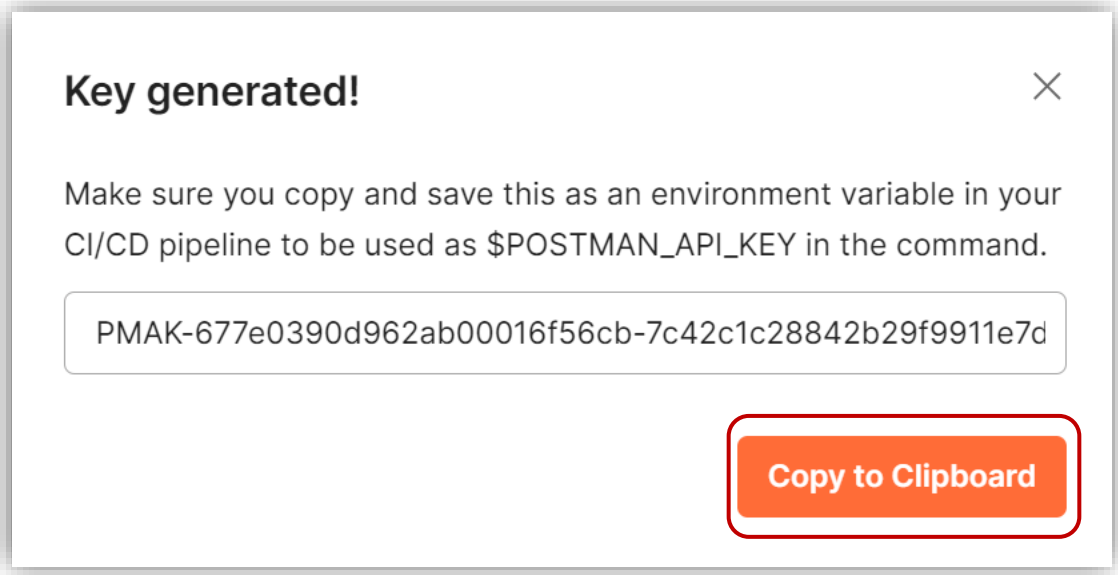
Key generated!
Make sure you copy and save this as an environment variable in your CI/CD pipeline to be used as $POSTMAN_API_KEY in the command.
PMAK-677e0390d962ab00016f56cb-7c42c1c28842b29f9911e7d
Copy to Clipboard

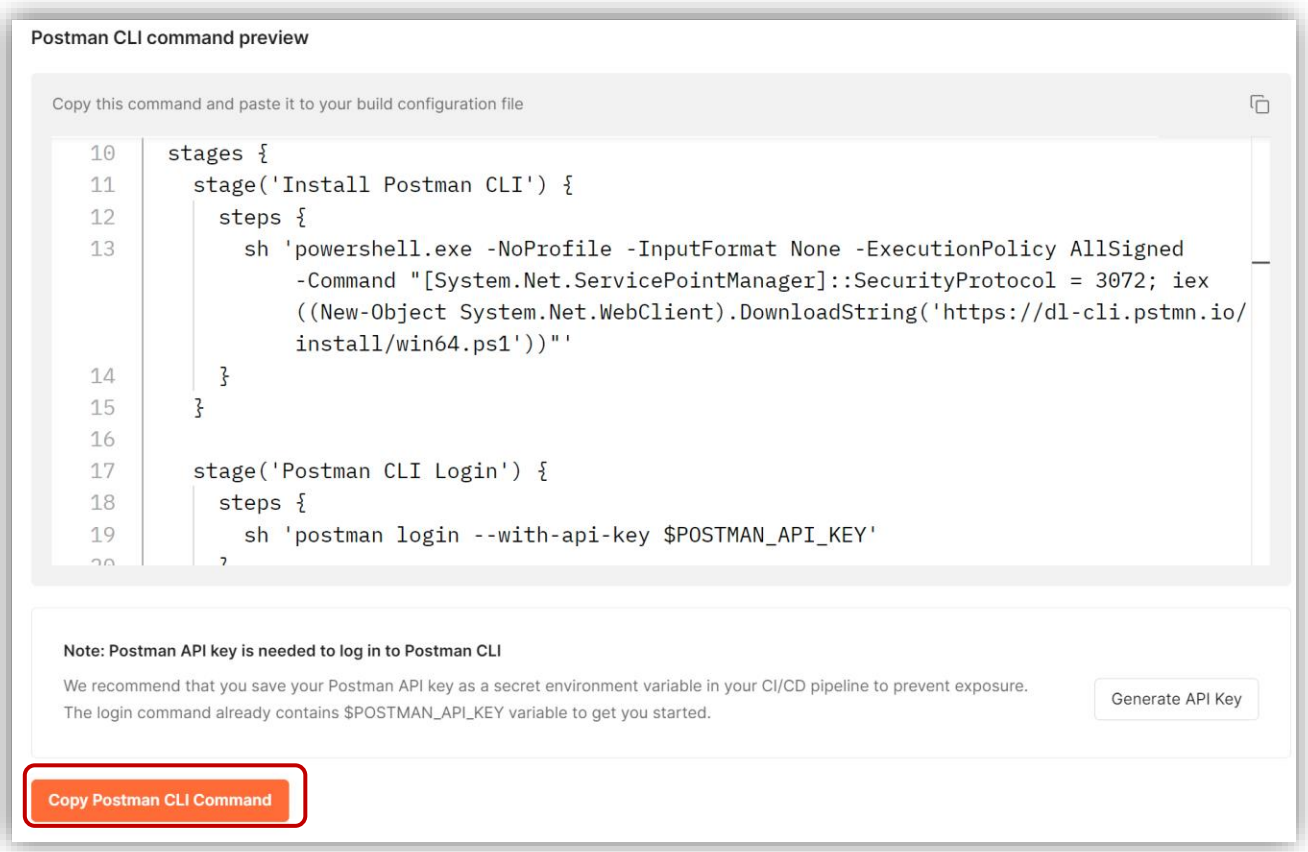

Login to Jenkins→Create new Job→ Select Pipeline job.


Add pipeline script:


```
pipeline {
  agent any

  tools {nodejs "nodejslocal"}

  stages {
    stage('Postman CLI Login') {
      steps {
        bat 'postman login --with-api-key PMAK-677e0390d962ab00016f56cb-
7c42c1c28842b29f9911e7d160a4830d2f'
      }
    }

    stage('Running collection') {
      steps {
        bat 'postman collection run "4924228-98df0c4c-5ef1-4f12-821e-6e22f59b674c" -d
"C:\\Automation\\postman-api-testing\\OnlineStoreAPI\\product_data.json" -g "C:\\Automation\\postman-
api-testing\\OnlineStoreAPI\\workspace.postman_globals.json" -r html'
      }
    }
  }
}
```

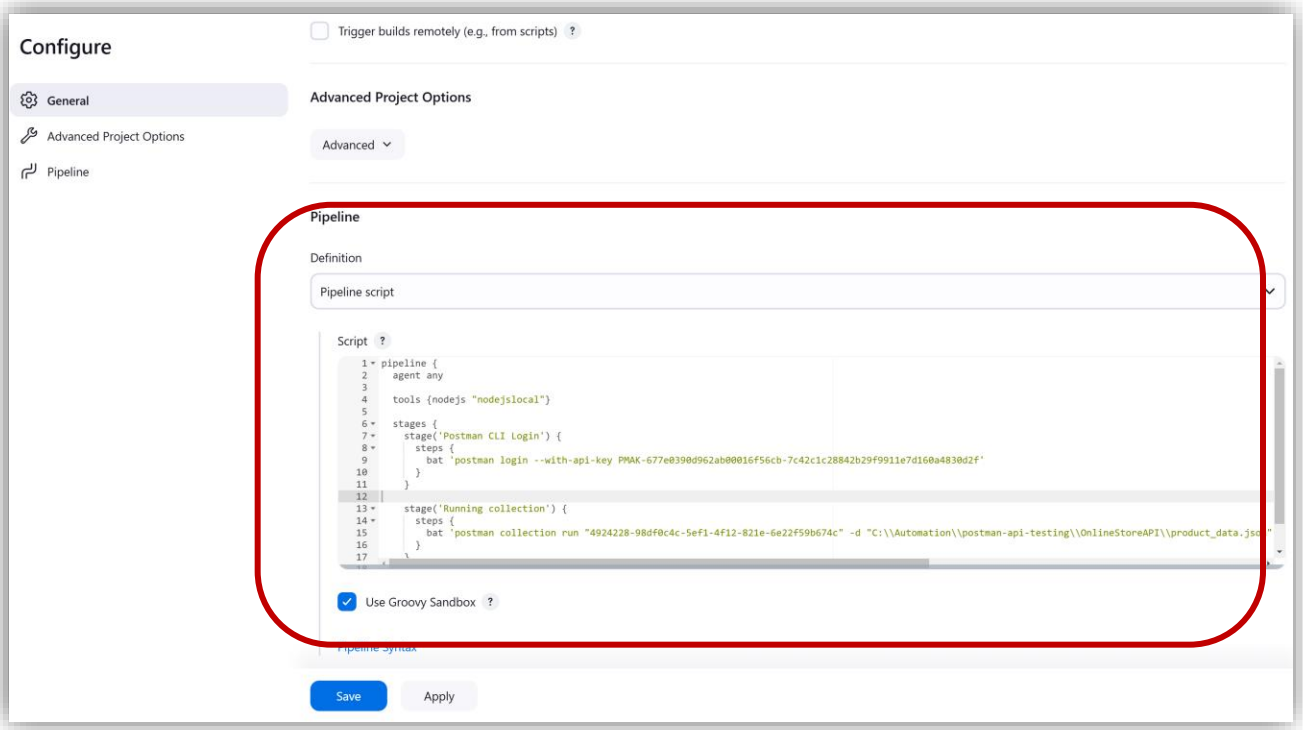
Configure
General
Advanced Project Options
Pipeline
Trigger builds remotely (e.g., from scripts)
Advanced Project Options
Advanced
Pipeline
Definition
Pipeline script
Script
pipeline {
agent any
tools {nodejs "nodejslocal"}
stages {
stage('Postman CLI Login') {
steps {
bat 'postman login --with-api-key PMAK-677e0390d962ab00016f56cb-7c42c1c28842b29f9911e7d160a4830d2f'
}
}
stage('Running collection') {
steps {
bat 'postman collection run "4924228-98df0c4c-5ef1-4f12-821e-6e22f59b674c" -d "C:\\Automation\\postman-api-testing\\OnlineStoreAPI\\product_data.jso
}
}
Use Groovy Sandbox
Save
Apply

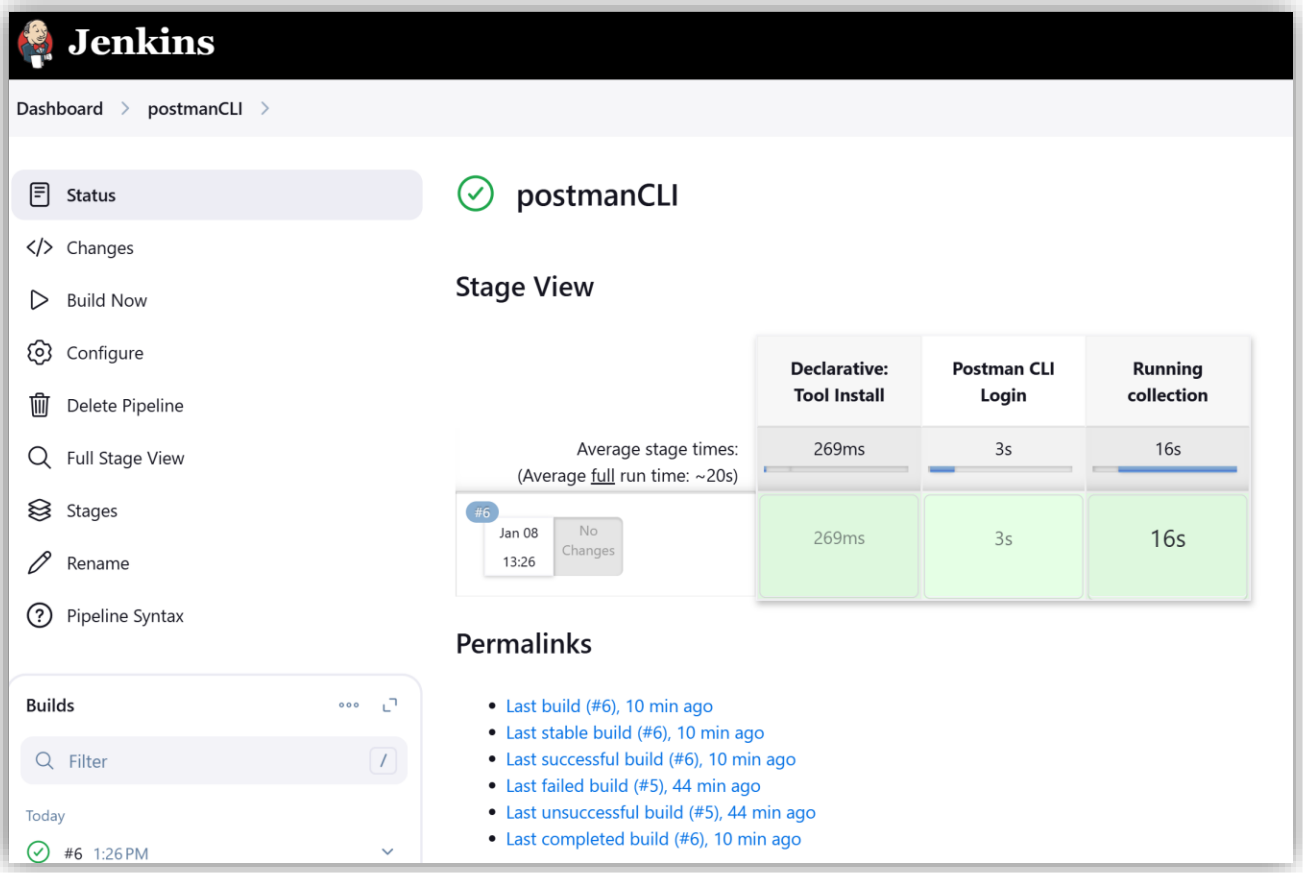
Jenkins
Dashboard
postmanCLI
Status
Changes
Build Now
Configure
Delete Pipeline
Full Stage View
Stages
Rename
Pipeline Syntax
Builds
Filter
Today
#6 1:26 PM
postmanCLI
Stage View
Declarative: Tool Install
Postman CLI Login
Running collection
Average stage times:
(Average full run time: ~20s)
269ms
3s
16s
#6
Jan 08
13:26
No Changes
269ms
3s
16s
Permalinks
Last build (#6), 10 min ago
Last stable build (#6), 10 min ago
Last successful build (#6), 10 min ago
Last failed build (#5), 44 min ago
Last unsuccessful build (#5), 44 min ago
Last completed build (#6), 10 min ago