

```
In [36]: import numpy as np
import pandas as pd
from sklearn import preprocessing
import matplotlib.pyplot as plt
plt.rcParams["font.size"] = 14
import seaborn as sns
sns.set(style="white") #white background style for seaborn plots
sns.set(style="whitegrid", color_codes=True)
import warnings
warnings.simplefilter(action='ignore')
```

```
In [37]: train_df=pd.read_csv(r"C:\Users\jangidi veena\OneDrive\Documents\jupyter\train.gender_s
train_df
```

Out[37]:

| | PassengerId | Survived | Pclass | Name | Sex | Age | SibSp | Parch | Ticket | Fare | Cabin | Embarked |
|-----|-------------|----------|--------|--|--------|------|-------|-------|------------------|---------|-------|----------|
| 0 | 1 | 0 | 3 | Braund, Mr. Owen Harris | male | 22.0 | 1 | 0 | A/5 21171 | 7.2500 | NaN | |
| 1 | 2 | 1 | 1 | Cumings, Mrs. John Bradley (Florence Briggs Th...) | female | 38.0 | 1 | 0 | PC 17599 | 71.2833 | C85 | |
| 2 | 3 | 1 | 3 | Heikkinen, Miss. Laina | female | 26.0 | 0 | 0 | STON/O2. 3101282 | 7.9250 | NaN | |
| 3 | 4 | 1 | 1 | Futrelle, Mrs. Jacques Heath (Lily May Peel) | female | 35.0 | 1 | 0 | 113803 | 53.1000 | C123 | |
| 4 | 5 | 0 | 3 | Allen, Mr. William Henry | male | 35.0 | 0 | 0 | 373450 | 8.0500 | NaN | |
| ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | |
| 886 | 887 | 0 | 2 | Montvila, Rev. Juozas | male | 27.0 | 0 | 0 | 211536 | 13.0000 | NaN | |
| 887 | 888 | 1 | 1 | Graham, Miss. Margaret Edith | female | 19.0 | 0 | 0 | 112053 | 30.0000 | B42 | |
| 888 | 889 | 0 | 3 | Johnston, Miss. Catherine Helen "Carrie" | female | NaN | 1 | 2 | W./C. 6607 | 23.4500 | NaN | |
| 889 | 890 | 1 | 1 | Behr, Mr. Karl Howell | male | 26.0 | 0 | 0 | 111369 | 30.0000 | C148 | |
| 890 | 891 | 0 | 3 | Dooley, Mr. Patrick | male | 32.0 | 0 | 0 | 370376 | 7.7500 | NaN | |

891 rows × 12 columns



```
In [38]: test_df=pd.read_csv(r"C:\Users\jangidi veena\OneDrive\Documents\jupyter\test.gender_sul
test_df
```

Out[38]:

| | PassengerId | Pclass | Name | Sex | Age | SibSp | Parch | Ticket | Fare | Cabin | Embarked |
|-----|-------------|--------|--|--------|------|-------|-------|--------------------|----------|-------|----------|
| 0 | 892 | 3 | Kelly, Mr. James | male | 34.5 | 0 | 0 | 330911 | 7.8292 | NaN | Q |
| 1 | 893 | 3 | Wilkes, Mrs. James (Ellen Needs) | female | 47.0 | 1 | 0 | 363272 | 7.0000 | NaN | S |
| 2 | 894 | 2 | Myles, Mr. Thomas Francis | male | 62.0 | 0 | 0 | 240276 | 9.6875 | NaN | Q |
| 3 | 895 | 3 | Wirz, Mr. Albert | male | 27.0 | 0 | 0 | 315154 | 8.6625 | NaN | S |
| 4 | 896 | 3 | Hirvonen, Mrs. Alexander (Helga E Lindqvist) | female | 22.0 | 1 | 1 | 3101298 | 12.2875 | NaN | S |
| ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... | ... |
| 413 | 1305 | 3 | Spector, Mr. Woolf | male | NaN | 0 | 0 | A.5. 3236 | 8.0500 | NaN | S |
| 414 | 1306 | 1 | Oliva y Ocana, Dona. Fermina | female | 39.0 | 0 | 0 | PC 17758 | 108.9000 | C105 | C |
| 415 | 1307 | 3 | Saether, Mr. Simon Sivertsen | male | 38.5 | 0 | 0 | SOTON/O.Q. 3101262 | 7.2500 | NaN | S |
| 416 | 1308 | 3 | Ware, Mr. Frederick | male | NaN | 0 | 0 | 359309 | 8.0500 | NaN | S |
| 417 | 1309 | 3 | Peter, Master. Michael J | male | NaN | 1 | 1 | 2668 | 22.3583 | NaN | C |

418 rows × 11 columns



```
In [39]: train_df.head()
```

```
Out[39]:
```

| | PassengerId | Survived | Pclass | Name | Sex | Age | SibSp | Parch | Ticket | Fare | Cabin | Emba |
|---|-------------|----------|--------|---|--------|------|-------|-------|------------------|---------|-------|------|
| 0 | 1 | 0 | 3 | Braund, Mr. Owen Harris | male | 22.0 | 1 | 0 | A/5 21171 | 7.2500 | NaN | |
| 1 | 2 | 1 | 1 | Cumings, Mrs. John Bradley (Florence Briggs Th... | female | 38.0 | 1 | 0 | PC 17599 | 71.2833 | C85 | |
| 2 | 3 | 1 | 3 | Heikkinen, Miss. Laina | female | 26.0 | 0 | 0 | STON/O2. 3101282 | 7.9250 | NaN | |
| 3 | 4 | 1 | 1 | Futrelle, Mrs. Jacques Heath (Lily May Peel) | female | 35.0 | 1 | 0 | 113803 | 53.1000 | C123 | |
| 4 | 5 | 0 | 3 | Allen, Mr. William Henry | male | 35.0 | 0 | 0 | 373450 | 8.0500 | NaN | |

```
In [40]: train_df.shape
```

```
Out[40]: (891, 12)
```

```
In [41]: test_df.head()
```

```
Out[41]:
```

| | PassengerId | Pclass | Name | Sex | Age | SibSp | Parch | Ticket | Fare | Cabin | Embarked |
|---|-------------|--------|--|--------|------|-------|-------|---------|---------|-------|----------|
| 0 | 892 | 3 | Kelly, Mr. James | male | 34.5 | 0 | 0 | 330911 | 7.8292 | NaN | Q |
| 1 | 893 | 3 | Wilkes, Mrs. James (Ellen Needs) | female | 47.0 | 1 | 0 | 363272 | 7.0000 | NaN | S |
| 2 | 894 | 2 | Myles, Mr. Thomas Francis | male | 62.0 | 0 | 0 | 240276 | 9.6875 | NaN | Q |
| 3 | 895 | 3 | Wirz, Mr. Albert | male | 27.0 | 0 | 0 | 315154 | 8.6625 | NaN | S |
| 4 | 896 | 3 | Hirvonen, Mrs. Alexander (Helga E Lindqvist) | female | 22.0 | 1 | 1 | 3101298 | 12.2875 | NaN | S |

```
In [42]: test_df.shape
```

```
Out[42]: (418, 11)
```

In [74]: train_df.describe()

Out[74]:

| | PassengerId | Survived | Pclass | Age | SibSp | Parch | Fare |
|--------------|-------------|------------|------------|------------|------------|------------|------------|
| count | 891.000000 | 891.000000 | 891.000000 | 714.000000 | 891.000000 | 891.000000 | 891.000000 |
| mean | 446.000000 | 0.383838 | 2.308642 | 29.699118 | 0.523008 | 0.381594 | 32.204208 |
| std | 257.353842 | 0.486592 | 0.836071 | 14.526497 | 1.102743 | 0.806057 | 49.693429 |
| min | 1.000000 | 0.000000 | 1.000000 | 0.420000 | 0.000000 | 0.000000 | 0.000000 |
| 25% | 223.500000 | 0.000000 | 2.000000 | 20.125000 | 0.000000 | 0.000000 | 7.910400 |
| 50% | 446.000000 | 0.000000 | 3.000000 | 28.000000 | 0.000000 | 0.000000 | 14.454200 |
| 75% | 668.500000 | 1.000000 | 3.000000 | 38.000000 | 1.000000 | 0.000000 | 31.000000 |
| max | 891.000000 | 1.000000 | 3.000000 | 80.000000 | 8.000000 | 6.000000 | 512.329200 |

In [44]: train_df.info()

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 12 columns):
#   Column          Non-Null Count  Dtype
---  -
0   PassengerId      891 non-null    int64
1   Survived         891 non-null    int64
2   Pclass           891 non-null    int64
3   Name             891 non-null    object
4   Sex              891 non-null    object
5   Age              714 non-null    float64
6   SibSp            891 non-null    int64
7   Parch            891 non-null    int64
8   Ticket           891 non-null    object
9   Fare             891 non-null    float64
10  Cabin            204 non-null    object
11  Embarked         889 non-null    object
dtypes: float64(2), int64(5), object(5)
memory usage: 83.7+ KB
```

In [73]: test_df.describe()

Out[73]:

| | PassengerId | Pclass | Age | SibSp | Parch | Fare |
|--------------|-------------|------------|------------|------------|------------|------------|
| count | 418.000000 | 418.000000 | 332.000000 | 418.000000 | 418.000000 | 417.000000 |
| mean | 1100.500000 | 2.265550 | 30.272590 | 0.447368 | 0.392344 | 35.627188 |
| std | 120.810458 | 0.841838 | 14.181209 | 0.896760 | 0.981429 | 55.907576 |
| min | 892.000000 | 1.000000 | 0.170000 | 0.000000 | 0.000000 | 0.000000 |
| 25% | 996.250000 | 1.000000 | 21.000000 | 0.000000 | 0.000000 | 7.895800 |
| 50% | 1100.500000 | 3.000000 | 27.000000 | 0.000000 | 0.000000 | 14.454200 |
| 75% | 1204.750000 | 3.000000 | 39.000000 | 1.000000 | 0.000000 | 31.500000 |
| max | 1309.000000 | 3.000000 | 76.000000 | 8.000000 | 9.000000 | 512.329200 |

```
In [46]: test_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 418 entries, 0 to 417
Data columns (total 11 columns):
#   Column          Non-Null Count  Dtype
---  -
0   PassengerId      418 non-null    int64
1   Pclass           418 non-null    int64
2   Name             418 non-null    object
3   Sex              418 non-null    object
4   Age              332 non-null    float64
5   SibSp            418 non-null    int64
6   Parch            418 non-null    int64
7   Ticket           418 non-null    object
8   Fare             417 non-null    float64
9   Cabin            91 non-null     object
10  Embarked         418 non-null    object
dtypes: float64(2), int64(4), object(5)
memory usage: 36.1+ KB
```


```
In [47]: train_df.isnull().sum()
```

```
Out[47]: PassengerId      0
Survived                0
Pclass                  0
Name                    0
Sex                     0
Age                    177
SibSp                   0
Parch                   0
Ticket                  0
Fare                    0
Cabin                   687
Embarked                 2
dtype: int64
```

```
In [48]: test_df.isnull().sum()
```

```
Out[48]: PassengerId      0
Pclass                  0
Name                    0
Sex                     0
Age                     86
SibSp                   0
Parch                   0
Ticket                  0
Fare                     1
Cabin                   327
Embarked                 0
dtype: int64
```

```
In [49]: ax = train_df["Age"].hist(bins=15, density=True, stacked=True, color='cyan', alpha=0.6)
train_df["Age"].plot(kind='density', color='teal')
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

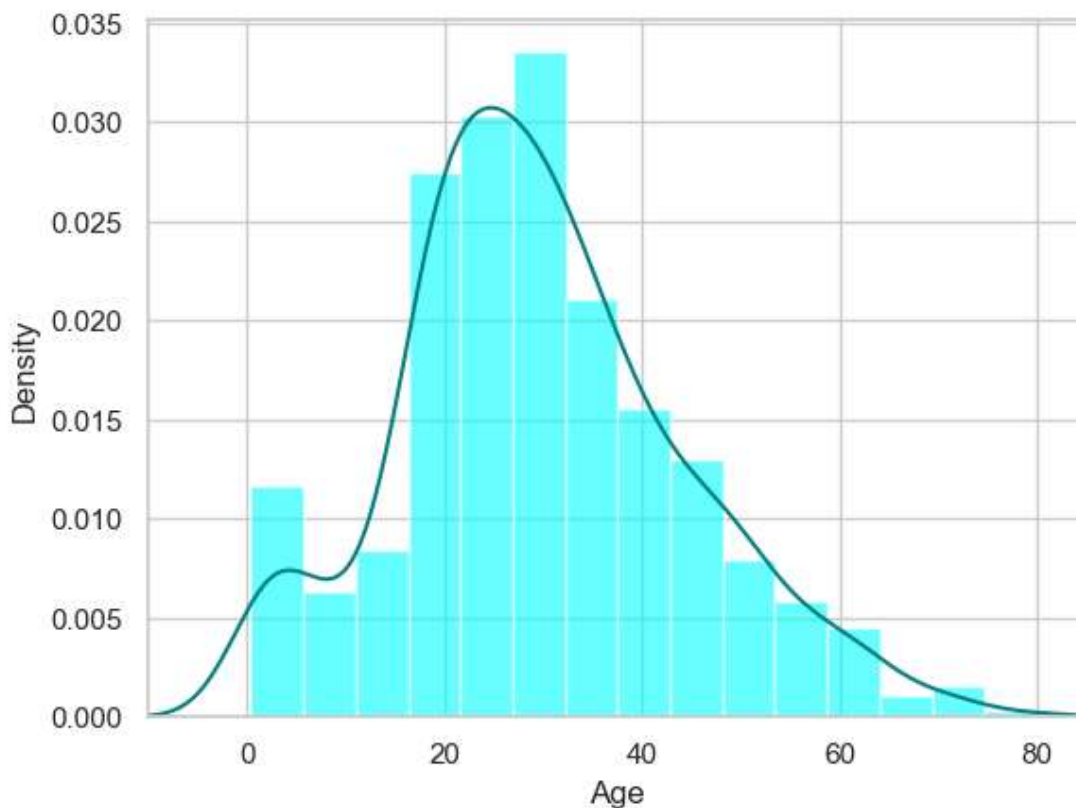

```
In [50]: print((train_df['Cabin'].isnull().sum()/train_df.shape[0])*100)
```

77.10437710437711

```
In [51]: print(train_df["Age"].mean(skipna=True))
print(train_df["Age"].median(skipna=True))
```

29.69911764705882
28.0

```
In [52]: print((train_df['Embarked'].isnull().sum()/train_df.shape[0])*100)
```

0.22446689113355783

```
In [53]: print('Boarded passengers grouped by port of embarkation (C = Cherbourg, Q = Queenstown, S = Southampton)')
print(train_df['Embarked'].value_counts())
sns.countplot(x='Embarked', data=train_df, palette='Set2')
plt.show()
```

Boarded passengers grouped by port of embarkation (C = Cherbourg, Q = Queenstown, S = Southampton):


Embarked

S 644

C 168

Q 77

Name: count, dtype: int64

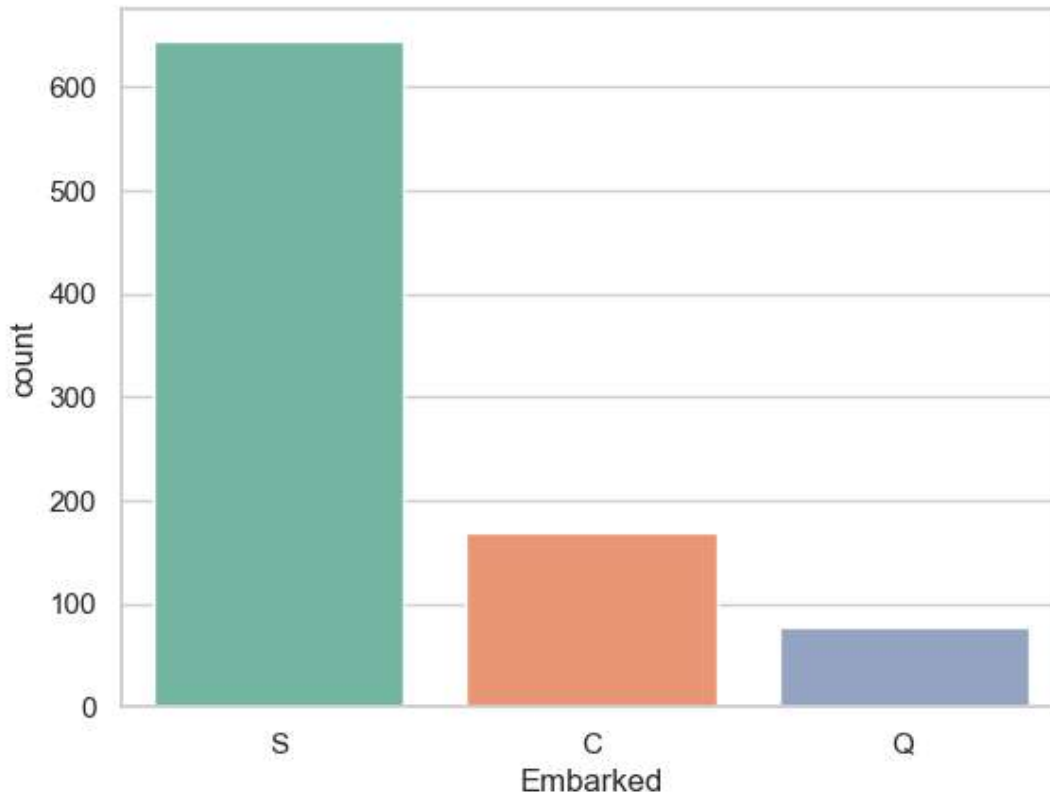

```
In [54]: print(train_df['Embarked'].value_counts().idxmax())
```

S

```
In [75]: train_data = train_df.copy()
train_data["Age"].fillna(train_df["Age"].median(skipna=True), inplace=True)
train_data["Embarked"].fillna(train_df["Embarked"].value_counts().idxmax(), inplace=True)
train_data.drop('Cabin', axis=1, inplace=True)
```



```
In [76]: train_data.isnull().sum()
```


```
Out[76]: PassengerId    0
Survived    0
Pclass      0
Name        0
Sex         0
Age         0
SibSp       0
Parch       0
Ticket      0
Fare        0
Embarked    0
dtype: int64
```

```
In [77]: train_data.head()
```

```
Out[77]:
```

| | PassengerId | Survived | Pclass | Name | Sex | Age | SibSp | Parch | Ticket | Fare | Embarked |
|---|-------------|----------|--------|--|--------|------|-------|-------|------------------|---------|----------|
| 0 | 1 | 0 | 3 | Braund, Mr. Owen Harris | male | 22.0 | 1 | 0 | A/5 21171 | 7.2500 | S |
| 1 | 2 | 1 | 1 | Cumings, Mrs. John Bradley (Florence Briggs Th...) | female | 38.0 | 1 | 0 | PC 17599 | 71.2833 | C |
| 2 | 3 | 1 | 3 | Heikkinen, Miss. Laina | female | 26.0 | 0 | 0 | STON/O2. 3101282 | 7.9250 | S |
| 3 | 4 | 1 | 1 | Futrelle, Mrs. Jacques Heath (Lily May Peel) | female | 35.0 | 1 | 0 | 113803 | 53.1000 | S |
| 4 | 5 | 0 | 3 | Allen, Mr. William Henry | male | 35.0 | 0 | 0 | 373450 | 8.0500 | S |

```
In [72]: plt.figure(figsize=(15,8))
ax = train_df["Age"].hist(bins=15, density=True, stacked=True, color='teal', alpha=0.6)
train_df["Age"].plot(kind='density', color='teal')
ax = train_data["Age"].hist(bins=15, density=True, stacked=True, color='orange',alpha=0.6)
train_data["Age"].plot(kind='density', color='orange')
ax.legend(['Raw Age', 'Adjusted Age'])
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

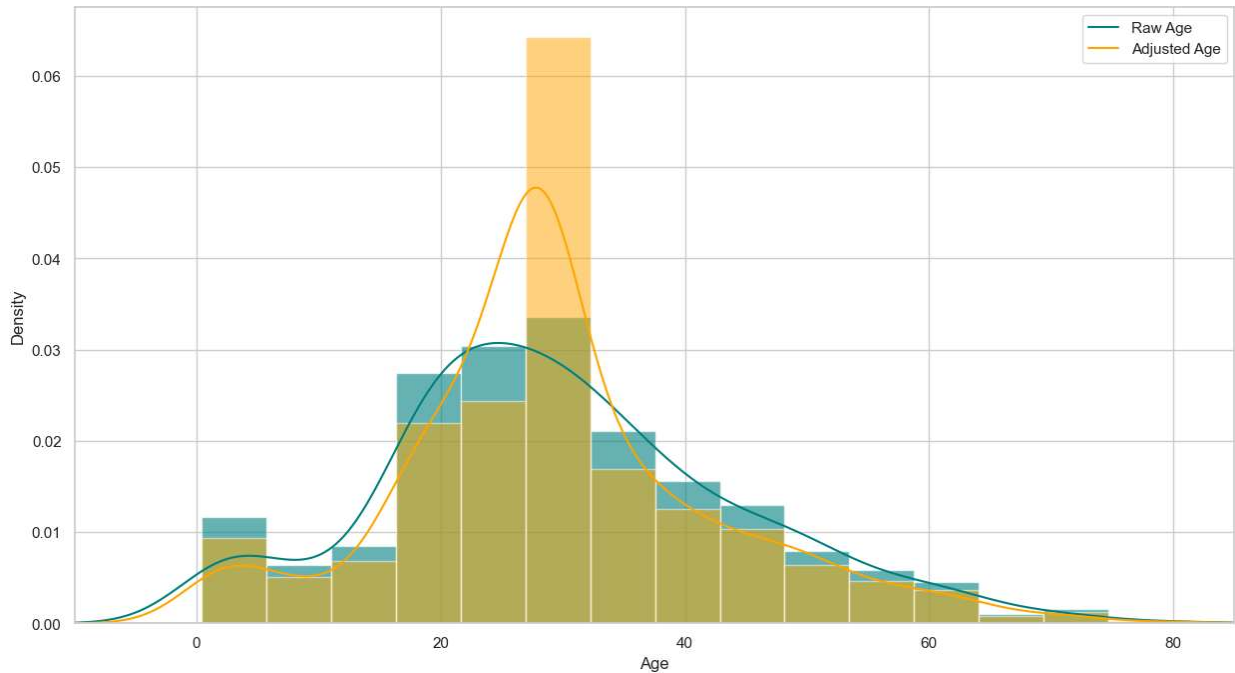

```
In [78]: ## Create categorical variable for traveling alone
train_data['TravelAlone']=np.where((train_data["SibSp"]+train_data["Parch"])>0,0,1)
train_data.drop('SibSp', axis=1, inplace=True)
train_data.drop('Parch', axis=1, inplace=True)
```

```
In [79]: training=pd.get_dummies(train_data, columns=["Pclass","Embarked","Sex"])
training.drop('Sex_female', axis=1, inplace=True)
training.drop('PassengerId', axis=1, inplace=True)
training.drop('Name', axis=1, inplace=True)
training.drop('Ticket', axis=1, inplace=True)
final_train = training
final_train.head()
```

Out[79]:

| | Survived | Age | Fare | TravelAlone | Pclass_1 | Pclass_2 | Pclass_3 | Embarked_C | Embarked_Q | Embarked_S |
|---|----------|------|---------|-------------|----------|----------|----------|------------|------------|------------|
| 0 | 0 | 22.0 | 7.2500 | 0 | False | False | True | False | False | |
| 1 | 1 | 38.0 | 71.2833 | 0 | True | False | False | True | False | 1 |
| 2 | 1 | 26.0 | 7.9250 | 1 | False | False | True | False | False | |
| 3 | 1 | 35.0 | 53.1000 | 0 | True | False | False | False | False | |
| 4 | 0 | 35.0 | 8.0500 | 1 | False | False | True | False | False | |

```
In [80]: test_df.isnull().sum()
```


```
Out[80]: PassengerId      0
Pclass      0
Name        0
Sex         0
Age        86
SibSp       0
Parch       0
Ticket      0
Fare        1
Cabin      327
Embarked    0
dtype: int64
```

```
In [81]: test_data = test_df.copy()
test_data["Age"].fillna(train_df["Age"].median(skipna=True), inplace=True)
test_data["Fare"].fillna(train_df["Fare"].median(skipna=True), inplace=True)
test_data.drop('Cabin', axis=1, inplace=True)
test_data['TravelAlone']=np.where((test_data["SibSp"]+test_data["Parch"])>0, 0, 1)
test_data.drop('SibSp', axis=1, inplace=True)
test_data.drop('Parch', axis=1, inplace=True)
testing = pd.get_dummies(test_data, columns=["Pclass","Embarked","Sex"])
testing.drop('Sex_female', axis=1, inplace=True)
testing.drop('PassengerId', axis=1, inplace=True)
testing.drop('Name', axis=1, inplace=True)
testing.drop('Ticket', axis=1, inplace=True)
final_test = testing
final_test.head()
```


```
Out[81]:
```

| | Age | Fare | TravelAlone | Pclass_1 | Pclass_2 | Pclass_3 | Embarked_C | Embarked_Q | Embarked_S | Sex |
|---|------|---------|-------------|----------|----------|----------|------------|------------|------------|-----|
| 0 | 34.5 | 7.8292 | 1 | False | False | True | False | True | False | |
| 1 | 47.0 | 7.0000 | 0 | False | False | True | False | False | True | |
| 2 | 62.0 | 9.6875 | 1 | False | True | False | False | True | False | |
| 3 | 27.0 | 8.6625 | 1 | False | False | True | False | False | True | |
| 4 | 22.0 | 12.2875 | 0 | False | False | True | False | False | True | |

```
In [83]: plt.figure(figsize=(15,8))
ax = sns.kdeplot(final_train["Age"][final_train.Survived == 1], color="darkturquoise", shade=True)
sns.kdeplot(final_train["Age"][final_train.Survived == 0], color="lightcoral", shade=True)
plt.legend(['Survived', 'Died'])
plt.title('Density Plot of Age for Surviving Population and Deceased Population')
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

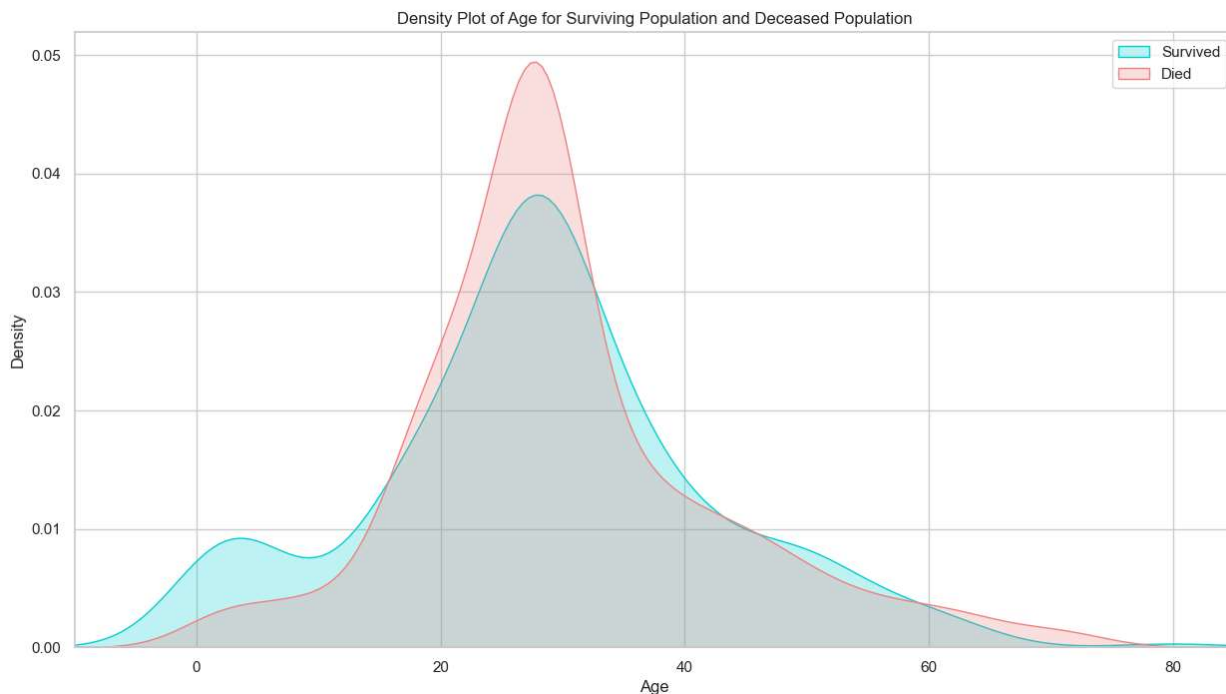

```
In [84]: plt.figure(figsize=(20,8))
avg_survival_byage = final_train[["Age", "Survived"]].groupby(['Age'], as_index=False)
g = sns.barplot(x='Age', y='Survived', data=avg_survival_byage, color="LightSeaGreen")
plt.show()
```

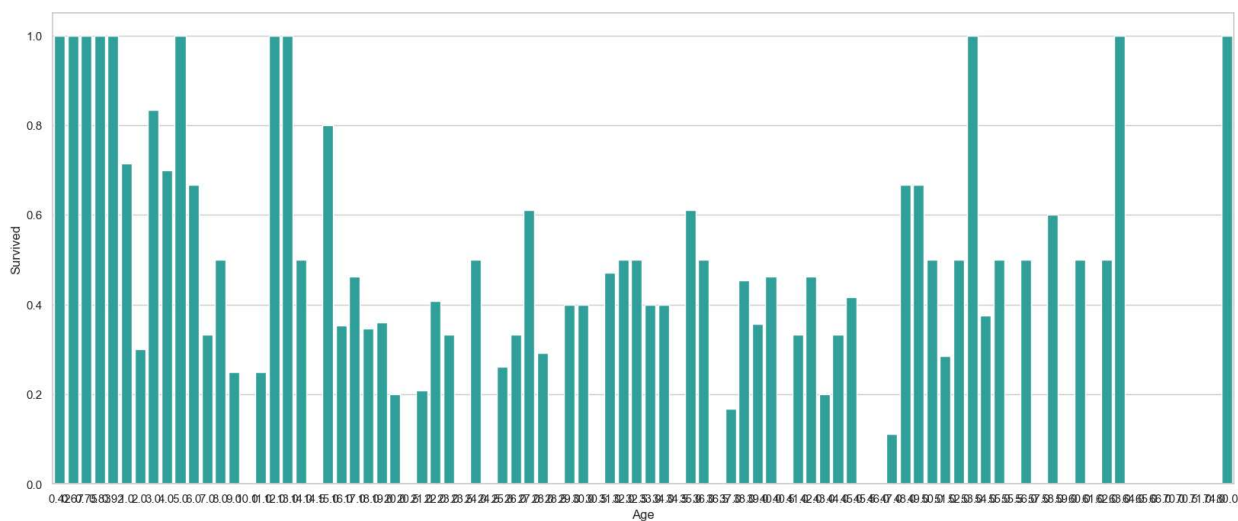


```
In [85]: final_train['IsMinor']=np.where(final_train['Age']<=16, 1, 0)
print(final_train['IsMinor'])
```

```
0      0
1      0
2      0
3      0
4      0
..
886    0
887    0
888    0
889    0
890    0
Name: IsMinor, Length: 891, dtype: int32
```


```
In [86]: final_test['IsMinor']=np.where(final_test['Age']<=16, 1, 0)
print(final_test['IsMinor'])
```

```
0      0
1      0
2      0
3      0
4      0
..
413    0
414    0
415    0
416    0
417    0
Name: IsMinor, Length: 418, dtype: int32
```

```
In [87]: sns.barplot(x='TravelAlone', y='Survived', data=final_train, color="mediumturquoise")  
plt.show()
```

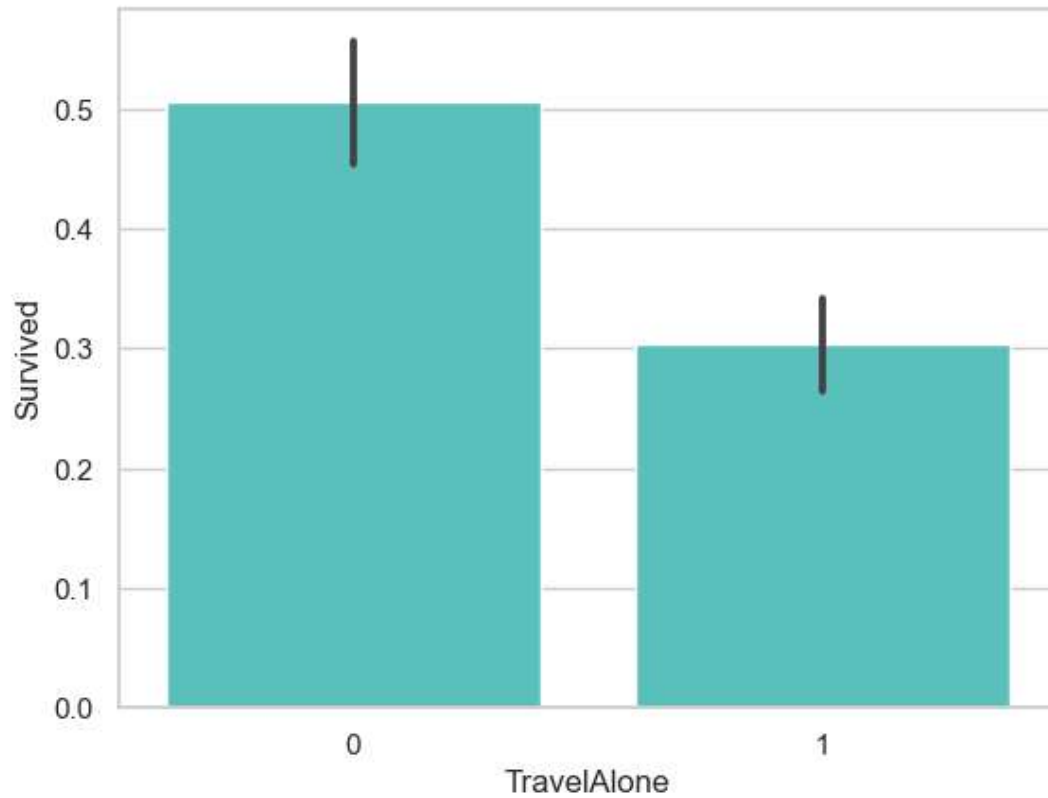

```
In [88]: import seaborn as sns
import matplotlib.pyplot as plt
# Assuming 'train_df' is your DataFrame containing the data
sns.barplot(x='Sex', y='Survived', data=train_df, color='aquamarine')
plt.show()
```

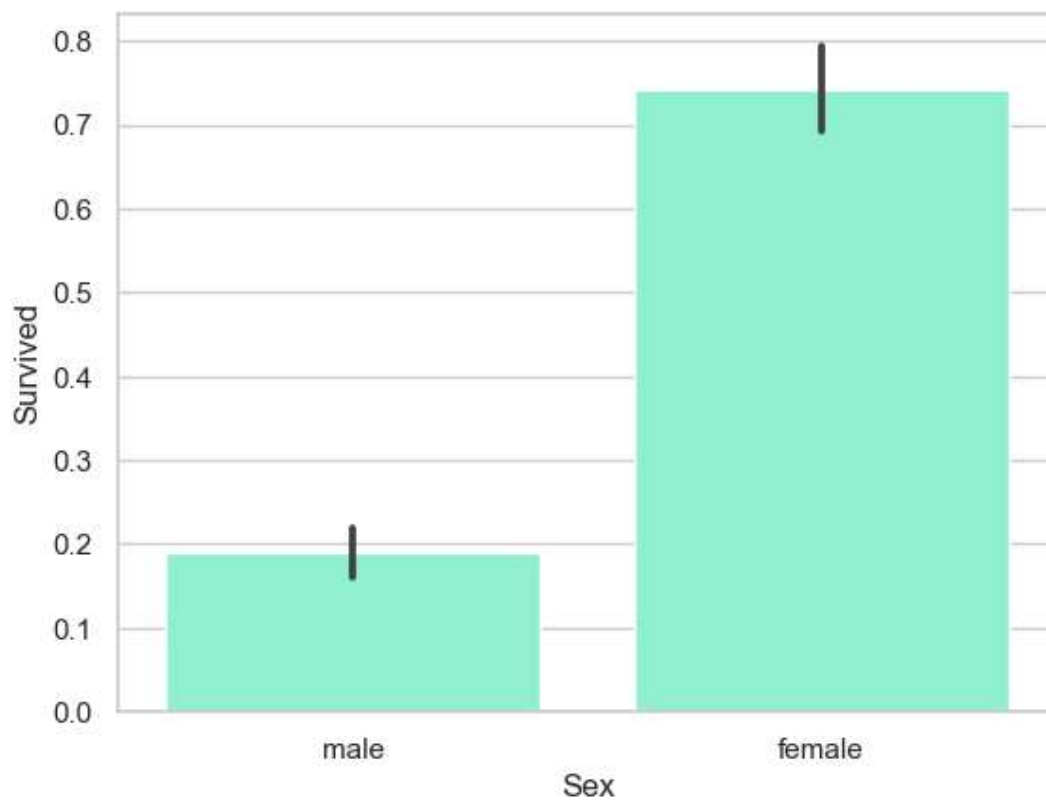

In []: