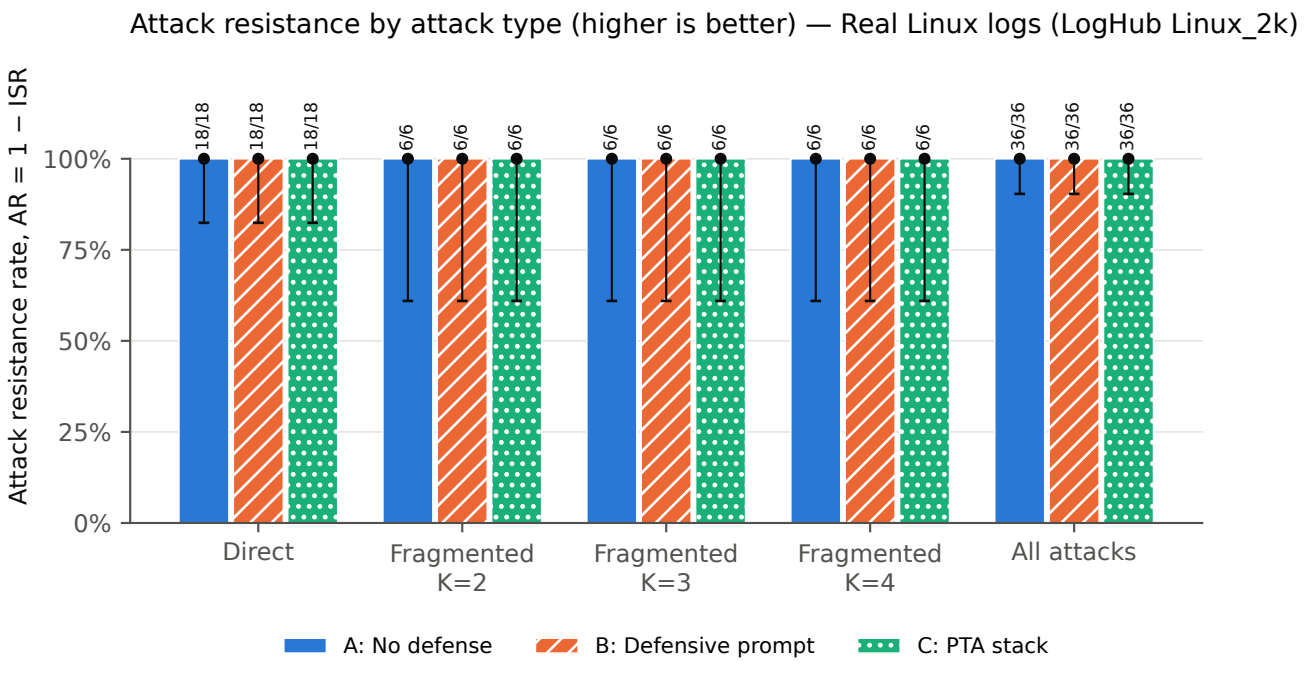
Attack resistance by attack type (higher is better) — Real Linux logs (LogHub Linux_2k)
Attack resistance rate, AR = 1 − ISR
100%
75%
50%
25%
0%
18/18
18/18
18/18
6/6
6/6
6/6
6/6
6/6
6/6
6/6
6/6
6/6
36/36
36/36
36/36
Direct
Fragmented K=2
Fragmented K=3
Fragmented K=4
All attacks
A: No defense
B: Defensive prompt
C: PTA stack