


P11: HERENCIA SIMPLE

P11: Alex Choque Vega.

C.I.: 13183020

1.- 5 ejemplos de herencia simple

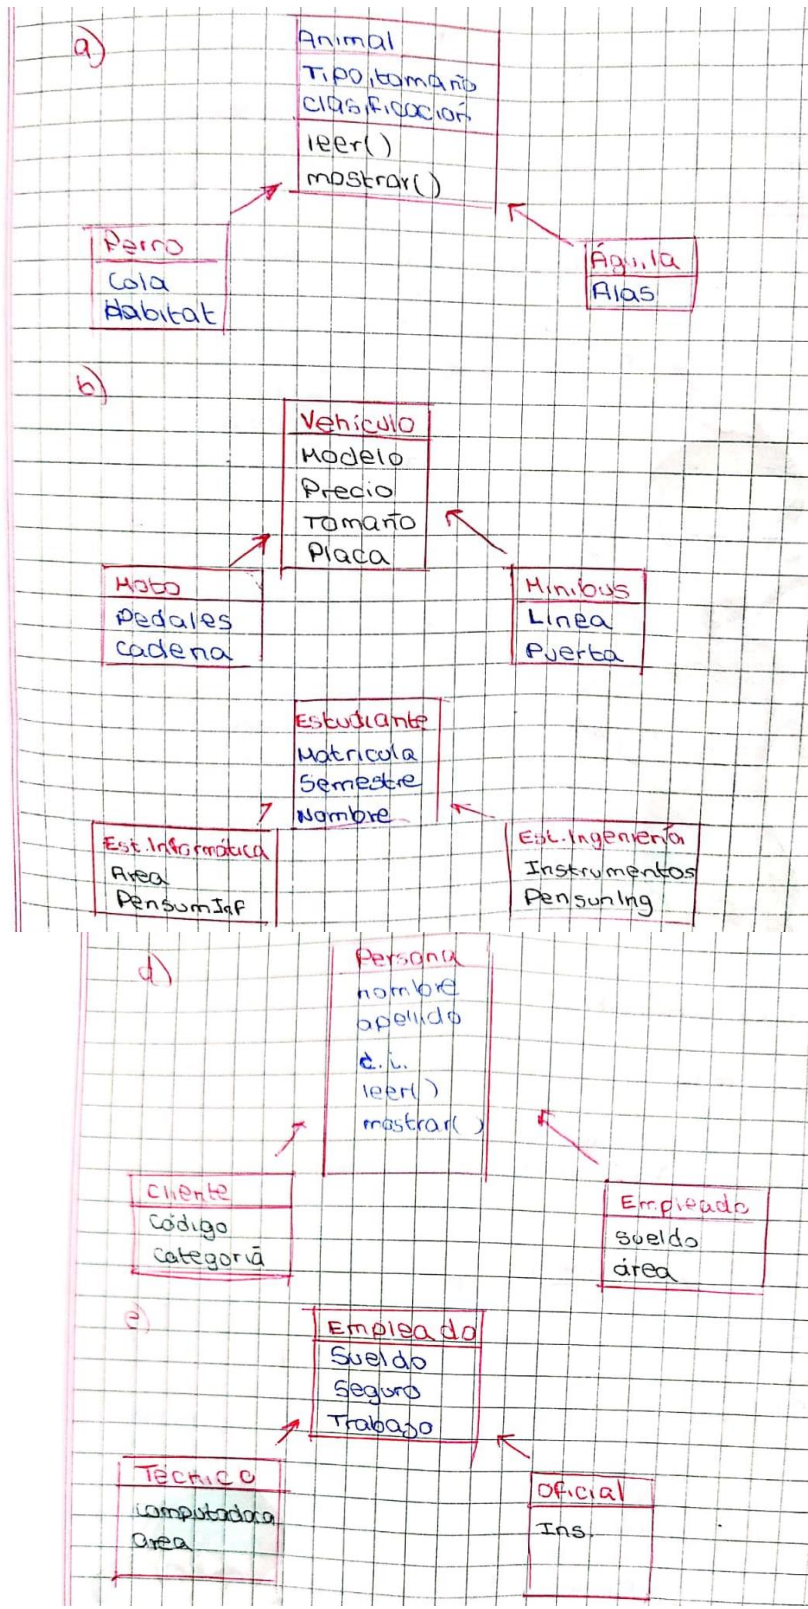

(II) Escogemos el caso b)

vehículo

```
class persona {
```

```
protected
```

```
String modelo;
```

```
double precio
```

```
String tamaño
```

```
String placa
```

```
public
```

```
vehículo() {
```

```
    modelo ← "Toyota";
```

```
    precio ← 238121;
```

```
    tamaño ← "Grande";
```

```
    placa ← "123LP";
```

```
}
```

```
vehículo (String a, String b, String c) {
```

```
    modelo ← a;
```

```
    precio ← 281000;
```

```
    tamaño ← b;
```

```
    placa ← c;
```

```
}
```

```
método leer() {
```

```
    read(modelo, precio, tamaño, placa); }
```

```
método mostrar() {
```

```
    print(modelo, precio, tamaño, placa); }
```

```
método obt m() {
```

```
    return(modelo); }
```

```
método obt pre() {
```

```
    return(precio); }
```



```
class moto extends Vehiculo{
```

```
    private
```

```
        int pedales;
```

```
        string cadenas;
```

```
    public (int a, string b){
```

```
        super(a);
```

```
        pedales ← a;
```

```
        cadenas ← b;
```

```
    }
```

```
    obtPed() {
```

```
        return(pedales);
```

```
    método leer() {
```

```
        read(pedales, cadenas);
```

```
        super.leer();
```

```
    método mostrar() {
```

```
        print(pedales, cadenas);
```

```
        super.mostrar();
```

```
class Minibus extends Vehiculo{
```

```
    private
```

```
        int linea;
```

```
        string puerta;
```

```
    public
```

```
        Minibus() { super();
```

```
            linea ← 848;
```

```
            puerta ← "automática";
```

```
        }
```

```
    método leer() {
```

```
        super.leer();
```

```
        read(linea, puerta);
```

```
    método mostrar() {
```

```
        super.mostrar();
```

```
        read(linea, puerta);
```

```
    } // fin
```

