

Network analysis for information retrieval

Julien Velcin

Master MALIA-MIASHS

2023-2024

(part 3/4)

Outline

- Motivation
 - ubiquity of information networks
 - applications (in particular to IR)
 - importance of indexing
- Representation of documents
 - sparse representations
 - dense representations
 - topic models
- Network analysis
 - spectral clustering, modularity
 - representation learning for graphs
- Analyzing information networks
 - Graph Neural Networks


2

Network analysis

Network analysis for information retrieval, M2 MALIA-MIASHS, Julien Velcin

Network science

- New discipline (early 2000s)
- Heavily relies on (many) previous works, in particular using **graph theory**, but not only
- Various network structures sharing similar properties (metabolic networks, WWW, social networks...)
- Closely related to the field of **complex systems** (Barabási, 2016)

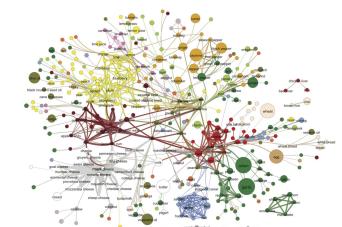



Different networks, same graph

Network	Nodes	Links	Directed / Undirected	N	L	$\langle k \rangle$
Internet	Routers	Internet connections	Undirected	192,244	609,066	6.34
WWW	Webpages	Links	Directed	325,729	1,497,134	4.60
Power Grid	Power plants, transformers	Cables	Undirected	4,941	6,594	2.67
Mobile-Phone Calls	Subscribers	Calls	Directed	36,595	91,826	2.51
Email	Email addresses	Emails	Directed	57,194	103,731	1.81
Science Collaboration	Scientists	Co-authorships	Undirected	23,133	93,437	8.08
Actor Network	Actors	Co-acting	Undirected	702,388	29,397,908	83.71
Citation Network	Papers	Citations	Directed	449,673	4,689,479	10.43
E. Coli Metabolism	Metabolites	Chemical reactions	Directed	1,039	5,802	5.58
Protein Interactions	Proteins	Binding interactions	Undirected	2,018	2,930	2.90

from: (Barabási, 2016)

5

Because a picture is worth a 1000 words

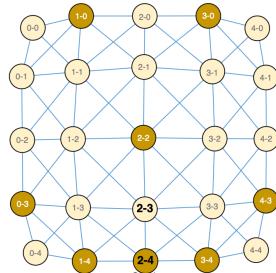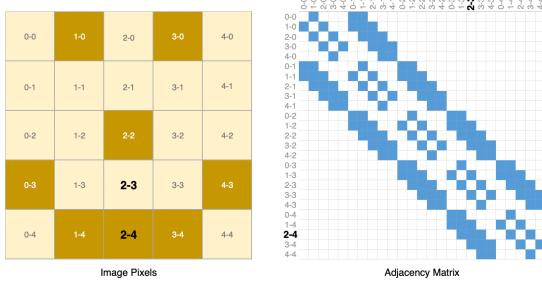

<https://distill.pub/2021/gnn-intro/>


7

Basics on graphs

- $G = (V, E, W)$ is usually coded with its adjacency matrix A
- Degrees:
 - If G is **undirected**, the degree of G is the sum of W of incident nodes (number of neighbors for unweighted G)
 - If G is **directed**, the in-degree of G is the sum of W for incoming edges and out-degree of G is the sum of W for outgoing edges (or number if G is unweighted)
- The powers of A is related to the paths
 - A^k encodes the paths of length k
 - can be approximated by random walks

6

Some datasets

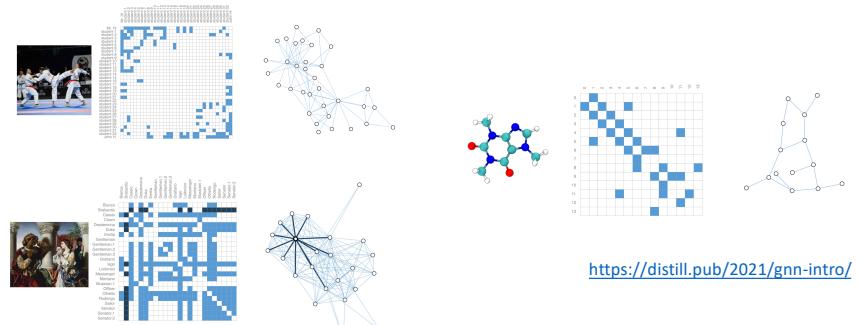

<https://distill.pub/2021/gnn-intro/>

8

Proximity measures: from local to global

- One-order proximity: direct links
 - see A
- Two-order proximity: similar neighborhood
 - see A.A
- Higher-order proximity: related to the distance in the graph
 - see A^k
- Approximation by *random walks*

Local proximity measures

$$S[u, v] = |\mathcal{N}(u) \cap \mathcal{N}(v)|$$

$$S_{\text{Salton}}[u, v] = \frac{2|\mathcal{N}(u) \cap \mathcal{N}(v)|}{\sqrt{d_u d_v}}$$

$$S_{\text{Sorenson}}[u, v] = \frac{2|\mathcal{N}(u) \cap \mathcal{N}(v)|}{d_u + d_v}$$

$$S_{\text{Jaccard}}[u, v] = \frac{|\mathcal{N}(u) \cap \mathcal{N}(v)|}{|\mathcal{N}(u) \cup \mathcal{N}(v)|}$$

9

10

Global proximity measures

$$S_{\text{Katz}}[u, v] = \sum_{i=1}^{\infty} \beta^i A^i[u, v]$$

solved by a spectral decomposition: $S_{\text{Katz}} = (\mathbf{I} - \beta \mathbf{A})^{-1} - \mathbf{I}$

$$S_{\text{RW}}[u, v] = \mathbf{q}_u[v] + \mathbf{q}_v[u] \quad (\text{Personalized Page Rank})$$

with: $\mathbf{q}_u = (1 - c)(\mathbf{I} - c\mathbf{P})^{-1}\mathbf{e}_u$

↑
transition matrix \mathbf{AD}^{-1}
↑
OHE of the node
↑

Centrality measures

- Degree centrality: simply based on node degree
- Betweenness centrality: number of times a node lies on the shortest path between other nodes
- Closeness centrality: sum of shortest paths to all other nodes
- EigenCentrality: importance based on eigen decomposition
- PageRank: eigenCentrality + direction + weight

11

12

Eigen centrality and PageRank


- Centrality score of vertex v is defined as: $x_v = \frac{1}{\lambda} \sum_{n \in N(v)} x_n$
- It can be rewritten as: $\mathbf{A} \cdot \mathbf{x} = \lambda \cdot \mathbf{x}$
- Following the Perron–Frobenius theorem, we know we have to choose the vector associated to the *highest eigenvalue*
- Google PR is a generalization to a weighted, directed graph

13

Clustering coefficient

- CC measures the proportion of closed triangles in a node's local neighborhood

$$c_u = \frac{|(v_i, v_j) \in E : v_i, v_j \in N(u)|}{\binom{d_u}{2}}$$

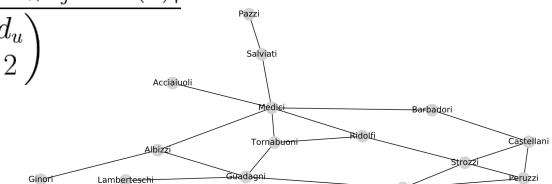

14

Power law

- Power law describes relations between the objects in the network
 - Very characteristic for the networks generated within some kind of social process
 - Describes **scale invariance** found in many natural phenomena (including physics, biology, sociology, economy and linguistics)
- In the analysis of information networks, we usually deal with power law distributed graphs

15

Power law on the Web


- In the context of Web the power-law appears in many cases:
 - Web pages sizes
 - Web page connectivity
 - Web connected components' size
 - Web page access statistics
 - Web Browsing behavior
- Formally, power law describing web page degrees are:

$$\Pr(\text{out-degree is } k) \propto 1/k^{a_{\text{out}}}$$


$$\Pr(\text{in-degree is } k) \propto 1/k^{a_{\text{in}}}$$

(This property has been preserved as the Web has grown)

16

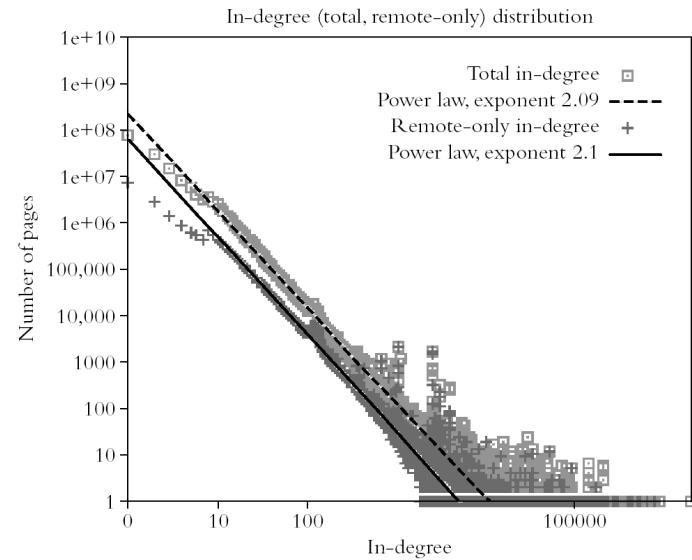

17

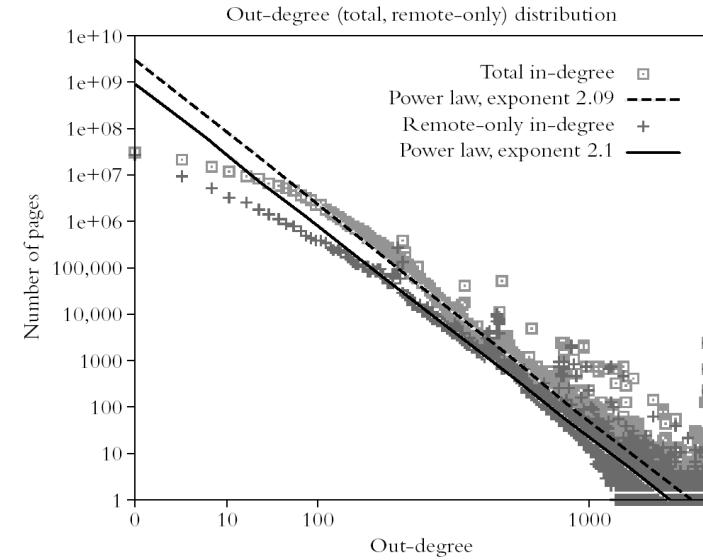

18

Small world theory

- Empirical observation for the Web-Graph is that the diameter of the Web-Graph is small relative to the size of the network
 - This property is called "Small World"
 - Formally, small-world networks have diameter exponentially smaller than the size
- By simulation it was shown that for the Web-size of 1B pages the diameter is approx. 19 steps
 - Empirical studies confirmed the findings

19

Example of Small World: project collaboration network

- The network represents collaboration between institutions on projects funded by European Union
 - 7886 organizations collaborating on 2786 projects
 - Each node is an organization, two organizations are connected if they collaborate on at least one project
- Small world properties of the collaboration network:
 - Main connected part** of the network contains 94% of the nodes
 - Max distance** between any two organizations is 7 steps ... meaning that any organization can be reached in up to 7 steps from any other organization
 - Average distance** between any two organizations is 3.15 steps (with standard deviation 0.38)
 - 38% (2770) of organizations have avg. distance 3 or less

20

Modeling the Web Growth

- Links/Edges in the Web-Graph are not created at random
 - Probability that a new page gets attached to one of the more popular pages is higher than to a one of the less popular pages
 - Intuition: “rich gets richer” or “winners takes all”
 - Simple algorithm “Preferential Attachment Model” (Barabasi, Albert) efficiently simulates Web-Growth

21

Importance of the web pages

- Two main approaches, both based on eigenvector decomposition of the graph adjacency matrix
 - Hubs and Authorities (HITS)
 - PageRank – used by Google

22


Hubs and Authorities

- Intuition behind HITS is that each web page has two natures:
 - Good **content page** (authority weight)
 - Good **hub** (hub weight)
- Idea behind the algorithm:
 - Good authority page is pointed to by good hub pages
 - Good hub page is pointing to good authority pages

23

Hubs and Authorities

[Kleinberg, 99]

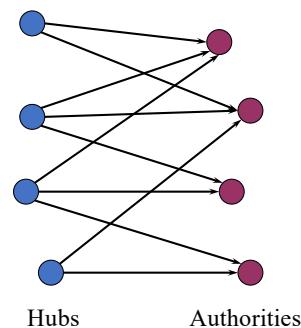

“Hubs and authorities exhibit what could be called a *mutually reinforcing* relationship”

Iterative relaxation:

$$\text{Hub}(p) = \sum_{q:p \rightarrow q} \text{Authority}(q)$$

$$\text{Authority}(p) = \sum_{q:q \rightarrow p} \text{Hub}(q)$$

24

Machine learning with graphs

Community detection

Network analysis for information retrieval, M2 MALIA-MIASHS, Julien Velcin

- Define your object:

- vertice / node
- edge
- graph as a whole


- What kind of ML:

- unsupervised
- supervised
- semi-supervised
- self-supervised

26

Clusters and communities


- Identifying underlying structures
- Based on graph properties
- Partitioning vertices means:
 - many edges within
 - few edges between

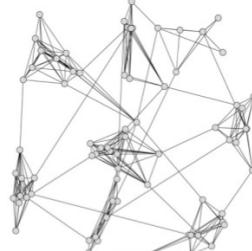

Laplacian for undirected graphs

- For an undirected weighted G , $L_u = D - W$
where D is the matrix with degrees in its diagonal

$$\begin{array}{c} L \\ \left[\begin{matrix} 0 & 1 & 1 & 0 & 0 & 0 \\ 1 & 0 & 1 & 0 & 0 & 0 \\ 1 & 1 & 0 & 1 & 1 & 0 \\ 0 & 0 & 1 & 0 & 1 & 0 \\ 0 & 0 & 1 & 1 & 0 & 1 \\ 0 & 0 & 0 & 0 & 1 & 0 \end{matrix} \right] \end{array} \quad \begin{array}{c} D \\ \left[\begin{matrix} 2 & 0 & 0 & 0 & 0 & 0 \\ 0 & 2 & 0 & 0 & 0 & 0 \\ 0 & 0 & 4 & 0 & 0 & 0 \\ 0 & 0 & 0 & 2 & 0 & 0 \\ 0 & 0 & 0 & 0 & 3 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{matrix} \right] \end{array} \quad \begin{array}{c} W \\ \left[\begin{matrix} 2 & -1 & -1 & 0 & 0 & 0 \\ -1 & 2 & -1 & 0 & 0 & 0 \\ -1 & -1 & 4 & -1 & -1 & 0 \\ 0 & 0 & -1 & 2 & -1 & 0 \\ 0 & 0 & -1 & -1 & 3 & -1 \\ 0 & 0 & 0 & 0 & -1 & 1 \end{matrix} \right] \end{array}$$



- L captures interesting features on the G
- New space of the k first eigenvectors can be used for clustering

27

28

Features of the Laplacian (1)

- For any $\mathbf{f} \in \mathbb{R}^n$:

$$\mathbf{f}^\top \mathbf{L} \mathbf{f} = \frac{1}{2} \sum_{i,i'=1}^n w_{i,i'} (f_i - f_{i'})^2$$

- \mathbf{L} is **symmetric** and **positive semi-definite** (all $\lambda \geq 0$)
- $0 = \lambda_1 \leq \lambda_2 \dots \leq \lambda_n$ and $\mathbf{v}_1 = \mathbf{1}$

29

Features of the Laplacian (2)

- Spectral decompositon gives us the number of strongly connected components

$$\begin{bmatrix} [1 & 0 & 0 & 0 & 0] \\ [0 & 1 & 0 & 0 & 0] \\ [0 & 0 & 1 & 0 & 0] \\ [0 & 0 & 0 & 2 & 0] \\ [0 & 0 & 0 & 0 & 1] \end{bmatrix}$$

- Spectrum : $\lambda = [0, 0, 1, 2, 3]$



multiplicity linked to # of
connected components

30

Normalized Laplacian

- \mathbf{L} have normalized forms, such as:

$$\mathbf{L}_{\text{RW}} = \mathbf{D}^{-1} \mathbf{L} \quad (\text{related to the transition matrix})$$

$$\mathbf{L}_{\text{sym}} = \mathbf{D}^{-\frac{1}{2}} \mathbf{L} \mathbf{D}^{-\frac{1}{2}} \quad (\text{symmetric version})$$

with \mathbf{L}_{sym} eigenvalues: $0 = \lambda_1 \leq \dots \leq \lambda_n \leq 2$

31

Spectral clustering

- Eigen (spectral) decomposition of \mathbf{L} is linked to the min-cut problem :

$$\text{Cut}(C_1, C_2, \dots, C_s) = \frac{1}{2} \sum_{m=1}^s w(C_m, \bar{C}_m)$$

- Better optimization criterion can be found with RatioCut and Ncut

- For the RatioCut: $\min_{\mathcal{A} \subset \mathcal{V}} \mathbf{a}^\top \mathbf{L} \mathbf{a} \quad \text{s.t.}$

$$\mathbf{a} \perp \mathbb{1} \quad \mathbf{a} \text{ sums to 1}$$

simplification to just
two clusters \mathcal{A} and $\bar{\mathcal{A}}$

$$\|\mathbf{a}\|^2 = |\mathcal{V}|$$

number of vertices

- By relaxing to the continuous domain, the solution to the NCut problem is given by the k smallest eigenvalues of \mathbf{L} (λ_2 for the binary case).

32

Cluster properties

- Density and separability:

$$\delta_{\text{int}}(G/C_1 \dots, C_k) = \frac{1}{k} \sum_{i=1}^k \delta_{\text{int}}(C_i) \quad \delta_{\text{int}}(C) = \frac{|\{\{u,v\} / u \in C, v \in C\}|}{|C| \times |C-1|}$$

$$\delta_{\text{ext}}(G/C_1 \dots, C_k) = \frac{|\{\{u,v\} / u \in C_i, v \in C_j, i \neq j\}|}{n(n-1) - \sum_{l=1}^k (|C_l|(|C_l|-1))}$$

- Plenty of proposed “holistic” measures (or *fitness measures*), such as the modularity (Newman, 04)

Modularity (Newman, 06)

- Poor performance of spectral clustering for detecting natural communities
- Avoiding the trivial solution (one cluster!)
- Good division = the number of edges between groups is smaller than *expected*

$Q = (\text{number of edges within communities}) - (\text{expected number of such edges})$

33

34

Optimizing modularity

- “Expected number” => null model
- Modularity Q:

$$Q = \frac{1}{2m} \sum_C \sum_{i,j \in C} (A_{ij} - P_{ij}) \quad Q = \frac{1}{2m} \sum_C \sum_{i,j \in C} (A_{ij} - \frac{k_i k_j}{2m})$$

- Spectral optimization of Q
 - For 2 communities: “leading eigenvector” method
 - Generalization for more than 2 communities

Leading eigenvector method

- index vector $s : (1,1,1,-1,1\dots-1,-1,1)$
 - Q can be rewritten as:
- $$Q = \frac{1}{4m} s^T B s \quad \text{with} \quad B_{ij} = A_{ij} - P_{ij}$$
- B = modularity matrix
 - Maximizing Q => PCA decomposition of B
 - Leading eigenvector method = choosing s closest to the leading eigenvector u (+1 if $u_i \geq 0$, -1 otherwise)

35

36

Louvain algorithm


- Proposed by Blondel et al., 2008
- Greedy approximation for finding communities, based on modularity
- Basically: initialize with small communities then merge as soon as the modularity is increased
- Complexity in $O(n \cdot \log n)$, where n is the number of nodes
- Really efficient, implemented in Gephi <https://gephi.org>
- Can be found in python, for instance
<https://scikit-network.readthedocs.io>

37

Representing graph data

Network analysis for information retrieval, M2 MALIA-MIASHS, Julien Velcin

Document networks

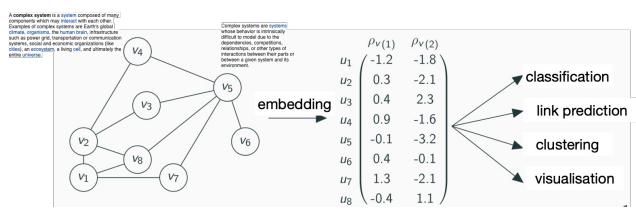


- **Document network:** “graph of vertices, where each vertex is associated with a text document” (Tuan et al., 2014), e.g.: scientific articles, newspapers, social media...
- Embedding for building a **joint** space for solving downstream tasks (e.g., link prediction, node classification, community detection)

39

Using graph features

- For a graph:
 - structural properties (e.g., number connected components, width, density)
 - distributions over individual measures
 - graphlets
- For a node:
 - ego-network and all of the above
 - attributes labelling the node
 - centrality measures
 - clustering coefficient

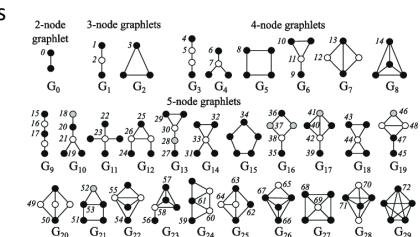

40

Graph kernel

- Useful to calculate if two nodes / graphs are similar
- Some kernels:
 - Node level statistics and features (e.g., centrality, clustering coef)
 - Overlapping measures on the neighborhood (local and global)
 - Patterns, such as closed triangles, graphlets, etc.
 - Graphs as « bag of nodes »
 - Path-based methods
 - Personalized PageRank (PPR)
 - Weisfeiler-Lehman kernel (iterative neighborhood aggregation)


Neighborhood reconstruction

Network analysis for information retrieval, M2 MALIA-MIASHS, Julien Velcin

41

Encoder-decoder perspective

- We can adopt an **encoder-decoder** perspective for learning how to encode node into a latent space (Hamilton, 2020) :

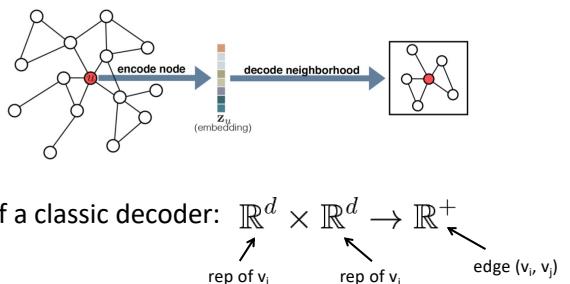

- Example of a classic decoder: $\mathbb{R}^d \times \mathbb{R}^d \rightarrow \mathbb{R}^+$

Laplacian eigenmaps (Belkin and Niyogi, 2002)

- Based on spectral clustering
- Decoder: $\text{DEC}(z_u, z_v) = \|z_u - z_v\|_2^2$
- Loss function: $\mathcal{L} = \sum_{(i,j) \in V} \text{DEC}(z_i, z_j).S(i, j)$
- If S = the adjacency matrix, the solution is provided by the matrix of eigenvectors corresponding to the **lowest eigenvalues** of the generalized eigenvalue problem: $Ly = \lambda.D.y$
- Note that other decoders make use of the dot product


$$\text{DEC}(z_i, z_j) = z_i^T.z_j$$

43

44

Node2vec and DeepWalk

- Similarity matrix S can be extended to farther nodes ($A^2, A^3\dots$) and it can be *approximated* by random walks
- Main idea:** two nodes are similar if they co-occur on the same paths

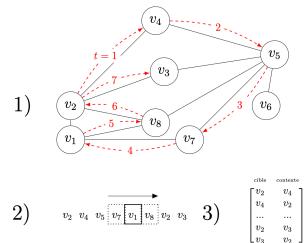

45

Node2vec and DeepWalk

- We try to approximate $p(v|u)$, probability to *visit* v when we *start* at u
- The higher $p(v|u)$, the higher $z_u^T \cdot z_v$
- Several solutions:

- DeepWalk (Perozzi et al., 2014): hierarchical softmax for approximate

$$\mathcal{L} = \sum_{(u,v) \in D} -\log\left(\frac{e^{z_u^T \cdot z_v}}{\sum_{v_k \in V} e^{z_u^T \cdot z_k}}\right)$$

- Node2vec (Grover & Leskovec, 2016): noise contrastive approach

$$\mathcal{L} = \sum_{(u,v) \in D} -\log(\sigma(z_u^T \cdot z_v)) - \gamma \mathbb{E}_{v_n \sim P_n(V)} [\log(\sigma(-z_u^T \cdot z_{vn}))]$$

positive examples

negative examples

46

Link DeepWalk / spectral clustering

- Qiu et al. (2008) shows that the embeddings Z of DeepWalk satisfies:

$$Z^T Z \approx S_{DW} \text{ avec } S_{DW} = \log\left(\frac{\text{vol}(\mathcal{V})}{T}\right) \underbrace{\left(\sum_{t=1}^T \mathbf{P}^t\right)}_{\text{length of the random walk}} \mathbf{D}^{-1} - \log(b) \\ \mathbf{D}^{-\frac{1}{2}} \left(\mathbf{U} \left(\sum_{t=1}^T \Lambda^t \right) \mathbf{U}^T \right) \mathbf{D}^{-\frac{1}{2}}$$

- $\mathbf{U} \Lambda \mathbf{U}^T = \mathbf{L}_{\text{sym}}$ is the *eigendecomposition* of the normalized Laplacian

GVNR (Brochier et al., 2019)

- Following GloVe (Pennington et al., 2014), GVNR solves a **regression** task on the weighted cooccurrence matrix X where cells with small values are set to 0 (> threshold x_{\min})
- We're looking for (U, b^U) and (V, b^V) s.t.:

$$\arg \min_{U, V, b^U, b^V} \sum_i^n \sum_j^n s(x_{ij})(u_i \cdot v_j + b_i^U + b_j^V - \log(1 + x_{ij}))^2$$

with $s(x_{ij}) = 1$ if $x_{ij} > 0$ and $m_i \sim B(\alpha)$ else

where α is chosen s.t. $m = k$ in average

$$X = \begin{pmatrix} 0 & 4 & 8 & 0 & 0 & 0 \\ 4 & 0 & 0 & 3 & 0 & 0 \\ 8 & 0 & 0 & 0 & 0 & 0 \\ 0 & 3 & 0 & 0 & 0 & 6 \\ 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 6 & 1 & 0 \end{pmatrix}$$

47

48

Some results with GVNR

Table 3: Accuracy on the citation (1) network.

	% of training data				
	10%	20%	30%	40%	50%
GloVe	57.7	62.4	69.5	72.8	73.8
GVNR ($x_{\min} = 0$)	58.5	62.5	70.7	73.4	75.0
NetMF	65.7	72.9	76.4	78.6	79.4
DeepWalk	67.8	71.6	74.5	75.8	79.2
GVNR ($x_{\min} = 1$)	69.5	72.6	75.9	78.1	80.2

Table 4: Accuracy on the citation (2) network.

	% of training data				
	10%	20%	30%	40%	50%
GloVe	42.8	53.5	55.3	56.2	56.8
GVNR ($x_{\min} = 0$)	38.7	46.8	49.1	50.4	50.9
NetMF	51.2	54.8	55.1	55.0	54.8
DeepWalk	41.3	52.5	54.5	55.5	56.0
GVNR ($x_{\min} = 1$)	45.6	55.6	57.3	58.7	59.0

Table 5: Accuracy on the co-authorship network.

	% of training data				
	10%	20%	30%	40%	50%
GloVe	41.0	42.1	43.7	46.4	51.2
GVNR ($x_{\min} = 0$)	60.3	64.6	67.4	67.1	68.2
NetMF	60.7	66.2	70.1	72.1	72.8
DeepWalk	75.4	77.2	77.3	75.9	79.3
GVNR ($x_{\min} = 1$)	74.7	75.3	76.3	73.8	74.6

Table 6: F_1 score on the language network.

	% of training data				
	10%	20%	30%	40%	50%
GloVe	34.0	44.1	46.7	47.7	48.6
GVNR ($x_{\min} = 0$)	31.7	40.7	43.2	44.7	45.1
NetMF	27.5	33.5	36.2	37.7	38.7
DeepWalk	33.6	43.6	46.2	47.6	48.2
GVNR ($x_{\min} = 1$)	32.2	41.7	44.0	45.2	46.1

Limits of these approaches

- shallow embedding : a unique vector for each node
- no parameter sharing
- usually, no node features
- mostly transductive


49

50

Analyzing information networks

Network analysis for information retrieval, M2 MALIA-MIASHS, Julien Velcin

Graph Neural Networks

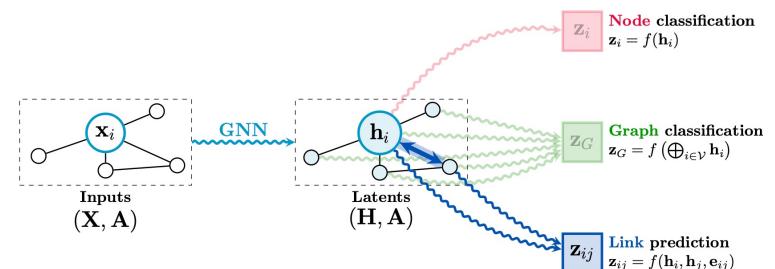

(Veličković, 2023)

51

52


New kind of deep learning architecture

- Permutation **invariance** and **equivariance**:

$$\begin{aligned} f(PAP^T) &= f(A) && \text{permutation invariance} \\ f(PAP^T) &= Pf(A) && \text{permutation equivariance} \end{aligned}$$

with P a permutation matrix

- Neural **message passing**

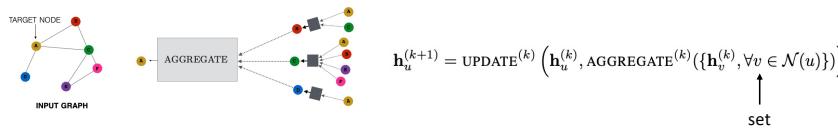

53

GCN (Kipf et al., 2017)

- In the message passing formulation:

$$h_u^{(k)} = \sigma \left(\mathbf{W}^{(k)} \sum_{v \in \mathcal{N}(u) \cup \{u\}} \frac{h_v^{(k-1)}}{\sqrt{|\mathcal{N}(u)| |\mathcal{N}(v)|}} \right)$$

• It should be noted that all this is grounded in term of an analogy to a spectral formulation of a **convolution** operator on a graph

- One layer of the GCN computes:

$$H^{(n)} = \text{ReLU}(\tilde{D}^{-1/2} \tilde{A} \tilde{D}^{-1/2} H^{(n-1)} W^{(n)})$$

with $H^0=X$ (feature vector), $\tilde{A}=A+\mathbf{I}$ (normalization trick), $W^{(n)}$ the trainable weights

54

GAT (Veličković et al., 2018)

- GAT adds an *attention* weight to the neighbors:

$$h_i^{(n)} = \sum_{j \in \mathcal{N}(i)} \alpha_{ij}^{(n)} h_j^{(n-1)} W^{(n)}$$

- The attention is calculated on the latent representations:

$$\alpha_{ij}^{(n)} = \frac{\exp \left(\text{LeakyReLU} \left(\mathbf{a} \cdot [W^{(n)} h_i^{(n-1)}, W^{(n)} h_j^{(n-1)}] \right) \right)}{\sum_{k \in \mathcal{N}(i)} \exp \left(\text{LeakyReLU} \left(\mathbf{a} \cdot [W^{(n)} h_i^{(n-1)}, W^{(n)} h_k^{(n-1)}] \right) \right)}$$

\mathbf{a} an additional parameter vector
 $[., .] = \text{concatenation}$

- As the GCN, we can **stack** GAT layers to go beyond 1-hop

55

GATv2 (Brody et al., 2022)

- GAT computes static attention:

$$\alpha_{ij}^{(n)} = \frac{\exp \left(\text{LeakyReLU} \left(\mathbf{a} \cdot [W^{(n)} h_i^{(n-1)}, W^{(n)} h_j^{(n-1)}] \right) \right)}{\sum_{k \in \mathcal{N}(i)} \exp \left(\text{LeakyReLU} \left(\mathbf{a} \cdot [W^{(n)} h_i^{(n-1)}, W^{(n)} h_k^{(n-1)}] \right) \right)}$$


linear

- GATv2 is more expressive by using dynamic attention, similarly to the early work on (Bahdanau et al., 2014), with a simple trick:

$$\begin{aligned} e(h_i, h_j) &= \text{LeakyReLU} (\mathbf{a}^\top \cdot [W h_i || W h_j]) \\ \rightarrow e(h_i, h_j) &= \mathbf{a}^\top \text{LeakyReLU} (W \cdot [h_i || h_j]) \end{aligned}$$

56

Beyond node representations: Deep Graph InfoMax (Veličković et al., 2019), InfoGraph (Sun et al., 2020)

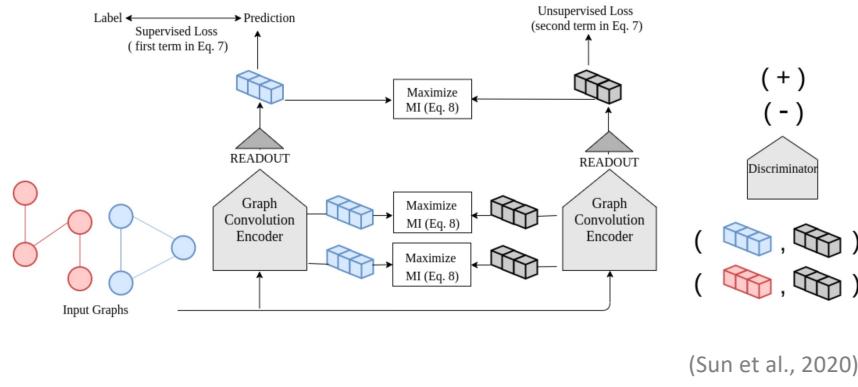

57

58

About Information Retrieval

Network analysis for information retrieval, M2 MALIA-MIASHS, Julien Velcin

Recent developments in IR

- Leveraging LLMs, see ColBERT (Khattab and Zaharia, 2020) and ColBERT v2 (Santhanam et al., 2022)
- Retrieval Augmented Generation (RAG)
<https://ai.meta.com/blog/retrieval-augmented-generation-streamlining-the-creation-of-intelligent-natural-language-processing-models/>
- Natural Language is All a Graph Needs (Ye et al., arXiv 2023)

59

Some references

- Graph Representation Learning. W. Hamilton. Morgan and Claypool, 2020.
https://www.cs.mcgill.ca/~wlh/grl_book/
- A Tutorial on Spectral Clustering. U. von Luxburg. Statistics and Computing, 17 (4), 2007
https://people.csail.mit.edu/dsontag/courses/ml14/notes/Luxburg07_tutorial_spectral_clustering.pdf
- Network Science. Barabási A.L., Cambridge University Press, 2016.
<http://networksciencebook.com>
- Everything is Connected: Graph Neural Networks. Petar Veličković, 2023.
<https://paperswithcode.com/paper/everything-is-connected-graph-neural-networks>

60