


Zadatak. U Packet Tracer-u nacrtati šemu sa slike i konfigurisati:

- 1. Hostname prema šemi, baner sa imenom i prezimenom i brojem indeksa na R1.
- 2. IP adrese na interfejsima prema šemi
- 3. DHCP server na R6
- 4. Statičko rutiranje
- 5. PPP sa lozinkom "raf"

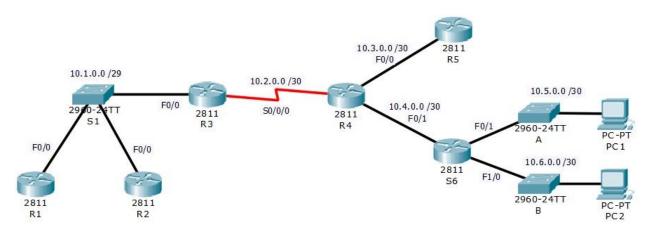

1. Hostname i baner

Router(config) #hostname R1
R1(config) #banner motd #Ime Prezime Indeks#

2. IP adrese

Serijski DCE

R3(config)#interface Serial 0/0/0

R3(config-if) #clock rate 4000000

R3(config-if)#ip address 10.2.0.1 255.255.255.252

R3(config-if) #no shutdown

Serijski DTE

R4(config)#interface Serial 0/0/0

R4(config-if)#ip address 10.2.0.2 255.255.255.252

R4(config-if) #no shutdown

FastEthernet

R1(config) #interface FastEthernet 0/0

R1(config-if)#ip address 10.1.0.1 255.255.255.248

R1(config-if) #no shutdown



5. PPP

```
R3(config) # interface serial 0/0/0
R3(config-if) # encapsulation ppp
R3(config-if) # ppp authentication chap pap
R4(config) # interface serial 0/0/0
R4(config-if) # encapsulation ppp
R4(config-if) # ppp authentication chap pap
R3(config) # username R4 password raf
R4(config) # username R3 password raf
```