

FIRST_WORD

Assignment name : first_word
Expected files : first_word.c
Allowed functions: write

Write a program that takes a string and displays its first word, followed by a newline.

A word is a section of string delimited by spaces/tabs or by the start/end of the string.

If the number of parameters is not 1, or if there are no words, simply display a newline.

Examples:

```
$> ./first_word "FOR PONY" | cat -e
FOR$
$> ./first_word "this is sparta, then again,
maybe not" | cat -e
this$
$> ./first_word " " | cat -e
$
$> ./first_word "a" "b" | cat -e
$
$> ./first_word " lorem,ipsum " | cat -e
lorem,ipsum$
$>
```

FIZZBUZZ

Assignment name : fizzbuzz
Expected files : fizzbuzz.c
Allowed functions: write

Write a program that prints the numbers from 1 to 100, each separated by a newline.


If the number is a multiple of 3, it prints 'fizz' instead.

If the number is a multiple of 5, it prints 'buzz' instead.

If the number is both a multiple of 3 and a multiple of 5, it prints 'fizzbuzz' instead.

Example:

```
$>./fizzbuzz
1
2
fizz
4
buzz
fizz
7
8
fizz
buzz
11
fizz
13
14
fizzbuzz
[...]
97
98
fizz
buzz
$>
```

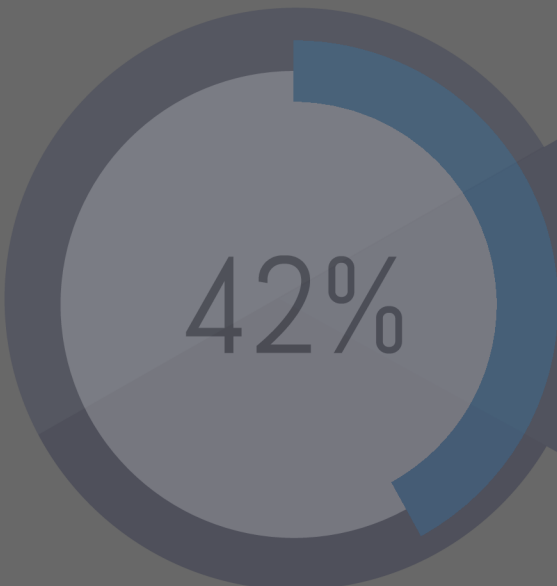42%

FT_PUTSTR

Assignment name : ft_putstr
Expected files : ft_putstr.c
Allowed functions: write

Write a function that displays a string on the standard output.

The pointer passed to the function contains the address of the string's first character.

Your function must be declared as follows:

void ft_putstr(char *str);


FT_STRCPY

Assignment name : ft_strcpy
Expected files : ft_strcpy.c
Allowed functions: Aucune

Reproduce the behavior of the function strcpy (man strcpy).

Your function must be declared as follows:

```
char    *ft_strcpy(char *dest, char *src);
```

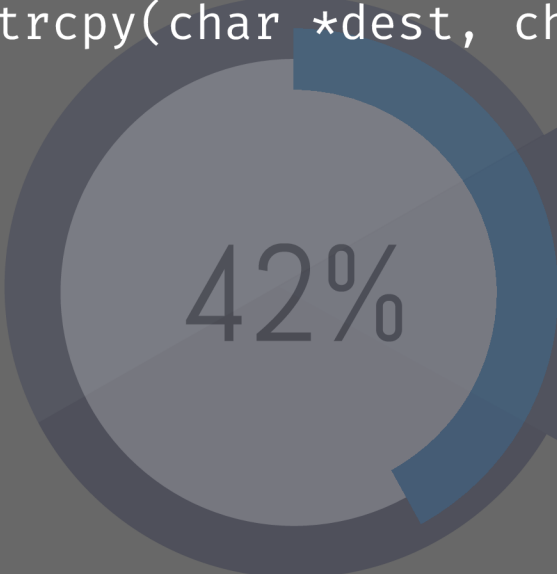

42%

FT_STRLEN

Assignment name : ft_strlen
Expected files : ft_strlen.c
Allowed functions:

Write a function that returns the length of a string.

Your function must be declared as follows:

```
int ft_strlen(char *str);
```

42%

FT_SWAP

Assignment name : ft_swap
Expected files : ft_swap.c
Allowed functions:

Write a function that swaps the contents of two integers the addresses of which are passed as parameters.

Your function must be declared as follows:

```
void ft_swap(int *a, int *b);
```

42%

REPEAT_ALPHA

Assignment name : repeat_alpha
Expected files : repeat_alpha.c
Allowed functions: write

Write a program called repeat_alpha that takes a string and display it repeating each alphabetical character as many times as its alphabetical index, followed by a newline.

'a' becomes 'a', 'b' becomes 'bb', 'e' becomes 'eeeee', etc...

Case remains unchanged.

If the number of arguments is not 1, just display a newline.

Examples:

```
$>./repeat_alpha "abc"
abbccc
$>./repeat_alpha "Alex." | cat -e
Allllllllllllleeeeeeexxxxxxxxxxxxxxxxxxxxxxxxxxxxxx.$
$>./repeat_alpha 'abacadaba 42!' | cat -e
abbaccaddddabba 42!$
$>./repeat_alpha | cat -e
$
$>
$>./repeat_alpha "" | cat -e
$
$>
```

42%

REV_PRINT

Assignment name : rev_print
Expected files : rev_print.c
Allowed functions: write

Write a program that takes a string, and displays the string in reverse followed by a newline.

If the number of parameters is not 1, the program displays a newline.

Examples:

```
$> ./rev_print "zaz" | cat -e  
zaz$  
$> ./rev_print "dub0 a POIL" | cat -e  
LIOP a 0bud$  
$> ./rev_print | cat -e  
$
```

ROT_13

Assignment name : rot_13
Expected files : rot_13.c
Allowed functions: write

Write a program that takes a string and displays it, replacing each of its letters by the letter 13 spaces ahead in alphabetical order.

'z' becomes 'm' and 'Z' becomes 'M'. Case remains unaffected.

The output will be followed by a newline.

If the number of arguments is not 1, the program displays a newline.

Example:

```
$>./rot_13 "abc"
nop
$>./rot_13 "My horse is Amazing." | cat -e
Zl ubefr vf Nznmvat.$
$>./rot_13 "AkjhZ zLKIJz , 23y " | cat -e
NxwuM mYXVWm , 23l $
$>./rot_13 | cat -e
$
$>
$>./rot_13 "" | cat -e
$
$>
```

42%

ROTONE

Assignment name : rotone
Expected files : rotone.c
Allowed functions: write

Write a program that takes a string and displays it, replacing each of its letters by the next one in alphabetical order.

'z' becomes 'a' and 'Z' becomes 'A'. Case remains unaffected.

The output will be followed by a `\n`.

If the number of arguments is not 1, the program displays `\n`.

Example:

`$>./rotone "abc"`
`bcd`
`$>./rotone "Les stagiaires du staff ne sentent pas toujours tres bon." | cat -e`
`Mft tubhjbjsft ev tubgg of tfoufou qbt upvkpvst usft cpo.$`
`$>./rotone "AkjhZ zLKIJz , 23y " | cat -e`
`BlkiA aMLJKa , 23z $`
`$>./rotone | cat -e`
`$`
`$>`
`$>./rotone "" | cat -e`
`$`
`$>`

42%

SEARCH_AND_REPLACE

Assignment name : search_and_replace
Expected files : search_and_replace.c
Allowed functions: write, exit

Write a program called `search_and_replace` that takes 3 arguments, the first arguments is a string in which to replace a letter (2nd argument) by another one (3rd argument).

If the number of arguments is not 3, just display a newline.

If the second argument is not contained in the first one (the string) then the program simply rewrites the string followed by a newline.

Examples:

```
$>./search_and_replace "Papache est un sabre" "a" "o"  
Popoche est un sobre  
$>./search_and_replace "zaz" "art" "zul" | cat -e  
$  
$>./search_and_replace "zaz" "r" "u" | cat -e  
zaz$  
$>./search_and_replace "jacob" "a" "b" "c" "e" | cat -e  
$  
$>./search_and_replace "ZoZ eT Dovid oiME le METol." "o" "a" |  
cat -e  
ZaZ eT David aiME le METal.$  
$>./search_and_replace "wNcOre Un ExEmPle Pas Facilw a Ecriv " "  
"w" "e" | cat -e  
eNcOre Un ExEmPle Pas Facile a Ecrire $
```

ULSTR

Assignment name : ulstr
Expected files : ulstr.c
Allowed functions: write

Write a program that takes a string and reverses the case of all its letters.
Other characters remain unchanged.

You must display the result followed by a '\n'.

If the number of arguments is not 1, the program displays '\n'.

Examples :

```
$>./ulstr "L'eSPrit nE peUt plUs pRogResSer s'Il staGne  
et sI peRsIsTent VAnIte et auto-justification." | cat -e  
l'EsPRIT Ne PEuT PLuS PRoGrESSER S'iL STAGNE ET Si  
PeRsIStENT vaNiTE ET AUTO-JUSTIFICATION.$  
$>./ulstr "S'enTOuRer dE sECreT eSt uN sIGnE De mAnQuE  
De coNNaiSSanCe. " | cat -e  
s'ENtoUrER De SecREt EST Un SigNe dE MaNqUe dE  
COnnAIssANcE. $  
$>./ulstr "3:21 Ba tOut moUn ki Ka di KE m'en Ka fe  
fot" | cat -e  
3:21 bA ToUT MOuN KI kA DI ke M'EN kA FE FOT$  
$>./ulstr | cat -e  
$
```