

Thalia Project Report

Team Charlie

**Martti Aukia, Albert Boehm, Arthur-Louis Heath,
George Stoian, Daniel Joffe, Weronika Kakavou,
Marcell Veiner**



University of Aberdeen
Friday 27th March, 2020

Acknowledgement

TO DO: Thank stackoverflow and everyone else here.

Contents

1	Introduction	4
1.1	Project Overview	4
1.2	Motivation/Rationale	4
1.3	Project management strategy	4
1.4	Budget	5
2	Background and Competitors	6
2.1	Portfolio Visualizer	6
2.2	Other Competing Software	7
2.3	Summary	9
3	Requirements	10
3.1	Functional Requirements	10
3.2	Non-functional Requirements	12
3.3	Use Case	13
3.3.1	Backtest Strategy	14
4	Design	15
4.1	General Design Decisions	15
4.2	Overview of System Architecture	15
4.3	GUI Structure	16
4.3.1	Thalia Web	16
4.3.2	The Dashboard	18
4.3.3	Changes to the Initial Design	21
4.4	Business Logic Structure	22
4.5	Data Harvester Structure	23
4.6	Database Structure	23
4.7	Data Segregation	23
4.8	The Data Layer Module (Finda)	24
5	Coding and Integration	25
5.1	Overview	25
5.2	Planning	25
5.3	Key Implementation Decisions	27
5.3.1	Web Framework	27
5.3.2	GUI	28
5.3.3	Business Logic	28
5.3.4	Database & Finda	29
5.3.5	Harvester	29
5.4	Integration and Deployment	29
5.4.1	Continuous Integration	30
5.4.2	Hosting and Continuous Deployment	32
6	Testing	34
7	Evaluation and further Work	35
7.1	Schedule	35
7.2	Feasibility Analysis	35
7.3	Appendix A - User Manual	36
7.3.1	Launching Thalia	36
7.3.2	Homepage	36
7.3.3	About Page	38
7.3.4	Log In and Sign Up Pages	38

7.3.5	Report Issues Page	39
7.3.6	TODO PAGE	40
7.3.7	Dashboard	40
7.4	Appendix B - Maintenance Manual	44
7.5	Appendix C - Problem Domain Glossary	45
7.6	Appendix D - Project Terminology	47
References		48

1 Introduction

1.1 Project Overview

The aim of this project was to create a portfolio backtesting software, which enables creating custom portfolios and measuring their performance with different backtesting functions. The user can pick from a variety of assets, some of which are Equities, Fixed Income, Currencies, Commodities, and Cryptocurrencies. Risk metrics and performance are then visualized for the given asset allocation.

1.2 Motivation/Rationale

Since retail investing is a growing market, our target audience consists of individual investors, who instead of seeking the full package that comes with financial advising, would like to take over the wheel and assess the viability of their investment strategies themselves. As retail investors are non-professionals and invest comparatively small amounts, with financial advice services being non affordable for those individual clients, our goal was to create a product that would not only be more affordable for small retail investors, but would also include a variety of international assets, which most existing backtesting software fails to provide [1].

1.3 Project management strategy

The creators of Thalia are:

- Martti Aukia, *Team Leader*
- Arthur-Louis Heath, *Deputy Team Leader*
- Albert Boehm, *Chief Editor*
- Marcell Veiner
- George Stoian
- Daniel Joffe
- Weronika Kakavou

Our goal was the creation of a high quality industrial prototype of the Thalia backtesting software based on the identified project requirements [2] and optional features [2]. The team held regular meetings, both with the project guide, Dr Nigel Beacham, and the course coordinator Dr Ernesto Compatangelo. During the analysis stage meetings took place weekly and were aimed to discuss ideas and requirements. Whereas later, during the implementation stage the team held meeting at least once per week, some of which were aimed to discuss the design for the tool with the inclusion of some coding sessions.

As in the past[2], our workflow was centered around the GitHub platform and the tools it provides. Furthermore, we continued to follow the Egalitarian Team structure, as this worked very well during the first term of the course. In our Technical Report [2] we also discussed the use of effort-oriented metrics, i.e. story points, which were assigned to tickets based on the time needed and the functionality of the task. However, the following term we concluded that in many occasions these metrics failed to successfully measure the size of a task, as they were artificially assigned. Based on this observation, we decided not to make use of them for the rest of the development.

As we were fortunate enough to gain an additional member this term, some of our initial effort was focused on introducing her to the project and team dynamics. Given our access to a large team, it was common to see coding tickets assigned to pairs and groups rather than individuals. We believe this not only resulted in writing better-quality code, but in faster team communication when making design decisions.

1.4 Budget

As previously discussed, we did not have any budget restrictions other than time. All of us agreed to allocating a minimum of 10 hours per week to development efforts and discussed personal expectations well in advance. We estimate the value of our products goodwill to be approximately £13,000. We base this estimate on the developer time allocated to this project, the total duration of 20 weeks, and average developer salaries in the UK[3] (taking into account that we have no industry experience, meaning the value of our work is realistically towards the lower end of the range).

2 Background and Competitors

As a result of our initial competitor analysis, we may group the competing software into two categories. For a comprehensive list of available backtesters please see [4]. The first consists of various third-party trading software, such as Fidelity [5], MetaTrader [6] and NinjaTrader [7] that offer backtesting features as well. Services in this category include features such as buying and selling of financial assets, prediction of future prices and storing and managing of users' money. Although it may be beneficial to consider some features related to real time trading, these would only be part of a future development process, and are not in the scope of our prototype.

The second category consists of pieces of software that do not offer trading as a service, and solely focus on backtesting. Thus, for now, we shall only consider the feature set provided by the second category. In the following paragraphs we will consider some of the design decisions made by competing software, together with the brief analysis and conclusion on each feature.

2.1 Portfolio Visualizer

Our main competitor of the second category is an online backtesting tool named Portfolio Visualizer[8]. During the inception phase of development we heavily relied on this website for writing the requirement analysis. Let us now briefly dissect what it has to offer.

Upon opening the website we are greeted with a brief description of the domain, together with the following input form:

Time Period ⓘ	Year-to-Year ▼
Start Year ⓘ	1985 ▼
End Year ⓘ	2019 ▼
Initial Amount ⓘ	\$ 10000 .00
Cashflows ⓘ	None ▼
Rebalancing ⓘ	Rebalance annually ▼
Display Income ⓘ	No ▼
Benchmark ⓘ	Vanguard 500 Index Investor ▼

Figure 1: Portfolio Visualizer - Input (source: <https://www.portfoliovisualizer.com/>)

As we can already see, the key elements of portfolio analysis are provided. Considering the functionality of our prototype as a baseline (that is testing an allocation of assets with a fixed initial investment on a fixed time period), we see that in addition users are able to do the following set of features:

- Set the endpoints of the investment period, up to months.
- Set the initial investment.
- Specify a regular cashflow and its frequency.
- Select a rebalancing strategy.
- Select a benchmark strategy for comparison.
- Compare multiple strategies at the same time.
- Adjust to inflation.

- Select from a set of lazy portfolios.
- Calculate additional metrics.
- Export the results to PDF, Excel, or save link.

At first it may seem as if Portfolio Visualizer meets all the requirements needed for a financial backtester, and indeed our main criticism is regarding the UI, responsiveness and user experience, and is a result of the initial user testing.

The UI design is simplistic and has a non-commercial, bare-bones look, and although this was appreciated while testing the system it certainly does not improve the user experience. The input, mostly using dropdown menus is straightforward to use, except for the selection of Assets, which we will discuss briefly at the end of this section.

Moreover, users will want to fine-tune their investment strategies, by changing their allocations frequently. The only means to do this using Portfolio Visualizer is to scroll to the top, change the input and rerun the entire simulation. Our goal is to design a more responsive and dynamic system, to ease this procedure.

The website also has user accounts, however little to no data is associated with a user's profile, which further decreases the overall user experience. Finally, as a last remark, which holds for most of the back-testing tools we have tried, the website is heavily US biased, and so the selection of asset classes is limited. Furthermore, we have no means of changing the currency, which would also be an important feature for a product accessible through the web (and therefore available to users from all over the globe).

2.2 Other Competing Software

The rest of the alternatives are of a significantly lower quality. In the remaining parts of this section we will briefly consider a few design decisions made by these websites.

Tree-like Asset Selection

One challenging aspect of designing such a system is the following:

What is the most intuitive way for selecting a portfolio item?

Where a portfolio item could be: an equity, ETF index, a commodity, bond or stock. Within these classes we have more options to choose from. Many backtesters opted for a search bar, which is a sensible approach, but poor in practice. Many portfolio items are named similarly, and for a new user it is a barrier, as they might not know what is available.

One of the better option is what ETFReplay [9] has implemented, which is a tree-like selection form, shown below.

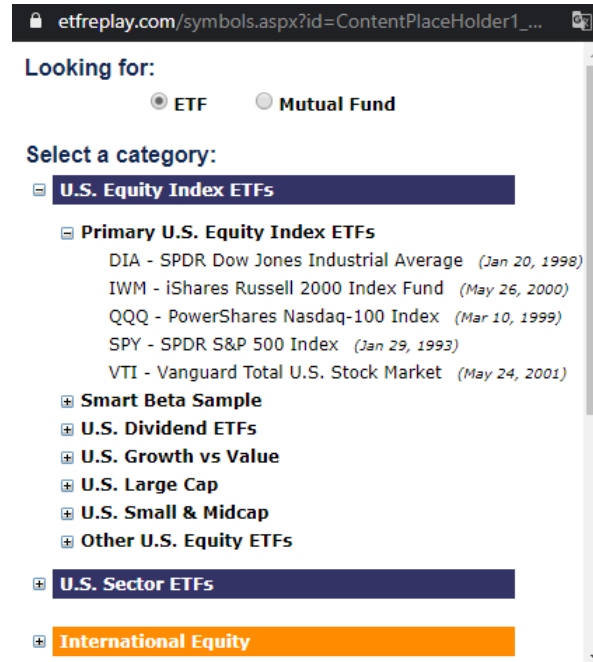


Figure 2: ETFReplay - Tree-like Structure (source: <https://www.etfreplay.com/>)

We feel this was the most intuitive to use, and will thus pursue a similar approach. The only potential issue associated with this is that it opens in a new window, which we would prefer to avoid.

Tiles

It may be worth briefly discussing an example of a backtester with a good layout design. We found the simplistic and tiled design of Backtest Curvo [10] a good choice as it gives the website an overall modern and fresh look, whereas most backtesters looked old and out of date. Our goal is to achieve a layout similar to this. For a further analysis on design decisions, please see section 4 of this report.

Simple Logic

In our whitepaper, we briefly discussed implementing a simple scripting language allowing users to simulate dynamic trading strategies [1]. As mentioned, this would not be in the scope of the course, but for inspiration we can have a look at the approach of Stockbacktest [11].

Signals (Need at least one buy or short signal)

Buy When:

Signal 1:	Upper Bollinger Band (days devs) ▼	Crosses Below ▼	Percentage % ▼	AND ▼
	20 2	none	70	
Signal 2:	Close Price ▼	Is At Least % Above (%) ▼	Percentage % ▼	
	none	15	10	

Figure 3: Stockbacktest - Simple Logic (source: <http://stockbacktest.com/>)

Although not intuitive at all, given its presentation, it shows this feature is also possible. We believe that after nailing down how exactly the user would create the rules, this would be a straightforward task, as the calculations involved are not more complicated than in the static case. As mentioned above, this is something we would like to implement in the future.

2.3 Summary

As we initially tested the competing software during the inception phase of development, we were left with three key observations. These were the following:

- Transparency: Many of the testers' webpages did not give the impression of being operated by a reputable businesses. In the worst case, they gave the impression of being untransparent or untrustworthy (misspelt words, advertisements with questionable subject matter), which is something we should avoid.
- Learning Curve: After getting to know our target audience we concluded that most seem willing to learn how to use a complex system if it is worth it.
- Design of the UI: It was easy to tell which backtesters are still getting updated, by looking at their design. We should aim at looking fresh. In addition, some backtesters offered so many features that every corner of their UI was packed with information, this is something we should also avoid doing.

The analysis was conducted informally with the help of colleagues studying or involved in finance. This allowed us to develop a more neutral and accurate impression, despite the subjective nature of the observations. Having analysed the competing software, we are now better suited to determine the requirements of our system.

3 Requirements

Earlier in the inception phase of the development, we classified our requirements using the established FURPS+ model [12]. Since identifying requirements for our initial project report [2] we have also identified some additional requirements that Thalia should fulfil based on feedback from our project guide. Let us briefly revisit our main functional and non-functional requirements. The items outlined below focus on some of the key requirements we have so far identified as features necessary for providing a compelling product for paying customers.

3.1 Functional Requirements

Portfolio Configuration	
Allocate fixed amount/proportions of the portfolio to given assets	Choose how much each asset contributes to the portfolio's total value using either percentages or raw monetary amounts
Find assets quickly by category or name	When adding an asset the user can search a category for assets or search for a specific asset by its name
Share portfolio	Portfolios can be shared between people using a URL
Edit portfolio	Change asset allocation and their distributions in a portfolio

Portfolio analysis	
Compare portfolios	Use multiple portfolios in a single analysis to see differences in their performance
Use a selection of lazy portfolios	Select an existing common portfolio to compare against, such as common index funds (e.g. Vanguard 500 Index Investor or SPY)
Plot portfolio as a time-series	View portfolio performance as a line graph for a quick overview
Specify a time frame for the analysis	Select start and end dates for portfolio analysis
Choose rebalancing strategy	Optionally choose a strategy for buying and selling assets to meet your strategy e.g. buying and selling stocks each year to ensure the value of portfolio stays at 60% stocks and 40% bonds (i.e. maintain the initial allocation)
Change the distribution of assets in a portfolio using a slider	A slider for each asset to quickly increase or decrease its proportion of the total value
Edit portfolio analysis	Change parameters for portfolio's analysis after running it (e.g. date range or rebalancing strategy)

View results	
See key numerical figures	Show important numerical metrics for a portfolio's performance such as Initial Balance, Standard Deviation, Worst Year, Sharpe Ratio, and Sortino Ratio
See both real and nominal values	See portfolio's value as both adjusted and not adjusted for inflation
A breakdown of portfolio value at specific points of time	See what the value of the portfolio is at some point in time (e.g. January 3rd 1997)
Export result of analysis	Exports results to PDF for sharing and offline reading

User accounts	
Combine portfolios	Combine two portfolios' assets into one single portfolio
Save portfolio analysis for later	Save portfolio analysis parameters to the account so you can rerun it with a single click
Delete saved portfolio analysis	Remove a stored portfolio analysis from your account
Manage portfolio analyses	Edit saved portfolio analysis with different assets, distributions or other parameters
Sign-up, log in and log out	Basic authentication

Assets	
Choose assets from European market	Data for European assets were found to be lacking in competing products
Choose assets from Equities, Fixed Income, Currencies, Commodities, and Cryptocurrencies	Coverage of some of the largest asset classes

3.2 Non-functional Requirements

1. Usability:

- The product must be easily usable for users who already have some financial investment experience.
- The basic backtesting interface needs to look familiar to people already experienced with it.
- The product must have detailed instructions on how to use its advertised functions.
- All major functions must be visible from the initial landing page.
- Must work in both desktop and mobile browsers.
- The results page should scale with mobile.

2. Reliability:

- The product must have a greater than 99% uptime.
- All our assets need to have up to date daily data where the asset is still publicly tradeable.
- All assets supported by the system must provide all publicly available historical data.

3. Performance:

- The website should load within 3 seconds on mobile [2].
- Large portfolios must be supported - up to 300 different assets.

4. Implementation:

- The system needs to work on a cloud hosting provider.

5. Interfacing:

- The Data Gathering Module must never use APIs stated to-be-deprecated within a month.
- The Data Gathering Module must not exceed its contractual usage limits.

6. Operations:

- An administrator on-call will be necessary for unexpected issues.

7. Packaging:

- The product needs to work inside a Linux container (e.g. Docker).
- All dependencies need to be installable with a single command.

8. Legal:

- All user testing must be done with ethical approval from the University.
- UI must display a clear legal disclaimer about the service not providing financial advice.
- All third-party code should allow for commercial use without requiring source disclosure (e.g. no GPL-3).
- User data handling should comply with GDPR.
- Provided services should not constitute financial advice under UK law to avoid being subject to financial advice legislation and potential liability.

9. Accessibility

- Display items should be clearly labelled.
- UI should scale to accommodate different screen sizes and aspect ratios,
- UI elements and text superimposed over one another should have high contrast in their colors.
- UI should allow for the use of assistive technologies to accommodate individuals with accessibility issues.

In the literature, the FURPS+ model has been criticised for disregarding developer consideration [13], such as not taking into account portability and maintainability. Furthermore it has been pointed out, that our requirements fail to capture ...

TODO

3.3 Use Case

3.3.1 Backtest Strategy

Actors: User

Purpose: Show a user how their strategy would have performed in the past.

Overview: The user selects the assets they want in their portfolio, along with how much to invest in each asset. They may select contribution/withdrawal and rebalancing options also. On completion, the user will see a graph plotting the value of their portfolio over time and a table of a few key metrics summarising performance.

Preconditions: The user must be logged in.

Flow of Events:

1. The user navigates to the *backtest* page of the website.
2. The system sends a list of available assets.
3. The user enters the period of time over which they wish to backtest.
4. The user selects a financial asset.
5. The user enters the proportion of their portfolio they want to invest in that asset.
6. The user submits their strategy for evaluation.
7. The system analyses the user's strategy over the specified period.
8. The user received their strategy's performance.

Alternate Flow of Events

- Steps 4 and 5 may repeat any number of times, allowing the user to have as large a portfolio as they like. But they must happen at least once.
- In step 6, the system may have insufficient data for the user's desired time range. If this is the case, the system should give results for the time it does have data for.
- Between steps 3 and 6, the user may optionally enter a rebalancing frequency and a contribution amount and frequency. The system should take these into account when calculating.

4 Design


4.1 General Design Decisions

We have chosen pandas dataframes [14] as the common data format for both data exchange and any calculations. Pandas provides us with data structures “that cohere with the rest of the scientific Python stack” [15], such as NumPy, which we are using to calculate historical returns and risk metrics (4.4). Additionally, it is supported natively by many third party APIs and can even be used to read data from SQL databases. For additional information, please consult the official pandas documentation [14].

4.2 Overview of System Architecture

Before discussing any specific component and architectural layer in depth, it is worth revisiting our original architecture [2].

Figure 4: Original Thalia System Architecture [2]

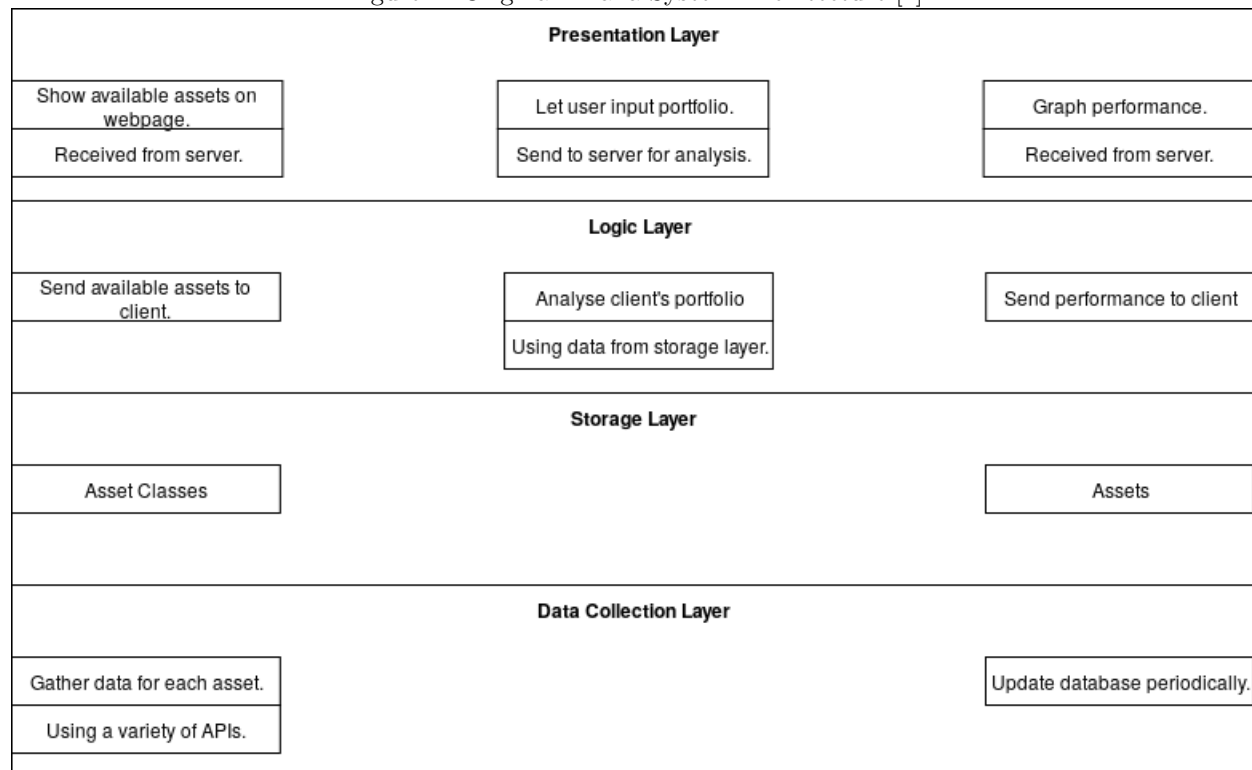

The above schematic illustrates how we modified a typical Three Layer architecture [citation needed] to include a Data Collection Layer. Subsequent discussion will refer to this layer as the ‘Data Harvester’. It consists of adapters for third party APIs which offer price data for financial assets. The associated API will be queried according to a configurable interval to allow for live updates to our price data. Additionally, initial seeding of the database with historical price data can also be achieved via the Data Harvester. The decision to isolate this system component has been made in order to increase security by limiting the access of the Thalia web service to the financial data database to read-only and to allow for independent scaling of the Data Harvester and our web service [2].

While the architecture of our system has stayed the same, there have been some modifications to individual components. Most notable are the changes to the Database Structure examined in 4.6. The following sections will provide for a discussion of design decisions made on a layer-by-layer basis.

4.3 GUI Structure

The Graphical User Interface of Thalia consists of two main parts. One is a *static* website created with Html 5 [16] and stylised with the help of Bulma [?]. The second is a *dynamic* Dash [?] page, which is basically the bulk of our application. In the following paragraphs we will discuss these separately.

4.3.1 Thalia Web

Thalia Web consists of 5 pages, which all serve as a cover for our application. We aimed at creating an authentic and modern looking website that attracts users. This was done by following a consistent style for the whole website, i.e. using the official colours, motto and Thalia logo, discussed in ??.

While Thalia was not meant to be used on a smaller devices due to the nature of our application, with the help of Bulma every component of Thalia Web is responsive. Consequently, the layout of the website changes so that it fits the browser size perfectly.

Even though it is possible to navigate between pages by urls directly, we have designed a navigation bar for this purpose. The look of this navigation bar depends on the device of the current user and whether the user has already been logged in or not. By default an unauthenticated user will see the navigation bar visible on Figure23.



Figure 5: Thalia Navigation Bar

In case Thalia is launched on a mobile phone, the navigation bar becomes a so called "hamburger button" and dropdown menu visible on Figure24.



Figure 6: Thalia Navigation Bar - Hamburger

For the rest of this section we shall assume that the application was launched on a computer, although the layout is identical and intuitive in both cases.

Homepage

We shall not discuss every page separately, as they are identical, for a full walkthrough please read 7.3. As an example of the design let us look at the homepage, where users should arrive by default.

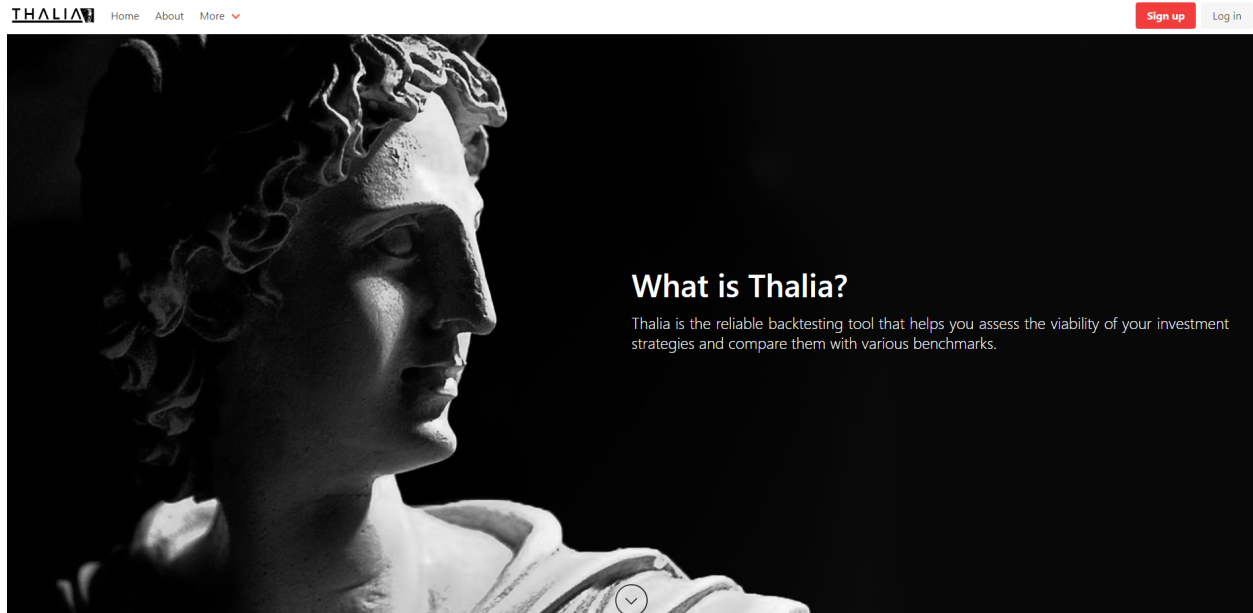


Figure 7: Thalia Homepage (source: <http://ec2-54-211-238-18.compute-1.amazonaws.com/>)

As users arrive at the homepage they are greeted with a short description on Thalia and the process of backtesting. We have designed the homepage that the navigation bar and the Thalia Logo fills the screen completely. To indicate that the page does not end there, we have added a scroll down button, which with the help of a JavaScript [17] animation takes the user down to the bottom of the page. Here the user may encounter a small register form, or in case the user is logged in, a link to the dashboard, i.e. the main application.

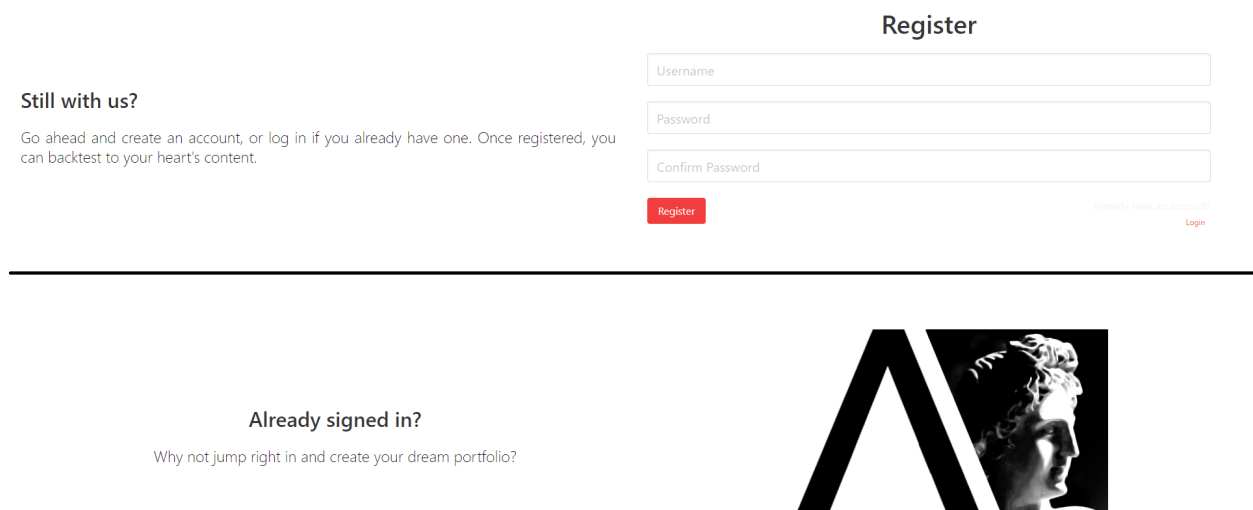


Figure 8: Thalia Homepage 2 - Top: User not logged in; Bottom: User recognised

Log In and Sign Up Pages

In case the User is not yet logged in, links for the Log In and Sign Up pages are visible on the navigation bar as seen on Figure23 or Figure24. Both of these forms are quite common, with the login requiring:

- Username
- Password
- (Optional) Remember me

And for signing up, the fields are:

- Username
- Password
- Confirm Password

As standard, the registration fails when the user enters different values to the Password and Confirm Password fields. In this case the user is prompted to try again.

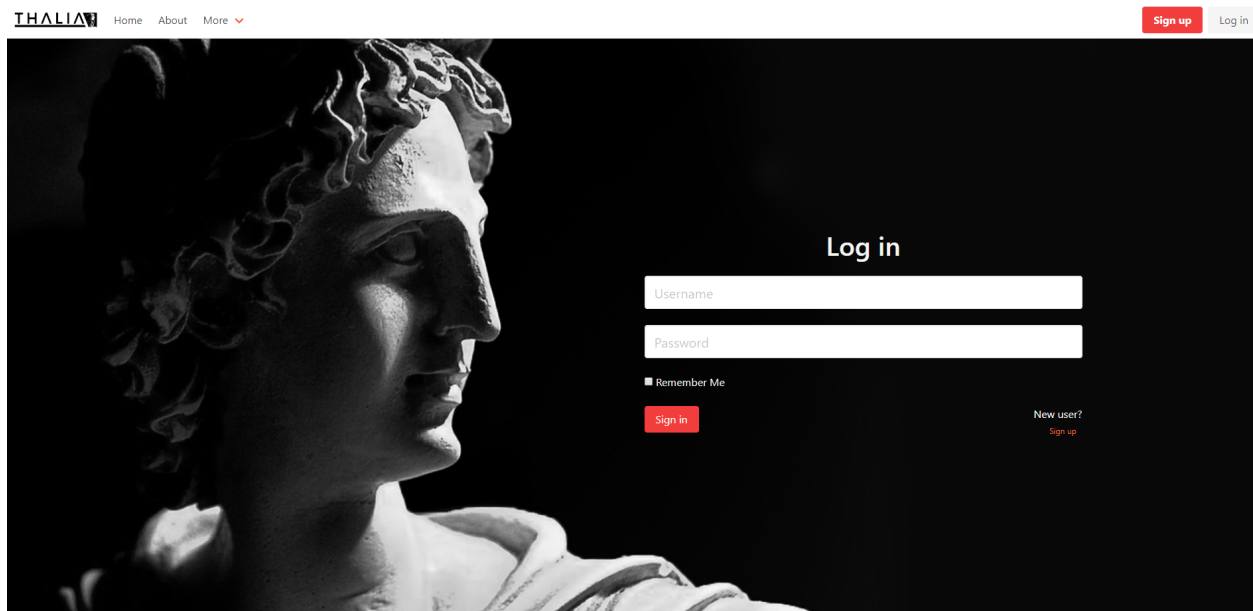


Figure 9: Thalia Log In Page (source: <http://ec2-54-211-238-18.compute-1.amazonaws.com/login/>)

In case the user is already logged in and attempts to access these pages, he or she gets redirected to the homepage. In addition the navigation bar changes, allowing to log out. Opting so the user finds themselves at the homepage.

4.3.2 The Dashboard

“Dash apps are composed of two parts. The first part is the ”layout” of the app and it describes what the application looks like. The second part describes the interactivity of the application...” [18]. Creating the Dashboard with Dash meant using Python classes for all of the visual components of the application.

Writing code for the layout was intuitive, but cumbersome, as on top of the html-like structure, it also needed to be correctly indented. As such, we needed to rely on refactoring a lot, chopping the layout code into smaller manageable components. In our final design we have decided to divide the Dashboard into tabs, which helped us achieve a more intuitive look and organised code base. The layout of the dashboard can now be initialised as follows:

```

1 import dash_core_components as dcc
2 import dash_html_components as html
3 from . import tabs
4
5 layout = html.Div(
6     html.Main(
7         [
8             html.Div(
9                 [
10                    dcc.Tabs(
11                        [
12                            tabs.tickers(),
13                            tabs.summary(),
14                            tabs.metrics(),
15                            tabs.returns(),
16                            tabs.drawdowns(),
17                            tabs.assets(),
18                        ],
19                        id="tabs",
20                        value="tickers",
21                    ),
22                ],
23                className="column",
24            ),
25        ],
26        className="columns",
27    ),
28    className="section",
29 )

```

Listing 1: layout.py - Example of Dash Code

Upon arrival to the Dashboard, only the Ticker Selection tab is available to the user. This is where, the user is expected to input their investment strategy. Although this process is fairly intuitive, and is done by using dropdown menus, input fields and standard date selectors, a more thorough walkthrough can be found in 7.3.

For the selection of assets we have decided to take an alternative approach visible on Figure31. This was done mostly because of the limitations of Dash discussed in ??, but came with its own benefits.

Ticker:

	AssetTicker	Name	Allocation
×	SPY		1
×	VTSAX		2
×	JPY		1

Figure 10: Thalia Dashboard - Assets Table

The official documentation describes the dash table as: “Dash DataTable is an interactive table component designed for viewing, editing, and exploring large datasets” [19]. Working with the dash table is also quite simple, as its data can be accessed by addressing the id of the table and then the data component. For a further explanation on registering Dash Components, read 5.3.2.

Accessing the data like this also allowed us to fulfill one of our requirements, that is to support portfolios

with a large number of assets. This would have been significantly harder, if not impossible, with alternative approaches, see ??.

To compare investment strategies, the user may add portfolios via the "Add Portfolio" button. Due to the arguments presented in ??, we have decided to set the maximum number of portfolios to 5, compared to letting it be dynamic. In addition, it is possible to select from a set of benchmarks, also known as lazy portfolios. Having selected one, the user will find the table populated with the desired assets and proportions.

When the user is content with the input, they can start the backtesting by clicking the submit button. If all required fields are populated, the user is taken to the summary tab. This as well as all other tabs are now unlocked.

Showing the Results

Many studies have shown that one most important factor when designing a dashboard application, is to show the right data using the right visualization tools [20] [21]. In our case we have already established which metrics, and plots are the most important to the users. When the user lands on the summary tab, it is these key metrics that are presented, leaving a more detailed analysis for the relevant tabs. This way the user is not overloaded with information as the results are presented.

Having decided on 'What' the user should see, now comes the 'How'. In our final design we combine data visualization techniques to make the dashboard look interesting. Key metrics are shown either in a 'box', which is a core building block of a dashboard, or in tables. Proportions are visualised using pie charts, whereas relative differences are shown with the help of a bar chart. Some examples can be seen on Figure11.

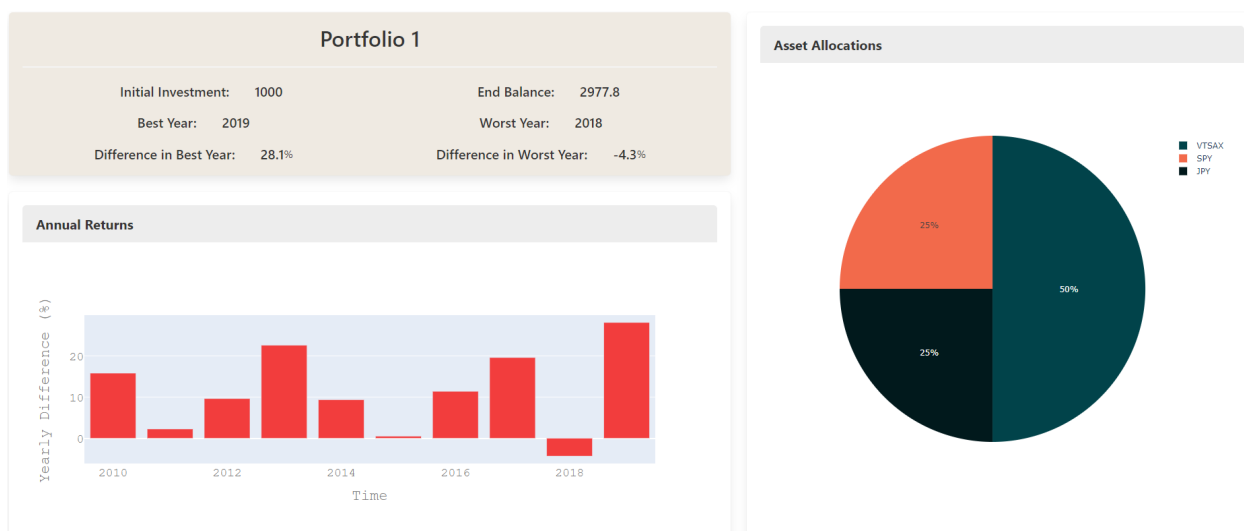


Figure 11: The Dashboard

Among these charts can the user find one of the key components of our application, the Portfolio Growth Plot. This graph is crucial for our application, as it is a visualisation for two of our main functional requirements, i.e. showing the total returns of a portfolio over time, and the comparison of strategies. Thanks to Dash this, and all other graphs are fully interactive. The user may zoom in on selected areas, hover over desired data points, save plot as image, etc.



Figure 12: Dash Functionalities

Showing this in action on the Portfolio Growth Plot can be seen on Figure13. In this case the user is about to enlarge the selected region, to inspect the plot closer. Resetting the graph can then be done by one of the buttons visible on Figure32.



Figure 13: Dash Functionalities - Portfolio Growth

4.3.3 Changes to the Initial Design

The design of the Dashboard was done according to the wireframes we have provided last term [2], also visible on Figure14.

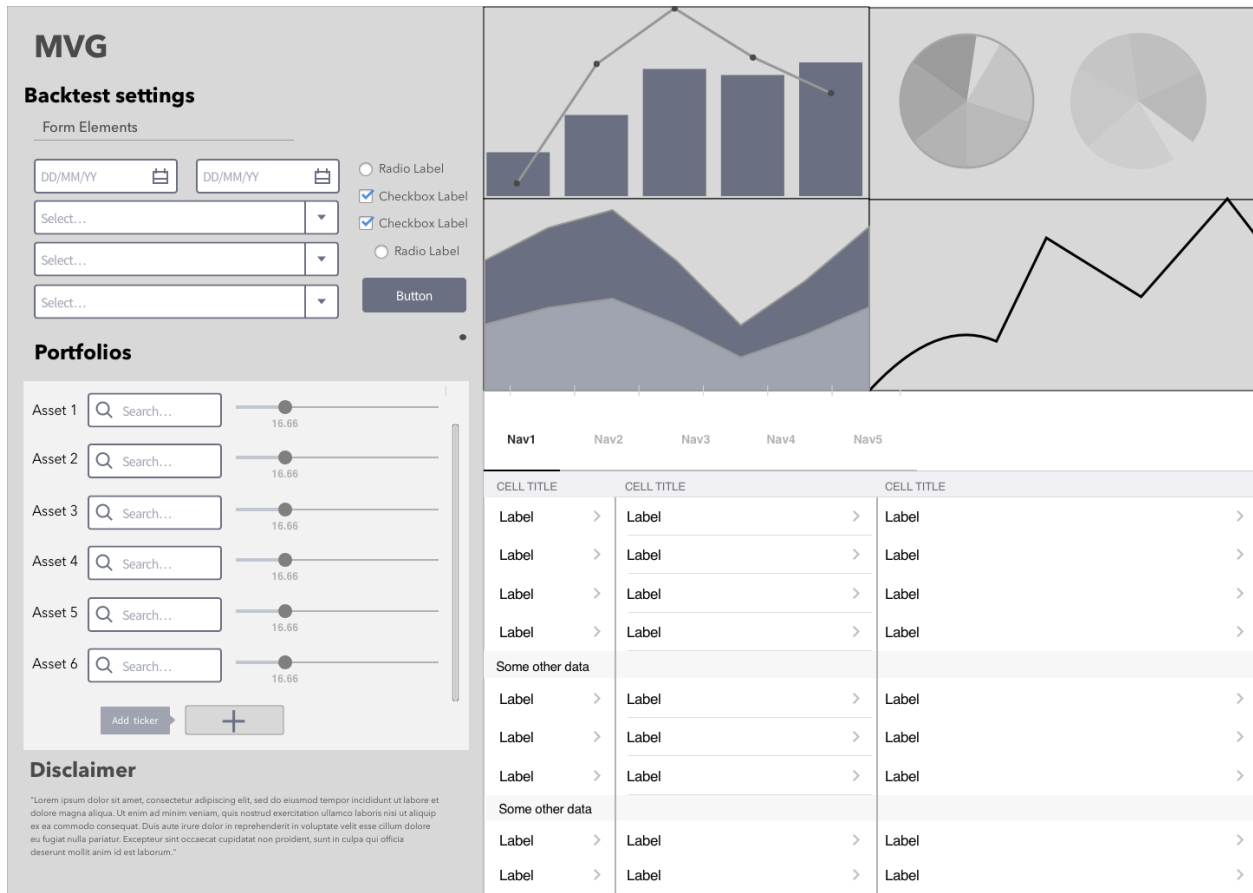


Figure 14: UI Wireframes

As we can see we managed to encapsulate the overall look as we envisioned with minor changes only. The data is significantly better distributed by the use of tabs, giving a less cluttered UI. In addition, we have decided not to implement the aside menu, partly because it was unnecessary, but partly because it suggests that the backtest results can be changed on the go. This, as we have realised was not so feasible, due to excessive calculations in the Business Logic Layer.

One change we had to make was the use of the Dash table instead of the approach visible on Figure14. The benefits of this change as previously discussed. In addition, we have also decided to discard the sliders as a way of changing asset allocations.

For portfolio comparison, we also had to enable inputting multiple strategies. As seen on Figure14, this is something we have not accounted for when planning the design. The implementation of this feature lead to a full refactor of the UI code, as it came with an excessive amount of code due to the arguments presented in ???. Fortunately, this issue was addressed relatively early, and resulted in the current design.

4.4 Business Logic Structure

The responsibility of our business logic can be summarised as follows: Given an investment strategy specification input from a user via the GUI, retrieve relevant financial data from the database to perform calculations for the historical performance and associated risk metrics.

To achieve this, we have developed a library (Anda) that performs the necessary calculations. Anda is decoupled from both the presentation and database layer by relying on external providers for any price data and the specification of a strategy. This decision has been made to allow for alternative sources of price data in the future. One of our optional features for future development is allowing users to input their own price data for assets not supported by Thalia. This data could be uploaded, for example, as a CSV file or JSON.

Without our current design, i.e. by coupling calculation of performance and metrics to database access, we would have to modify the business logic to support multiple data sources. Given our current implementation, however, we can simply parse the user data into a pandas dataframe in a wrapper around Anda and then call functions within the library as require. Currently supported metrics include Total Return, Max Drawdown, Best / Worst Year, and the Sharpe and Sortino Ratios. However, the library is open for extension, hence additional metrics may be added at any point.

For a closer look at how an investment strategy is specified, consider the following class that serves as input to Anda library functionality (e.g. for calculating the Sharpe Ratio [citation needed]):

```

1 import pandas as pd
2
3 class Strategy:
4     def __init__(
5         self,
6         start_date: date,
7         end_date: date,
8         starting_balance: Decimal,
9         assets: [Asset],
10        contribution_dates, # implements __contains__ for date
11        contribution_amount: Decimal,
12        rebalancing_dates, # implements __contains__ for date
13    ):
14        self.dates = pd.date_range(start_date, end_date, freq="D")
15        self.starting_balance = starting_balance
16        self.assets = assets
17        self.contribution_dates = contribution_dates
18        self.contribution_amount = contribution_amount
19        self.rebalancing_dates = rebalancing_dates

```

Listing 2: setup.py - Development environment

Here, Asset is a simple dataclass consisting of a ticker string (e.g. ‘MSFT’ for Microsoft), a weight as a share of the portfolio overall (e.g. 0.25), a pandas dataframe holding historical price data ordered by date, and a pandas dataframe for dividends data (if any).

As alluded to earlier, functions within the library depend on a Strategy object for their calculations. For example:

```

1 def total_return(strat) -> pd.Series:

```

Listing 3: setup.py - Development environment

will calculate a series of total return values ordered by date within the date range specified in the passed Strategy instance.

Another important design decision has been the choice of data type to represent money, for example for price data. For this, we have chosen the Decimal type from the Python Standard Library decimal module, since it “provides support for fast correctly-rounded decimal floating point arithmetic” [22]. As rounding errors and imprecision are unacceptable for our application, using the Decimal type will allow us to reliably compute figures for prices, risk metrics, etc.

Finally, we have chosen NumPy [23] for performing numerical calculations as this allows for highly optimized computation through the use of vectorized operations.

4.5 Data Harvester Structure

4.6 Database Structure

4.7 Data Segregation

The decision was made early on to horizontally partition the data store by Thalia into two parts. One consisting of data related to users and user accounts and the other of financial data related to asset classes, assets and their historical prices. The following is the list of reasons the team documented for this decision:

- One alternative revenue stream we identified early on was the sale of our financial data as a separate product. This process would be trivially easy if it was stored in a separate database.

- Although the security of both types of data is important to our business model, protecting user's private information is the highest priority. The financial data is accessed by the data harvester, a separate program gathering data from many sources on the web and introducing additional security risks. Data segregation helps limit the scope of a potential data breach [24].
- The two types of data serve two separate purposes. The modules responsible for managing each are also decoupled. Thus, separation helps to enforce the principle of least concern.
- A large corpus of guides and examples on how to manage user accounts is available online. Extending any of these to include financial data might be difficult, and risks leading to bad design.

The separation of dissimilar collections of data is a practice widely adopted in industry. Criteria for assessing when this approach is appropriate have also been documented. [25] Based on the decision to use SQLite as our DBMS and to maximize the portability and security of the financial data, we decided to implement this decision by using two separate databases.

4.8 The Data Layer Module (Finda)

The Finda module was designed to implement the data layer, acting as an intermediary between the data harvester/business logic and the financial data. It allows users to manage a number of databases implementing a common schema and give them access to a suite of tools for reading, writing, and removing the data stored in each. In addition to this the Finda module implements the following features:

- A system for managing user permissions to help reinforce separation of responsibilities among Thalia's other modules.
- Integrity checks to ensure the integrity of the data provided to the end user.
- A suite of administrative features to aid with managing the application back end.

Users can access these features through an outwards facing interface object, designed based on the facade design pattern [26].

Finda's design was modeled after object relational mappers (ORMs), libraries offered by most popular web frameworks the use of which was prohibited by the project constraints. Although the implementation of what is essentially our own ORM proved to be costly in terms of developer time, it allowed us to create a more focused module tailored to our requirements. This helped to streamline the development of other modules.

5 Coding and Integration

After a brief overview of the project and the project plan, this section will focus on the main technologies used in the project and the rationale behind choosing them. Moving on, we will discuss how these components were integrated and eventually deployed.

5.1 Overview

One of the first decision we have made this term was to completely recreate our prototype of Thalia. Firstly, this radical move was the consequence of a new implementation decision (for more detail see 5.3.1). Secondly, as prototypes are meant to be disposable and are designed only to answer key questions about the system [27], the proof of concept served its purpose, giving us a chance to refine the structure and the quality of the code.

Despite the risks posed by using an Software Version Control (SVC) Host such as GitHub, we have decided to continue using it as our software development platform. The reasoning behind this builds on the argument developed in our Technical Report [2], which highlights that our, that our Data Processing Module is a completely separate component in our system which none of the other components is able to access. Additionally, we are storing API keys as environment variables in a file that is not tracked by our SVC system, which minimizes the probability of us exposing sensitive data.

TODO talk about API keys and security measures

We have also decided to develop the application with python as our main choice of programming language. Even though this choice seemed obvious from the beginning, we did consider its main benefits, these would be the following:

- Python is a high level programming language allowing us to better focus on the application.
- A standard choice for prototyping.
- Provides superb third party libraries and frameworks for free.
- Easy to integrate if we were to choose other languages at some point in our development.
- The whole team was already familiar with the language, saving us the precious time needed to learn another programming language.
- Our application does not require an unreasonable amount of computation, so there is no need for a more efficient programming language such as C. 5.3.3 [28].

We will discuss other technologies used in more detail after the discussion on project planning.

5.2 Planning

Early in the inception phase of development we have decided that our goal was not to have fixed responsibilities in our team, allowing everybody to work on each component of the system. This decision has also eased the code review process, as we had no status differences to distort the error-correcting mechanism [29]. Furthermore, since no team member was the sole developer of a system component, this allowed us to direct comments at the code and not the author [30]. For these reasons we have decided to follow the Egalitarian Team structure, and make use of the flexibility offered by it.

Our workflow was centered around the tools provided by GitHub. We used a ticketing system to divide and distribute tasks among team members. These tickets were sometimes given by the team on the weekly meetings, but occasionally they were chosen by the member proposing the feature or change. Our goal with this approach was to divide larger jobs into smaller tasks.

A typical ticket in our project was an encapsulation of a user story, as it consisted of a title, a one liner, value, acceptance criteria, and sub tasks. In the first half of development we also used effort-oriented metrics, called story points to measure the amount of work but we decided to abandon this aspect. An example of a ticket can be seen on Figure15.

mara42 commented on Nov 17 2019 • edited
+
😊
...

As a user, I want to see the results of a backtest, so I can use the tool.

Value

- Working product

Acceptance criteria

- Does pressing submit on the portfolio page return results of the backtest?
- Do the results contain a table of key metrics?
- Do the results contain a graph?

SP:?

Subtasks:

- ☒ Send user input to backend
- ☒ Send backtest data back to frontend
- ☒ Create graph
- ☒ Create table

Figure 15: Ticket Example (source: <https://github.com/>)

TODO update git stats

Throughout the whole project we had a total of 110 tickets, and 71 pull requests. The following graph also shows the number of contributions to master, excluding merge commits.

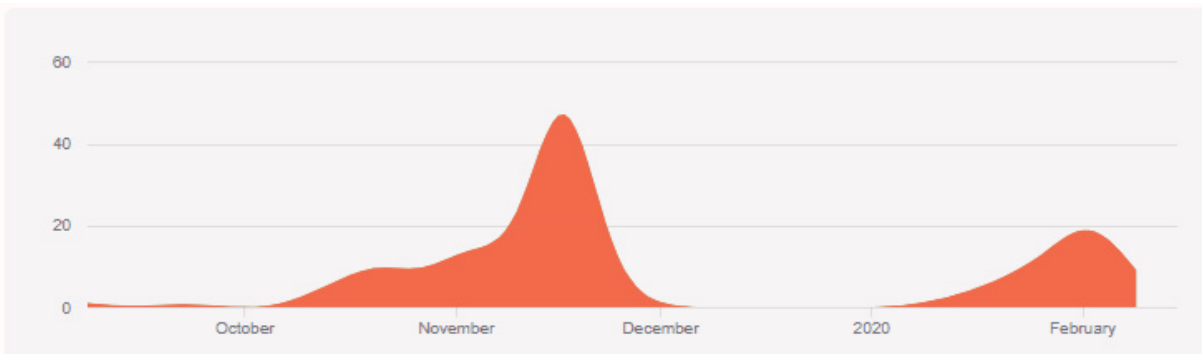


Figure 16: Contributions to the Master branch (source: <https://github.com/>)

Nevertheless, this was not always achievable especially in the beginning of the development when more crucial components of the systems were developed. In these cases, we assigned the ticket to a pair, or group of people. This approach achieved the following:

- Improved the overall code quality and fastened production [31].
- Minimised review time on the long run.
- Distributed the knowledge of large system components amongst a few people instead of one.
- Eased introducing the new team member to the project.

In addition, we also had a scrum board as an overview for the ongoing tickets. Although in the Scrum community there are ongoing discussions about the benefits of a physical scrum board over an online one

[32], given no actual workplace this was not possible to achieve. This allowed us to see which tickets needed to be reviewed and which were ready to be merged. The tickets/cards were distributed into columns, such as To do, In progress, Review in progress, Review complete and Finished. A truncated picture of this scrum board can be seen on figure Figure17.

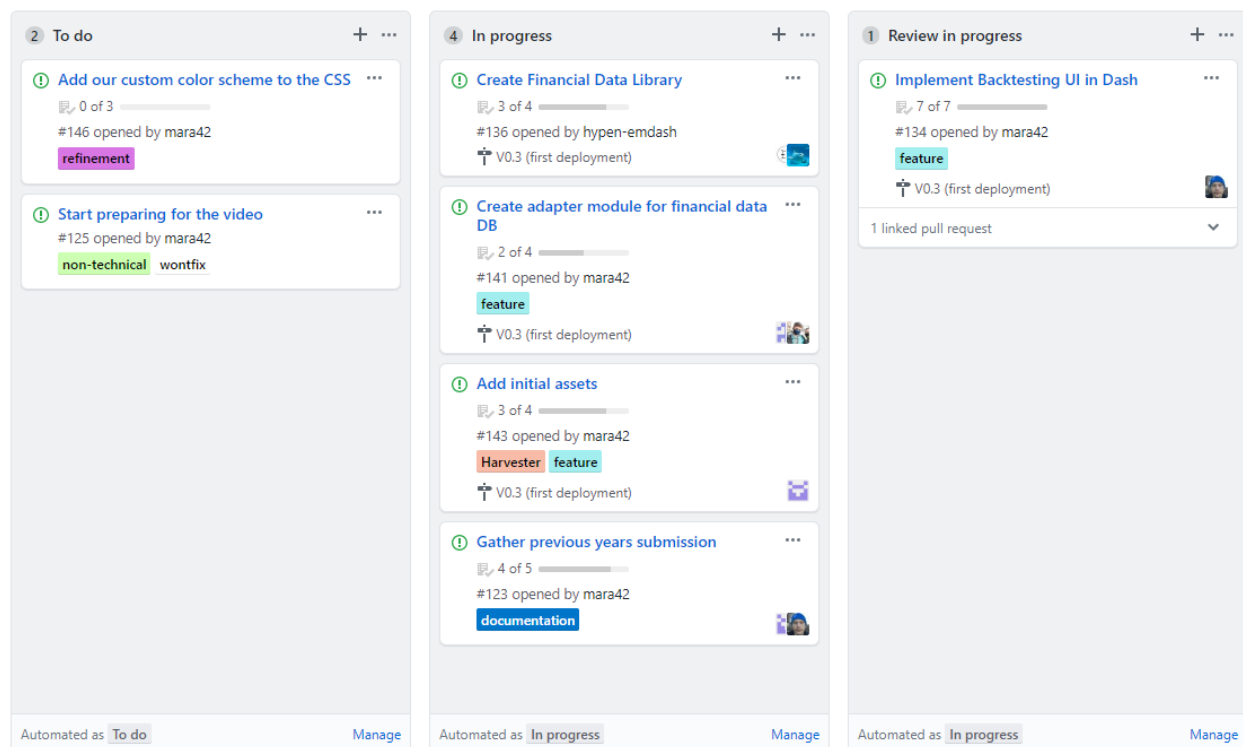


Figure 17: Scrum board - truncated

The workflow then largely depended on the task at hand and the person working on it. It was up to them if they met for pair-programming, or chose to work individually. In the beginning we all agreed on the developing environment and coding standards (for a detailed analysis see the later section 5.4). Since this report was a relevant portion of the workload, we decided to treat it as code. The report was written in \LaTeX , first creating the overall structure of the document with a `main.tex` compiling the sections together. This let us to work on different sections separately just like features in our software.

Regardless of the nature of the ticket, the week, or in case of some larger tasks, two weeks, ended by the creator indicating that the changes were ready to be integrated. This was done by publishing the changes and creating a new pull request, pushing the changes onto the master branch. To ensure code quality, we set up a continuous integration (CI) environment (more on that in 5.4). After all checks have passed, the changes were successfully integrated into the code base.

5.3 Key Implementation Decisions

Let us now discuss the main technologies used in our project, these can be categorised as follows:

5.3.1 Web Framework

Choosing the right web framework was more controversial than originally planed. The two major options for Python are Django and Flask. Although we decided to use Django for our MVP in the first semester, we had to spend a significant portion of the time available learning the framework, so we had to decide whether we were going to stick with it or learn Flask. In the end, we opted to go with Flask for the following reasons:

- Django has one architecture that all projects must share, and we have designed the architecture for our project ourselves. While neither architecture is wrong, the two are not compatible. Flask, on the other hand, is structure-agnostic, so we can lay out the code as we see fit.
- Flask comes with the bare minimum for web-development, which means that we don't need to manage the complexity of any feature we're not using. Django has a more complete feature-set from the beginning. This would be desirable in a large web application, but introduces significant overhead in our case, where the website has only a handful of pages.
- Django all but insists on using its ORM for all database interaction, while we plan to have a more manual approach.
- Our concerns were also confirmed by more experienced web-developers, suggesting simpler alternatives.

As stated this decision has contributed to the opportunity to recreate the basis of our application, and to apply what we have learnt from our prototype.

5.3.2 GUI

5.3.3 Business Logic

The business logic module sits at the very core of our application. We require it for producing a time series of a portfolio's performance as well as selected key risk metrics of a given asset allocation. This output is consumed by our web application and presented in plots and tables as described in 5.3.2.

Research into developing this module was initiated by listing our requirements for its desired behaviour. We identified that it should support:

- Specification of a portfolio as a set of pandas dataframes, the common data exchange format in our application
- Calculation of a portfolio's return over time
- Regular contributions to mimic saving
- Rebalancing strategies to reestablish the desired weighting of a portfolio
- Calculation of key metrics, including the Sharpe and Sortino Ratio, Max Drawdown, Best and Worst Year
- Collecting and reinvesting dividends for equities

Using these requirements, we struggled to find an open-source library that would handle these tasks for us. While backtesting libraries written in Python are available in abundance (e.g. PyAlgoTrade [33] and bt [34]), each of these was lacking in at least one critical aspect. None of them support specifying a portfolio using absolute or relative weights and instead seem to focus on backtesting trading strategies involving just a single asset while using technical indicators. Thus, we made the decision to develop our own library for handling the aforementioned tasks.

The result of this effort is "Anda" (short for analyse data). For each of its functions, Anda takes as input a Strategy object that specifies the entire list of parameters for a backtest, including contribution dates, a list of assets with associated price data, dividends for equities, etc. Calculations are performed on a per-metric basis by separating them into individual functions. This approach has allowed us to tailor the entire business logic module exactly to our needs without having to produce complicated wrapper code for existing backtesting libraries.

5.3.4 Database & Finda

Another major technology decision was the choice of appropriate database management system (DBMS) for storing historical price data collected by the data harvester. Before committing to a specific technology we identified the following requirements a suitable DBMS should fulfil:

- **Schema:** The structure of our data is relatively simple, consequently Thalia does not require support for sophisticated features and data types. A suitable DBMS should be able to accommodate the database schema designed last term, with the addition of simple integrity constraints and cascade operations.
- **Support:** Ideally the DBMS should be cross platform, as this would allow us to defer commitment to a specific deployment platform until we are ready to start the CD process.
- **License and pricing:** The DBMS should be free to use and have a non-restrictive license. **PERFORMANCE:** The DBMS should be able to handle a high volume of concurrent reads to fulfil user requests. The data will be updated daily, meaning efficient write operations are a lower priority.
- **Usability:** As our team lacks experience in this field, a suitable DBMS should be relatively simple to learn. Ideally team members should be able to learn the basics in a single weekly sprint.
- **Security:** The DBMS should have a mature code base and be relatively secure, as access to financial data is a key component of our business model. Later it will likely also store data that is not available through public APIs, meaning potential data breaches could expose us to legal liability. [35]
- **Type:** Since the project constraints specify we use SQL queries, only relational DBMS supporting a version of SQL are appropriate.

MySQL, PostgreSQL, SQLite and MariaDB were subject to in depth comparison based on fulfilment of the above requirements and industry adoption [36] [37]. Our final decision was to use SQLite for the following reasons:

It is user-friendly and easy to deploy, allowing us to start continuous deployment faster. It has a small footprint and offers good performance. [36] Portable serverless design aids with development and testing. All team members have experience working with SQLite from previous term. This helps to reduce overhead of knowledge transfer.

The main drawbacks of using SQLite, namely scalability and performance are not a concern at this stage, as the current version of Thalia is meant to be a high quality industrial prototype, and as such will not contain the full range of financial data needed for marketability. Should SQLite prove to be inadequate in the future, we would be able to switch to a different DBMS with relatively little trouble, as the process of database migration is exceedingly well documented [38] [39]. To preempt any difficulties that might arise, the decision was made to design the data layer to easily accommodate such a migration.

5.3.5 Harvester

5.4 Integration and Deployment

Writing well documented and good quality code is one thing, but making sure it all works together as a whole is a completely different story. In the first term, many hours have been wasted on trying to integrate different components of the system which did not want to fit together. Even then we had some DevOps tools in place [40], but considering that we had to produce significantly less code and more documentation last term, this was not a priority.

Starting afresh the coming term, we have decided to set up the development environment again. Upon opening the setup.py file, we see a list of required libraries, and the following two lines of code:

```
1 """A setuptools based setup module."""
2 from os import path
3
4 from setuptools import find_packages, setup
5
```

```

6 here = path.abspath(path.dirname(__file__))
7
8 install_requires = [
9     "flask",
10    "flask-login >= 0.5",
11    "flask-migrate",
12    "flask-wtf",
13    "pandas",
14    "dash",
15 ]
16
17
18 tests_require = ["pytest", "coverage"]
19
20 extras_require = {"dev": ["black", "flake8", "pre-commit"], "test": tests_require}
21
22 setup(
23     name="Thalia",
24     version="0.2.0",
25     packages=find_packages(),
26     install_requires=install_requires,
27     extras_require=extras_require,
28 )

```

Listing 4: setup.py - Development environment

One of the first decisions we had to make, is to decide on a standards coding style. This is exactly what flake8 is for, which we can see amongst the extras in the code snippet above. The original documentation of flake8 defines it as ” [...] is a command-line utility for enforcing style consistency across Python projects. By default it includes lint checks provided by the PyFlakes project, PEP-0008 inspired style checks provided by the PyCodeStyle project, and McCabe complexity checking provided by the McCabe project” [41]. However, as many other developers we also decided to redefine the maximum line-length from 79 to 88 as we found this convention a hindrance.

Another tool used for enforcing uniform style was the black auto-formatter for Python [42], which formatted the code for us upon every save if enabled, and also when committing code. This has been achieved by the use of githooks [43], which are programs that are triggered upon certain git actions. For this we needed the pre-commit package for setting up these actions and writing the configuration file. This ensured that both flake8 and black have been run before publishing changes.

5.4.1 Continuous Integration

Many studies have investigated the positive effects of developing in a continuous integration (CI) environment [44], [45]. Regardless of the exact implementation, its obvious benefit is that it provides security and uniformity for projects. We already made some steps to achieve a uniform style, but had no means to know whether the code published has been also passed its tests. Note in this section we will only discuss testing as a part of CI and not the testing strategy, for that see the section 6.

Another important part of the DevOps toolchain is the use of containers, which is what Docker helps to achieve [46]. Docker helps developers focus on writing code rather than worrying about the system the application will be running on, and also helps to reveal dependency and library issues. As Docker is open source, there are many free to use docker images available online [47]. When choosing the CI environment, Docker support was one of the main requirements.

The most promising candidate for this was CircleCI [48], which is a cloud-based system with first-class Docker support and a free trial. After connecting our GitHub repository to CircleCI, and setting up a configuration, CircleCI now does the following on every pull-request:

1. Sets up a clean container or virtual machine for the code.
2. Checks previously cached requirements, for more detail see Figure18.
3. Installs the requirements from requirements.txt
4. Caches the requirements for faster performance.

5. Clones the branch needed to be merged.
6. Runs flake8 one last time and saves results.
7. Runs tests and saves results.
8. Deploys the master branch to Heroku, see 5.4.2

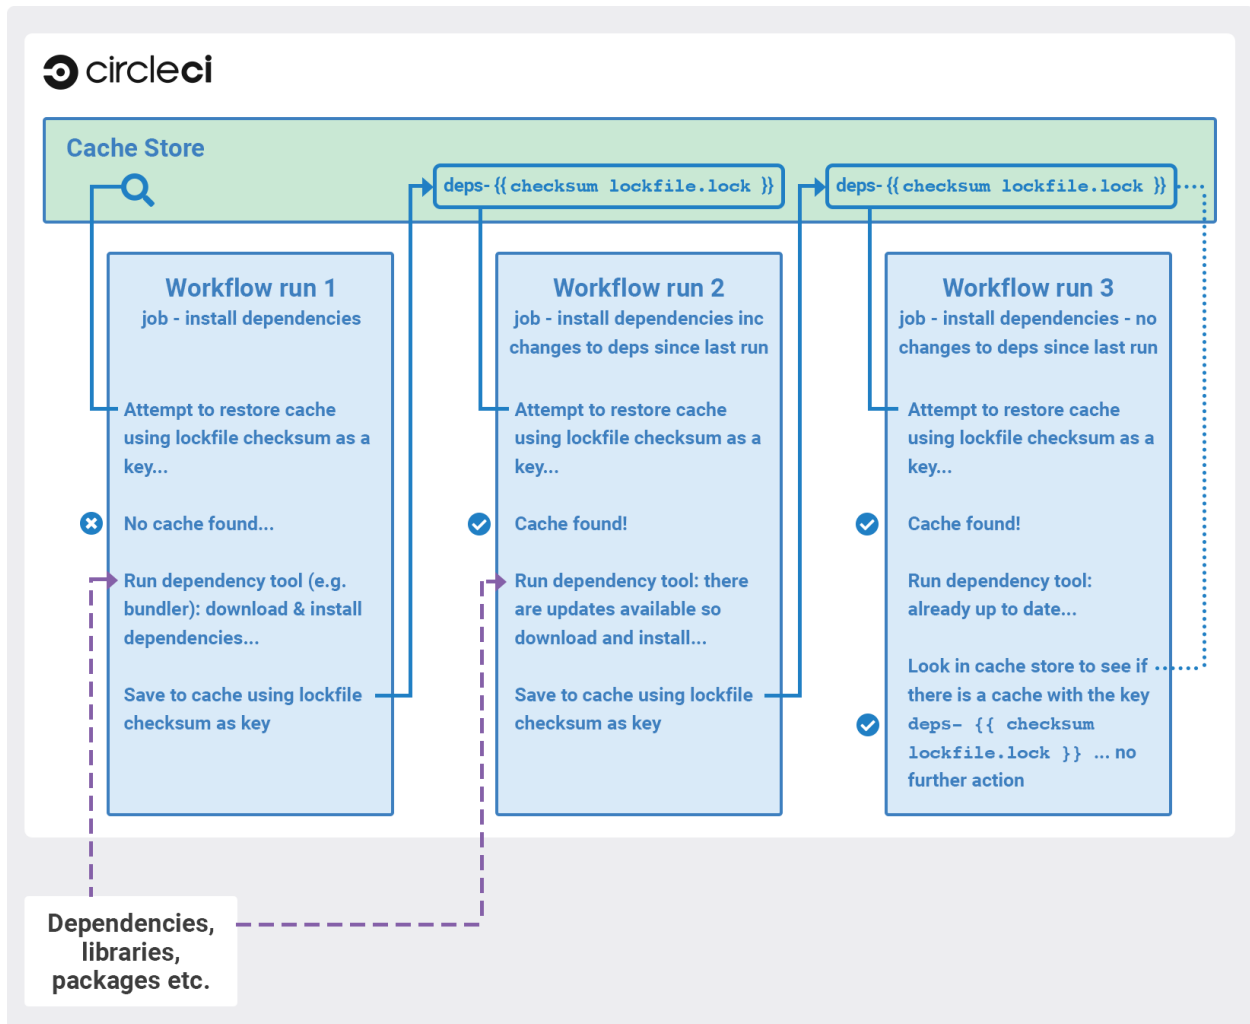


Figure 18: CircleCI on Caching (source: <https://circleci.com/docs/2.0/caching/>)

The outcome of these steps is visible on CircleCI, but more importantly also on GitHub, and it refuses to merge if failing test (or no tests) have been found.

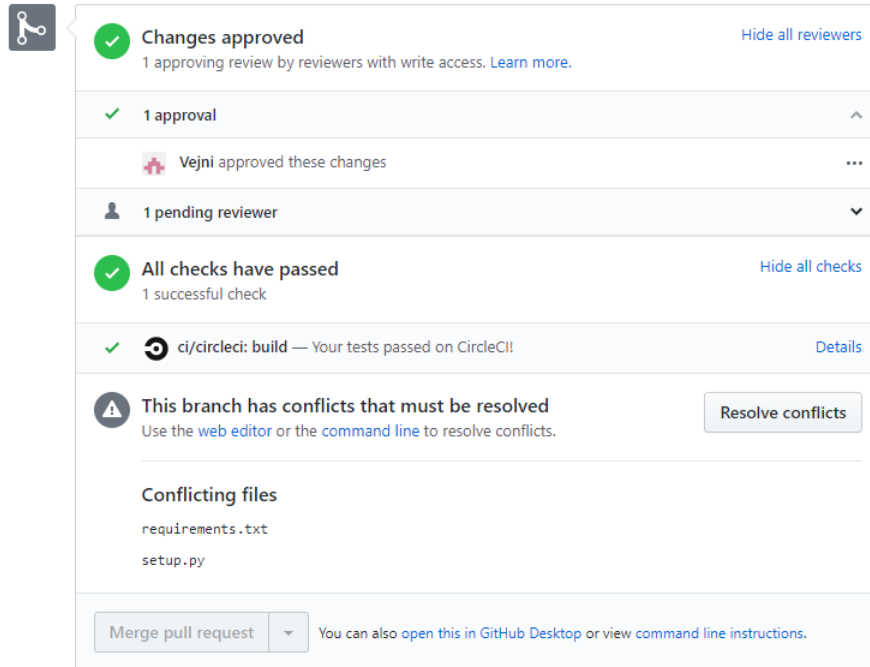


Figure 19: CircleCI on GitHub (source: <https://github.com/>)

With the help of these steps and CircleCI we managed to ensure that the code written is uniform and of good quality. It significantly reduced the time needed for integrating and code reviewing. The last step was now to deploy the system.

5.4.2 Hosting and Continuous Deployment

An overview over the literature covering reveals a plethora of different strategies for deploying and hosting web applications [49]. Our decision of how to choose among them involved the following considerations:

- Price - since we have severe budget constraints, we were looking for a cheap hosting solution
- CircleCI support - The target host should be supported by CircleCI natively to ease development of a continuous deployment (CD) pipeline

The upfront cost of buying physical servers ruled it out as an option for us. Thus, we turned our attention to using a solution that involved deployment to a virtual machine in the Cloud. Many providers for such a service exist, including Amazon Web Services [50] and Microsoft Azure [51]. While these would provide us with extensive control over the hosting process, their use involves a lot of complexity that seemed unnecessary for the initial rollout of a simple application such as Thalia.

Due to native CircleCI support and a free tier service, we ended up choosing Heroku [52] as our initial hosting provider. This enables us to host our application for free in the initial stages of development while providing ample opportunity for horizontal and vertical scaling later on, if it is required.

The benefits of using continuous deployment have been well established for multiple years and involve "the ability to get faster feedback, the ability to deploy more often to keep customers satisfied, and improved quality and productivity" [53]. Using Heroku in combination with CircleCI, our CD pipeline involves the following simple steps:

1. Upon commits to the master branch on GitHub, CircleCI triggers a workflow.
2. The workflow first executes the steps listed in 5.4.1 to ensure the validity of the current codebase state.

3. If this step is successful, the master branch is pushed to a remote repository recognized by Heroku via git.
4. Heroku executes the Procfile script stored in the root of our project to start the application using a gunicorn web server [54].

Our deployment process is thus fully automatized and immune to failing tests, as it will only complete successfully if the application is in a correct state. The full CI/CD workflow is captured by the flowchart on Figure20.

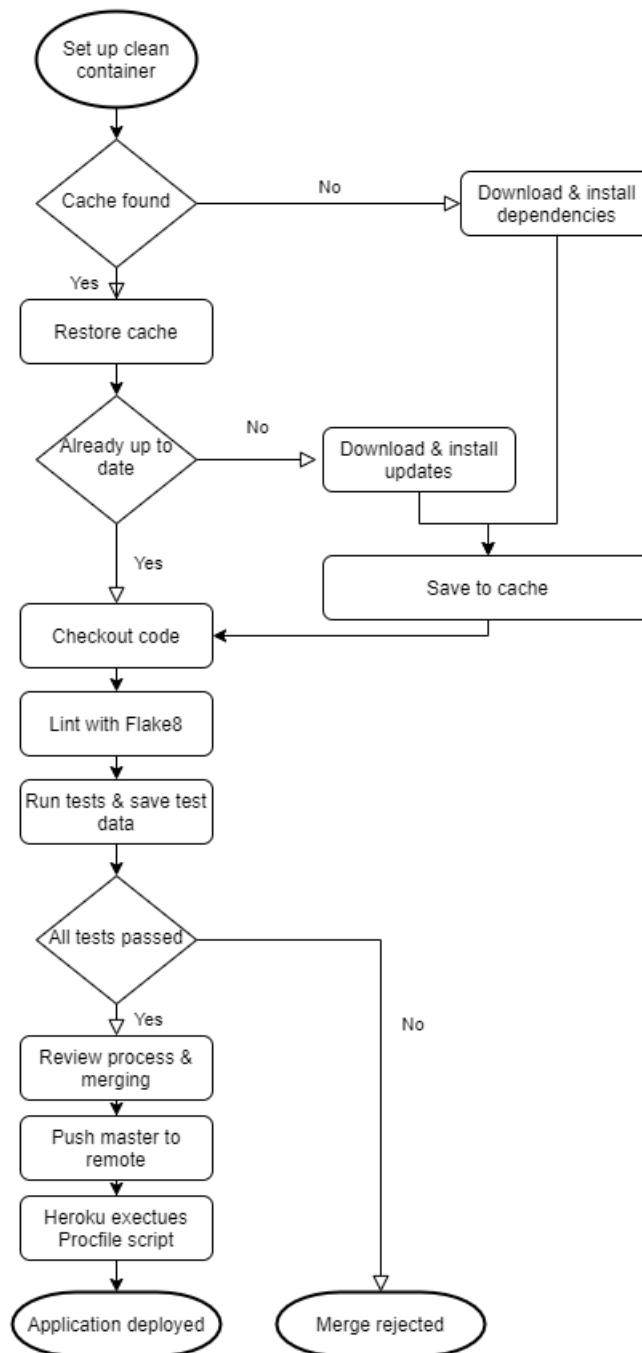


Figure 20: CI/CD workflow

6 Testing

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

7 Evaluation and further Work

7.1 Schedule

As mentioned in our Technical Report, we introduced some milestones or releases for our product based on incremental sets of features. This was done to help us stay on track with development. The roadmap based on this schedule can be seen on Figure21.

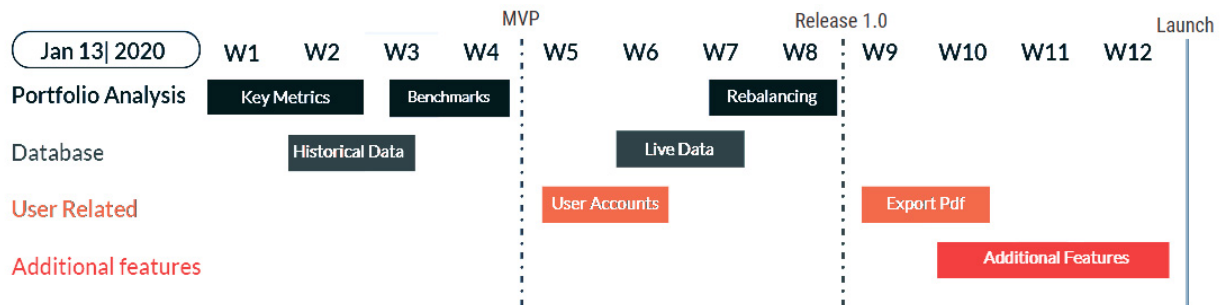


Figure 21: Technical Report: Roadmap - revisited

TODO retrospective on schedule

7.2 Feasibility Analysis

TODO

7.3 Appendix A - User Manual

7.3.1 Launching Thalia

As Thalia is a web application, it is accessible in a web browser via the url: `http://ec2-54-211-238-18.compute-1.amazonaws.com/`.




Figure 22: Thalia Web

Navigation within the application can be achieved mainly by the navigation bar, visible on Figure23.



Figure 23: Thalia Navigation Bar

In case Thalia is launched on a different device, such as mobile or in a smaller window, the layout changes to fit to the screen. In this case the navigation bar becomes a so called "hamburger button" and dropdown menu visible on Figure24.



Figure 24: Thalia Navigation Bar - Hamburger

For the rest of this manual we shall assume that the application was launched on a computer, although the layout is identical and intuitive in both cases.

7.3.2 Homepage

By default the user ends up on the homepage, although some other pages are accessible as well given the correct url. The Homepage is visible on Figure25.

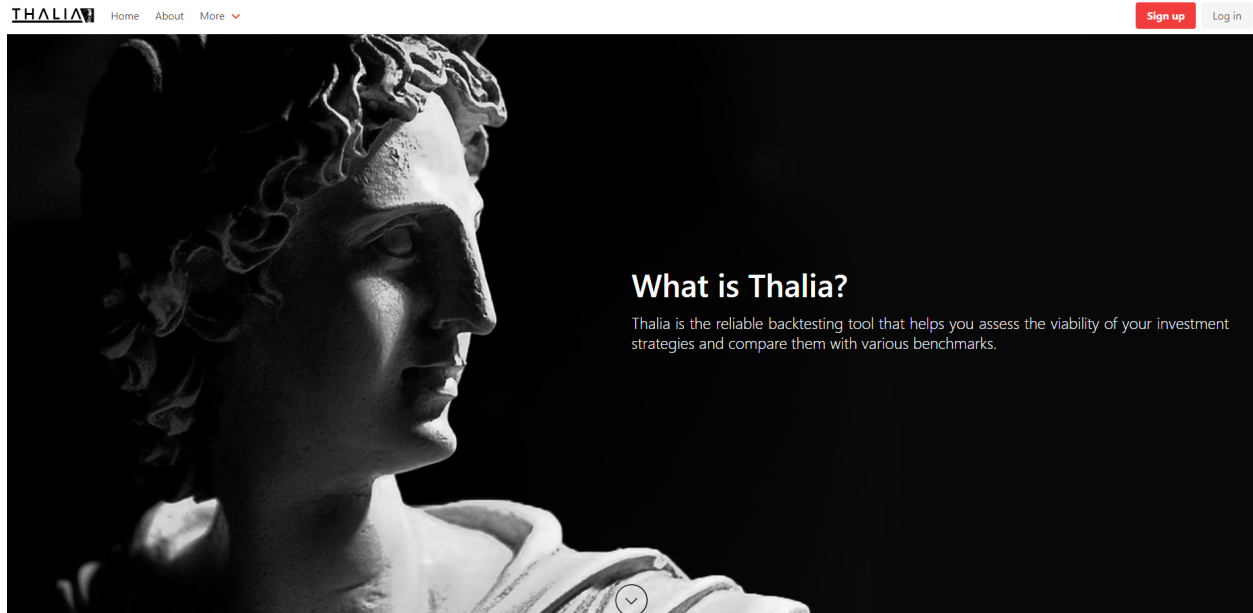


Figure 25: Thalia Homepage (source: <http://ec2-54-211-238-18.compute-1.amazonaws.com/>)

The purpose of the homepage is to provide a cover to our application. As users arrive at the homepage, they are greeted with a short description of what the software actually is. As we do not wish to have users jumping blindly into the process of portfolio analysis, following that we provide some basic information on the backtesting process. A link at the end of the description then leads to the about page, where users can read more on the topic.

Scrolling further down the user may encounter a small register form, or in case the user is logged in, a link to the dashboard, i.e. the main application.

Register

[Already have an account? Login](#)

Still with us?

Go ahead and create an account, or log in if you already have one. Once registered, you can backtest to your heart's content.

Already signed in?

Why not jump right in and create your dream portfolio?

Figure 26: Thalia Homepage 2 - Top: User not logged in; Bottom: User recognised



7.3.3 About Page

The about page of our application is to provide a more detailed description of the problem domain, and is available at <http://ec2-54-211-238-18.compute-1.amazonaws.com/about/>. The user can arrive at this page either by directly typing in the url, clicking on the learn more option on the Homepage, or by navigating here using the navigation bar.

Our About Page looks as follows:

But how does it work?

Imagine you're nearing retirement and can't afford to sit patiently through another financial crisis waiting for your investments to regain the value that they have lost. You're also passionate about finance, and devised an investment strategy, which couldn't possibly fail, you say. Imagine this dream portfolio consists of the following:

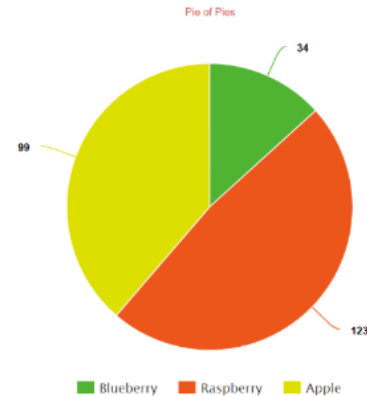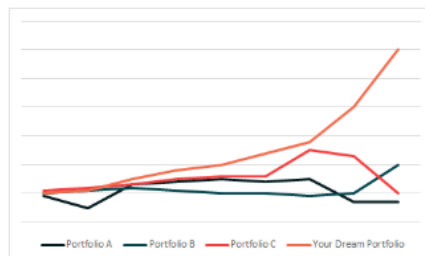

That's great, but wouldn't it be useful to consider similar portfolios, comparing how much they've lost in the worst year out of the last 50? Just to make sure that the dream portfolio indeed works. This process is known as backtesting and is usually done with the assistance of a computer.

That is where Thalia can help you, with Thalia, you can:

- Specify an asset allocation using hundreds of assets across major asset classes
- Plot the performance of strategies against each other and an index benchmark
- Gain insight into a strategy's key risk and performance metrics
- Model regular contributions and re-balancing strategies
- Save and share a portfolio to compare and discuss with peers



Figure 27: Thalia About Page (source: <http://ec2-54-211-238-18.compute-1.amazonaws.com/about/>)

7.3.4 Log In and Sign Up Pages

TODO if we introduce extra fields or regex for pw.

In case the User is not yet logged in, links for the Log In and Sign Up pages are visible on the navigation bar as seen on Figure23 or Figure24. In addition, they are directly available at <http://ec2-54-211-238-18.compute-1.amazonaws.com/login/> and <http://ec2-54-211-238-18.compute-1.amazonaws.com/register/>. Both of these

forms are quite common, with the login requiring:

- Username
- Password
- (Optional) Remember me

And for signing up, the fields are:

- Username
- Password
- Confirm Password

As standard, the registration fails when the user enters different values to the Password and Confirm Password fields. In this case the user is prompted to try again.

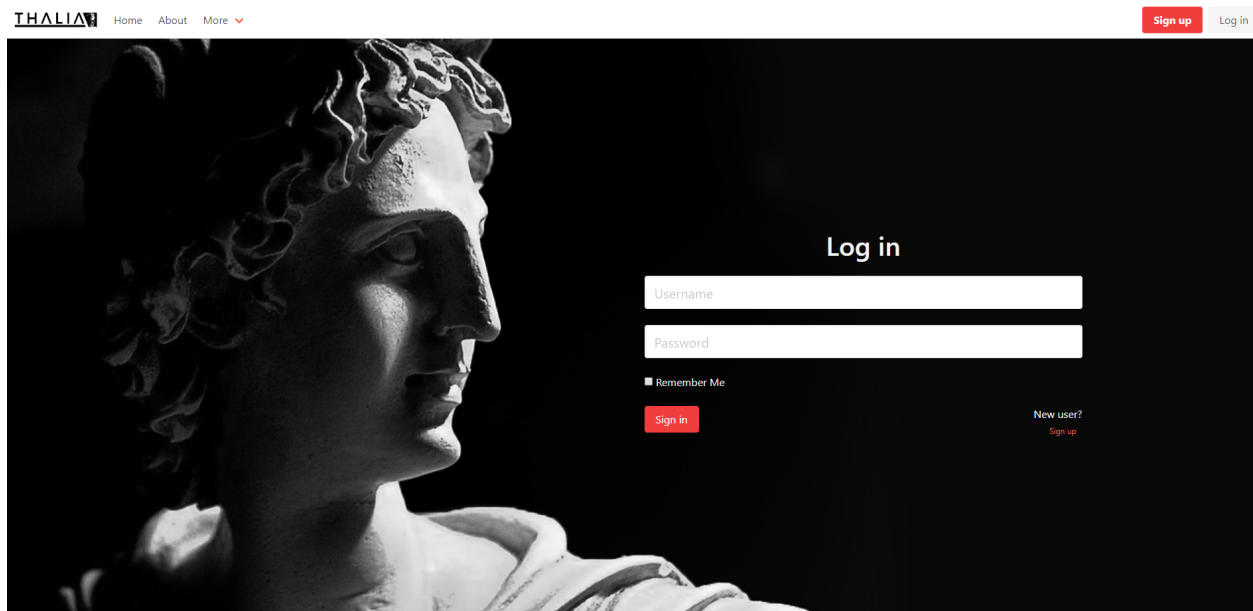


Figure 28: Thalia Log In Page (source: <http://ec2-54-211-238-18.compute-1.amazonaws.com/login/>)

In case the user is already logged in and attempts to access these pages, he or she gets redirected to the homepage. In addition the navigation bar changes, allowing to log out as visible on Figure29. Opting to log out the user finds themselves at the homepage.

7.3.5 Report Issues Page

The Report Issues Page is available at <http://ec2-54-211-238-18.compute-1.amazonaws.com/issues/> or via opening the dropdown menu on the navbar and clicking the link. This short form is for users to provide feedback, report possible issues or request features.

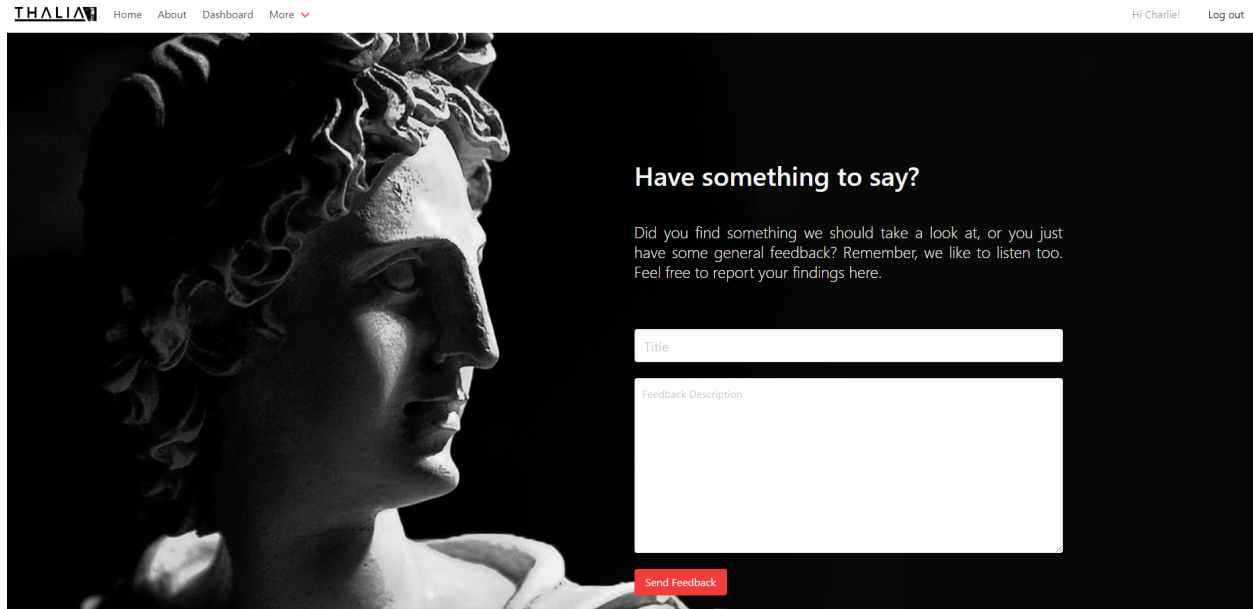


Figure 29: Thalia Report Issues Page (source: <http://ec2-54-211-238-18.compute-1.amazonaws.com/issues/>)

7.3.6 TODO PAGE

7.3.7 Dashboard

The Dashboard, our main application, is available only if the user is logged in at <http://ec2-54-211-238-18.compute-1.amazonaws.com/dashboard/> or via the link on the navigation bar. This web page is divided into tabs, which are:

- Ticker Selector
- Summary
- Metrics
- Returns
- Drawdowns
- Assets

At first only the Ticker Selector Page is accessible for the user. This is because the following tabs show only the output of backtesting a or multiple portfolios, and as a consequence are, for the time being, empty.



Figure 30: Thalia Dashboard - Disabled Tabs

Let us now consider each tab individually.

Ticker Selector

Here the user is required to input their backtesting strategy. As Thalia supports testing multiple portfolios at once (up to 5 currently) there are input fields that are portfolio specific and that are not. The latter consists only of:

- Start Date: The day the investment is made.
- End Date: The last day of the investment, defaulted to the present date.
- Initial Amount: Initial balance, default currency is dollars.

The first two of these are standard date-selectors, but also allow for typing the date directly. Next, the user enters the data specific to the current strategy.

- Portfolio Name: Defaulted to Portfolio 1, Portfolio 2, etc.
- Contribution Amount: The amount that should be regularly invested into the portfolio.
- Contribution Frequency: Specify how regularly should these contributions be.
- Rebalancing Frequency: Specify how often rebalancing should happen.
- Investment Proportions : Discussed below.

The last one is the most crucial information in a strategy. First the user selects the desired asset from the dropdown menu. The menu item also allows for typing in order to find an asset faster. The selected item is then added to the table below.

Ticker:

	AssetTicker	Name	Allocation
×	SPY		1
×	VTSAX		2
×	JPY		1

Figure 31: Thalia Dashboard - Asset Table (source: TODO)

The user then specifies the proportion of the investment, this is required to be a numeric value, representing the relative weight of the asset. For example, given Asset A with relative weight 1, and Asset B with relative weight 2, then they 33% of the investment comes from Asset A and 66% from Asset B. In case the user is content with the portfolio, they can either add another strategy via the "Add Portfolio" button, or click "Submit" to see the results. In case the user has already entered the maximum number of portfolios, i.e. 5, the button is disabled and the only possibility is to submit.

In many cases the user may want to compare their portfolio to a benchmark, that is to a small set of predetermined portfolios. These can be selected from the "Lazy" dropdown at each portfolio, which then populates the table with the desired proportions.

TODO User uploaded data

Summary


If all required fields are populated, the user is taken to the summary tab. This as well as all other tabs are now unlocked. At this point the user is shown one of the key components of our application, i.e. the portfolio growth graph. Thanks to Dash this, and all other graphs are fully interactive. The user may zoom in on selected areas, hover over desired data points, save plot as image, etc.



Figure 32: Dash Functionalities

The plot seen at the top of Figure 33 shows the total return of each portfolio. Users will typically use this graph for comparison. In addition, for each portfolio the user has given as input, the following is shown:

- Selected Key Metrics: Final Balance, Best Year, Worst Year, etc.
- Pie Chart: Proportion of each asset.
- Bar Chart: Shows how the total return changed over the years relatively to the last.

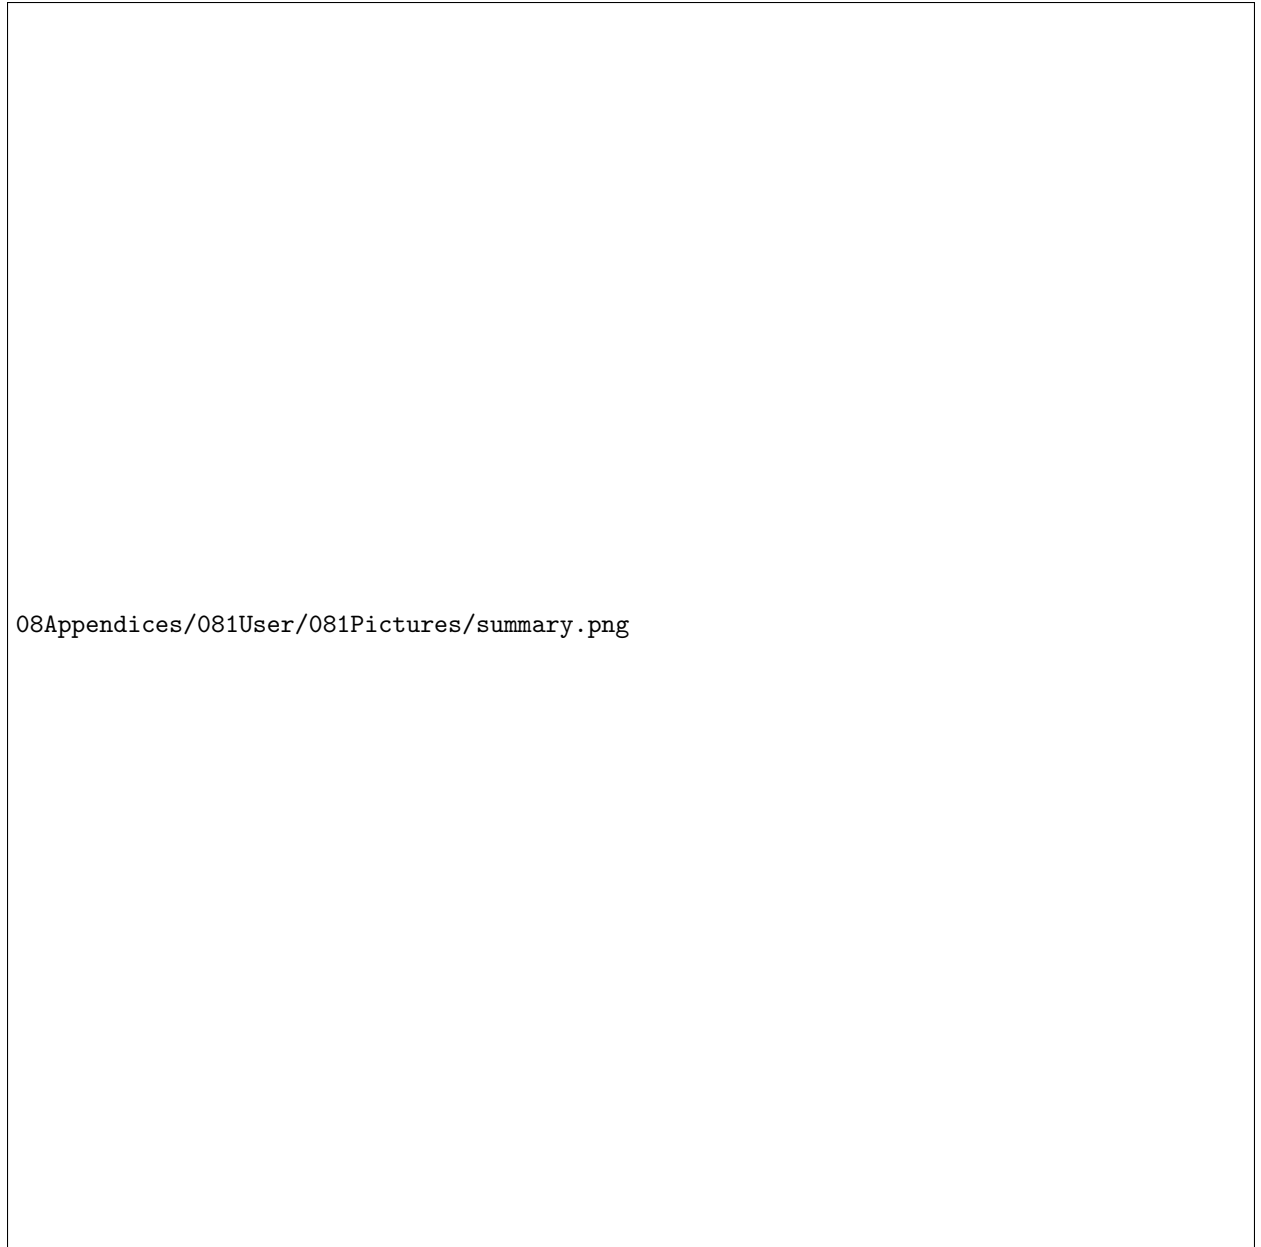

08Appendices/081User/081Pictures/summary.png

Figure 33: Dash Functionalities

Metrics

Returns

Drawdowns

Assets

7.4 Appendix B - Maintenance Manual

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

7.5 Appendix C - Problem Domain Glossary

- **Portfolio** - A portfolio is a grouping of financial assets such as stocks, bonds, commodities, currencies and cash equivalents, as well as their fund counterparts, including mutual, exchange-traded and closed funds. An investor's portfolio is the group of assets they have currently invested in. [<https://www.investopedia.com/terms/p/portfolio.asp>]
- **Asset** - Generally an asset that gets its value from being owned; can be traded on financial markets. Stocks, bonds, commodities, (crypto-)currencies are all types of financial assets. [<https://www.investopedia.com/terms/a/asset.asp>]
- **Asset Class** - An asset class is a grouping of investments that exhibit similar characteristics and are subject to the same laws and regulations. Asset classes are made up of instruments which often behave similarly to one another in the marketplace. [<https://www.investopedia.com/terms/a/assetclasses.asp>]
- **Backtesting** - Backtesting is the general method for seeing how well a strategy or model would have done ex-post. Backtesting assesses the viability of a trading strategy by discovering how it would play out using historical data. [<https://www.investopedia.com/terms/b/backtesting.asp>]
- **Standard Strategy / Lazy Portfolios** - A lazy portfolio is a collection of investments that require very little maintenance. [<https://www.thebalance.com/how-to-build-the-best-lazy-portfolio-2466533>]
- **Rebalancing** - Rebalancing is the process of realigning the weightings of a portfolio of assets. Rebalancing involves periodically buying or selling assets in a portfolio to maintain an original or desired level of asset allocation or risk. [<https://www.investopedia.com/terms/r/rebalancing.asp>]
- **Key metrics** - Performance measures of a portfolio that are of high interest to the majority of investors.
- **Standard Deviation** - The standard deviation is a statistic that measures the dispersion of a dataset relative to its mean. [<https://www.investopedia.com/terms/s/standarddeviation.asp>]
- **Worst Year** - The worst performance over any given 365 day period starting from January 1st of some year.
- **Sharpe Ratio** - The Sharpe ratio was developed by Nobel laureate William F. Sharpe and is used to help investors understand the return of an investment compared to its risk. [<https://www.investopedia.com/terms/s/sharperatio.asp>]
- **Sortino Ratio** - The Sortino ratio is a variation of the Sharpe ratio that differentiates harmful volatility from total overall volatility by using the asset's standard deviation of negative portfolio returns, called downside deviation, instead of the total standard deviation of portfolio returns. [<https://www.investopedia.com/terms/s/sortinoratio.asp>]
- **Inflation** - Inflation is a quantitative measure of the rate at which the average price level of a basket of selected goods and services in an economy increases over a period of time. [<https://www.investopedia.com/terms/i/inflation.asp>]
- **Nominal Values** - A value that is unadjusted for inflation.
- **Real Values** - A value that is adjusted for inflation.
- **Equity** - Equity is typically referred to as shareholder equity (also known as shareholders' equity) which represents the amount of money that would be returned to a company's shareholders if all of the assets were liquidated and all of the company's debt was paid off.

- Fixed Income - Fixed income is a type of investment security that pays investors fixed interest payments until its maturity date.
[<https://www.investopedia.com/terms/f/fixedincome.asp>]
- Commodity - A commodity is a basic good used in commerce that is interchangeable with other commodities of the same type. Commodities are most often used as inputs in the production of other goods or services. The quality of a given commodity may differ slightly, but it is essentially uniform across producers.
[<https://www.investopedia.com/terms/c/commodity.asp>]
- FOREX / FX - Forex (FX) is the marketplace where various national currencies are traded. The forex market is the largest, most liquid market in the world, with trillions of dollars changing hands every day.
[<https://www.investopedia.com/terms/f/forex.asp>]
- Overfitting - Overfitting is a modeling error that occurs when a function is too closely fit for a limited set of data points.
[<https://www.investopedia.com/terms/o/overfitting.asp>]
- Leverage - Leverage results from using borrowed capital as a funding source when investing to expand the firm's asset base and generate returns on risk capital.
[<https://www.investopedia.com/terms/l/leverage.asp>]
- Technical Analysis - Technical analysis is a trading discipline employed to evaluate investments and identify trading opportunities by analyzing statistical trends gathered from trading activity, such as price movement and volume.
[<https://www.investopedia.com/terms/t/technicalanalysis.asp>]

7.6 Appendix D - Project Terminology

- Anda - A library that calculates a portfolio's historical performance and associated risk metrics. The name has been chosen as the abbreviation of 'analyse data'.
- Data Harvester - Component of our system that fetches data from third party financial data APIs and writes it to the Thalia database. Retrieves both historical and live price data as well as dividends data for equities.
- Finda - An interface for our databases. Provides functionality for registering, creating and connecting to databases as well as reading from and writing data to them. The name has been chosen as the abbreviation of 'find data'.
- Thalia Web - Shorthand for the Thalia Web Server providing the service our customers interact with.

References

- [1] Arthur-Louis Heath George Stoian Daniel Joffe Marcell Veiner Martti Aukia, Albert Boehm. Thalia white paper. 2019.
- [2] Arthur-Louis Heath George Stoian Daniel Joffe Marcell Veiner Martti Aukia, Albert Boehm. Thalia technical report. 2019.
- [3] PayScale. Available at: https://www.payscale.com/research/UK/Job=Software_Developer/Salary.
- [4] Quantpedia. A comprehensive list of tools for quantitative traders. Available at: <https://quantpedia.com/links-tools/?category=historical-data>.
- [5] Fidelity. Available at: <https://www.fidelity.com/>.
- [6] MetaTrader4. Available at: <https://www.metatrader4.com/en>.
- [7] NinjaTrader. Available at: <https://ninjatrade.com/>.
- [8] Portfolio Visualizer. Available at: <https://www.portfoliovisualizer.com/backtest-portfolio>.
- [9] ETFReplay. Available at: <https://www.etfreplay.com/combine.aspx>.
- [10] Backtest Curvo. Available at: <https://backtest.curvo.eu/>.
- [11] Stockbacktest. Available at: <http://www.stockbacktest.com/>.
- [12] FURPS+ Model. Available at: <http://www.cs.sjsu.edu/faculty/pearce/modules/lectures/ooa/requirements/IdentifyingURPS.htm>.
- [13] Marzanah A. Jabar Jamilah Din Anas Bassam AL-Badareen, Mohd Hasan Selamat and Sherzod Turaev. Software quality models: A comparative study. *Communications in Computer and Information Science*, 2011.
- [14] pandas - python data analysis library. Available at: <https://pandas.pydata.org/>.
- [15] Wes McKinney et al. pandas: a foundational python library for data analysis and statistics. *Python for High Performance and Scientific Computing*, 14(9), 2011.
- [16] Html 5. Available at: <https://developer.mozilla.org/en-US/docs/Web/Guide/HTML/HTML5>.
- [17] JavaScript. Available at: <https://developer.mozilla.org/en-US/docs/Web/JavaScript>.
- [18] Dash Layout. Available at: <https://dash.plotly.com/layout>.
- [19] Dash DataTable. Available at: <https://dash.plotly.com/datatable>.
- [20] Richard Brath and Michael Peters. Dashboard design: Why design is important. *DM Review Online*, 2004.
- [21] Alberto Sillitti Andrea Janes and Giancarlo Succi. Effective dashboard design. *CUTTER IT JOURNAL*, 26, 2004.
- [22] Python Software Foundation. Decimal fixed point and floating point arithmetic - python 3.8.2 documentation 2020, 2020. Available at: <https://docs.python.org/3/library/decimal.html>.
- [23] Stéfan van der Walt, S Chris Colbert, and Gael Varoquaux. The numpy array: a structure for efficient numerical computation. *Computing in Science & Engineering*, 13(2):22–30, 2011.
- [24] Cisco. Available at: https://tools.cisco.com/security/center/resources/framework_segmentation.
- [25] O'Reilly. Available at: <https://www.oreilly.com/library/view/oracle-distributed-systems/1565924320/ch01s04.html>.

- [26] Johnson Vlissides Gamma, Helm. *Design Patterns*. Addison-Wesley, 1994.
- [27] David Thomas and Andrew Hunt. *The Pragmatic Programmer - 20th Anniversary Edition*. 2019. Topic 13: Prototypes and Post-it Notes.
- [28] Sebastian Nanz and Carlo A. Furia. A comparative study of programming languages in rosetta code. *IEEE/ACM 37th IEEE International Conference on Software Engineering*, 2015.
- [29] Alfred G. Edge and William Remus. The impact of hierarchical and egalitarian organization structure on group decision making and attitudes. *Developments in Business Simulation & Experiential Learning*, 11, 1984.
- [30] How to code review in a pull request. Available at: <https://blog.codacy.com/how-to-code-review-in-a-pull-request/>.
- [31] Alistair Cockburn and Laurie Williams. The costs and benefits of pair programming. 2000.
- [32] Joel Bancroft-Connors. Why physical task boards still matter. Available at: <https://www.leadingagile.com/2015/05/why-physical-task-boards-still-matter/>.
- [33] PyAlgoTrade Documentation. Available at: <https://github.com/gbeced/pyalgotrade>.
- [34] bt Documentation. Available at: <https://pmorisette.github.io/bt/>.
- [35] UK Government. Available at: <https://www.gov.uk/data-protection>.
- [36] Db-engines. Available at: <https://db-engines.com/en/ranking>.
- [37] Datazyne. Available at: <https://www.datanyze.com/market-share/databases-272>.
- [38] Ahlam Mohammad Al Balushi. A framework for data migration between various types of relational database management systems. *International Journal of Computer Applications*, 123(8):38–43, 2015.
- [39] Talend. <https://www.talend.com/resources/understanding-data-migration-strategies-best-practices/>.
- [40] What is DevOps? Available at: <https://theagileadmin.com/what-is-devops/>.
- [41] Flake8 Official Documentation. Available at: <https://flake8.pycqa.org/en/latest/manpage.html>.
- [42] Black Official Documentation. Available at: <https://pypi.org/project/black/>.
- [43] githooks Hooks used by Git. Available at: <https://git-scm.com/docs/githooks>.
- [44] Yuming Zhou Vladimir Filkov Yangyang Zhao, Alexander Serebrenik and Bogdan Vasilescu. The impact of continuous integration on other software development practices: A large-scale empirical study. *32nd IEEE/ACM International Conference on Automated Software Engineering (ASE)*, 2017.
- [45] Jesper Holck and Niels Jørgensen. Continuous integration and quality assurance: A case study of two open source projects. *Australasian Journal of Information Systems*, Special Issue 2003/2004.
- [46] What is a container? Available at: <https://www.docker.com/resources/what-container>.
- [47] Docker Images. Available at: <https://hub.docker.com/search?q=type=image>.
- [48] CircleCI. Available at: <https://circleci.com/>.
- [49] Randy Connolly. *Fundamentals of web development*. Pearson Education, 2015.
- [50] Amazon Web Services, 2020. Available at: <https://aws.amazon.com/>.
- [51] Microsoft Azure, 2020. Available at: <https://azure.microsoft.com>.
- [52] Heroku, 2020. Available at: <https://www.heroku.com/>.

- [53] Marko Leppanen, Simo Makinen, Max Pagels, Veli-Pekka Eloranta, Juha Itkonen, Mika V. Mantyla, and Tomi Mannisto. The highways and country roads to continuous deployment. *IEEE Software*, 32(2):64–72, 2015.
- [54] Gunicorn, 2020. Available at: <https://gunicorn.org/>.