

QEMU (MGMT)

PA-VM

Not secure | https://10.0.1/?#network:vsys1::network/zones

PA-VM

DASHBOARD ACC MONITOR POLICIES OBJECTS NETWORK DEVICE

Commit

4 items



							User-ID			Device-ID		
	NAME	TYPE	INTERFACES / VIRTUAL SYSTEMS	ZONE PROTECTION PROFILE	PACKET BUFFER PROTECTION	LOG SETTING	ENABLED	INCLUDED NETWORKS	EXCLUDED NETWORKS	ENABLED	INCLUDED NETWORKS	EXCLUDED NETWORKS
☐	HR	layer3	ethernet1/1.1		☒		☐	any	none	☐	any	none
☐	sales	layer3	ethernet1/1.2		☒		☐	any	none	☐	any	none
☐	WAN1	layer3	ethernet1/2		☒		☐	any	none	☐	any	none
☐	WAN2	layer3	ethernet1/3		☒		☐	any	none	☐	any	none

+ Add - Delete PDF/CSV

admin | Logout | Last Login Time: 09/24/2026 04:34:25 | Session Expire Time: 10/24/2026 04:37:28

Tasks | Language | paloalto

12:21 PM

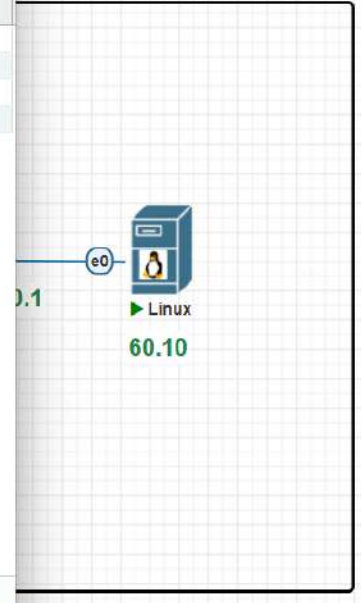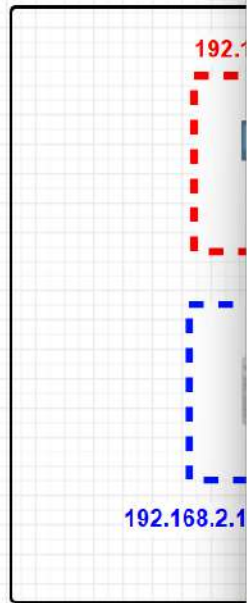

QEMU (MGMT)

PA-VM

Not secure | https://10.0.1/?#network:vsys1:network/interfaces

PA-VM

DASHBOARDACCMONITORPOLICIESOBJECTSNETWORKDEVICE

Commit

InterfacesZonesVLANsVirtual WiresVirtual RoutersIPSec TunnelsGRE TunnelsDHCPDNS ProxyGlobalProtectPortalsGatewaysMDMClientless AppsClientless App GroupsQoSLLDPNetwork ProfilesGlobalProtect IPsec CryptoIKE GatewaysIPsec CryptoIKE CryptoMonitorInterface MgmtZone ProtectionQoS ProfileLLDP ProfileBFD ProfileSD-WAN Interface Profile

Ethernet | VLAN | Loopback | Tunnel | SD-WAN

26 items

INTERFACE	INTERFACE TYPE	MANAGEMENT PROFILE	LINK STATE	IP ADDRESS	VIRTUAL ROUTER	TAG	VLAN / VIRTUAL WIRE	SECURITY ZONE	SD-WAN INTERFACE PROFILE
ethermet1/1	Layer3	Ping-Service		none	none	Untagged	none	none	
ethermet1/1.1	Layer3	Ping-Service		192.168.1.1/24	default	10	none	HR	
ethermet1/1.2	Layer3	Ping-Service		192.168.2.1/24	default	20	none	sales	
ethermet1/2	Layer3	Ping-Service		20.0.0.1/8	default	Untagged	none	WAN1	
ethermet1/3	Layer3	Ping-Service		30.0.0.1/8	default	Untagged	none	WAN2	
ethermet1/4				none	none	Untagged	none	none	
ethermet1/5				none	none	Untagged	none	none	
ethermet1/6				none	none	Untagged	none	none	
ethermet1/7				none	none	Untagged	none	none	
ethermet1/8				none	none	Untagged	none	none	
ethermet1/9				none	none	Untagged	none	none	
ethermet1/10				none	none	Untagged	none	none	
ethermet1/11				none	none	Untagged	none	none	
ethermet1/12				none	none	Untagged	none	none	
ethermet1/13				none	none	Untagged	none	none	



Add SubinterfaceDeletePDF/CSV

https://10.0.1/?#

10/24/2026 04:37:28

TasksLanguagepalto

12:21 PM

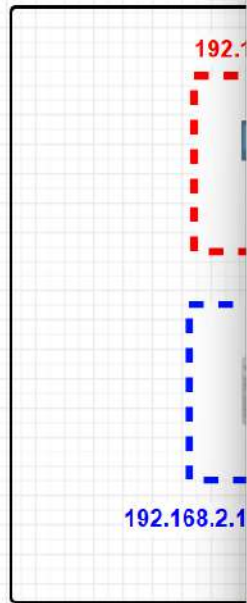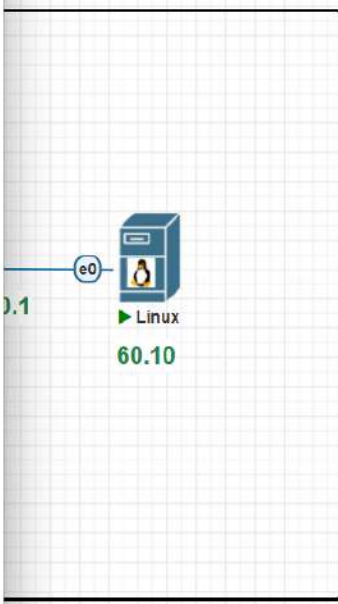

QEMU (MGMT)

PA-VM

Not secure | https://10.0.1/?#network:vsys1::network/virtual-routers

PA-VM

DASHBOARD ACC MONITOR POLICIES OBJECTS NETWORK DEVICE

Commit

Interfaces Zones VLANs Virtual Wires Virtual Routers IPsec Tunnels GRE Tunnels DHCP DNS Proxy GlobalProtect Portals Gateways MDM Clientless Apps Clientless App Groups QoS LLDP Network Profiles GlobalProtect IPsec Crypto IKE Gateways IPsec Crypto IKE Crypto Monitor Interface Mgmt Zone Protection QoS Profile LLDP Profile BFD Profile SD-WAN Interface Profile

Virtual Router - default

Router Settings Static Routes Redistribution Profile RIP OSPF OSPFv3 BGP Multicast

IPv4 IPv6

2 items

	NAME	DESTINA...	INTERFA...	TYPE	Next Hop	ADMIN DISTANCE	METRIC	BFD	ROUTE TABLE
☐	WAN ROUTE 1	0.0.0.0/0	ethernet1...	ip-address	20.0.0.2	default	10	None	unicast
☐	WAN ROUTE2	0.0.0.0/0	ethernet1...	ip-address	30.0.0.2	default	20	None	unicast



Add Delete Clone

OK Cancel

MULTICAST

RUNTIME STATS

More Runtime Stats

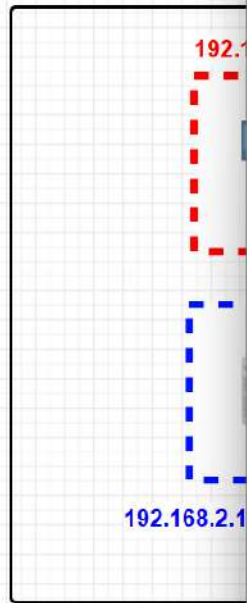

The screenshot displays the Palo Alto Networks PA-VM web interface. The left sidebar contains a navigation menu with various configuration categories. The main area shows the 'Addresses' configuration page, which includes a table listing network addresses. The table has columns for NAME, LOCATION, TYPE, ADDRESS, and TAGS. Two entries are visible: 'HR-LAN' and 'Sales-LAN', both configured as 'IP Netmask' addresses. The bottom of the interface shows a status bar with user information and session details.

NAME	LOCATION	TYPE	ADDRESS	TAGS
HR-LAN		IP Netmask	192.168.1.0/24	
Sales-LAN		IP Netmask	192.168.2.0/24	

admin | Logout | Last Login Time: 09/24/2026 04:34:25 | Session Expire Time: 10/24/2026 04:37:28

QEMU (MGMT)

PA-VM

Not secure | https://10.0.1/?#policies::vsys1::policies/nat-rulebase

PA-VM

DASHBOARD ACC MONITOR **POLICIES** OBJECTS NETWORK DEVICE

Commit

Security

NAT

QoS

Policy Based Forwarding

Decryption

Tunnel Inspection

Application Override

Authentication

DoS Protection

SD-WAN

Policy Optimizer

Rule Usage

Unused in 30 days

Unused in 90 days

Unused

	NAME	TAGS	SOURCE ZONE	DESTINATION ZONE	DESTINATION INTERFACE	SOURCE ADDRESS	DESTINATION ADDRESS	SERVICE	SOURCE TRANSLATION
1	NAT POLICY	none	HR sales	WAN1	ethernet1/2	HR-LAN Sales-LAN	any	any	dynamic-ip-and-port ethernet1/2 200.0.1/8
2	Nat Policy 2	none	HR sales	WAN2	ethernet1/3	HR-LAN Sales-LAN	any	any	dynamic-ip-and-port ethernet1/3 300.0.1/8

Object : Addresses

+

-

Clone

Enable

Disable

Move

PDF/CSV

Highlight Unused Rules

View Rulebase as Groups

Reset Rule Hit Counter


Group

https://10.0.1/?# 10/24/2026 04:37:28

Tasks

Language

paltoalto

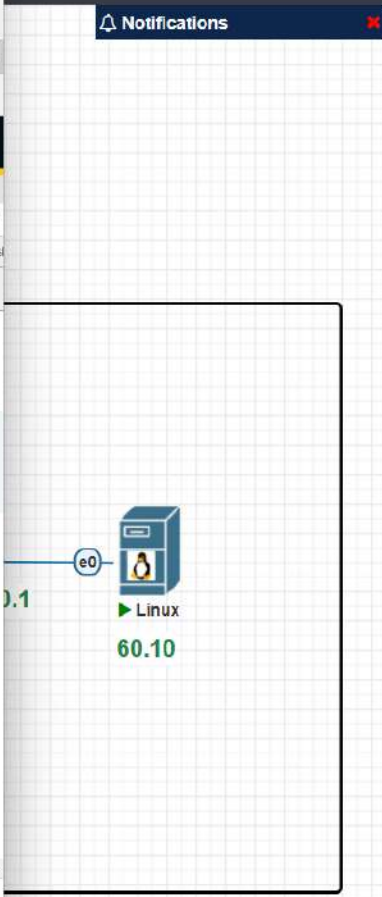

QEMU (MGMT)

PA-VM

Not secure | https://10.0.1/?#policies::vsys1:policies/security-rulebase

PA-VM

DASHBOARD ACC MONITOR **POLICIES** OBJECTS NETWORK DEVICE

Commit

4 items

Security

NAT

QoS

Policy Based Forwarding

Decryption

Tunnel Inspection

Application Override

Authentication

DoS Protection

SD-WAN

Policy Optimizer

No App Specified 1

Unused Apps 0

Rule Usage

Unused in 30 days 3

Unused in 90 days 3

Unused 3


				Source				Destination			
	NAME	TAGS	TYPE	ZONE	ADDRESS	USER	DEVICE	ZONE	ADDRESS	DEVICE	APPLIC
1	Intranet	none	universal	HR	HR-LAN	any	any	HR	HR-LAN	any	any
				sales	Sales-LAN			sales	Sales-LAN		
2	Internet	none	universal	HR	HR-LAN	any	any	WAN1	any	any	any
				sales	Sales-LAN			WAN2			
3	Intrazone-default	none	intrazone	any	any	any	any	(Intrazone)	any	any	any
4	Interzone-default	none	interzone	any	any	any	any	any	any	any	any

Object : Addresses

+ Add - Delete Clone Override Revert Enable Disable Move PDF/CSV Highlight Unused Rules View Rulebase as Groups Reset Rule Hit Counter

https://10.0.1/?# 10/24/2026 04:37:28

Tasks Language paloalto



QEMU (MGMT)

PA-VM

Not secure | https://10.0.1/?#policies::vsys1::policies/pbf-rulebase

PA-VM

DASHBOARD ACC MONITOR **POLICIES** OBJECTS NETWORK DEVICE

Commit

2 items

	NAME	TAGS	Source			Destination		APPLICATION	SERVICE	ACTION	EGRESS I/F
			ZONE/INTERFACE	ADDRESS	USER	ADDRESS					
1	http	none	HR	HR-LAN	any	60.0.0.10	any	service-http	forward	ethernet1/2	
2	ssh	none	HR	HR-LAN	any	60.0.0.10	any	ssh	forward	ethernet1/3	

Policy Optimizer

- Rule Usage
 - Unused in 30 days 2
 - Unused in 90 days 2
 - Unused 2

Object : Addresses

+ Add - Delete Clone Enable Disable Move PDF/CSV Highlight Unused Rules View Rulebase as Groups Reset Rule Hit Counter Group

https://10.0.1/?# 10/24/2026 04:37:28


Tasks Language paloalto

192.168.2.1

60.10



192.168.1.10/24



192.168.2.10/24



QEMU (Win-XP)

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600.1]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 192.168.2.10 -n 2

Pinging 192.168.2.10 with 32 bytes of data:
Reply from 192.168.2.10: bytes=32 time=4ms TTL=63
Reply from 192.168.2.10: bytes=32 time=3ms TTL=63

Ping statistics for 192.168.2.10:
    Packets: Sent = 2, Received = 2, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 3ms, Maximum = 4ms, Average = 3ms

C:\Documents and Settings\user>ping 192.168.1.1 -n 2

Pinging 192.168.1.1 with 32 bytes of data:
Reply from 192.168.1.1: bytes=32 time=3ms TTL=64
Reply from 192.168.1.1: bytes=32 time=2ms TTL=64

Ping statistics for 192.168.1.1:
    Packets: Sent = 2, Received = 2, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 3ms, Average = 2ms


C:\Documents and Settings\user>ping 192.168.2.1 -n 2


Pinging 192.168.2.1 with 32 bytes of data:
Reply from 192.168.2.1: bytes=32 time=2ms TTL=64
Reply from 192.168.2.1: bytes=32 time=3ms TTL=64

Ping statistics for 192.168.2.1:
    Packets: Sent = 2, Received = 2, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:
```



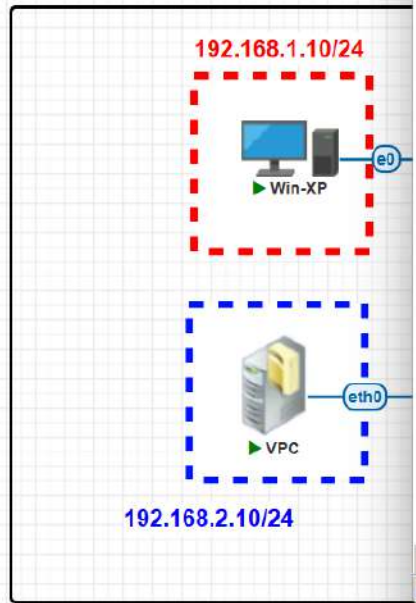

QEMU (Win-XP)

File Edit View History Bookmarks Tools Help


http://60.0.0.10/

60.0.0.10

Hello World! This file is located in /home/httpd

Firefox: automatically sends some data to Mozilla so that we can improve your experience. Choose What I Share

Start C:\WINDOWS\system32... Mozilla Firefox 1:23 PM

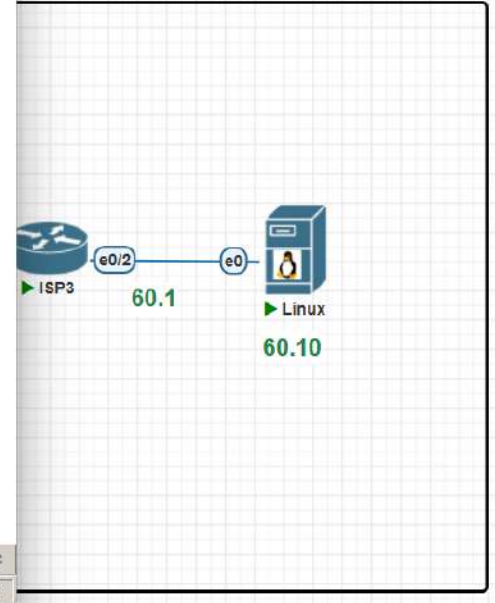



192.168.1.10/24

Win-XP

VPC

192.168.2.10/24

Int e1/1.1 Vlan 10 192.168.1.1

Int e1/1.2 Vlan 20 192.168.2.1

MGMT


```
VPC
84 bytes from 192.168.1.10 icmp_seq=1 ttl=127 time=4.427 ms
84 bytes from 192.168.1.10 icmp_seq=2 ttl=127 time=4.336 ms
84 bytes from 192.168.1.10 icmp_seq=3 ttl=127 time=4.106 ms
84 bytes from 192.168.1.10 icmp_seq=4 ttl=127 time=3.620 ms
84 bytes from 192.168.1.10 icmp_seq=5 ttl=127 time=3.299 ms

VPC> ping 60.0.0.10
60.0.0.10 icmp_seq=1 timeout
60.0.0.10 icmp_seq=2 timeout
84 bytes from 60.0.0.10 icmp_seq=3 ttl=61 time=4.462 ms
84 bytes from 60.0.0.10 icmp_seq=4 ttl=61 time=4.624 ms
84 bytes from 60.0.0.10 icmp_seq=5 ttl=61 time=3.614 ms

VPC> ssh 60.0.0.10
Bad command: "ssh 60.0.0.10". Use ? for help.

VPC> ssh?
Bad command: "ssh?". Use ? for help.

VPC> ?
  arp          Shortcut for: show arp. Show arp table
  clear ARG    Clear IPv4/IPv6, arp/neighbor cache, command history
  dhcp [OPTION] Shortcut for: ip dhcp. Get IPv4 address via DHCP
```

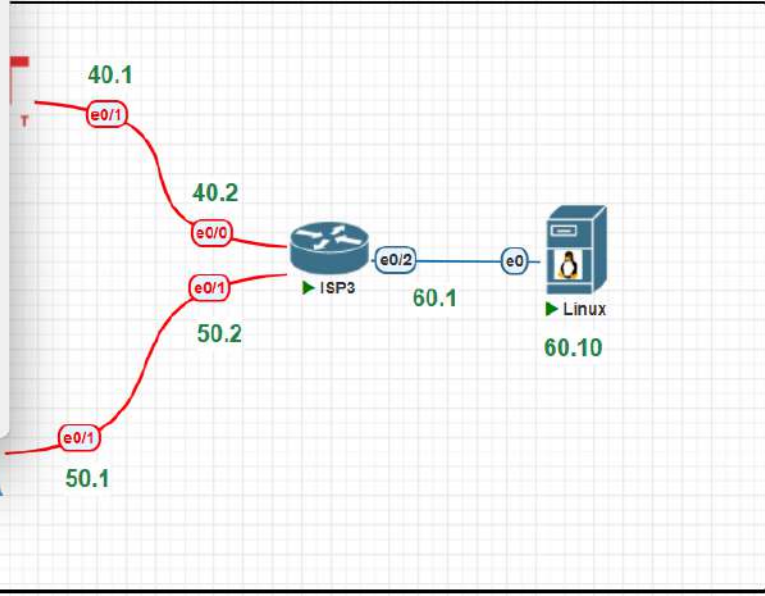

40.1 e0/1

40.2 e0/0

50.2 e0/1

50.1 e0/1

60.1 e0/2

60.10 Linux

30.2 ISP2