```python
In [2]: import pandas as pd
```

```python
In [3]: dataset=pd.read_csv("insurance_pre.csv")
```

```python
In [4]: dataset
```

Out[4]:

	age	sex	bmi	children	smoker	charges
0	19	female	27.900	0	yes	16884.92400
1	18	male	33.770	1	no	1725.55230
2	28	male	33.000	3	no	4449.46200
3	33	male	22.705	0	no	21984.47061
4	32	male	28.880	0	no	3866.85520
...	...	...	...	...	...	...
1333	50	male	30.970	3	no	10600.54830
1334	18	female	31.920	0	no	2205.98080
1335	18	female	36.850	0	no	1629.83350
1336	21	female	25.800	0	no	2007.94500
1337	61	female	29.070	0	yes	29141.36030

1338 rows × 6 columns

```python
In [5]: dataset.columns
```

Out[5]: Index(['age', 'sex', 'bmi', 'children', 'smoker', 'charges'], dtype='object')

```python
In [6]: dataset = pd.get_dummies(dataset,drop_first=True)
        dataset=dataset.astype(int)
```

```python
In [7]: dataset
```

Out[7]:

	age	bmi	children	charges	sex_male	smoker_yes
0	19	27	0	16884	0	1
1	18	33	1	1725	1	0
2	28	33	3	4449	1	0
3	33	22	0	21984	1	0
4	32	28	0	3866	1	0
...	...	...	...	...	...	...
1333	50	30	3	10600	1	0
1334	18	31	0	2205	0	0
1335	18	36	0	1629	0	0
1336	21	25	0	2007	0	0
1337	61	29	0	29141	0	1

1338 rows × 6 columns

```python
In [8]: dataset.columns
```

Out[8]: Index(['age', 'bmi', 'children', 'charges', 'sex_male', 'smoker_yes'], dtype='object')

```python
In [9]: independent=dataset[['age', 'bmi', 'children', 'charges', 'sex_male', 'smoker_yes']]
        dependent=dataset[['charges']]
```

```python
In [10]: independent
```

Out[10]:

	age	bmi	children	charges	sex_male	smoker_yes
0	19	27	0	16884	0	1
1	18	33	1	1725	1	0
2	28	33	3	4449	1	0
3	33	22	0	21984	1	0
4	32	28	0	3866	1	0
...	...	...	...	...	...	...
1333	50	30	3	10600	1	0
1334	18	31	0	2205	0	0
1335	18	36	0	1629	0	0
1336	21	25	0	2007	0	0
1337	61	29	0	29141	0	1

1338 rows × 6 columns

```python
In [11]: dependent
```

Out[11]:

	charges
0	16884
1	1725
2	4449
3	21984
4	3866
...	...
1333	10600
1334	2205
1335	1629
1336	2007
1337	29141

1338 rows × 1 columns

```python
In [12]: from sklearn.model_selection import train_test_split
         X_train,X_test,y_train,y_test=train_test_split(independent,dependent,test_size=1/3,random_state=0)
```
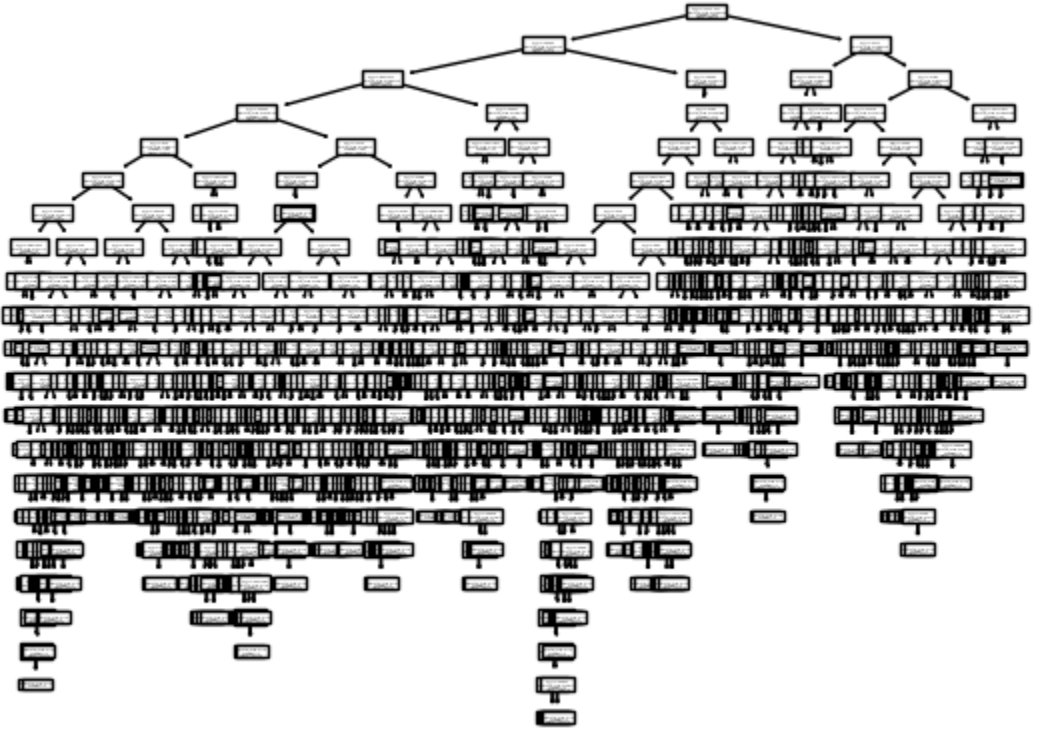
```python
In [13]: X_train
```

Out[13]:

	age	bmi	children	charges	sex_male	smoker_yes
482	18	31	0	1622	0	0
338	50	32	1	41919	1	1
356	46	43	3	8944	1	0
869	25	24	3	4391	0	0
182	22	19	3	4005	1	0
...	...	...	...	...	...	...
763	27	26	0	3070	1	0
835	42	35	2	7160	1	0
1216	40	25	0	5415	1	0
559	19	35	0	1646	1	0
684	33	18	1	4766	0	0

892 rows × 6 columns

```python
In [14]: from sklearn.tree import DecisionTreeRegressor
         regressor=DecisionTreeRegressor(criterion='absolute_error',splitter='random',max_features='log2')
         regressor=regressor.fit(X_train,y_train)
```

```python
In [15]: import matplotlib.pyplot as plt
         from sklearn import tree
         tree.plot_tree(regressor)
         plt.show()
```



```python
In [16]: y_pred=regressor.predict(X_test)
```

```python
In [17]: from sklearn.metrics import r2_score
         r_score=r2_score(y_test,y_pred)
```

```python
In [18]: r_score
```

Out[18]: 0.9250554684521578

```python
In [19]: import pickle
         filename="finalized_model_Mul_linear.sav"
         pickle.dump(regressor,open(filename,'wb'))
```

```python
loaded_model=pickle.load(open("finalized_model_Mul_linear.sav",'rb'))
```