



Fundamentals of the operating systems

Sofia, 2016

Contents

1. What is an operating system?
2. Basic concepts of OS
 - Concurrency
 - Scheduling(time sharing/time slicing)
 - Memory management & Virtual memory(address space)
 - I/O access
 - Interrupts
 - Real time operations
3. Kernel
4. System call
5. Multi process programming
6. Multi thread programming

Contents


1. **What is an operating system?**
2. Basic concepts of OS
 - Concurrency
 - Scheduling(time sharing/time slicing)
 - Memory management & Virtual memory(address space)
 - I/O access
 - Interrupts
 - Real time operations
3. Kernel
4. System call
5. Multi process programming
6. Multi thread programming

What is an operating system?

A system software/collection of procedures that:

- manage all the system's hardware resources
- control user actions to prevent errors and improper system usage
- provide the users the environment in which they can:
 - use the system resources
 - run their own applications

What is an operating system?

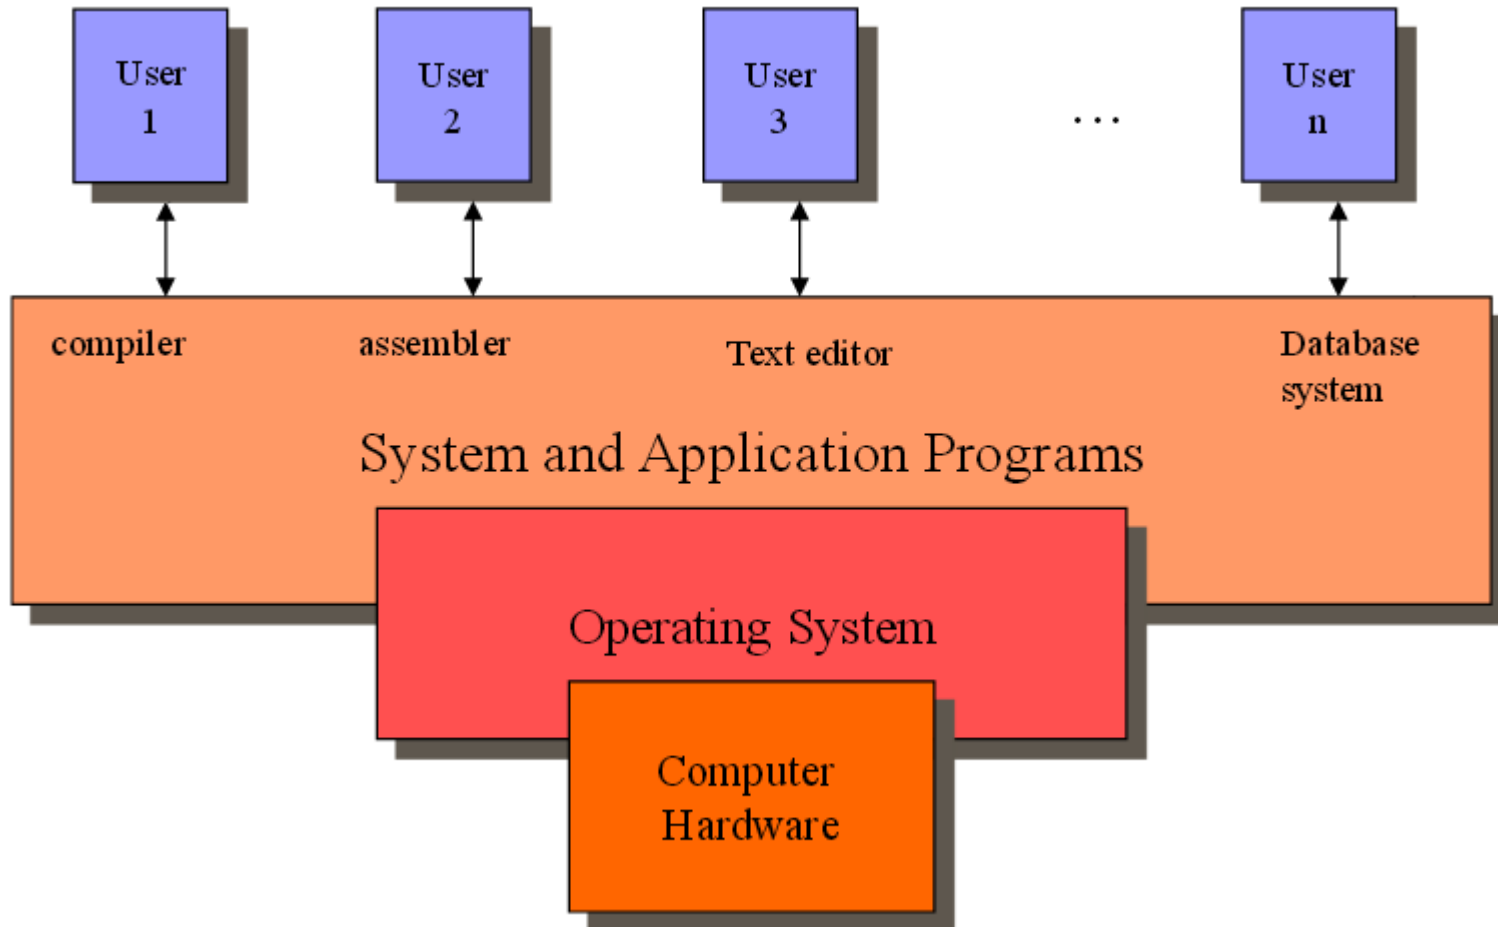

Operating system: Definitions

- Resource allocator
 - to allocate resources (software and hardware) of the computer system and manage them efficiently.
- Control program
 - controls the execution of user programs and operations of I/O devices.
- Kernel
 - the one program running at all time. Everything else is either a system program (ships with the operating system) or an application program.

Contents

1. What is an operating system?
2. **Basic concepts of OS**
 - **Concurrency**
 - Scheduling(time sharing/time slicing)
 - Memory management & Virtual memory(address space)
 - I/O access
 - Interrupts
 - Real time operations
3. Kernel
4. System call
5. Multi process programming
6. Multi thread programming

Basic concepts of OS: Concurrency

The operating system provides the ability to have more than one independent executions at a given time.


Usually there are no limitations on the number of independent executions at a given time, however, if the separate parallel executions, have to access a single resource, a concurrency arises.




Basic concepts of OS: Concurrency

Concurrency is the interleaving of processes in time to give the appearance of simultaneous execution. Thus it differs from parallelism, which offers genuine simultaneous execution.

Concurrent = Two Queues One Coffee Machine

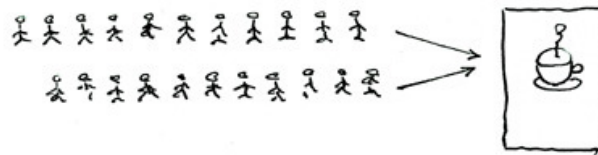

Parallel = Two Queues Two Coffee Machines

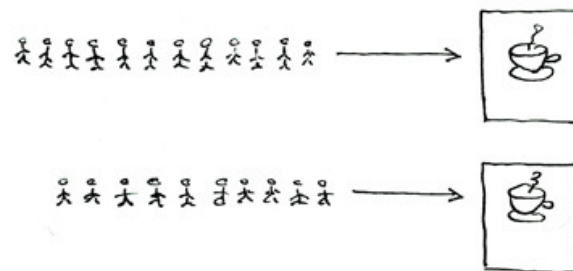


© Joe Armstrong 2013

Basic concepts of OS: Concurrency

Concurrency vs. parallelism

- Concurrency is about dealing with lots of things at once.
- Parallelism is about doing lots of things at once.
- Not the same, but related.
- Concurrency is about structure, parallelism is about execution.
- Concurrency provides a way to structure a solution to solve a problem that may (but not necessarily) be parallelizable.


Basic concepts of OS: Concurrency

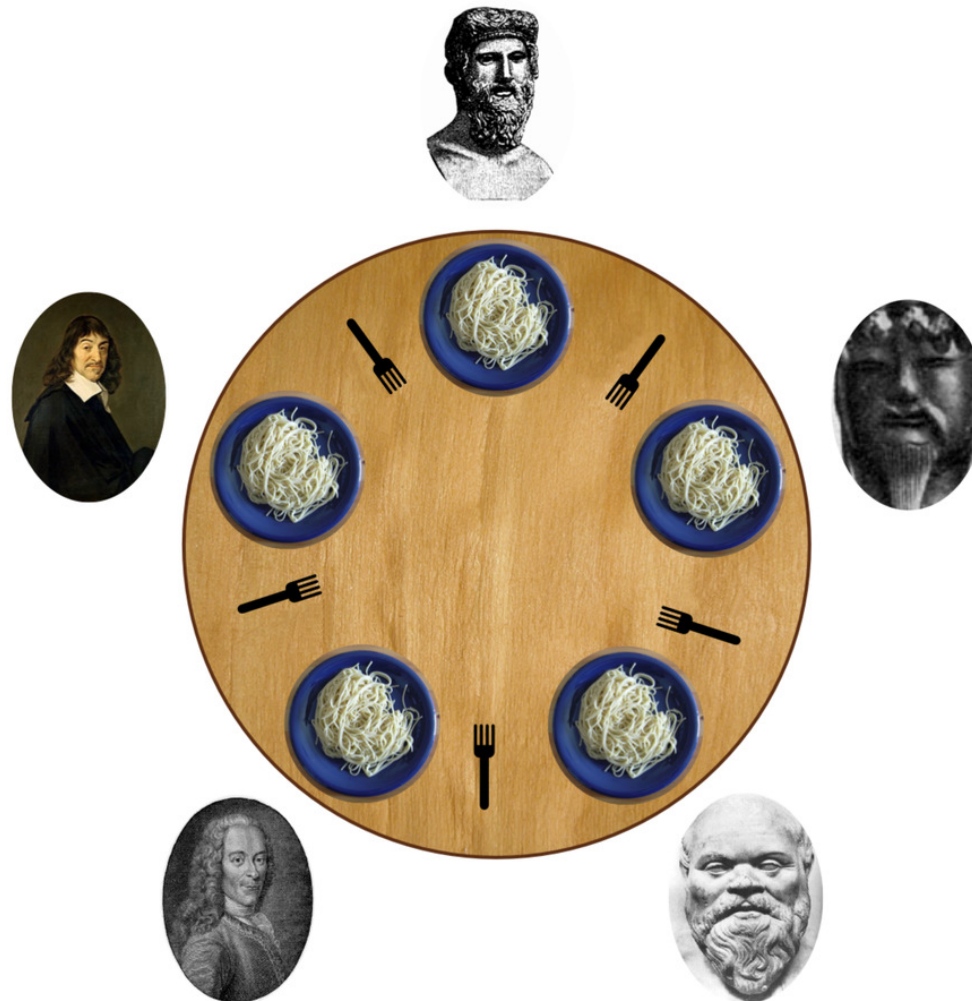

"Dining philosophers" by Benjamin D. Esham / Wikimedia Commons. Licensed under CC BY-SA 3.0

Basic concepts of OS: Concurrency

● The Dining Philosophers Problem (Deadlock)

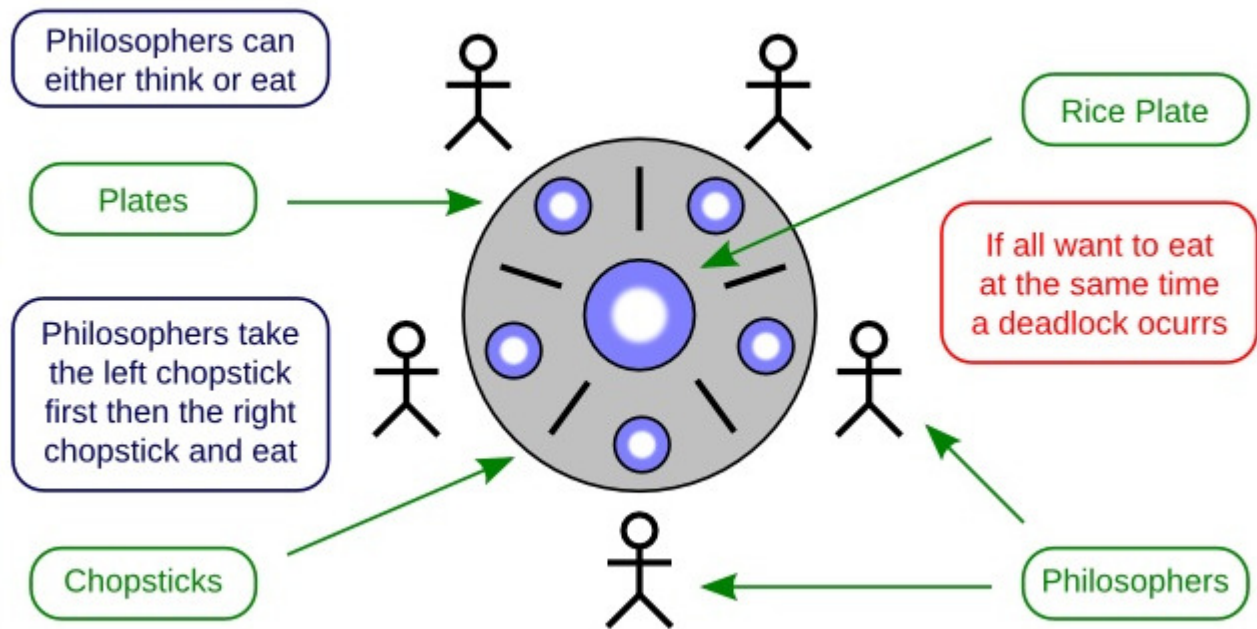

M. Eberhard

Basic concepts of OS: Concurrency

Concurrency cannot be avoided because:

- Users are concurrent - a person can handle several tasks at once (have you every listened to music while doing other work and heard the phone ring?) and expects the same from a computer.
- Multiprocessors are becoming more prevalent. The Internet is perhaps a huge multiprocessor.
- A distributed system (client/server system) is naturally concurrent.
- A windowing system is naturally concurrent.
- I/O is often slow because it involves slow devices such as disks, printers; many network operations are essentially (slow) I/O operations. When doing I/O it is helpful to handle the I/O concurrently with other work.

Basic concepts of OS: Concurrency

Concurrency issues:

- Separable operation (non-Atomic)

An operation is atomic if the steps are done as a unit. Operations that are not atomic, but interruptible and done by multiple processes can cause problems.

- Race condition

- A race condition occurs if the outcome depends on which of several processes gets to a point first.
- Situations like this where processes access the same data concurrently and the outcome of execution depends on the particular order in which the access takes place

For example, `fork()` can generate a race condition if the result depends on whether the parent or the child process runs first. Other race conditions can occur if two processes are updating a global variable.

- Blocking and starvation

While neither of these problems is unique to concurrent processes, their effects must be carefully considered. Processes can block waiting for resources. A process could be blocked for a long period of time waiting for input from a terminal. If the process is required to periodically update some data, this would be very undesirable. Starvation occurs when a process does not obtain sufficient CPU time to make meaningful progress.


- Deadlock

Deadlock occurs when two processes are blocked in such a way that neither can proceed. The typical occurrence is where two processes need two non-shareable resources to proceed but one process has acquired one resource and the other has acquired the other resource. Acquiring resources in a specific order can resolve some deadlocks.

Basic concepts of OS: Concurrency

Critical section & Mutual exclusion


- When a process executes code that manipulates shared data (or resource), we say that the process is in its **critical section** (for that shared data)
- The execution of critical sections must be **mutually exclusive**: at any time, only one process is allowed to execute in its critical section (even with multiple CPUs)

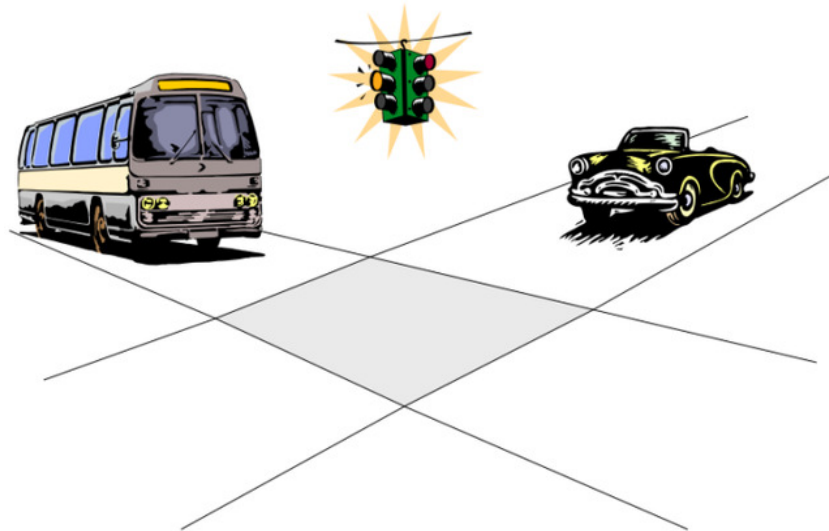

Basic concepts of OS: Concurrency

Critical section & Mutual exclusion

- Entry of critical section
 - Each process must request the permission to enter it's critical section (CS)
 - Once entered, each process must lock the critical section, so other cannot be permitted to enter
- Exit of critical section
 - Each process must unlock the critical section so other could be permitted to enter

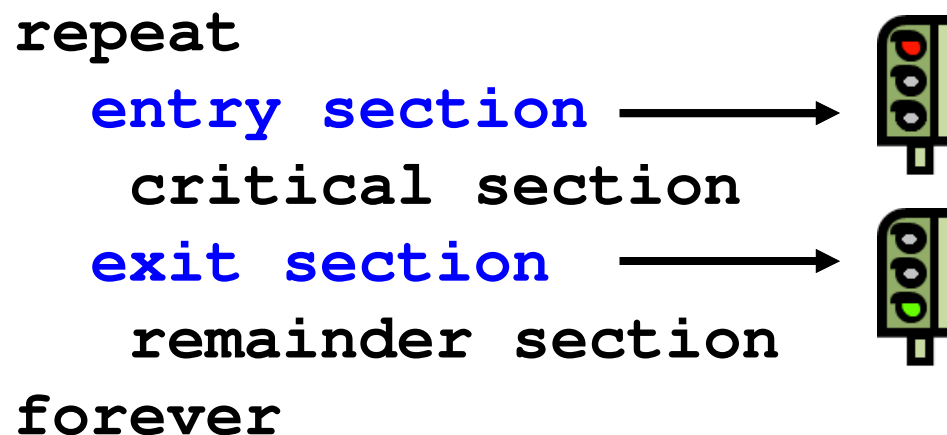


Basic concepts of OS: Concurrency

Semaphore

- Semaphores are a kind of generalized lock
 - First defined by the Dutch Edsger Dijkstra in late 60s
 - Main synchronization primitive used in original UNIX
- Definition: a Semaphore has a non-negative integer value and supports the following two operations:
 - P(): an atomic operation that waits for semaphore to become positive, then decrements it by 1
 - Think of this as the wait() operation
 - V(): an atomic operation that increments the semaphore by 1, waking up a waiting P, if any
 - Think of this as the signal() operation
- Semaphores were initially introduced to solve the producer – consumer paradigm

Basic concepts of OS: Concurrency

- Semaphores are like integers, except
 - No negative values
 - Only operations allowed are P and V – can't read or write value, except to set it initially
 - Operations must be atomic
 - Two P's together can't decrement value below zero
 - Similarly, thread going to sleep in P won't miss wakeup from V – even if they both happen at same time
- Semaphore from railway analogy
 - Here is a semaphore initialized to 2 for resource control:

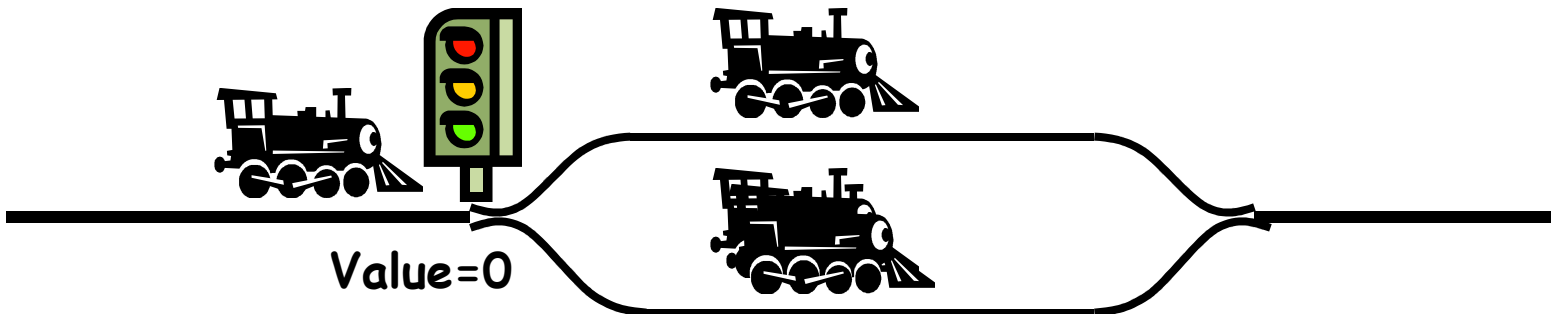

Basic concepts of OS: Concurrency

Two uses of semaphores

- Mutual Exclusion (initial value = 1)

- Also called “Binary Semaphore”.
- Can be used for mutual exclusion:

```
semaphore.P(); // Lock the access
// Critical section goes here
semaphore.V(); // Unlock the access
```

- Scheduling Constraints (initial value = 0)

- Locks are fine for mutual exclusion, but what if you want a thread to wait for something?
- Example: suppose you had to implement ThreadJoin which must wait for thread to terminate:

```
Initial value of semaphore = 0
ThreadJoin {
    semaphore.P();
}
ThreadFinish {
    semaphore.V();
}
```

Basic concepts of OS: Concurrency

Instead of using semaphores for mutual exclusion we can use *mutexes*.

- Usage of a mutex:
 1. When a program is started, a mutex is created with a unique name
 2. After this stage, any thread(process) that needs the resource must lock the mutex from other threads while it is using the resource
 3. The mutex is set to unlock when the data is no longer needed or the routine is finished

Basic concepts of OS: Concurrency

Instead of using semaphores for scheduling constraints we can use *condition variables* (*a.k.a.* CondVars).

- Condition Variable: a queue of threads waiting for something *inside* a critical section
 - Key idea: make it possible to go to sleep inside critical section by atomically releasing lock at time we go to sleep.
 - In other words, the lock is released, while one process is waiting on the CondVar, so another process can acquire the lock and signal the first process to continue its operation
 - Contrast to semaphores: Can't wait inside critical section

Basic concepts of OS: Concurrency

A synchronized queue example

```
Mutex lock;
CondVar dataready;
Queue queue;


AddToQueue(item) {
    lock.Acquire();           // Get Lock
    queue.enqueue(item);      // Add item
    dataready.signal();       // Signal any waiters
    lock.Release();           // Release Lock
}

RemoveFromQueue() {
    lock.Acquire();           // Get Lock
    while (queue.isEmpty()) {
        dataready.wait(&lock); // If nothing, sleep
    }
    item = queue.dequeue();    // Get next item
    lock.Release();           // Release Lock
    return(item);
}
```

Basic concepts of OS: Concurrency example

A GRAPHIC EXAMPLE OF THE PRODUCER/CONSUMER PROBLEM

Michael Vignaux

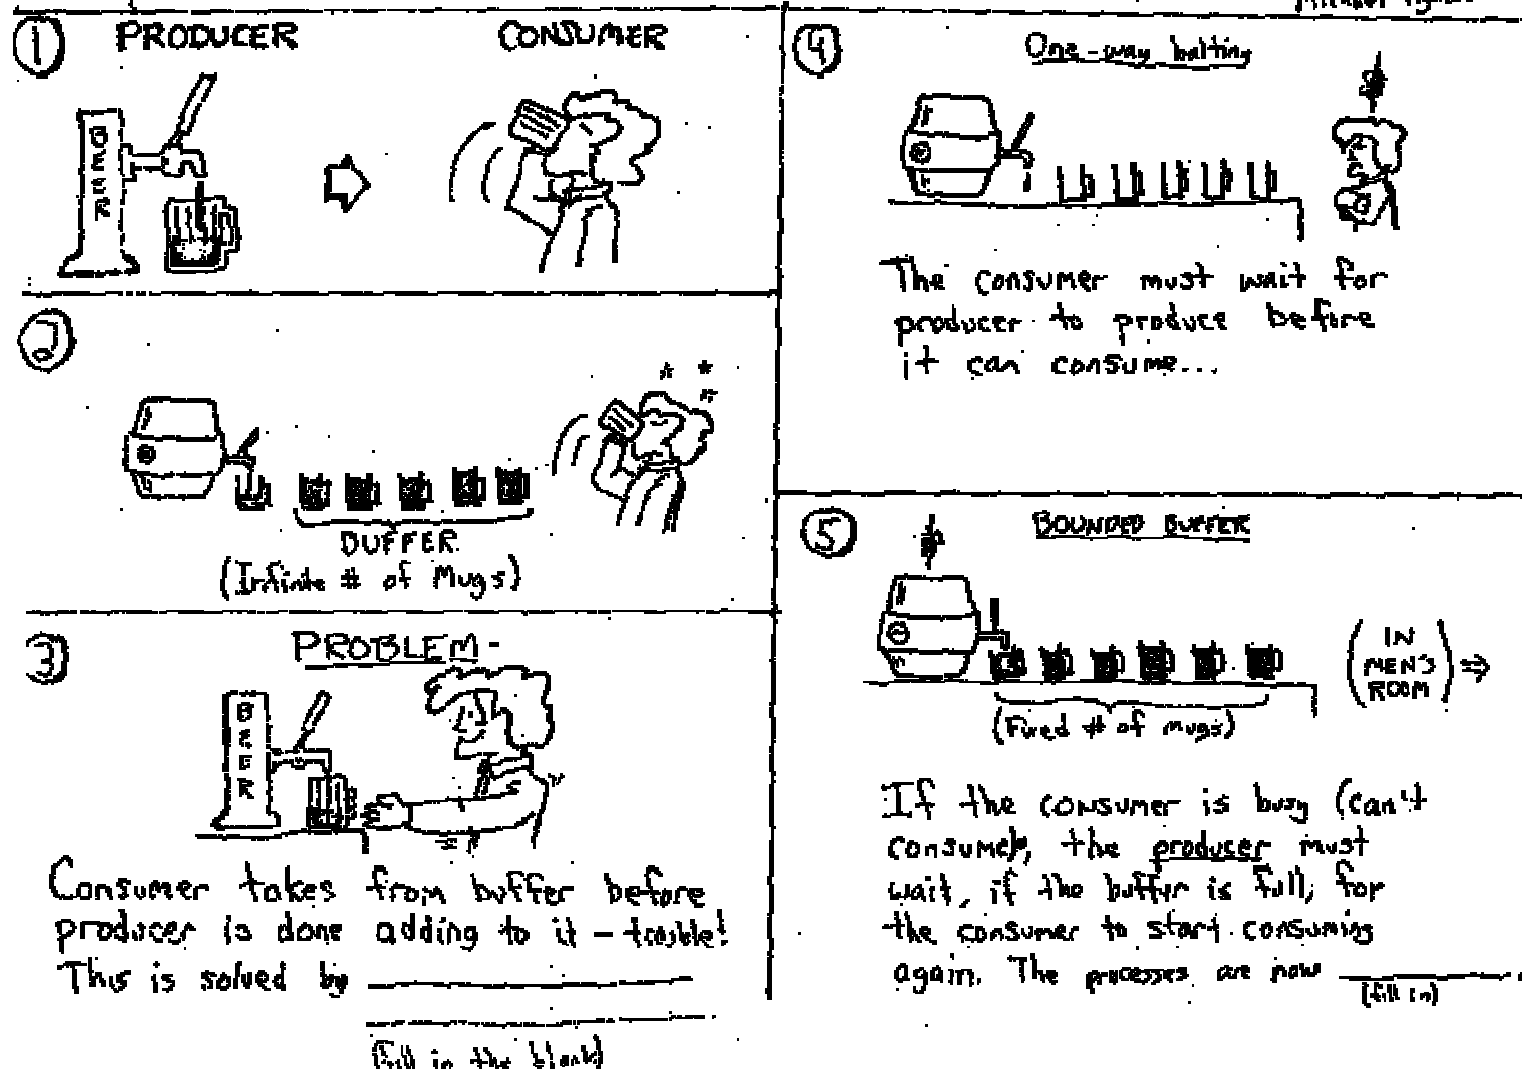


Contents

1. What is an operating system?
2. Basic concepts of OS
 - Concurrency
 - **Scheduling(time sharing/time slicing)**
 - Memory management & Virtual memory(address space)
 - I/O access
 - Interrupts
 - Real time operations
3. Kernel
4. System call
5. Multi process programming
6. Multi thread programming

Basic concepts of OS: Scheduling


A operating system can be **multitasking** or **multiprogramming** - appear to be running several processes at once even on one physical CPU. This can be achieved by giving each process a slice of time on a processor and a slice of memory for running and allocating resources as necessary.

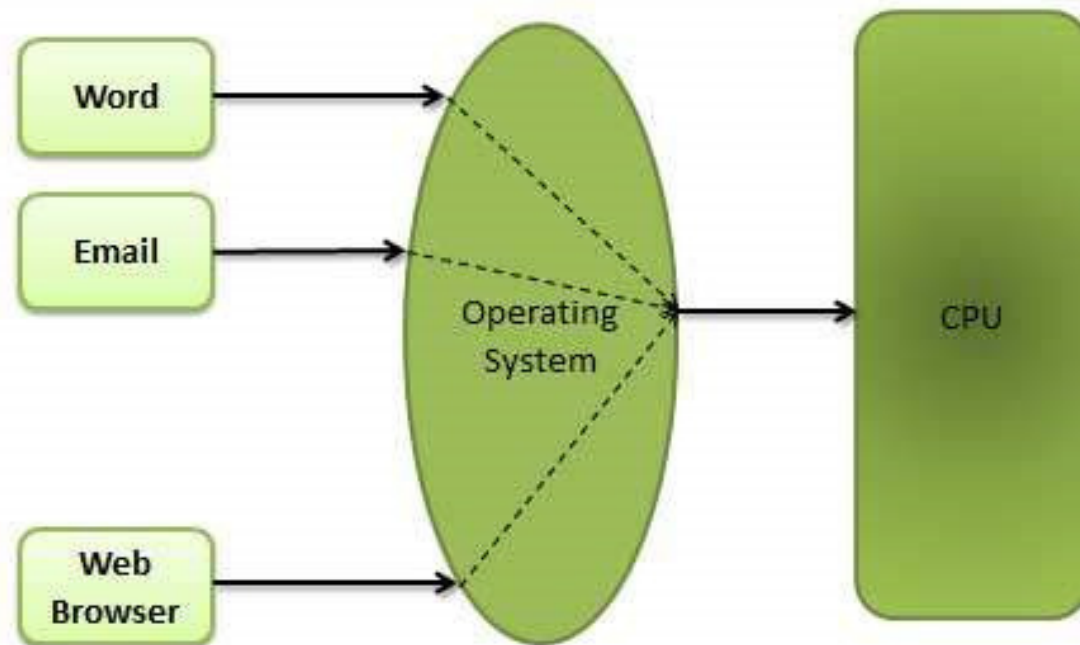


Basic concepts of OS: Scheduling

A **scheduler** allocates time. It decides when a process has used up enough time and should be forced to free the processor and be swapped for another process.

- Often processes are forced off a processor before their allocated time is up because they are doing I/O and have to wait for I/O to complete - devices are typically very slow compared to the CPU.
- Whenever the CPU becomes idle, it is the job of the scheduler to select another process from the ready queue to run next.
- The storage structure for the ready queue and the algorithm used to select the next process are not necessarily a FIFO queue.

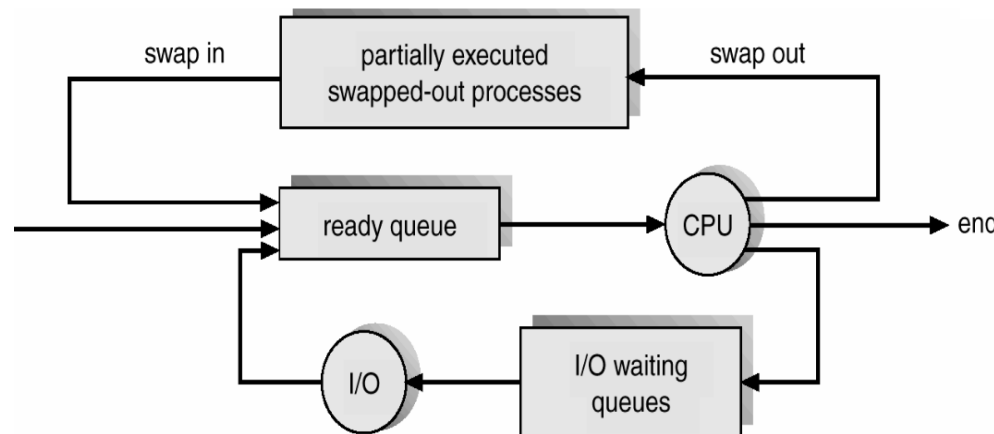

Basic concepts of OS: Scheduling

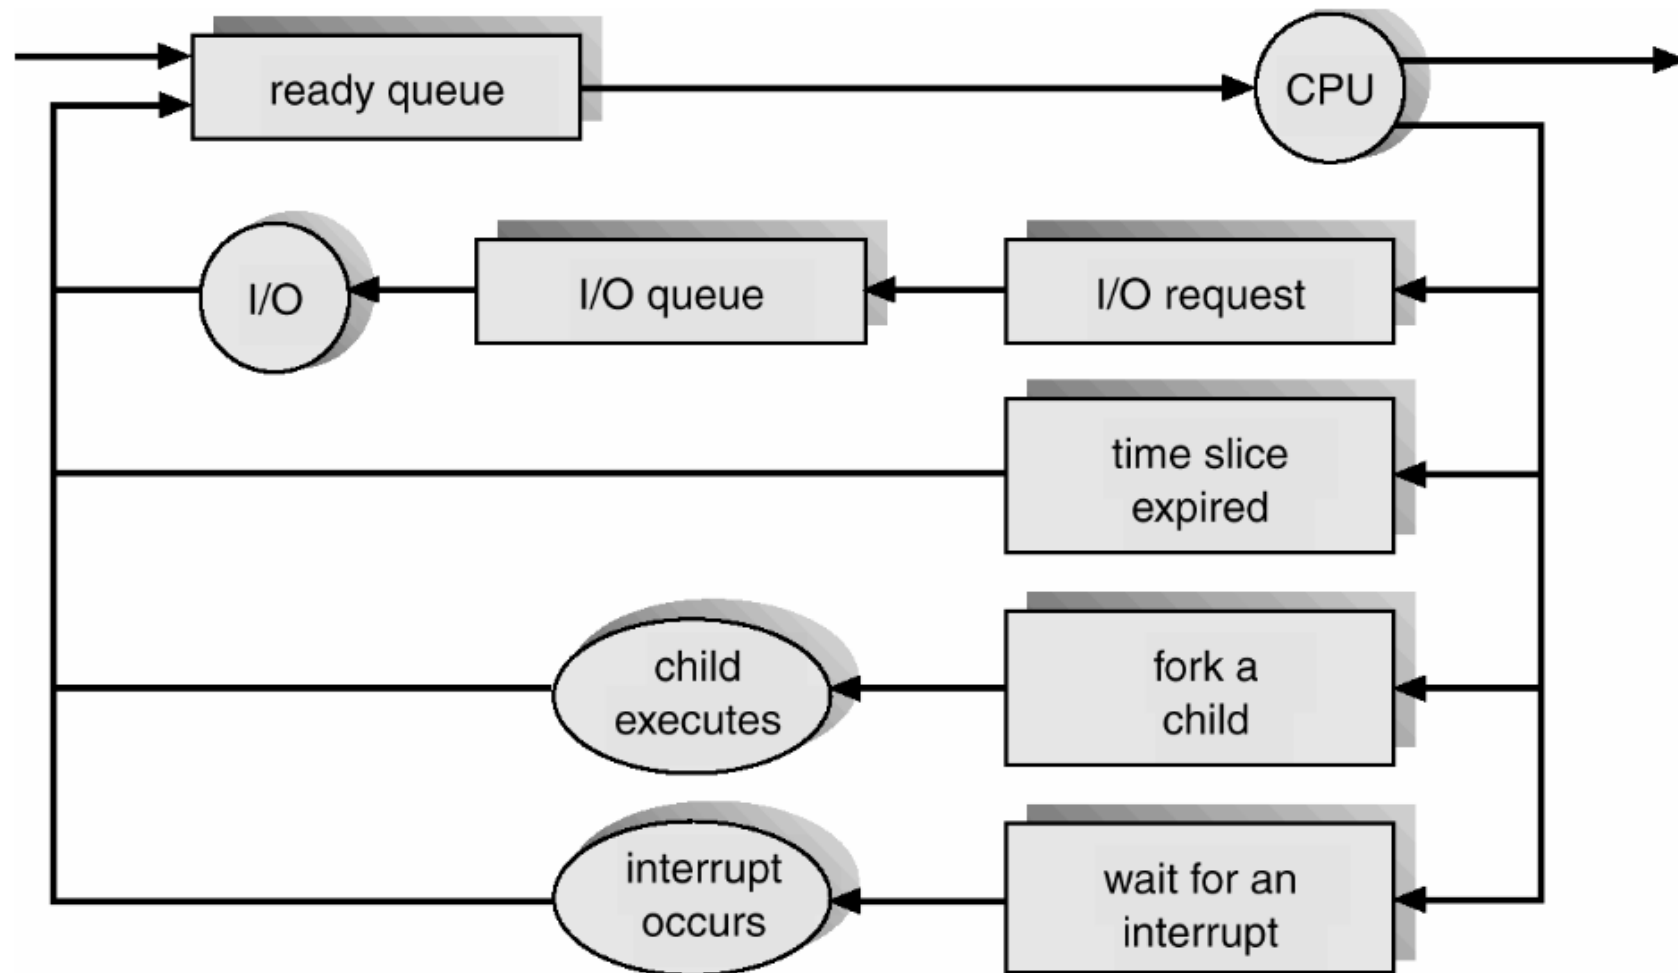

Basic concepts of OS: Scheduling

Preemptive vs. non-preemptive scheduling

- Non-preemptive scheduling
 - Once in running state, process will continue
 - Potential to monopolize the CPU
 - May voluntarily yield the CPU
- Preemptive scheduling
 - Currently running process may be interrupted by OS and put into ready state
 - Timer interrupts required (for IRP)
 - Incurs context switches

Basic concepts of OS: Scheduling

Scheduler vs dispatcher

The **dispatcher** is the module that gives control of the CPU to the process selected by the **scheduler**. This function involves:

- Switching context.
 - Switching to user mode.
 - Jumping to the proper location in the newly loaded program.
 - The dispatcher needs to be as fast as possible, as it is run on every context switch.
- The time consumed by the dispatcher is known as dispatch latency.

Process scheduling is an essential part of a Multiprogramming operating system. Such operating systems allow more than one process to be loaded into the executable memory at a time and loaded process shares the CPU using time multiplexing.

The process scheduling is the activity of the process manager that handles the removal of the running process from the CPU and the selection of another process on the basis of a particular strategy, called scheduling algorithm.

Basic concepts of OS: Scheduling


There are several different criteria to consider when trying to select scheduling algorithm for a particular situation and environment:

- **CPU utilization** - Ideally the CPU would be busy 100% of the time, so as to waste 0 CPU cycles. On a real system CPU usage should range from 40% (lightly loaded) to 90% (heavily loaded.)
- **Throughput** - Number of processes completed per unit time. May range from 10 / second to 1 / hour depending on the specific processes.
- **Turnaround time** - Time required for a particular process to complete, from submission time to completion. (Wall clock time.)
- **Waiting time** - How much time processes spend in the ready queue waiting their turn to get on the CPU.
 - **Average load** - The average number of processes sitting in the ready queue waiting their turn to get into the CPU. Reported in 1-minute, 5-minute, and 15-minute averages by "uptime" and "who".
- **Response time** - The time taken in an interactive program from the issuance of a command to the commence of a response to that command.
- The most common scheduling algorithms are:
 - First-Come First-Serve
 - Shortest-Job-First
 - Round Robin
 - Priority Scheduling

Basic concepts of OS: Scheduling

First-Come First-Serve

- FCFS is very simple - Just a FIFO queue, like customers waiting in line at the bank or the post office or at a copying machine.
- Unfortunately, however, FCFS can yield some very long average wait times, particularly if the first process to get there takes a long time.

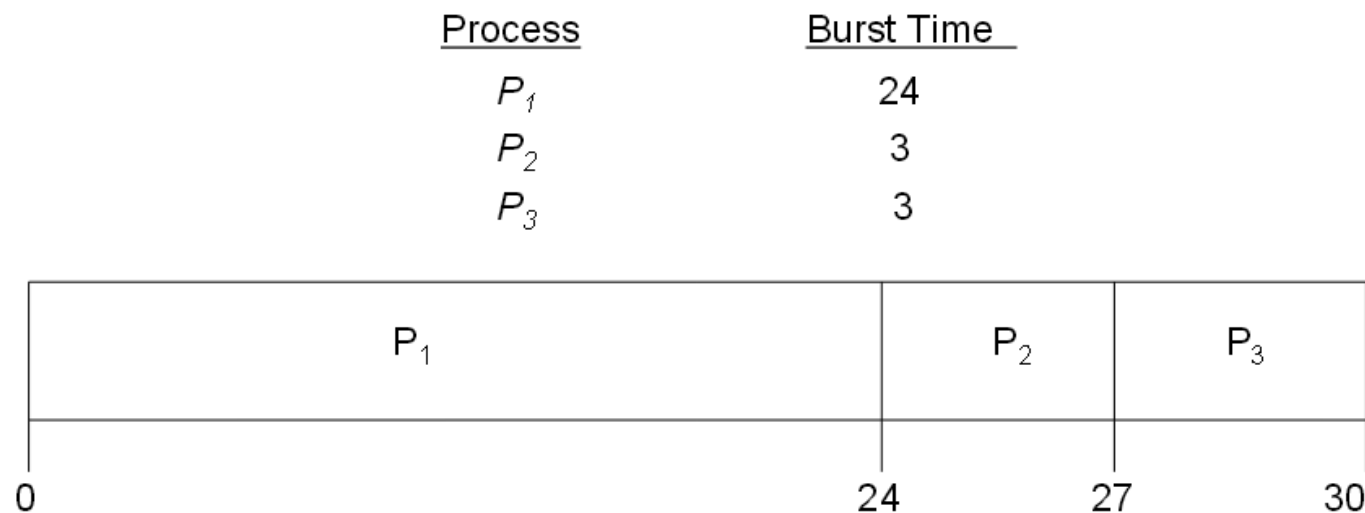

- Waiting time for $P_1 = 0$; $P_2 = 24$; $P_3 = 27$
- Average waiting time: $(0 + 24 + 27)/3 = 17$

Basic concepts of OS: Scheduling

Shortest-Job-First

- The idea behind the SJF algorithm is to pick the quickest fastest little job that needs to be done, get it out of the way first, and then pick the next smallest fastest job to do next.
- SJF is optimal - gives minimum average waiting time for a given set of processes

<u>Process</u>	<u>Burst Time</u>
P_1	6
P_2	8
P_3	7
P_4	3




■ Average waiting time = $(3 + 16 + 9 + 0) / 4 = 7$

- The difficulty is knowing the length of the next job(CPU request)

Basic concepts of OS: Scheduling

Priority Scheduling

- Priority scheduling is a more general case of SJF, in which each job is assigned a priority and the job with the highest priority gets scheduled first.

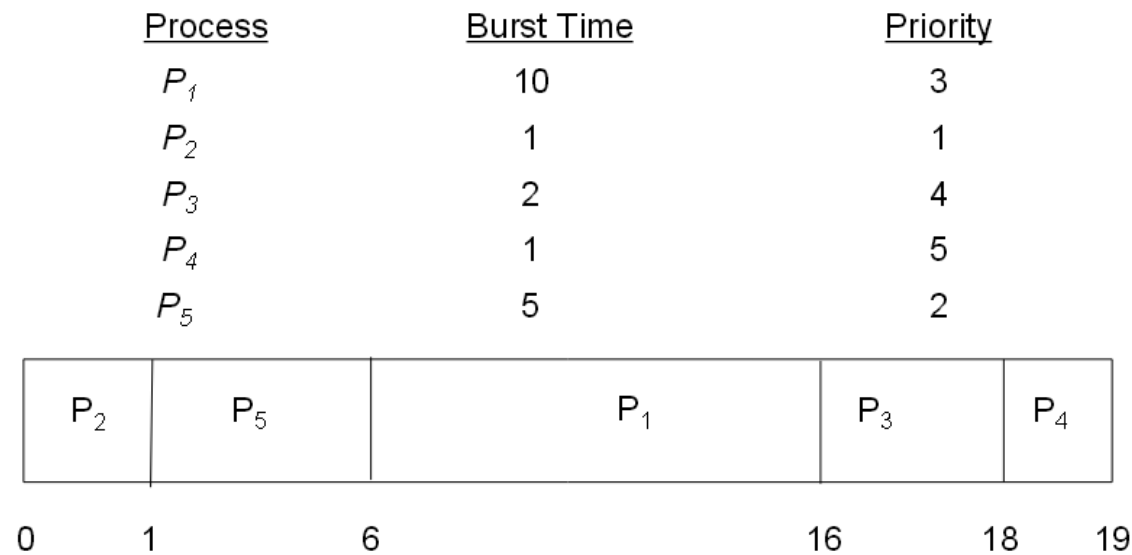


■ Average waiting time = 8.2 msec

- Problem:** Starvation - low priority processes may never execute
- Solution:** Aging - as time progresses, increase the priority of the process

Basic concepts of OS: Scheduling

Round Robin

- RR is similar to FCFS scheduling, except that CPU bursts are assigned with limits called **time quantum**.
- When a process is given the CPU, a timer is set for whatever value has been set for a time quantum.
 - If the process finishes its burst before the time quantum timer expires, then it is swapped out of the CPU just like the normal FCFS algorithm.
 - If the timer goes off first, then the process is swapped out of the CPU and moved to the back end of the ready queue.
- The ready queue is maintained as a circular queue, so when all processes have had a turn, then the scheduler gives the first process another turn, and so on.

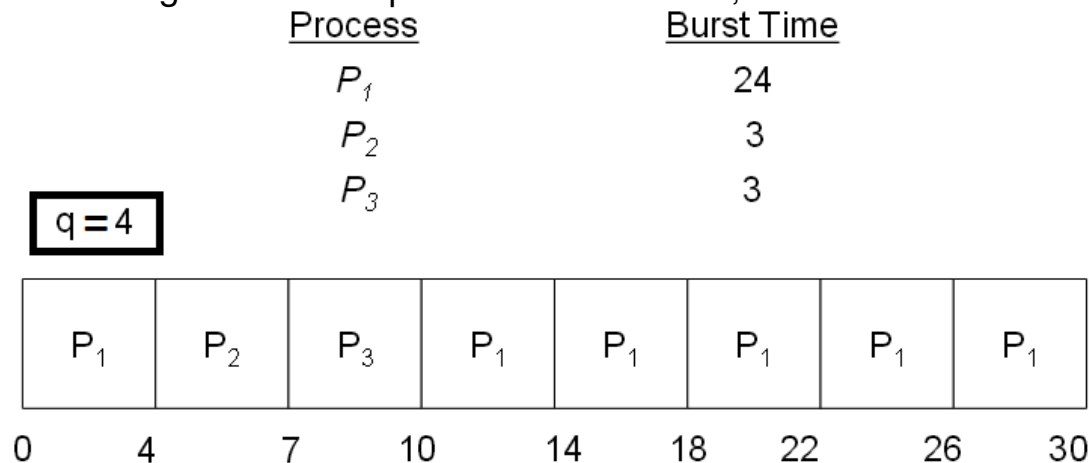

- Typically, higher average turnaround than SJF, but better *response*
- q should be large compared to context switch time
- q usually 10ms to 100ms, context switch < 10 usec

Contents

1. What is an operating system?
2. Basic concepts of OS
 - Concurrency
 - Scheduling(time sharing/time slicing)
 - **Memory management & Virtual memory(address space)**
 - I/O access
 - Interrupts
 - Real time operations
3. Kernel
4. System call
5. Multi process programming
6. Multi thread programming

Basic concepts of OS: Memory management


User's program must be brought into memory and placed within a process for it to be run.

- *Input queue* – collection of processes on the disk that are waiting to be brought into memory to run the program.
- User programs go through several steps before being run

Address binding of instructions and data to memory addresses can happen at three different stages.


- Compile time: If memory location is known ,absolute code can be generated; must recompile code if starting location changes.
- Load time: Must generate relocatable code if memory location is not known at compile time.
- Execution time: Binding delayed until run time if the process can be moved during its execution from one memory segment to another. Need hardware support for address maps (e.g., base and limit registers).

Basic concepts of OS: Memory management

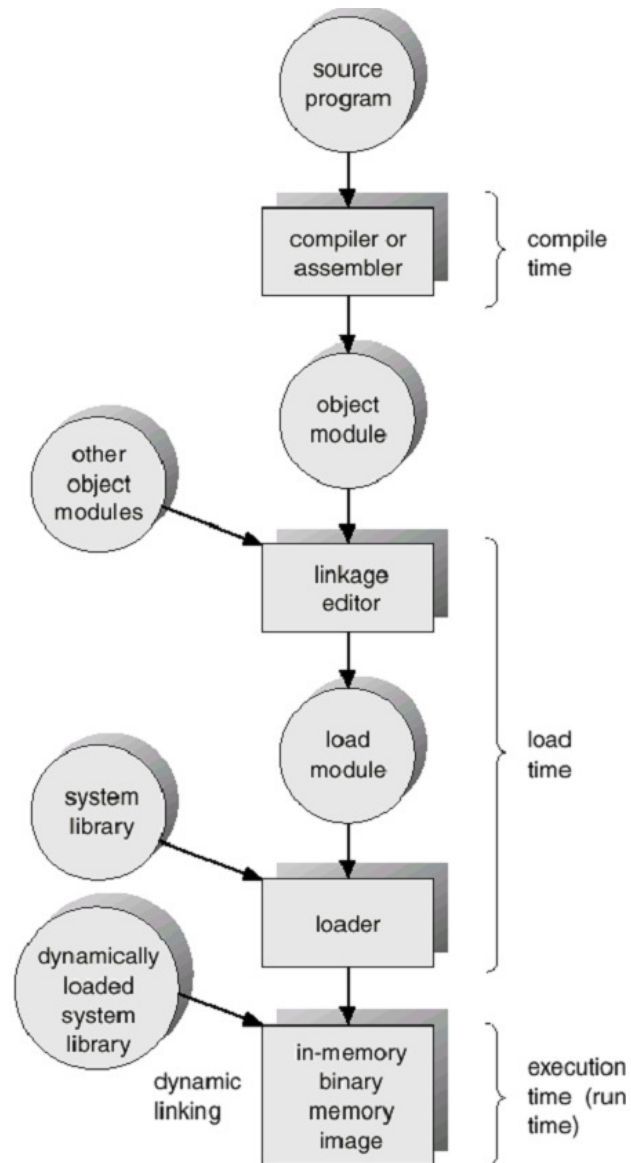

Basic concepts of OS: Memory management


- The concept of a logical *address space* that is bound to a separate *physical address space* is central to proper memory management.
 - *Logical address* – generated by the CPU; also referred to as *virtual address*.
 - *Physical address* – address seen by the memory unit.
- Logical and physical addresses are the same in compile time and load-time address-binding schemes;
- Logical (virtual) and physical addresses differ in execution-time address-binding scheme.

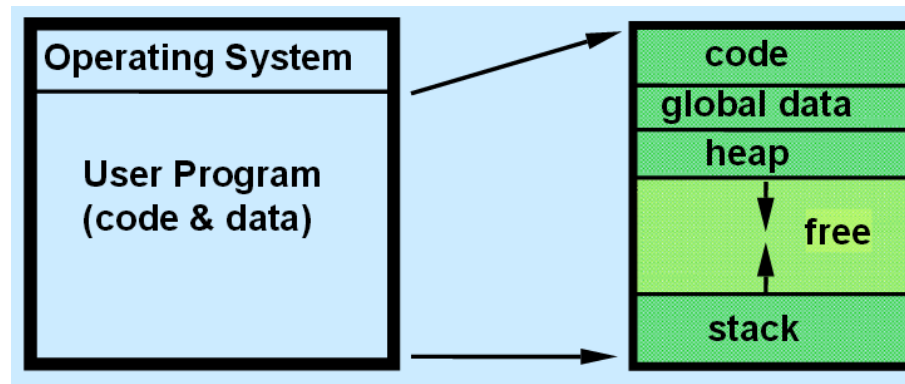

Basic concepts of OS: Memory management


User's program is a collection of segments in the logical address space. A segment is a logical unit such as:

- main program,
- procedures,
- functions,
- methods,
- objects,
- local variables,
- global variables,
- common block,
- stack,
- symbol table,
- arrays

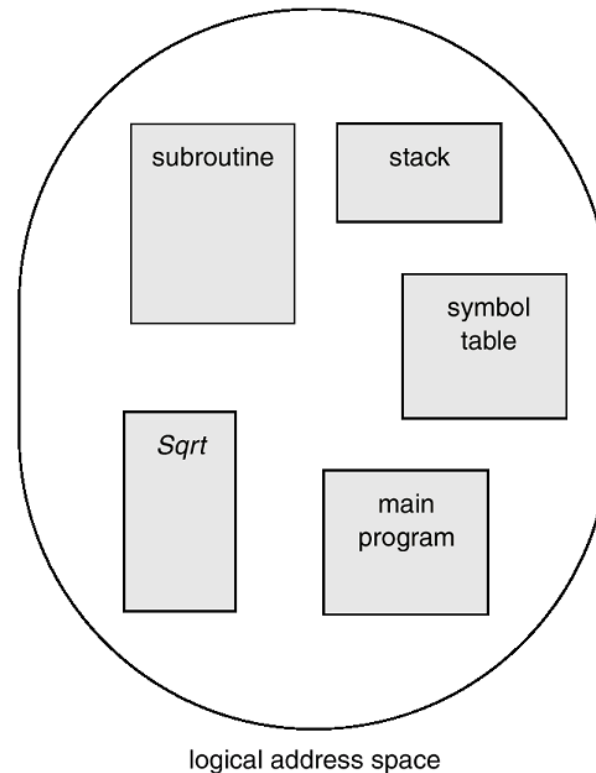


Basic concepts of OS: Memory management

- Logical address space \neq physical address

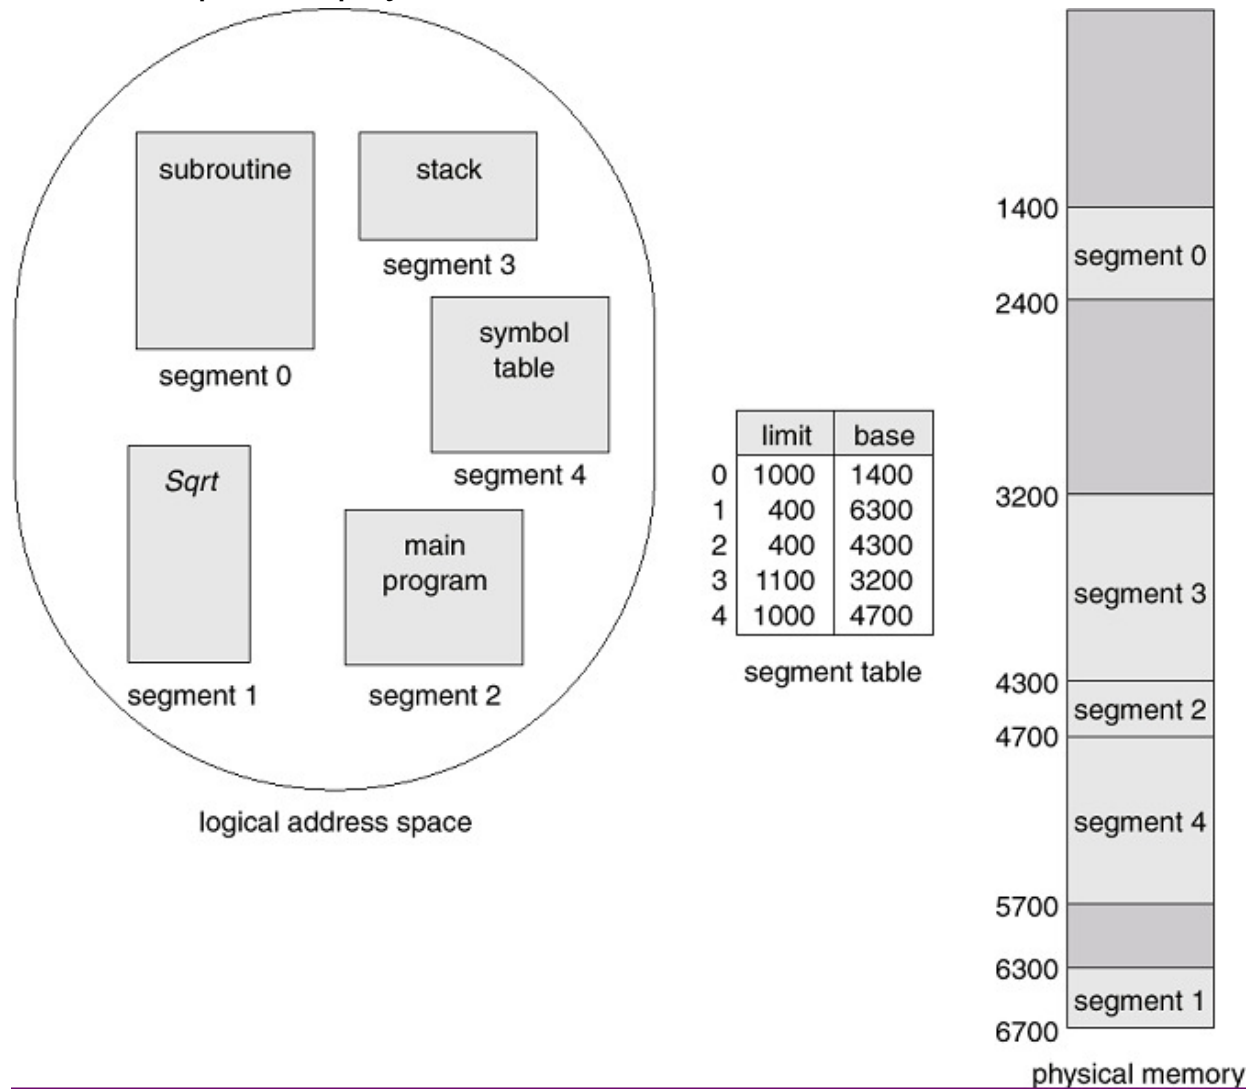

Basic concepts of OS: Memory management


Some program segments could be shared between several processes (e.g. Shared libraries)

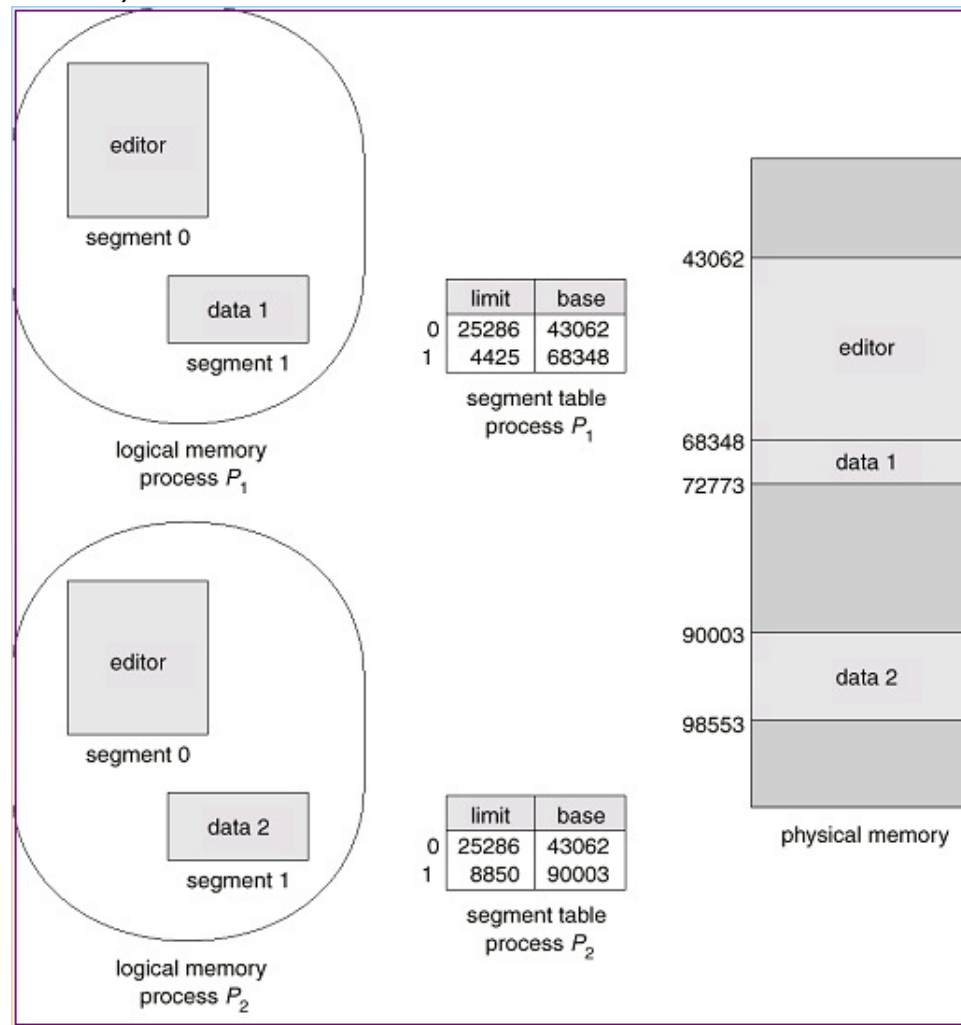

Basic concepts of OS: Memory management

Logical address spaces of a process can be noncontiguous – process is allocating physical memory whenever that memory is available and the program needs it.

- The physical memory is divided into fixed sized blocks called **frames** (size is power of 2, between 512 and 8192 bytes)
- The logical memory is divided into blocks of same size called **pages**.
- Keep track of all free frames
- To run a program of size n pages, the OS needs to find n free frames and load the program
- **Page table** is used to translate logical to physical addresses

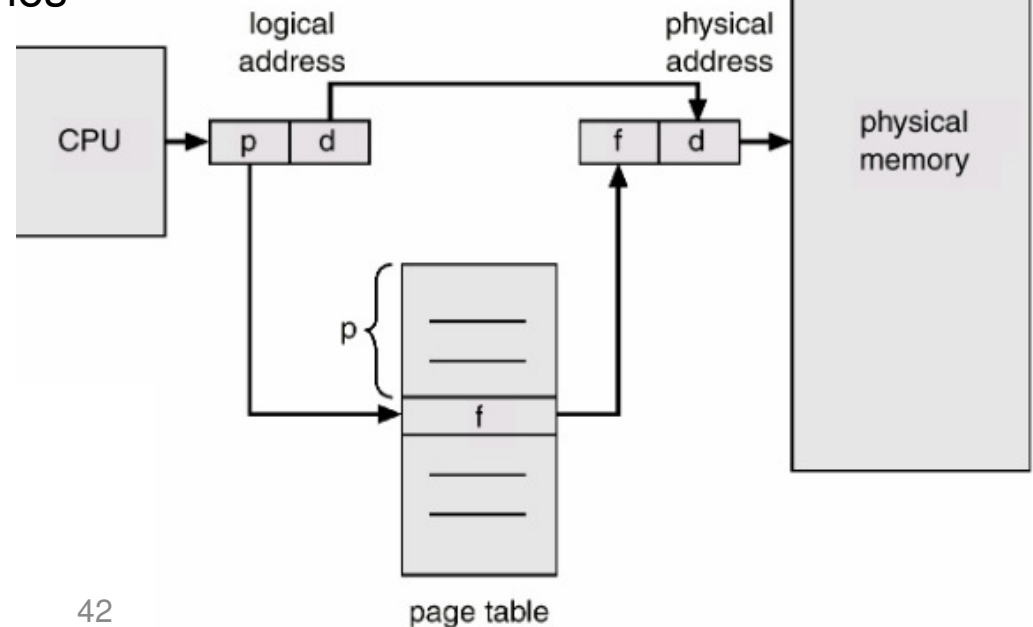


Basic concepts of OS: Memory management


Virtual memory addressing

- The address space (apparently accessible memory) of a process does not need to be identical to the physical address space.
- The virtual address space can be much larger than the physical space.
- Each process can have the same view of memory, for example, its program code is at (the same) very low virtual addresses even though physically this would be possible for at most one process.
- Program uses virtual addresses which the H/W maps to real store locations

Basic concepts of OS: Memory management

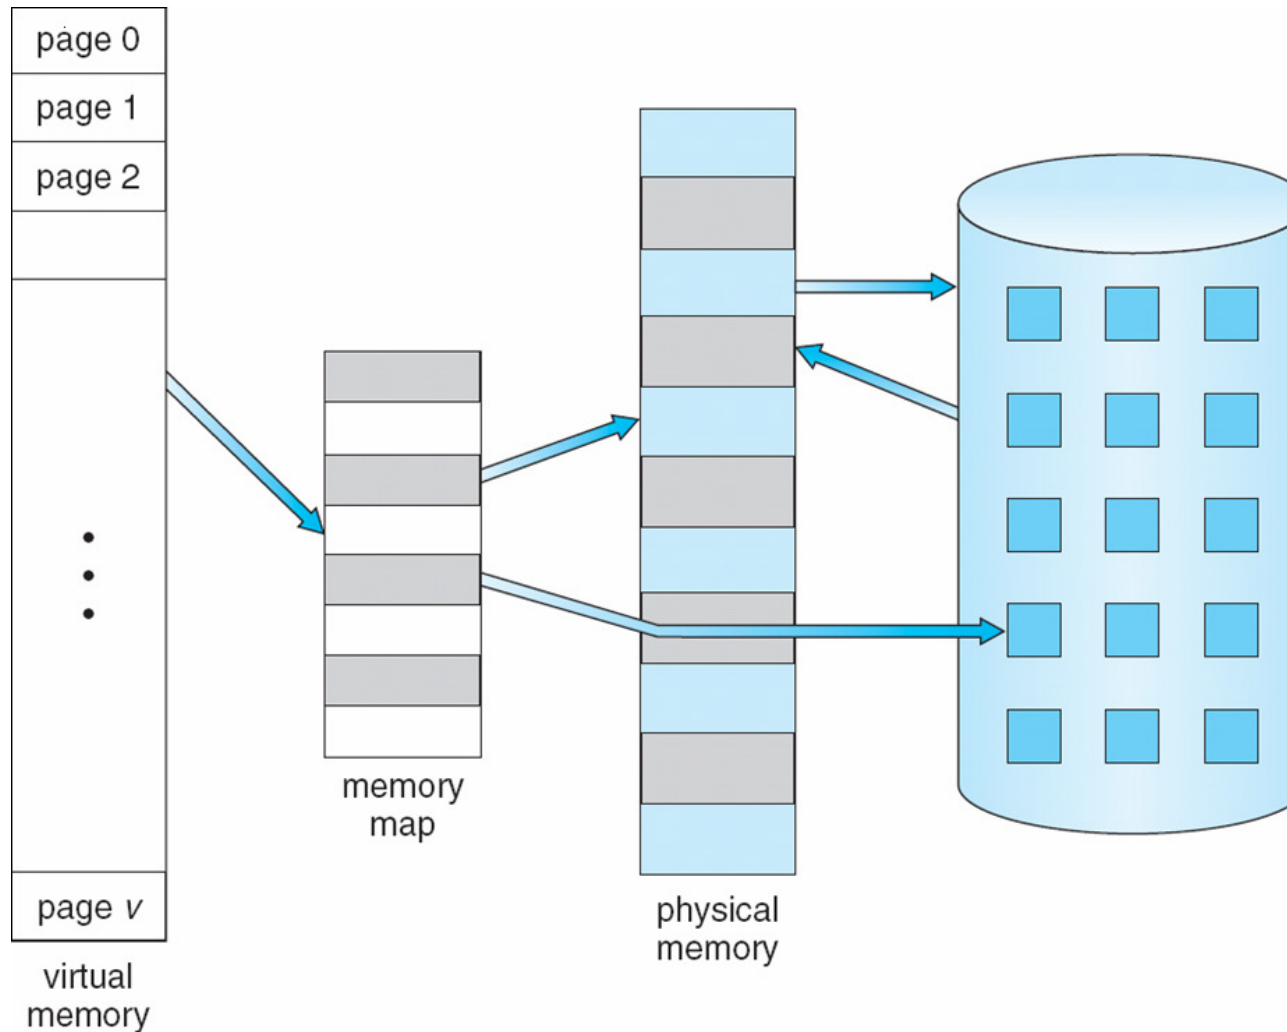


Basic concepts of OS: Memory management

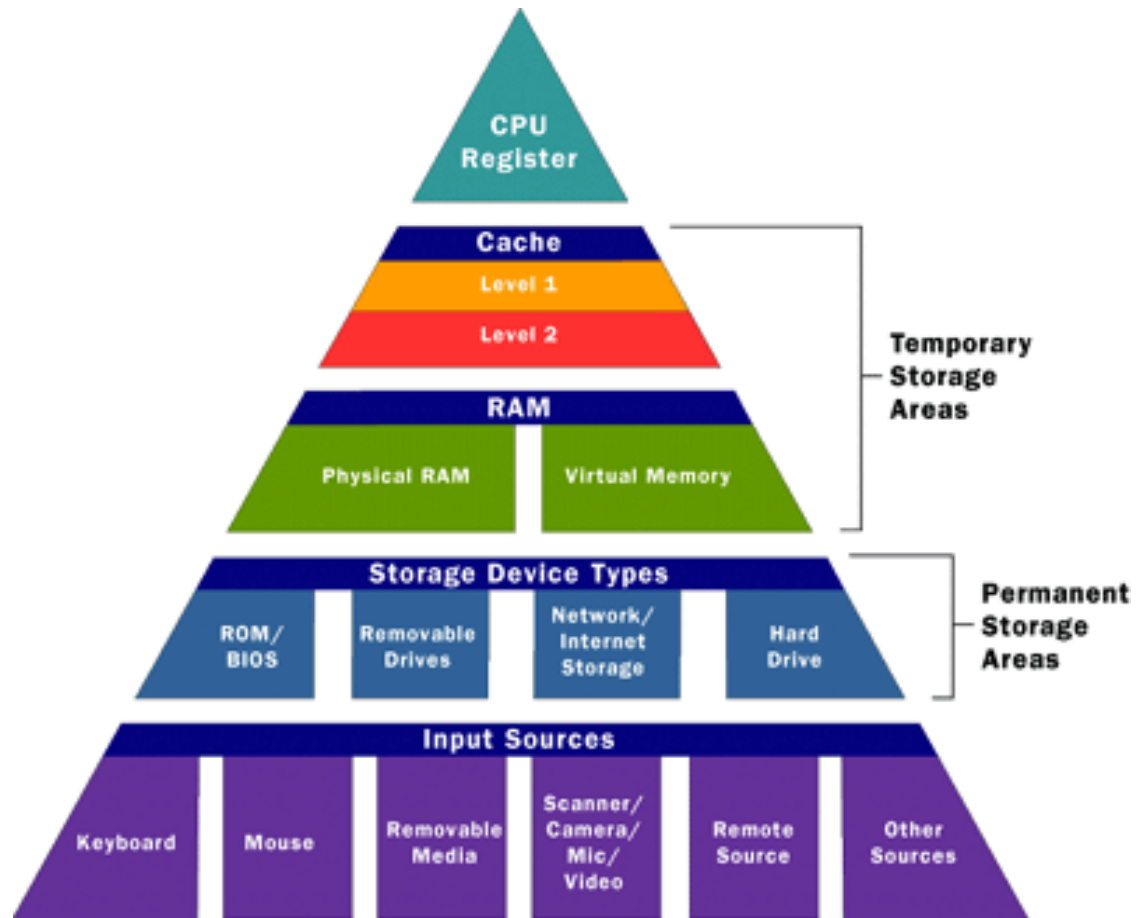


Basic concepts of OS: Memory management

Single process's memory map

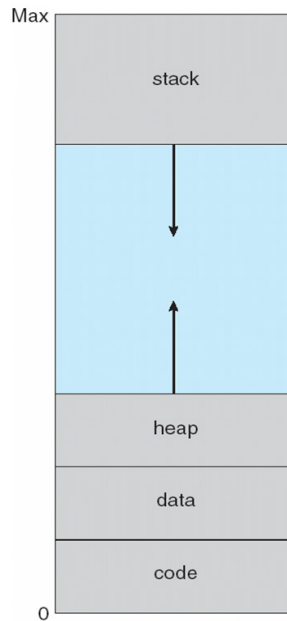

Multiple processes' memory map

- Pages can be shared

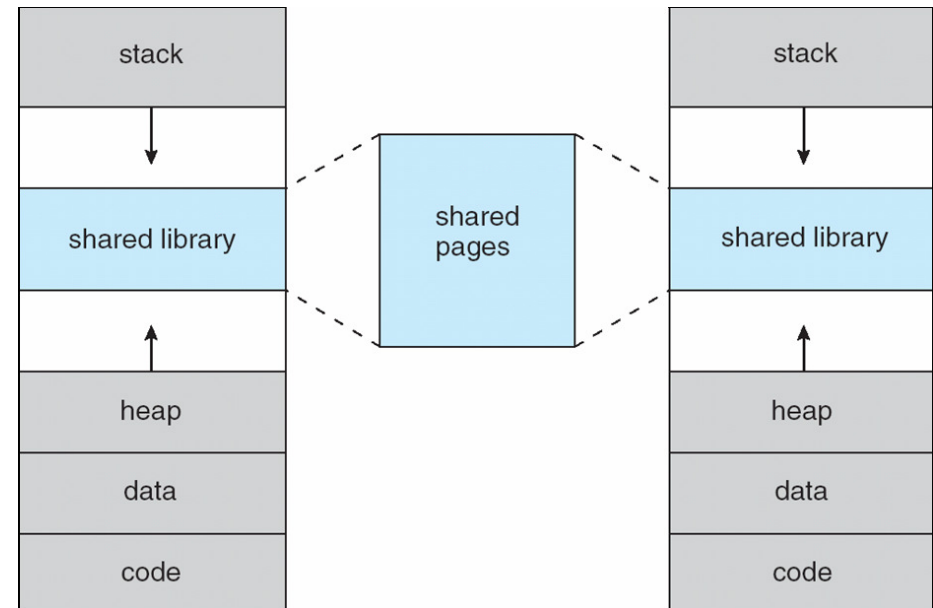


Basic concepts of OS: Memory management

Nm example

Contents

1. What is an operating system?
2. Basic concepts of OS
 - Concurrency
 - Scheduling(time sharing/time slicing)
 - Memory management & Virtual memory(address space)
 - **I/O access**
 - **Interrupts**
 - **Real time operations**
3. Kernel
4. System call
5. Multi process programming
6. Multi thread programming


Basic concepts of OS: I/O Access

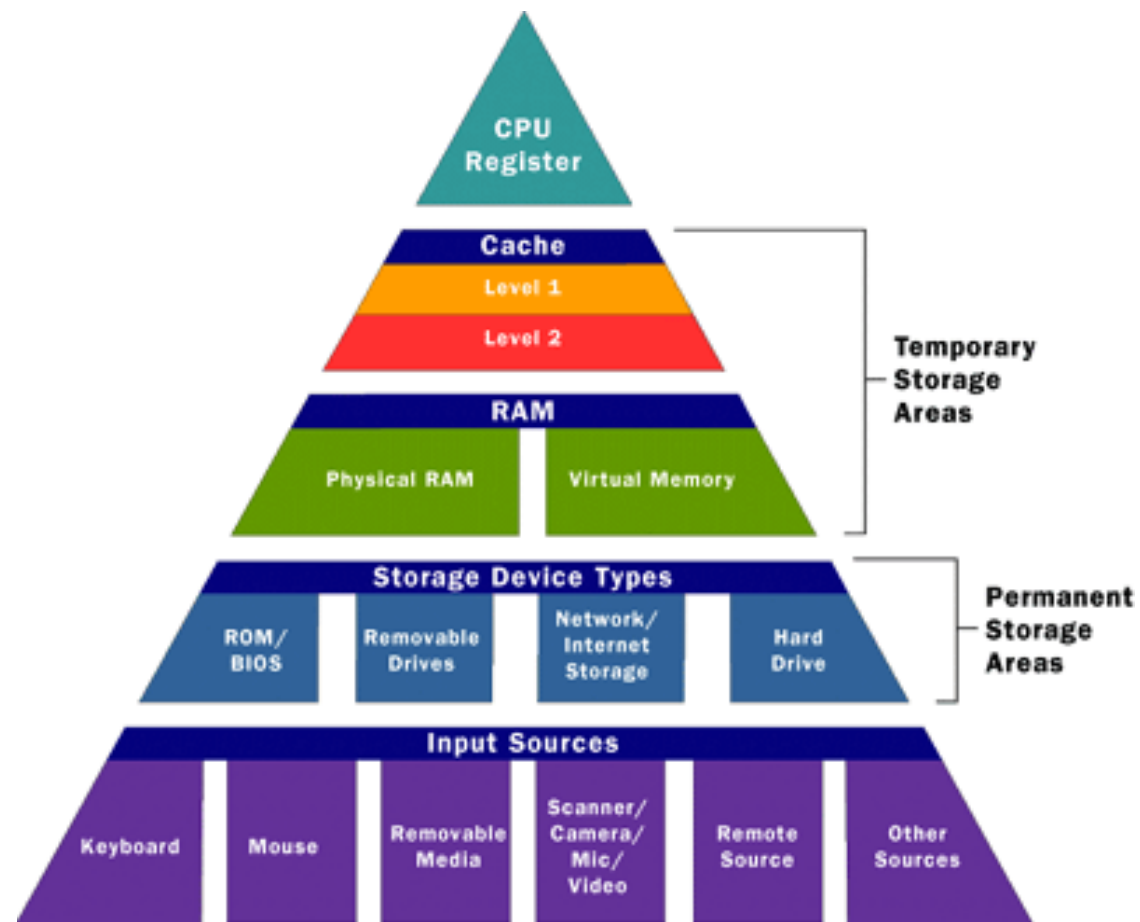

Basic concepts of OS: I/O Access

I/O access is generally slow, but most of the programs are depended on I/O devices. How do we know that I/O operation is complete?


- Polling:
 - I/O device sets a flag when it is busy.
 - Program tests the flag in a loop waiting for completion of I/O operation.
- Interrupts:
 - The I/O operation is handled asynchronously
 - When a program performs I/O, instead of polling, another program can be executed till interrupt is received.

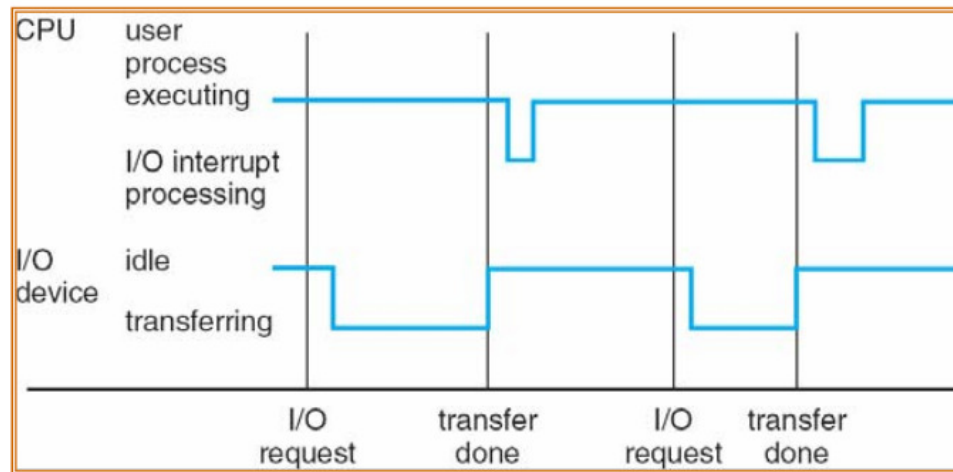

Basic concepts of OS: Interrupts

- On completion of I/O transfer or other external event, an interrupt is triggered and it forces CPU to jump to a specific location in the memory contains the interrupt service routine.
- After the interrupt has been processed, CPU returns to code it was executing prior to servicing the interrupt.
- The operating system preserves the state of the CPU by storing registers and the program counter.
- Incoming interrupts are disabled while another interrupt is being processed to prevent a lost interrupt (there are some exceptions though)
- A trap is a software-generated interrupt caused either by an error(e.g. division by zero) or a user request (e.g. request for operating system service).
- An operating system is interrupt driven.

Basic concepts of OS: Interrupts

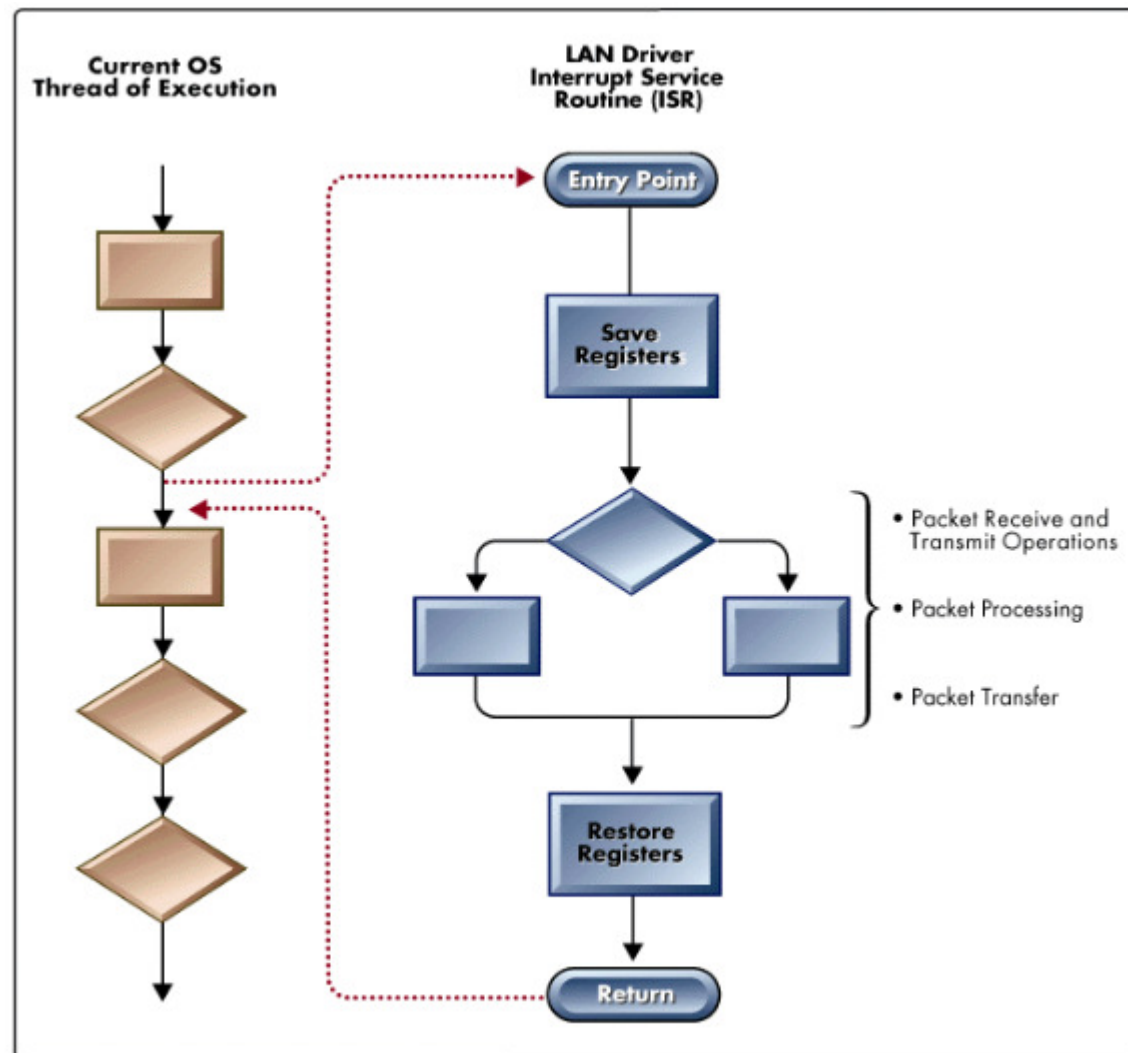

<http://support.novell.com/techcenter/articles/img/ana1996050101.gif>

Basic concepts of OS: Real time operations

- Real time in operating systems:

“The ability of the operating system to provide a required level of service in a bounded response time.”

POSIX standard 1003.1

- Real time handling of interrupts and user actions

- All inseparable program segments(including interrupt handlers themselves) must be completed within a well-defined fixed-time constraints.
- Two types of real time systems:
 - Hard real time systems
 - Failure if response time too long.
 - Soft real time systems
 - Less accurate if response time is too long

- Automotive electronics is a real time environment and real time operating systems(RTOS) are widely adopted.


Contents

1. What is an operating system?
2. Basic concepts of OS
 - Concurrency
 - Scheduling(time sharing/time slicing)
 - Memory management & Virtual memory(address space)
 - I/O access
 - Interrupts
 - Real time operations
- 3. Kernel**
4. System call
5. Multi process programming
6. Multi thread programming

Kernel

What is a kernel?

- The kernel is a fundamental part of any operating system.
- The kernel manages I/O requests from software, and translates them into data processing instructions for the central processing unit and other electronic components of a computer.


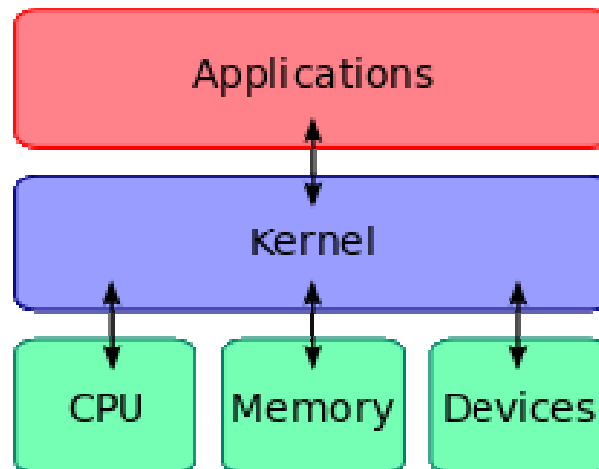


Kernel types


- **Micro-kernels**
 - the kernel modules run in user mode → protection against bugs
 - adaptability to use in distributed systems
 - forces the programmers to adopt a modularize approach
 - easily ported to other architectures
 - better use of RAM than monolithic kernels
- **Monolithic kernels**
 - monolithic OS faster than micro-kernel OS
 - modularized approach
 - platform independence
 - frugal main memory usage
 - no performance penalty

Kernel types

Monolithic Kernel vs Microkernel

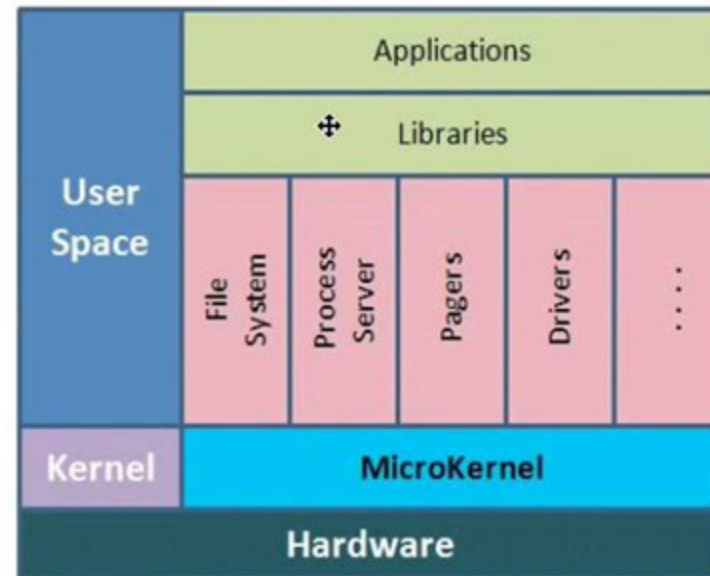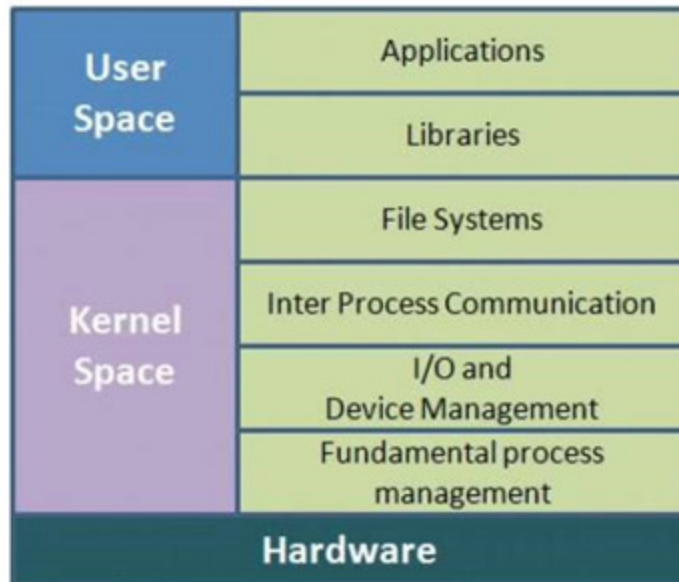

Kernel mode vs User mode

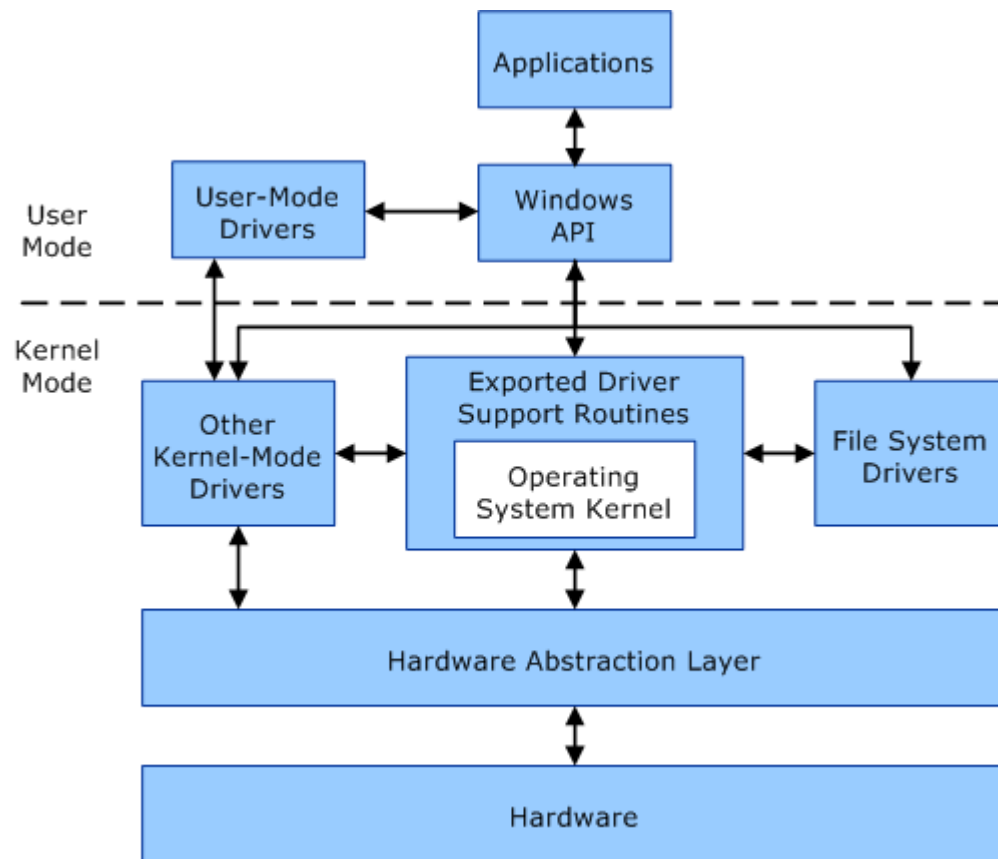


- Main reason for separation of kernel and user space is **security!**

Contents

1. What is an operating system?
2. Basic concepts of OS
 - Concurrency
 - Scheduling(time sharing/time slicing)
 - Memory management & Virtual memory(address space)
 - I/O access
 - Interrupts
 - Real time operations
3. Kernel
- 4. System call**
5. Multi process programming
6. Multi thread programming


System calls

- Definition
 - a call to an OS service
 - a trap into the OS code
- Examples of system calls
 - File manipulation: open(), read(), write(), lseek(), close() ...
 - File system management: mkdir(), mount(), link(), chown() ...
 - Process management: fork(), exec(), wait(), exit() ...

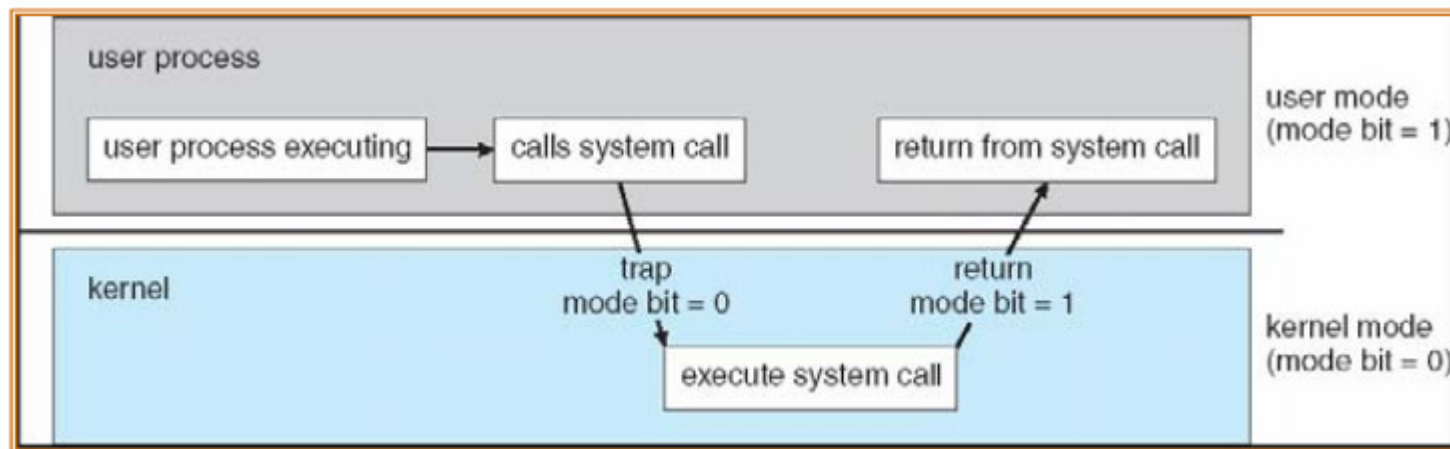

System functions – libc.so

- Steps in making a system call

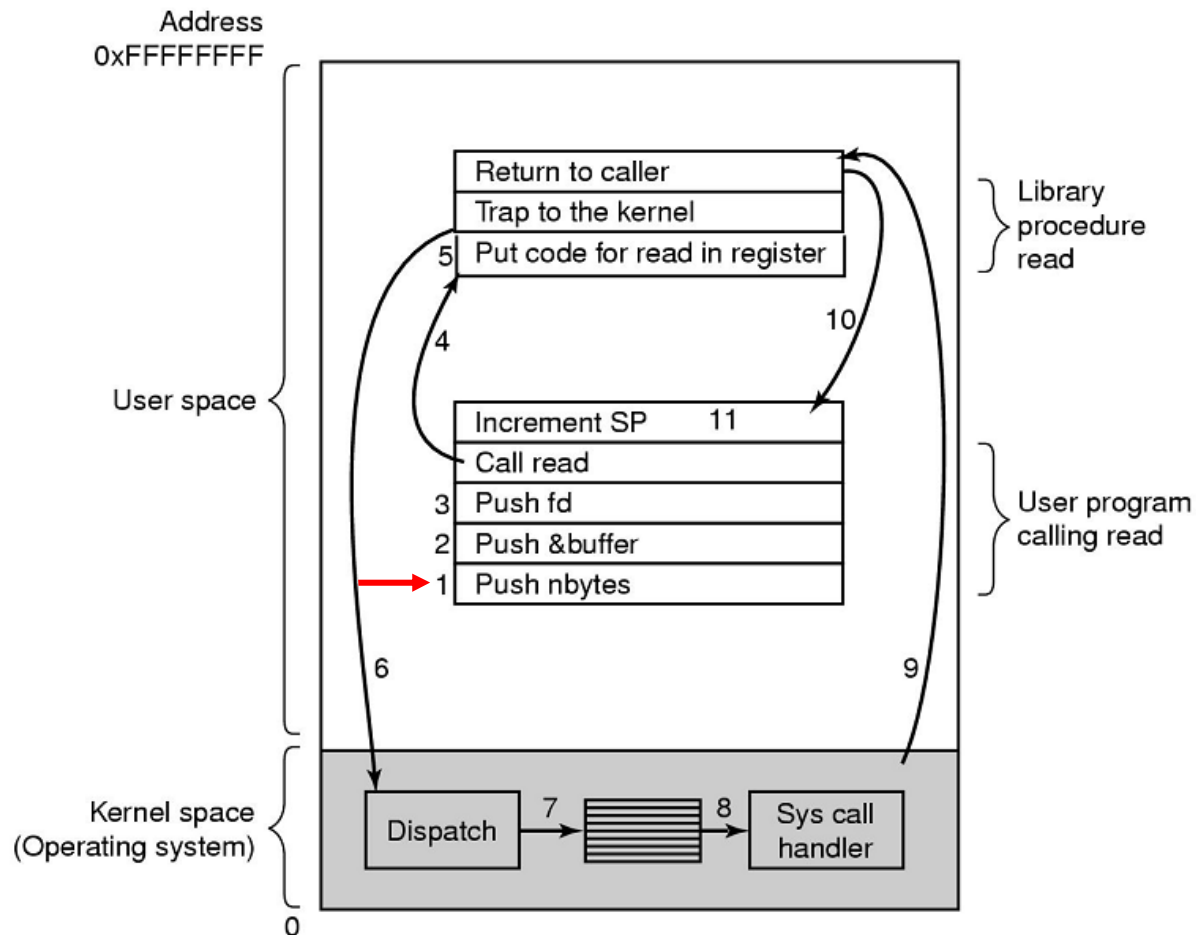

**There are 11 steps executing the system call:
read (fd, buffer, nbytes)**

Contents

1. What is an operating system?
2. Basic concepts of OS
 - Concurrency
 - Scheduling(time sharing/time slicing)
 - Memory management & Virtual memory(address space)
 - I/O access
 - Interrupts
 - Real time operations
3. Kernel
4. System call
- 5. Multi process programming**
6. Multi thread programming

Multi process programming


- What Is A Process
- Process Creation
 - The fork() System Call
- Child Process Termination
 - The wait() System Call

Multi process programming

What Is A Process?

UNIX definition:

- An entity that executes a given piece of code, has its own execution stack, its own set of memory pages, its own file descriptors table, and a unique process ID.*

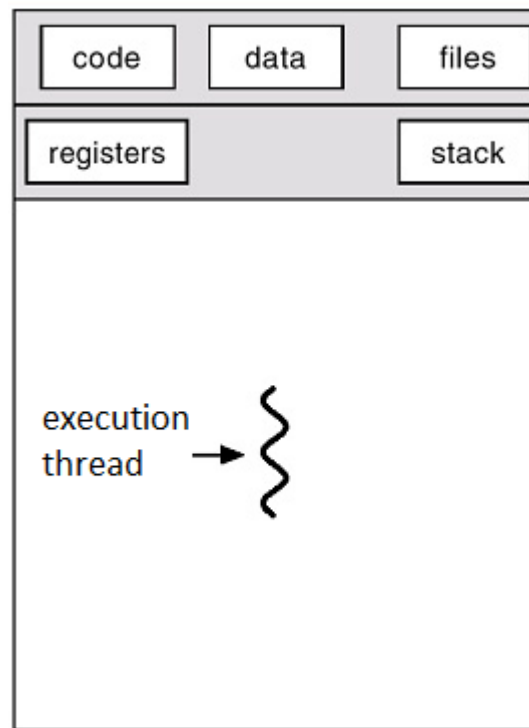

Slide 64

TLT(1

Tsirov, Lyubomir Todorov (L.); 30.9.2015 г.

Multi process programming

What Is A Process?

A process is not a program! Several processes may be executing the same computer program at the same time, for the same user or for several different users.

Multi process programming

What Is A Process?

- It might be that many different processes will try to execute the same piece of code at the same time, perhaps trying to utilize the same resources, and we should be ready to accommodate such situations. This leads us to the concept of 'Re-entrancy'.
- Re-entrancy
 - The ability to have the same function (or part of a code) being in some phase of execution, more than once at the same time.
- This re-entrancy might mean that two or more processes try to execute this piece of code at the same time.


Multi process programming

Process Creation

- The `fork()` system call is the basic way to create a new process. `fork()` is used to produce child shell.
- Returns twice(!!!!)
- `fork()` causes the current process to be split into two processes
 - a parent process
 - a child process.
- All of the memory pages used by the original process get duplicated during the `fork()` call, so both parent and child process see the exact same memory image.


Multi process programming

Process Creation

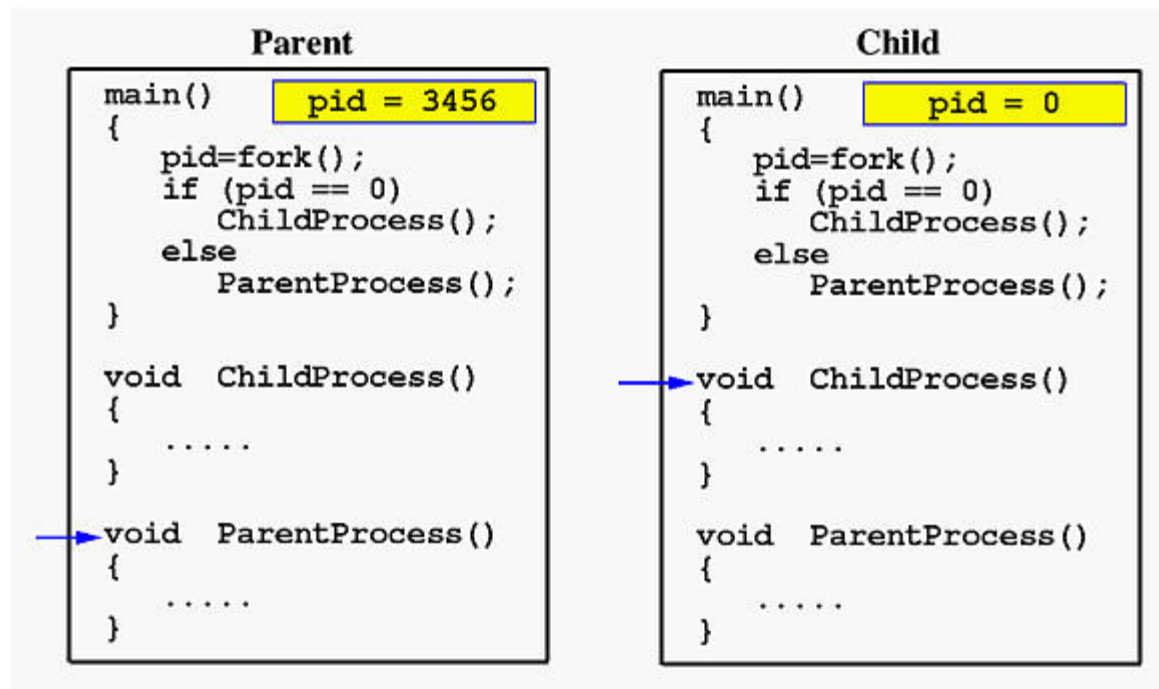

Multi process programming

Process Creation

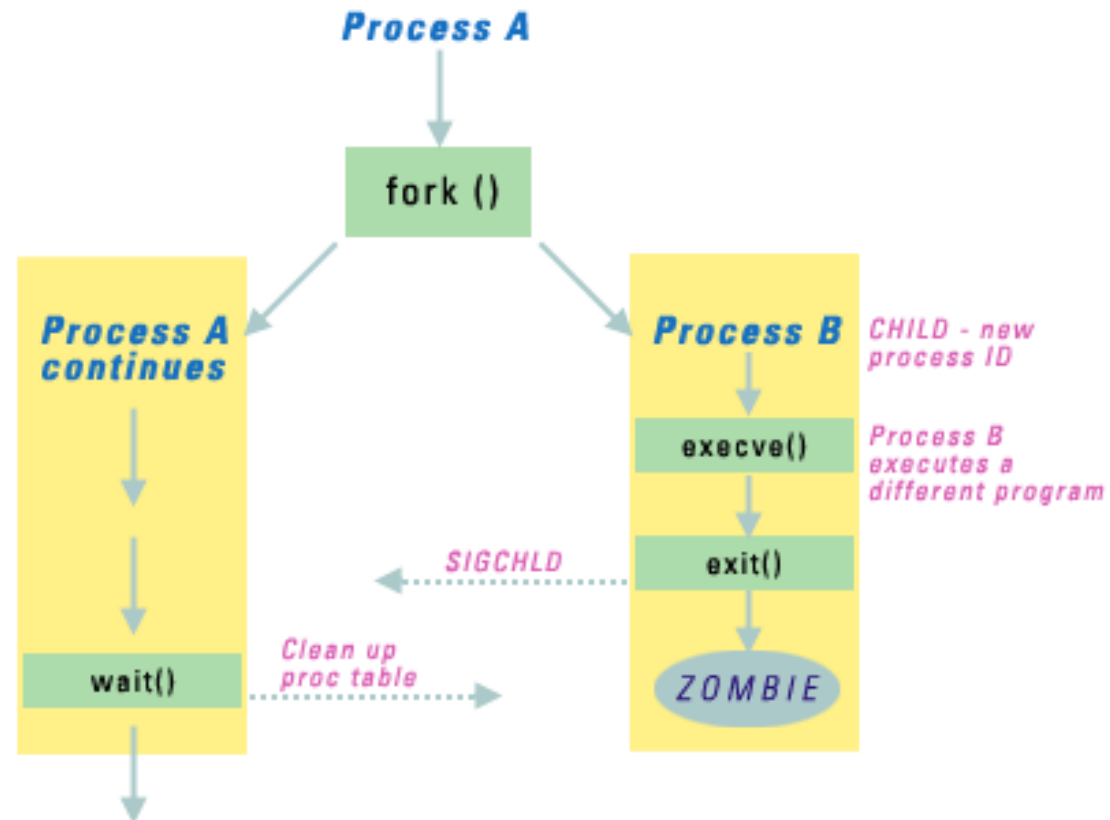

Multi process programming

Child Process Termination

Once we have created a child process, there are two possibilities.

- When a child process exits, it is not immediately cleared off the process table. Instead, a signal is sent to its parent process, which needs to acknowledge its child's death, and only then the child process is completely removed from the system. In the duration before the parent's acknowledgment and after the child's exit, the child process is in a state called "**zombie**".
- When a process exits (terminates), if it had any child processes, they become orphans. An orphan process is automatically inherited by the 'init' process (process number 1 on normal Unix systems), and becomes a child of this 'init' process. This is done to ensure that when the process terminates, it does not turn into a zombie, because 'init' is written to properly acknowledge the death of its child processes.
- When the parent process is not properly coded, the child remains in the zombie state forever.

Multi process programming

Child Process Termination


Once we have created a child process, there are two possibilities.

- When a child process exits, it is not immediately cleared off the process table. Instead, a signal is sent to its parent process, which needs to acknowledge its child's death, and only then the child process is completely removed from the system. In the duration before the parent's acknowledgment and after the child's exit, the child process is in a state called "**zombie**".
- When a process exits (terminates), if it had any child processes, they become orphans. An orphan process is automatically inherited by the 'init' process (process number 1 on normal Unix systems), and becomes a child of this 'init' process. This is done to ensure that when the process terminates, it does not turn into a zombie, because 'init' is written to properly acknowledge the death of its child processes.
- When the parent process is not properly coded, the child remains in the zombie state forever.

Multi process programming

The wait() System Call

- The simple way of a process to acknowledge the death of a child process is by using the wait() system call.
- When wait() is called, the process is suspended until one of its child processes exits, and then the call returns with the exit status of the child process.
- If it has a zombie child process, the call returns immediately, with the exit status of that process.

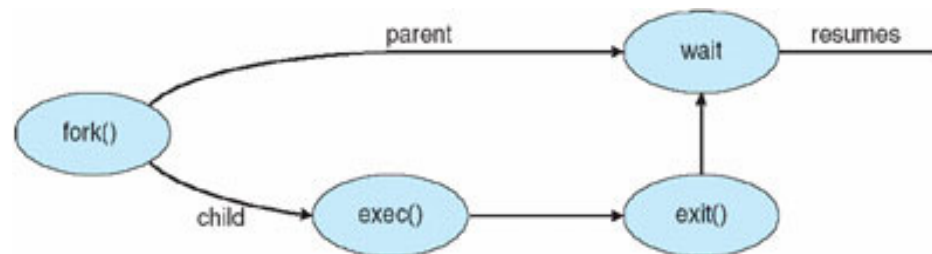


Contents


1. What is an operating system?
2. Basic concepts of OS
 - Concurrency
 - Scheduling(time sharing/time slicing)
 - Memory management & Virtual memory(address space)
 - I/O access
 - Interrupts
 - Real time operations
3. Kernel
4. System call
5. Multi process programming
6. **Multi thread programming**

Multi thread programming


- What is a thread?
- *Definition:*
 - *a thread is defined as an independent stream of instructions that can be scheduled to run as such by the operating system.*
- Processes vs. threads

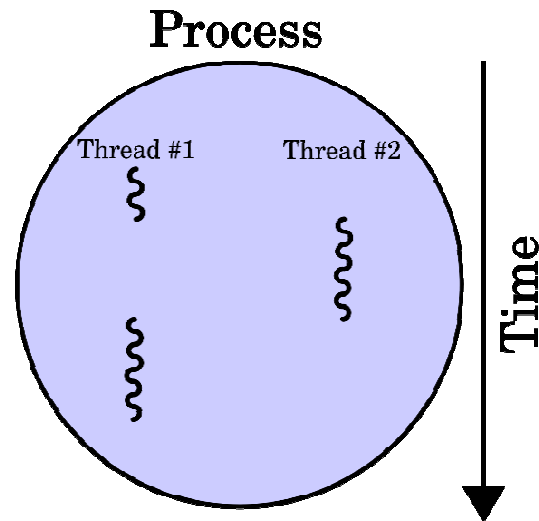

Multi thread programming

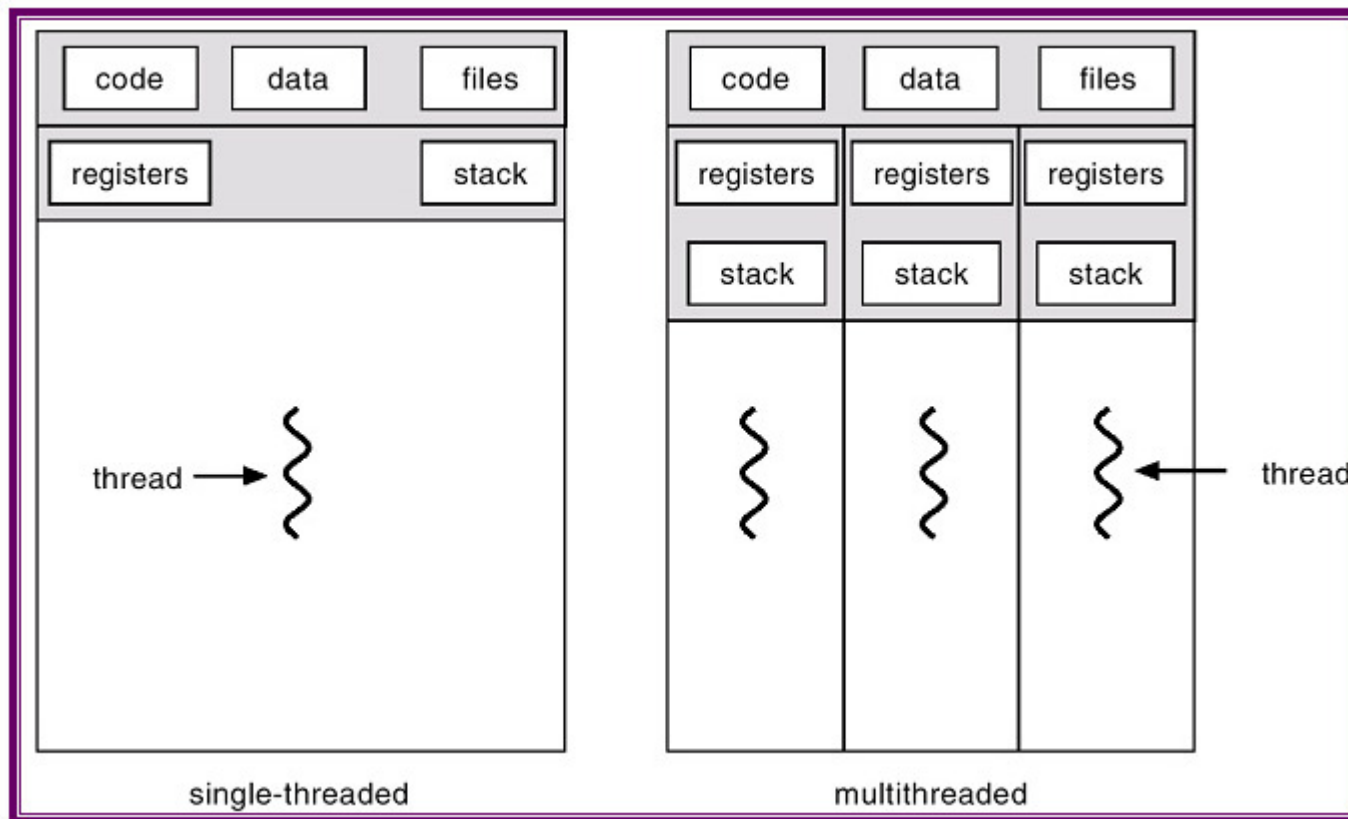

Multi thread programming

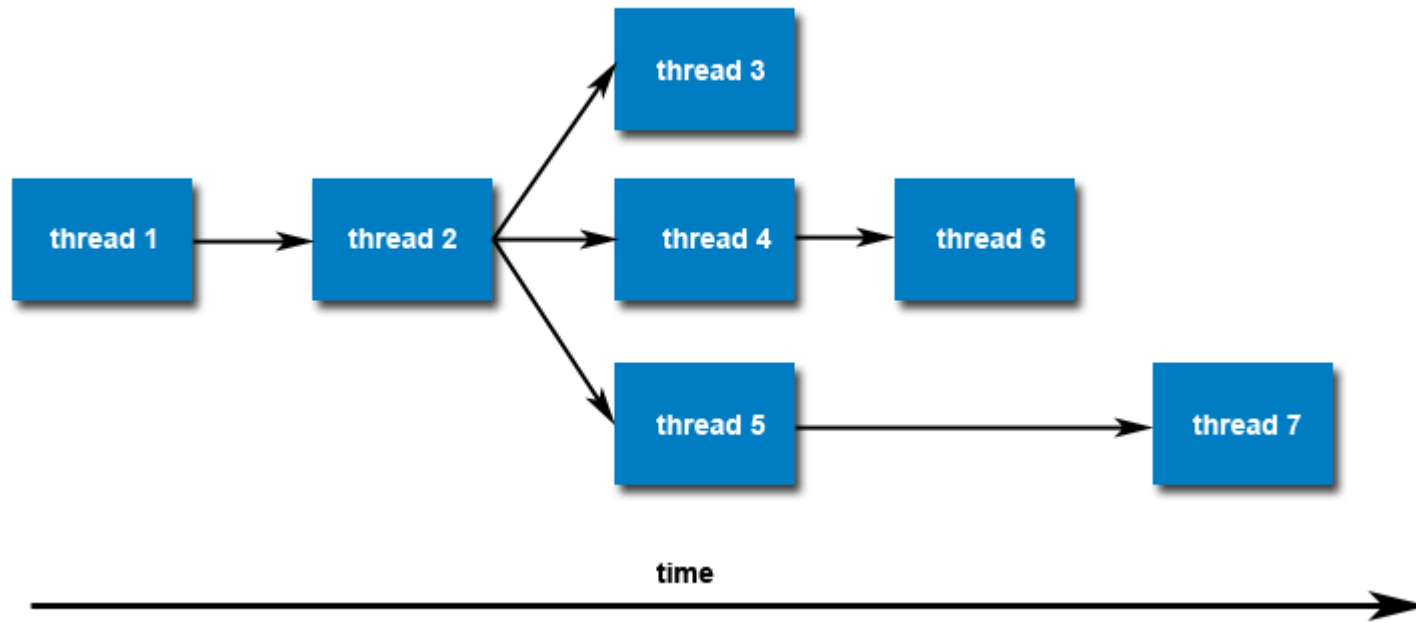


Multi thread programming

- POSIX threads
 - The pthread library is encapsulating all of the thread functionality in the POSIX based OS(e.g. Linux, QNX...)
- Thread manipulation
 - `pthread_create (thread,attr,start_routine,arg)`

Multi thread programming

- Thread manipulation
 - pthread_exit (status)
 - pthread_join (threadid,status)

Multi thread programming

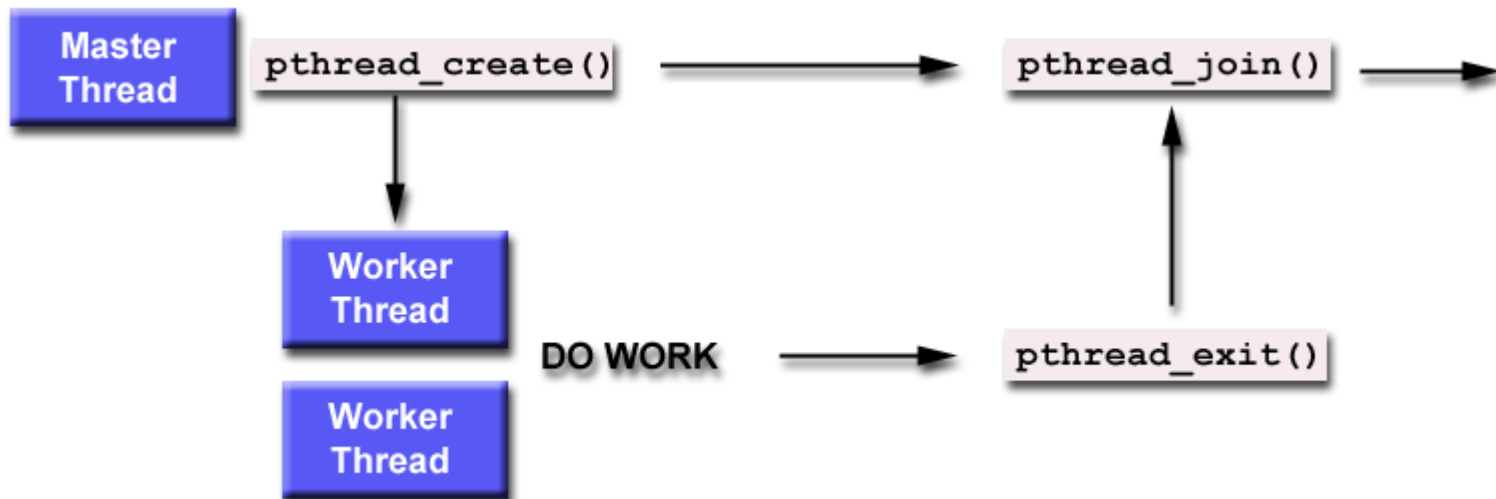

Multi thread programming

- Thread manipulation
 - `pthread_cancel (thread)`

Multi thread programming


3 main thread synchronization primitives in pthreads library:

- semaphore
 - mutex
 - condvar
-
- Mutex manipulation
 - pthread_mutex_init (mutex,attr)
 - pthread_mutex_destroy (mutex)
 - pthread_mutex_lock (mutex)
 - pthread_mutex_unlock (mutex)


Multi thread programming

- Condvar manipulation
 - `pthread_cond_init (condition,attr)`
 - `pthread_cond_destroy (condition)`
 - `pthread_cond_wait (condition,mutex)`
 - `pthread_cond_signal (condition)`
 - `pthread_cond_broadcast (condition)`

Multi thread programming

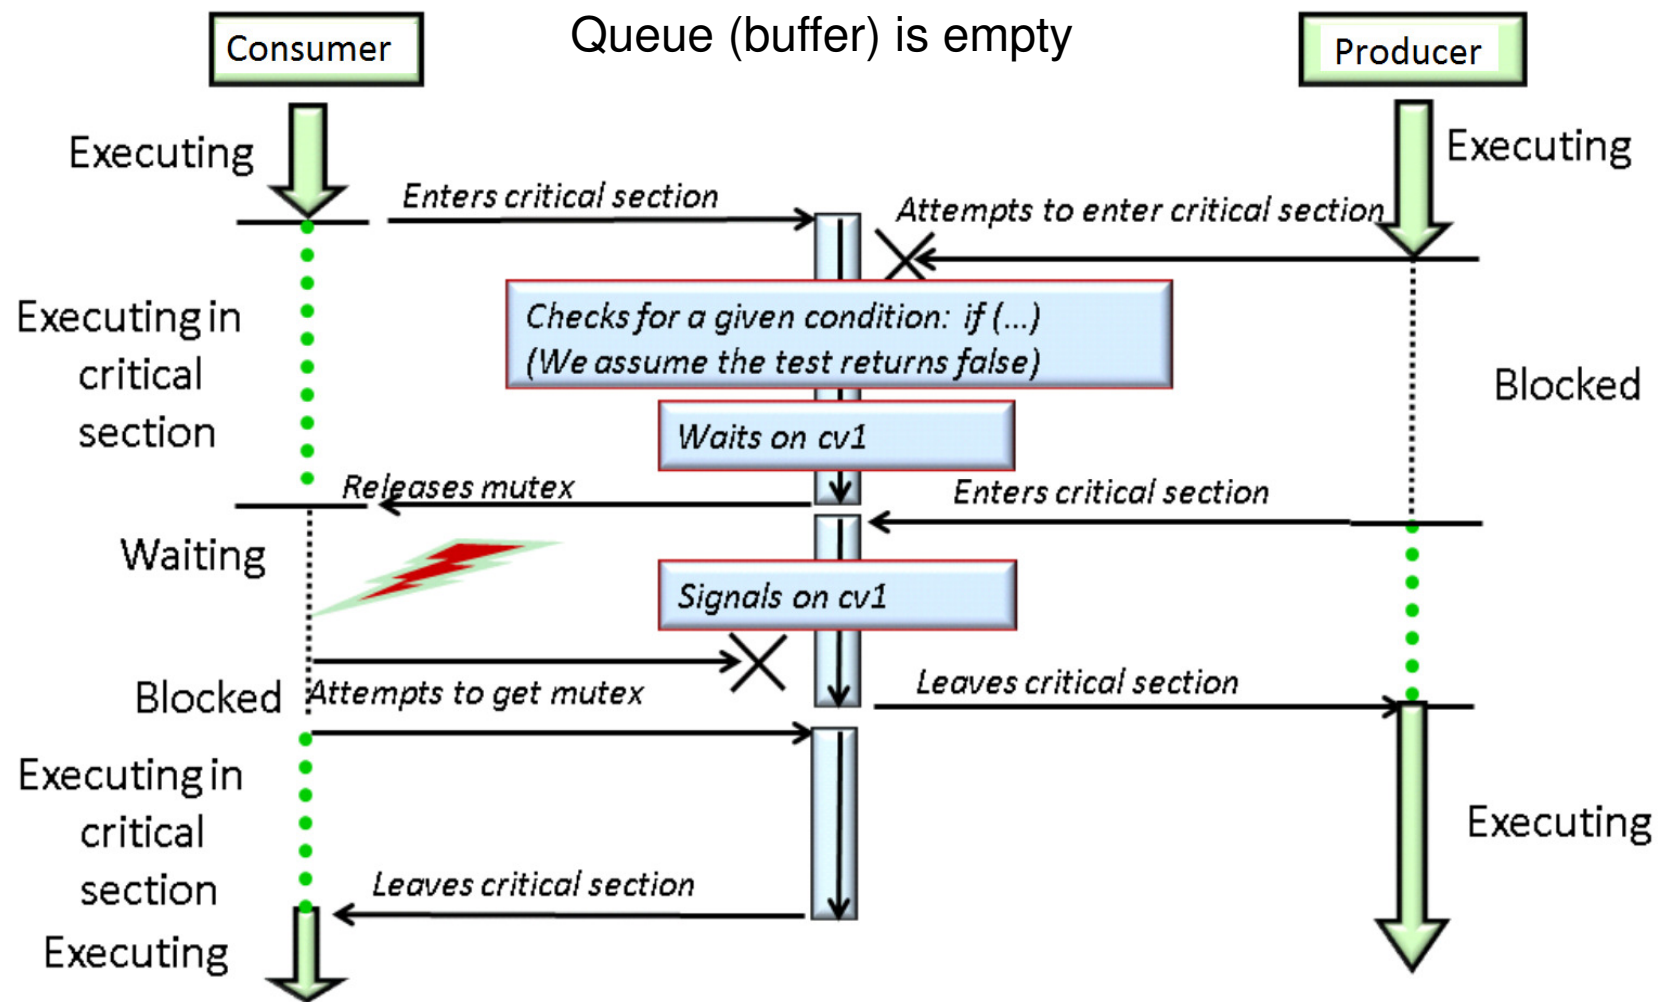

Multi thread programming

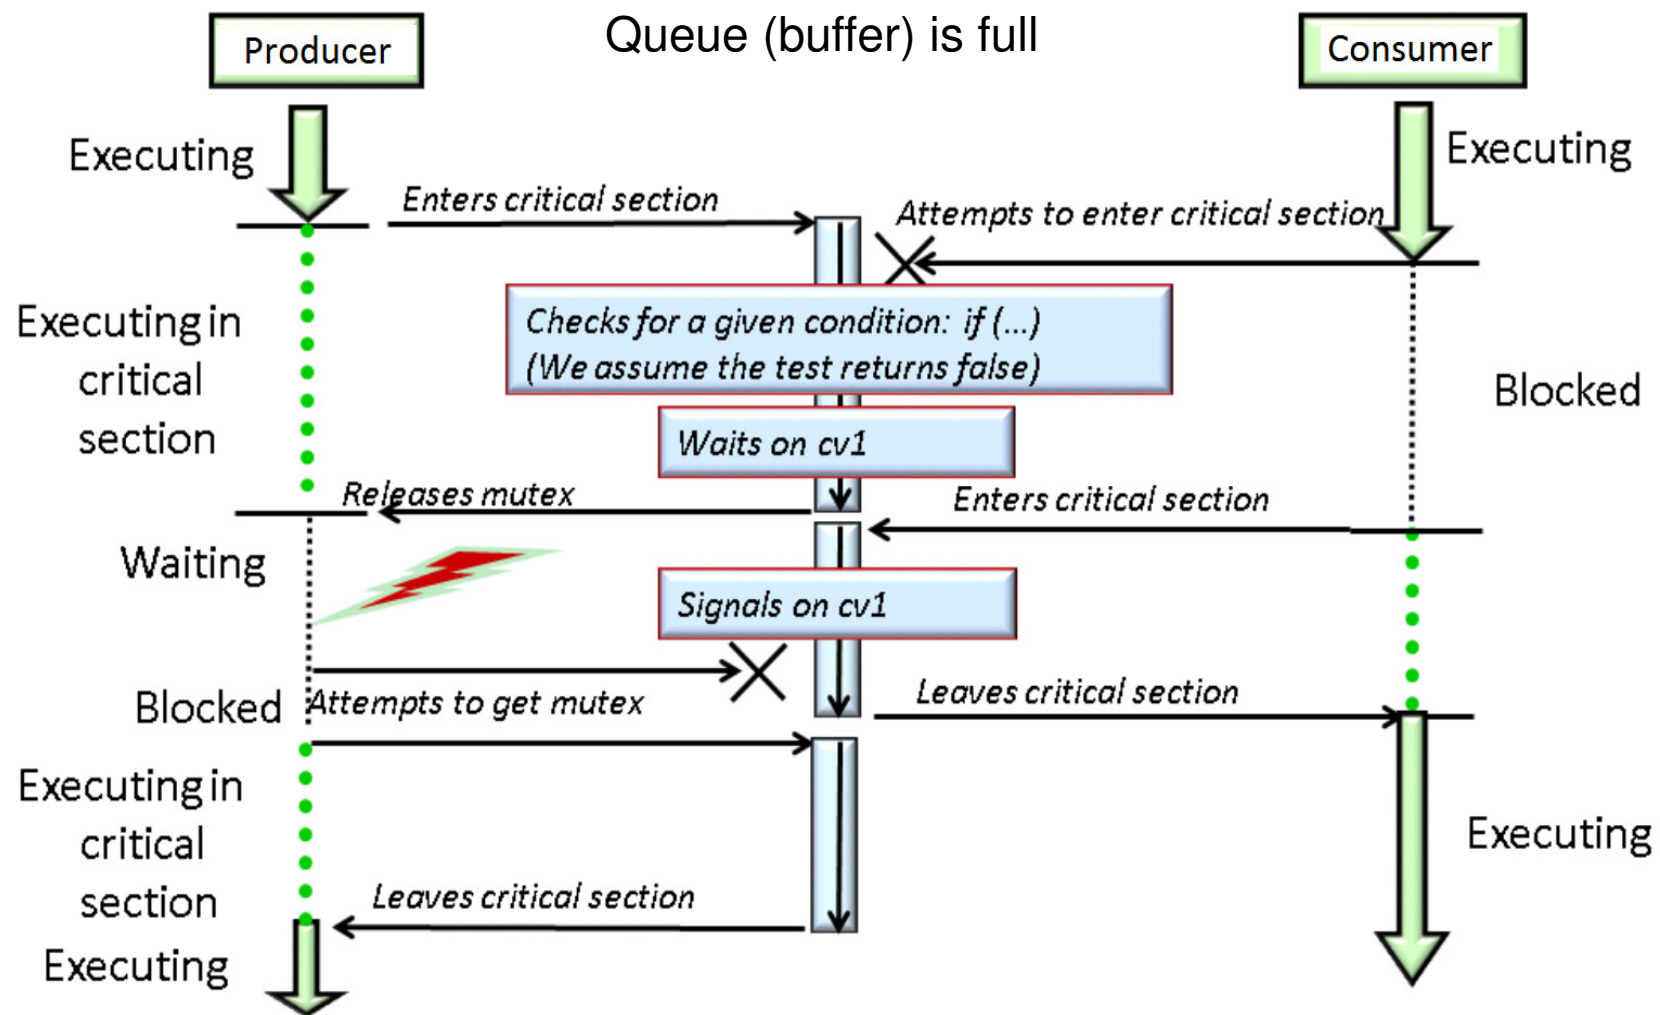



Backup slides

Basic concepts of OS: Memory management


A **pager** moves pages (contents of blocks of memory) in and out of memory to disk so that a process can appear to have a large address space, independent of all other processes but also shared where desired, and much larger than actual memory.

A **swapper** moves processes to and from memory, by moving process pages and process data that the kernel has for the process.

A GRAPHIC EXAMPLE OF THE PRODUCER/CONSUMER PROBLEM

Michael Vignaux

① PRODUCER CONSUMER

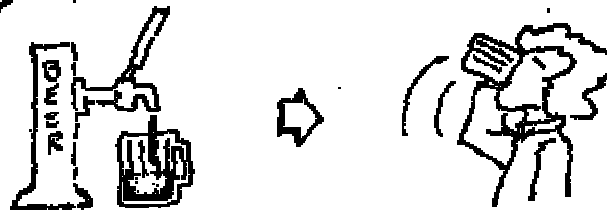


②



③

PROBLEM -

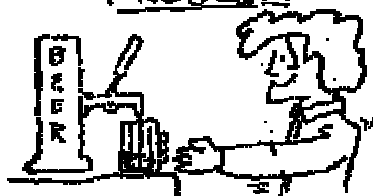


Consumer takes from buffer before producer is done adding to it - trouble!
This is solved by _____

(fill in the blank)

④

One-way bathing

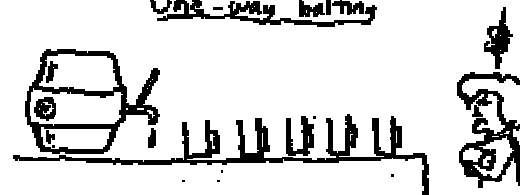

The consumer must wait for producer to produce before it can consume...

⑤

BOUNDED BUFFER



If the consumer is busy (can't consume), the producer must wait, if the buffer is full, for the consumer to start consuming again. The processes are now _____

(fill in)



Литература

- The GNU C Library Manual
(<http://www.gnu.org/software/libc/manual/pdf/libc.pdf>)
- Книги
 - Linux System Programming: Talking Directly to the Kernel and C Library – Robert M. Love
 - Modern Operating Systems – Andrew S Tanenbaum