


ETLEditor 对比主要用的是 ReactDiffViewer

● 调用顺序如下:

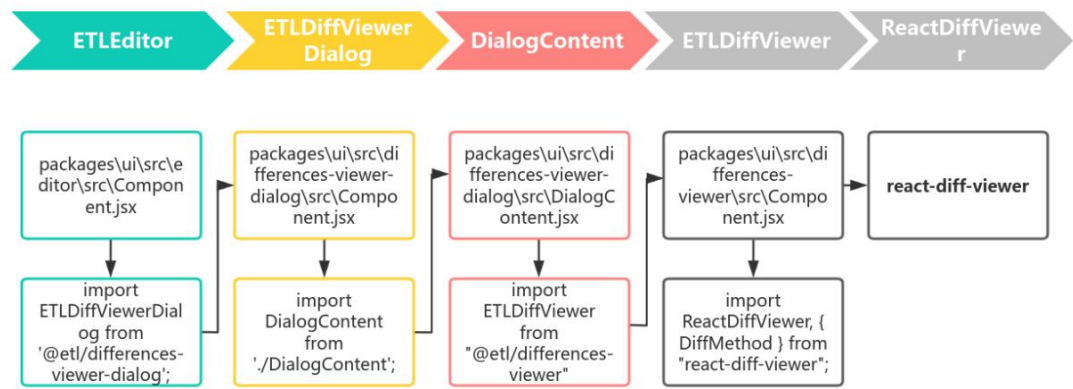

● 页面入口:

```
<etl-editor id="NEW_WordingEditor" trackchangesfeature="true" trackchanges="true" contentfieldname="NEW_WORDING" originalfieldname="NEW_ORIGINAL_WORDING" resultfieldname="NEW_WORDING"
htmlresultfieldname="NEW_WORDING_HTML"
rawfieldname="NEW_WORDING_RAW" showtextmappedvalues="true" dialogcontent='dialogContent' isopen='false' title='dialogTitle' dialogtitle='Compare With Previous Events'
loading='false'/>
<textarea name="dialogContent" id="dialogContent" style="display:none"></textarea>
```

以下属性是用于处理比较内容的

dialogcontent='dialogContent'

isopen='false'

title='dialogTitle'

dialogtitle='Compare With Previous Events'

loading='false'

● 比较内容获取

通过 usertag 获取比较内容

```
<EXIMTAGS:DataByEvent field="DATA_BY_EVENT" cols="I_EVENT_TIMES, WORDING,
SYS_FUNCTION_DESC" compareFieldValue="WORDING"/>
```

DataByEvent 输出的是一个隐藏的 textarea，其中包含按条件过滤和处理后的事件数据，格式为 JSON 数组字符串。

以下是获取比较内容的过程:

1. 获取必要数据: 从 ledger 表中获取 C_CREA_BY, D_CREA_DATE, T_CREA_TIME, C_FUNC_ID, C_TEMP_DATA 的值，查询结果存储在 resultList 中。
2. 遍历 resultList
 - 解析 C_TEMP_DATA (压缩 XML 数据)。
 - 从 domdata 中获取到 compareFieldValue(WORDING)的值如果 WORDING 为空或者当前

事件值与上一个事件值不同，构建一个 JSON 对象：

- 添加默认字段值：FUNC_DESC, C_CREA_BY, D_CREA_DATE, T_CREA_TIME。
FUNC_DESC 是根据 C_FUNC_ID 获取到的
- 从 domData 里获取用户指定的列值（columns）。添加到 events 里
cols="I_EVENT_TIMES, WORDING, SYS_FUNCTION_DESC"

3. 将 JSON 对象加入 events 列表。

4. 生成输出：

将 events 转为字符串并包裹在一个隐藏的 textarea 中：

例子：

```
<textarea id="DATA_BY_EVENT" style="display:none">
[{"FUNC_DESC":"Process Application","C_CREA_BY":"user1","D_CREA_DATE":"2024-12-01",
  "T_CREA_TIME":"10:00:00","I_EVENT_TIMES":"1","WORDING":".....","SYS_FUNCTION_DESC
":"Process Application"}, {"FUNC_DESC":"Resubmit Guarantee From
CE","C_CREA_BY":"user2","D_CREA_DATE":"2024-12-02","T_CREA_TIME":"11:00:00","I_EVENT_T
IMES":"2","WORDING":".....","SYS_FUNCTION_DESC":"Resubmit Guarantee From
CE"}]</textarea>
```

Value:

```
[0]
  C_CREA_BY: user1
  D_CREA_DATE: 2024-12-01
  FUNC_DESC: Process Application
  T_CREA_TIME: 10:00:00
  I_EVENT_TIMES: 1
  SYS_FUNCTION_DESC: Process Application
  WORDING: .....

[1]
  C_CREA_BY: user2
  D_CREA_DATE: 2024-12-02
  FUNC_DESC: Resubmit Guarantee From CE
  T_CREA_TIME: 11:00:00
  I_EVENT_TIMES: 2
  SYS_FUNCTION_DESC: Resubmit Guarantee From CE
  WORDING: .....
```

● etl-editor 获取 DATA_BY_EVENT 的值

EximBill.ear\EximBillWeb.war\etl-components\plugins\Plugin_Editor.js

把 usertag 中创建的 textarea id="DATA_BY_EVENT" 值赋给 definitions.dataProcessed.marks

```

(function () {
  CS.Plugins.Editor = CS.PluginTemplate.extend(function (oconfigurations) {

    base.InitValues = function () {
      // HACK MODE: ON
      //document.MAINFORM.WORDING.value = "Lorem ipsum dolor sit amet, consectetur adipiscing elit";

      definitions.editors.forEach(function (config) {
        let dataByEvent = document.MAINFORM.DATA_BY_EVENT;
        if (dataByEvent && dataByEvent.value) {
          definitions.dataProcessed.masks = JSON.parse(dataByEvent.value).map((elem, pos) => {
            return {
              value: pos + 1,
              eventTimes: elem.I_EVENT_TIMES,
              label: elem.FUNC_DESC,
              desc: elem.WORDING,
              createdBy: elem.C_CREA_BY,
              date: elem.D_CREA_DATE,
              hour: elem.T_CREA_TIME,
            };
          });
        }
      });
    };
  });
});

```

Editor 组件中获取到 masks 的值。

packages\ui\src\editor\src\Component.jsx 获取到对比的值

```

let newContent = dialogValue ? JSON.parse(dialogValue) : {
  | masks: []
};

```