



Recuperación de accesos con Trinity Rescue

1. Para el desarrollo de esta practica necesitaremos tener nuestro sistema Windows 7 bloqueado con una contraseña a la cual no tenemos acceso.

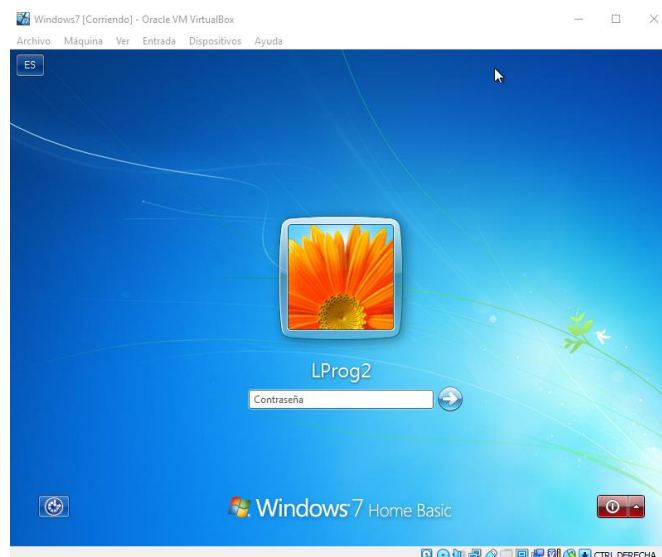

2. Ahora cargaremos al sistema la distribución **Trinity Rescue Kit**. Una vez cargado, iniciamos nuevamente el sistema Windows, pero al iniciar presionaremos F12, con esto nos mostrara un menú, seleccionaremos la opción c.

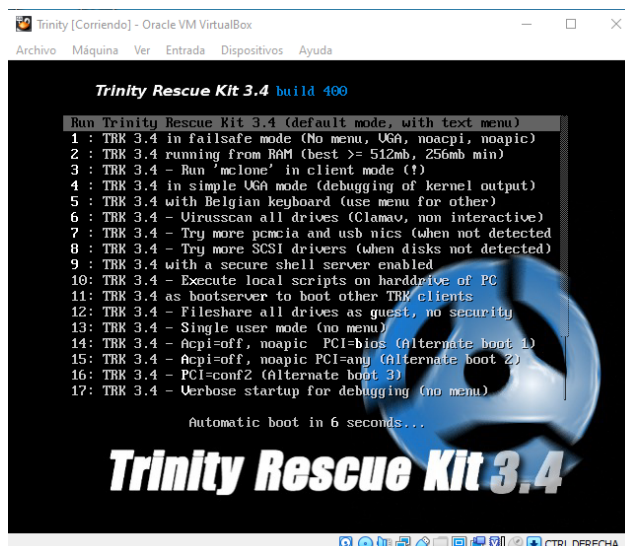

- Una vez cargado el Trinity Rescue en *default mode*, nos aparecerá otro menú, en este seleccionaremos la opción **Quit this menu**.

Ahora en la consola colocaremos `trk ~# loadkeys es`, esto nos ayudara a configurar el teclado a castellano.

```
Trinity Rescue Kit easy menu
| Welcome
| TRK Help -->
| Keyboard layout selection -->
| Windows password resetting -->
| Mount all local filesystems
| Unmount all local filesystems
| Virus scanning -->
| Windows junkfile cleaning -->
| Mclone: computer replication over the network -->
| Backup and restore utilities-->
| Run a windows fileserver -->
| Run an ssh server
| Set an ip-address on the first adapter
| TRK Network boot server
| Trinity Remote Support (contact us first)
| Ethernet packet sniffing -->
| Try detecting more harddisk controllers
| Try detecting more USB and PCMCIA network adapters
| Midnight Commander
| Go to a shell
| Go to a shell and save all output to /tmp/terminal.out
| Quit this menu
| Poweroff computer
| Reboot without ejecting CD / usb stick
You can always quit with CTRL+C
Welcome to Trinity Rescue Kit version 3.4 build 400
trk ~ # loadkeys es
Loading /usr/lib/kbd/keymaps/i386/qwerty/es.kmap.gz
trk ~ #
```

- Ahora mostraremos la tabla de usuarios, para esto colocaremos `trk ~# winpass -l`.

```
| Reboot without ejecting CD / usb stick
You can always quit with CTRL+C
Welcome to Trinity Rescue Kit version 3.4 build 400
trk ~ # loadkeys es
Loading /usr/lib/kbd/keymaps/i386/qwerty/es.kmap.gz
trk ~ # winpass -l
Searching and mounting all filesystems on local machine
Remounting NTFS partitions with ntfs-3g
The disk contains an unclean file system (0, 0).
The disk contains an unclean file system (0, 0).
The file system wasn't safely closed on Windows. Fixing.
The disk contains an unclean file system (0, 0).
The disk contains an unclean file system (0, 0).
The file system wasn't safely closed on Windows. Fixing.
Result of mounting:
/dev/sda1 on /sda1 type fuseblk (rw,noatime,user_id=0,group_id=0,default_permissions,allow_other,blk
size=4096)
/dev/sda2 on /sda2 type fuseblk (rw,noatime,user_id=0,group_id=0,default_permissions,allow_other,blk
size=4096)
Windows NT/2K/XP installation(s) found in:
1: /sda2/Windows
Make your choice or 'q' to quit [1]: 1
Ok, continue
chntpw version 0.99.6 110511 , (c) Petter N Hagen
Hive <SAM> name (from header): <\SystemRoot\System32\Config\SAM>
ROOT KEY at offset: 0x001020 * Subkey indexing type is: 666c <1f>
File size 262144 [40000] bytes, containing 5 pages (+ 1 headerpage)
Used for data: 205/15688 blocks/bytes, unused: 14/4632 blocks/bytes.

Hive <SECURITY> name (from header): <emRoot\System32\Config\SECURITY>
ROOT KEY at offset: 0x001020 * Subkey indexing type is: 666c <1f>
File size 262144 [40000] bytes, containing 5 pages (+ 1 headerpage)
Used for data: 326/15688 blocks/bytes, unused: 10/4632 blocks/bytes.

* SAM policy limits:
Failed logins before lockout is: 0
Minimum password length : 0
Password history count : 0
| RID |-----| Username | Admin? | Lock? |
| 01f4 | Administrador | ADMIN | dis/lock |
| 01f5 | Invitado | | dis/lock |
| 03e8 | Jesus | ADMIN | |
Unmounting /sda1
Unmounting /sda2
trk ~ #
```

- Posteriormente escribimos `trk ~# winpass -u <user>`. (En `<user>` colocaremos el nombre del sistema actual).

Ahora el sistema nos pedirá una partición válida, para esto colocaremos en número **1**. Esto se representa como **Make your choice or 'q' to quit [1]: 1**.

```
Hive <SECURITY> name (from header): <emRoot\System32\Config\SECURITY>
ROOT KEY at offset: 0x001020 * Subkey indexing type is: 666c <lf>
File size 262144 [40000] bytes, containing 5 pages (+ 1 headerpage)
Used for data: 326/15688 blocks/bytes, unused: 10/4632 blocks/bytes.

* SAM policy limits:
Failed logins before lockout is: 0
Minimum password length      : 0
Password history count       : 0

| RID |-----| Username |-----| Admin? | Lock? |
| 01f4 | Administrador | ADMIN | dis/lock |
| 01f5 | Invitado | | dis/lock |
| 03e8 | Jesus | ADMIN | |

-----> SYSKEY CHECK <-----
SYSTEM SecureBoot : -1 -> Not Set (not installed, good!)
SAM Account\F : 0 -> off
SECURITY PolSecretEncryptionKey: -1 -> Not Set (OK if this is NT4)
Syskey not installed!

RID : 1000 [03e8]
Username: Jesus
fullname: LProg2
comment :
homedir :

User is member of 1 groups:
00000220 = Administradores (which has 2 members)

Account bits: 0x0214 =
[ ] Disabled [ ] Homedir req. [X] Passwd not req. |
[ ] Temp. duplicate [X] Normal account [ ] NMS account |
[ ] Domain trust ac [ ] Wks trust act. [ ] Srv trust act |
[X] Pwd don't expir [ ] Auto lockout [ ] (unknown 0x08) |
[ ] (unknown 0x10) [ ] (unknown 0x20) [ ] (unknown 0x40) |

Failed login count: 0, while max tries is: 0
Total login count: 5

- - - User Edit Menu:
1 - Clear (blank) user password (recommended, set new password from Windows)
2 - Edit (set new) user password (careful with this on XP or Vista)
3 - Promote user (make user an administrator). WARNING! DEMOTE AFTERWARDS
MIGHT FAIL AND USER WILL REMAIN ADMIN FOREVER! USE WITH CAUTION!
(4 - Unlock and enable user account) [seems unlocked already]
q - Quit editing user, back to user select

Select: [q] > 1
Password cleared!

Hives that have changed:
# Name
0 <SAM> - OK

Making a backup copy of /sda2/Windows/System32/config/SAM to /sda2/Windows/System32/config/SAM
Writing /sda2/Windows/System32/config/SAM
Unmounting /sda1
Unmounting /sda2
trk ~#
```

- Una vez terminado el paso anterior nos aparecerá un pequeño menú, seleccionaremos la opción **Dejar la contraseña en blanco**.

```
- - - User Edit Menu:
1 - Clear (blank) user password (recommended, set new password from Windows)
2 - Edit (set new) user password (careful with this on XP or Vista)
3 - Promote user (make user an administrator). WARNING! DEMOTE AFTERWARDS
MIGHT FAIL AND USER WILL REMAIN ADMIN FOREVER! USE WITH CAUTION!
(4 - Unlock and enable user account) [seems unlocked already]
q - Quit editing user, back to user select
Select: [q] > 1
Password cleared!

Hives that have changed:
# Name
0 <SAM> - OK

Making a backup copy of /sda2/Windows/System32/config/SAM to /sda2/Windows/System32/config/SAM
Writing /sda2/Windows/System32/config/SAM
Unmounting /sda1
Unmounting /sda2
trk ~#
```

7. Finalmente reiniciamos el equipo, al reiniciar volvemos a reiniciar el sistema, esta vez seleccionamos la opción I.
Finalmente, solamente presionas **ENTER** al iniciar y nos mandara directamente al escritorio de Windows.

