# With 750 labelled tweets, does fine-tuning beat a calibrated open LLM?

**RESEARCH QUESTION (UNCHANGED FROM THE PROPOSAL)**

If we only have 750 labelled tweets, does fine-tuning BERTurk on them give a higher macro-F1 on the official OffensEval-TR 2020 test set (3,528 tweets) than prompting an open LLM (Gemma-2-9B-it or Qwen3-8B) that uses the same 750 tweets: 8 as examples in its prompt, and the other 742 to choose its decision threshold?

**THE ANSWER IS NO IF**

against either LLM, BERTurk's average over 10 runs is not at least 0.02 higher than the LLM's average over 3 runs, or a paired bootstrap test says the gap could be chance.

**0.763**

TF-IDF baseline on the frozen test set (95% CI 0.745–0.779)

**0.767**

BERTurk dev macro-F1, fine-tuned on 750 labels (10 runs)

**0.790**

Gemma-4-12B few-shot dev macro-F1 after threshold calibration

Vesile Han · Gürkan Göztepeli (CSE 654, research leads) · Mert Uğur · Utku Gökçek (CSE 484)

Talk: 10 slides + 4 Project Card appendix slides (graded, not presented).

# 30,000 train / 1,756 dev / 3,528 frozen test; 19.3% offensive

| File / split | Tweets | NOT | OFF | OFF % |
|---|---|---|---|---|
| Official training file | 31,756 | 25,625 | 6,131 | 19.3 |
| Our train (seed 42) | 30,000 | 24,208 | 5,792 | 19.3 |
| Our dev (never tuned on) | 1,756 | 1,417 | 339 | 19.3 |
| Official test (frozen) | 3,528 | 2,812 | 716 | 20.3 |

OffensEval-TR 2020 (Çöltekin, LREC 2020). Turkish tweets, annotations CC BY 2.0. The released files already mask @USER and URLs; we add no cleaning. Nine duplicate texts inside train; one test tweet also appears in train (0.03%).

REAL EXAMPLE, LABEL OFF (TRAIN ID 33518)

**“Kırmızı ağır karar Allah belanı versin”**

“A red card is a harsh call, God damn you.” Swearing at a decision, not at a person: the label is still OFF because the annotation guidelines treat the curse as offensive.

CONTRAST EXAMPLE, LABEL NOT

**“...annem alacağı arabadan kaç kere vazgeçti ya kahretsin zalım trafik”**


“How many times my mum gave up on buying a car, damn this cruel traffic.” Cursing at traffic is not offensive; target matters.

WHY THESE COUNTS MATTER

Only 19.3% of training tweets are offensive. A model that always says “not offensive” is 80.7% accurate but scores 0.447 macro-F1, so accuracy would hide the failure; we use macro-F1. Rules: test frozen since the split; dev is for code checks and mid-project numbers; no method setting is chosen by a dev score; every system uses the saved subsets (seed 42 + k).

# TF-IDF + logistic regression reaches 0.763 macro-F1 on test, but 0.620 with 750 labels

| System | Test macro-F1 | OFF P | OFF R | Spread |
|---|---|---|---|---|
| Always “not offensive” | 0.444 | — | 0.000 | deterministic |
| TF-IDF + LR, 750 labels | 0.620 ± 0.012 | — | — | sd over 10 samples |
| **TF-IDF + LR, 30,000 labels** | **0.763** | 0.589 | 0.673 | 95% CI [0.745, 0.779] |

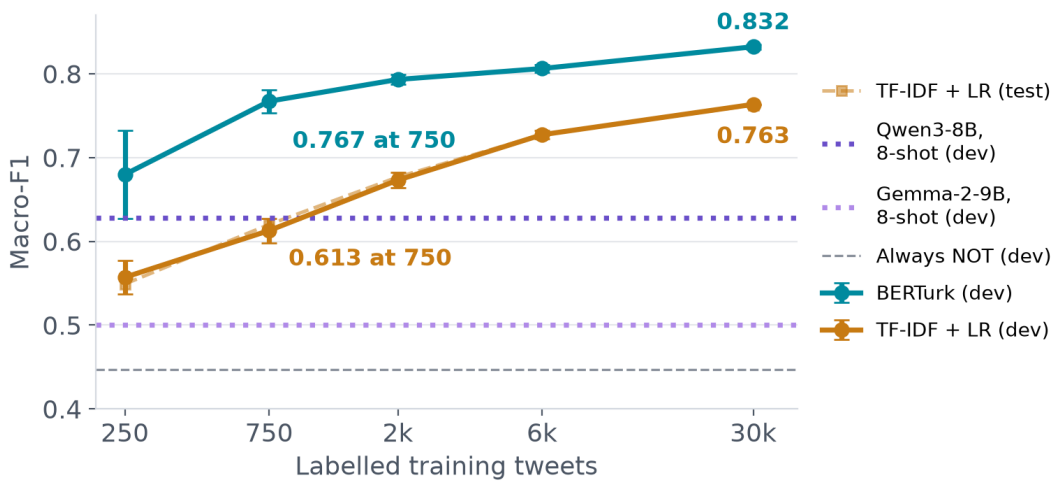


Dev curve (solid) and test curve (dashed) for the same TF-IDF runs; teal is BERTurk on dev (bars: sd over runs). The LLM lines are flat because the LLM always gets 750 labels. BERTurk test scores come after the freeze.

**WHAT THIS MEANS FOR THE RESEARCH QUESTION**

At 750 labels, the cheap baseline is 0.620 on test and 0.613 on dev: that is the floor BERTurk and the LLMs must beat. At 30,000 labels the same model reaches 0.763, about 0.05 below the published BERTurk score (0.816, KUISAIL), so the full-data ceiling is not the target of the 750-label question.

# 275 dev errors; a 60-error audit shows where a word model fails

| False alarms (166) — category | n |
|---|---|
| No insult; spurious word/char cue | 9 |
| Political or religious criticism | 10 |
| Sports criticism or banter | 5 |
| Personal criticism not judged offensive | 3 |
| Sarcasm or irony | 1 |
| Label noise or genuinely ambiguous | 2 |

| Missed offensive (109) — category | n |
|---|---|
| Implicit insult, no profanity | 8 |
| Masked or abbreviated profanity | 5 |
| Veiled threat or violence | 3 |
| Political or religious insult | 4 |
| Institutional or sports criticism | 3 |
| Label noise or not offensive | 7 |

Counts are in the 60-error audit (30 per direction, seed 42), not over all 275 errors. Both tables therefore sum to 30.

**False alarm · F2 · id 35124**

*"Hırsız tabloyu çalarken Işık'ları yakan ev sahibi gibisin İmamoğlu..."*

Political accusation; no target insult. Conflict vocabulary fires.

**Miss · M1 · id 43325**

*"...bundan daha parazit canlı türü yok"*

"No more parasitic species": an insult with no swear word.

**Miss · M2 · id 15069**

*"...bakanlık seçimi kaldı amkk"*

Masked profanity ("amkk") is unseen by the word/char model.

Lesson: false alarms cluster on political conflict vocabulary and character n-grams; misses cluster on implicit insults and masked profanity. Roughly one in seven audited errors is label noise or a genuinely ambiguous tweet — no threshold can fix that. We will use this audit to choose prompt examples and to report an annotation-noise ceiling.

# Both arms run end-to-end on the same 750 labels

1

### 750 labelled tweets

One random sample, shared with every system

2

### 8 prompt examples

4 offensive, 4 not; fixed per run

3

### 742 calibration tweets

The LLM scores these too; choose the threshold with best macro-F1

4

### Apply to dev


Score = log P(A) − log P(B); A = offensive, B = not

Controlled change: baseline trains weights on the 750 labels; the LLM uses the identical 750 labels to pick 8 examples and a threshold. Nothing else differs except how the labels are used.

| System (dev, 1,756 tweets) | Macro-F1 | Runs | Threshold |
|---|---|---|---|
| TF-IDF + LR, 750 labels | 0.613 ± 0.015 | 10 | — |
| Qwen3-8B, zero-shot | 0.162 | 1 | 0 |
| Qwen3-8B, 8 examples + 742 | **0.628** | 3 | 3.13, 2.75, 2.50 |
| Gemma-2-9B, zero-shot | 0.412 | 1 | 0 |
| Gemma-2-9B, 8 examples + 742 | **0.500** | 3 | 0.63, 0.25, 0.88 |
| BERTurk, 750 labels | 0.767 ± 0.014 | 10 | — |

Gemma-2-9B runs in 4-bit on an L4 with float16-compatible settings; Qwen3-8B runs with thinking mode off. Both use the same Turkish instructions and answer options. BERTurk: class-weighted loss, max(4 epochs, 400 updates), no early stopping; 10 runs, one per sample.

# First comparison on dev: BERTurk beats both proposal LLMs at 750 labels

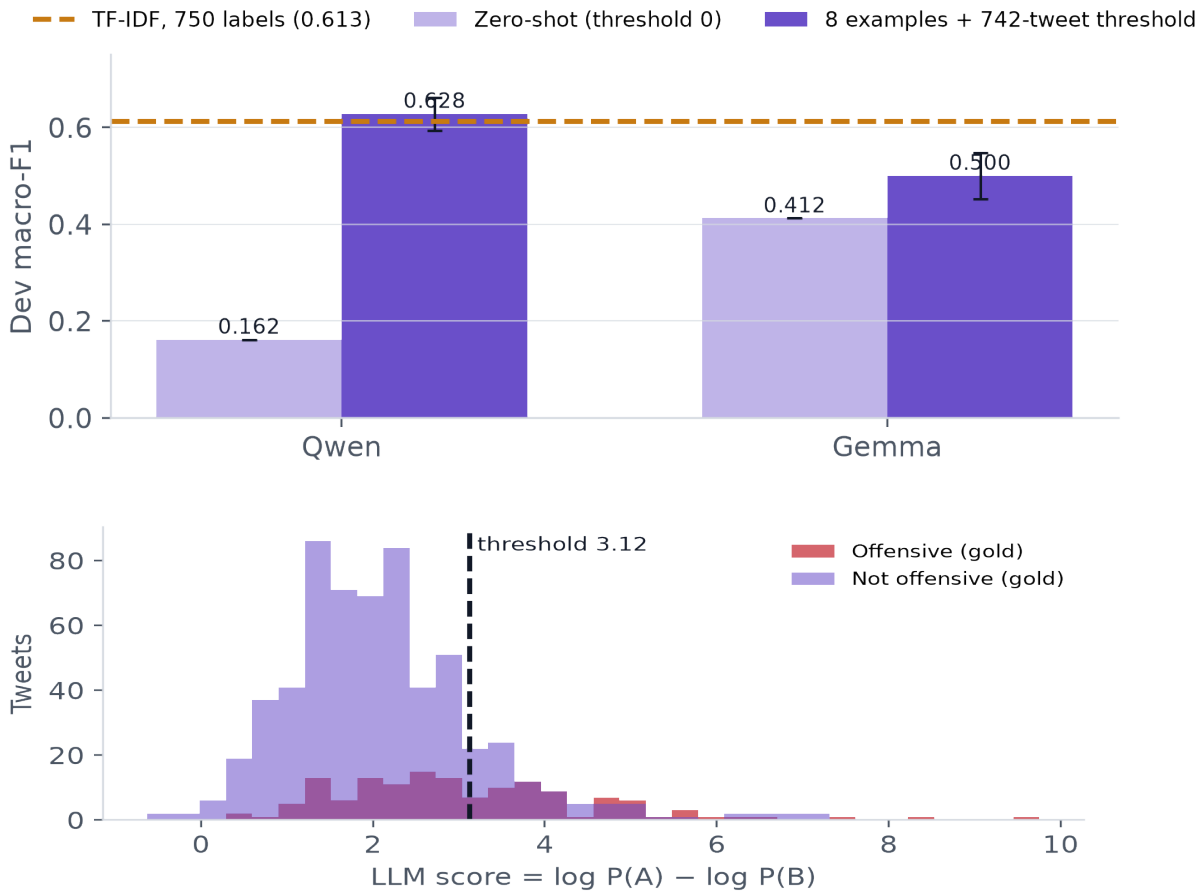


One Qwen3-8B run: scores on the 742 calibration tweets. The chosen threshold sits between the two gold classes; this is the only use of those 742 labels.

| Comparison (dev) | Macro-F1 | vs TF-IDF 750 |
|---|---|---|
| TF-IDF, 750 labels | 0.613 ± 0.015 | — |
| XLM-R-base, 750 labels (Ablation A) | 0.670 ± 0.025 | +0.057 |
| BERTurk, 750 labels | **0.767 ± 0.014** | +0.154 |
| Qwen3-8B, calibrated | 0.628 | +0.015 |
| Gemma-2-9B, calibrated | **0.500** | -0.113 |

**WHAT WE CAN AND CANNOT SAY**

At 750 labels BERTurk (0.767 ± 0.014) is +0.139 above Qwen3-8B and +0.267 above Gemma-2-9B, and +0.097 above XLM-R-base (Ablation A; paired bootstrap 95% CI +0.080 to +0.116). Calibration still matters for the LLMs: +0.466 (Qwen) and +0.088 (Gemma) against zero-shot. These are dev numbers; the test-set answer and its paired bootstrap come after all methods are frozen.

# Stronger multilingual models close the gap; Gemma 4 12B reaches 0.790

| Model (dev) | Zero-shot | Calibrated | Δ | Calib-set F1 |
|---|---|---|---|---|
| Qwen3-8B | 0.162 | 0.628 ± 0.034 | +0.466 | 0.640 |
| Gemma-2-9B | 0.412 | 0.500 ± 0.048 | +0.088 | 0.492 |
| Qwen3-14B | 0.171 | 0.773 ± 0.009 | +0.602 | 0.768 |
| Gemma-4-12B | 0.763 | 0.790 ± 0.007 | +0.027 | 0.804 |

Dev, 1,756 tweets. Three runs per calibrated model; zero-shot is one deterministic pass. Calib-set F1 is macro-F1 on the 742 threshold-selection tweets. For reference, BERTurk at 750 labels: 0.767 ± 0.014, below both stronger models on dev.

| Zero-shot diagnostic | F1 @ 0 | F1 @ best | AUC | mean OFF | mean NOT |
|---|---|---|---|---|---|
| Qwen3-14B | 0.171 | 0.677 | 0.756 | 2.79 | 2.10 |
| Gemma-4-12B | 0.763 | 0.765 | 0.864 | 1.03 | -4.13 |

### THREE CANDIDATES, ONE RULED OUT

1. Tokenizer fertility is not the explanation: on 500 dev tweets Gemma tokenizers are more compact than Qwen (32.3 vs 37.9 tokens/tweet), yet Qwen calibrates better.

2. Pretraining language is plausible: Qwen3 is pretrained on 119 languages including Turkish; Gemma 2 is English-centred. [INFERENCE from model cards, not a controlled ablation.]

3. Score geometry: Qwen3-14B's zero-shot scores are shifted positive — 99% of dev tweets are called offensive at threshold 0 — but its ranking is usable: best-threshold F1 is 0.677. Gemma-4 already sits near its optimum at 0 (F1 0.763 vs best 0.765).

This is a threshold-shift explanation, not evidence of contamination. The planned exact-completion check on the first 200 test tweets tests memorisation separately. The stronger-model rows test scale and newer multilingual data; pretraining, alignment and answer-token priors remain confounded.

### WHAT THIS SHOWS AND WHAT IT DOES NOT

It shows that the value of 742 calibration labels is model-dependent: Qwen3-8B turns them into +0.47, Gemma-2 into +0.09, while Qwen3-14B reaches 0.773 and Gemma-4-12B 0.790 (three runs each; Gemma-4 zero-shot is already 0.763). It does not show that Turkish pretraining alone causes the gap. The clean test would compare two checkpoints from the same family, identical size and alignment, one Turkish-heavy and one English-heavy, or continue pretraining on Turkish. That is out of scope for the mid-project; we report it as a hypothesis with the evidence above.

# One dev pass on an L4: 3–5 tweets/s with examples, 10–18 without

| System | Params | Dev scoring | Throughput | Peak VRAM | Notes |
|---|---|---|---|---|---|
| TF-IDF, 750 | — | 0.6 s | ~3,100/s | CPU | fit 1.0 s |
| TF-IDF, 30,000 | — | 0.6 s | ~3,100/s | CPU | fit 14.6 s |
| Qwen3-8B, few-shot | 8.2B | 355 s | 5.0/s | — | 3 runs |
| Gemma-2-9B, few-shot | 9.2B | 430 s | 4.1/s | — | 3 runs |
| Qwen3-14B, few-shot | 14.8B | 644 s | 2.7/s | — | 3 runs |
| Gemma-4-12B, few-shot | 12.0B | 579 s | 3.0/s | — | 3 runs |
| Qwen3-14B, zero-shot | 14.8B | 180 s | 9.8/s | 10.7 GB | load 157 s · 1,290 tok/s |

All times are for scoring the 1,756 dev tweets; model download and load are excluded unless stated. Few-shot throughput is 3–4× lower than zero-shot because each prompt adds 8 examples (~600 tokens).

Measured on one L4, 4-bit NF4, batch 6–8. Qwen3-14B zero-shot: load 157 s, 1,290 prompt tokens/s, peak 10.7 GB. Gemma-4-26B-A4B exceeded 22 GB and could not load. Reported runs: 8.8 Colab units (~2.3 L4-hours); 9.7 units including allocation probes.

# Every remaining run has a date and an owner

| Date | Experiment | Owner | Status |
|---|---|---|---|
| 12 Nov | Mid-project talk; freeze this deck | All | today |
| 11 Nov | BERTurk learning curve: 36 runs (250 to 30,000 labels) on dev | Vesile, Mert | done |
| 11 Nov | Ablation A: BERTurk vs XLM-R-base, 750 labels, 10 runs on dev | Vesile | done |
| 21–24 Nov | Ablation B: Gemma with English instructions, 3 runs | Gürkan | planned |
| 25–27 Nov | Zero-shot references + test-contamination check | Gürkan, Utku | planned |
| 28–30 Nov | Freeze methods; open test; final runs for every system | All | planned |
| 1–5 Dec | Paired bootstrap, final error analysis, paper draft | Utku, Vesile, Mert | planned |
| 8 Dec | Final report (short research paper) | All | planned |

Response to proposal feedback: the rubric asks for baseline numbers on the frozen test set, so we scored the deterministic TF-IDF baseline once on test and kept all method results on dev. The research question and the 0.02 / bootstrap rules are unchanged.

**BIGGEST RISK**

A 26B+ model may not fit the L4: Gemma 4 26B-A4B OOM'd at 22 GB, so we used the 12B dense model. Fallback: Qwen3-14B alone. Every run writes one CSV and a JSON, so a lost session costs one run, not the experiment.

**RESULT RISK**

The lines may never cross. The 750-label question still has a clear answer; the learning curve is descriptive, with no significance test at the other sizes.

# What we know, what we do not, and what comes next

**0.763**

test macro-F1 for the TF-IDF baseline at 30,000 labels; 95% CI [0.745, 0.779]. At 750 labels it falls to 0.620 ± 0.012.

**0.790**

Gemma-4-12B dev macro-F1 after calibration; zero-shot is 0.763. Qwen3-14B reaches 0.773.

**0.767**

BERTurk dev macro-F1 with 750 labels (10 runs): above Qwen3-8B and Gemma-2-9B, below Qwen3-14B and Gemma-4-12B. With 30,000 labels it reaches 0.832.

The mid-project answer is a baseline and two working arms, not the final verdict. What we do not have yet: any test-set method result. What is fixed: the frozen test set, the metric, the 0.02 threshold and the paired bootstrap.

**Questions welcome — any member can answer any part.**

# Fields 1–3: title and abstract, research question, contributions

## 1 · TITLE AND ABSTRACT

**Working title: Fine-tuning BERTurk vs threshold-calibrated open LLMs for Turkish offensive language with 750 labels**

Small Turkish platforms can label only a few hundred tweets. We ask whether fine-tuning BERTurk on 750 labelled OffensEval-TR tweets beats an open LLM that uses the same 750 labels as 8 prompt examples and 742 calibration tweets for its decision threshold. The TF-IDF + logistic-regression baseline scores 0.763 macro-F1 on the frozen 3,528-tweet test set, but 0.620 with 750 labels. Qwen3-8B and Gemma-2-9B score each tweet as log P(A) − log P(B), with the threshold chosen on the 742 held-out labels. On dev, calibration moves Qwen3-8B from 0.162 to 0.628 and Gemma-2-9B from 0.412 to 0.500; fine-tuned BERTurk reaches 0.767 ± 0.014. [GAP: BERTurk vs LLM test result, after the freeze.] The final paper reports the paired bootstrap gap and the label count at which fine-tuning overtakes the LLM line.

## 2 · RESEARCH QUESTION

Unchanged from the proposal. With 750 labelled tweets, does fine-tuning BERTurk beat prompting Gemma-2-9B-it or Qwen3-8B that uses the same 750 tweets (8 examples, 742 threshold labels), on macro-F1 over the official 3,528-tweet test set?

“No” result: against either LLM, BERTurk’s mean over 10 runs is not ≥0.02 higher than the LLM’s mean over 3 runs, or the paired bootstrap says the gap could be chance ($p \geq 0.05$).

Change: none. The data and method forced no change; the mid-project rubric added a test-set baseline, which is reported separately and does not alter the question.

## 3 · CONTRIBUTIONS (TESTABLE CLAIMS)

C1. At 750 labels, BERTurk’s mean test macro-F1 is at least 0.02 above each LLM’s, and a paired bootstrap rejects chance. Core claim; test pending. On dev, BERTurk (0.767) is above Qwen3-8B (0.628) and Gemma-2-9B (0.500).

C2. Choosing the threshold on the 742 non-example labels improves each LLM’s dev macro-F1 over zero-shot by a measurable margin; we report the per-model delta and its run-to-run spread.

C3. The learning curve places the label count where fine-tuning overtakes the LLM line between 250 and 6,000; if the lines never cross, the 750-label answer still stands.

# Fields 4–5: related work and data

## 4 · RELATED WORK (5–8 REFERENCES; ONE LINE ON THE DIFFERENCE)

**Zampieri et al. (2020). SemEval-2020 Task 12: Multilingual Offensive Language Identification in Social Media (OffensEval 2020).**

Top Turkish systems fine-tune transformers on the full training data; no label-budget comparison.

**Çöltekin (2020). A Corpus of Turkish Offensive Language. LREC 2020.**

The dataset we use; provides labels but no fine-tuning-vs-prompting comparison.

**Zampieri et al. (2023). OffensEval 2023: Offensive Language Identification in the Age of Large Language Models. Natural Language Engineering.**

Zero-shot LLMs; Turkish only Flan-T5-large (0.451). No examples and no threshold calibration.

**Dehghan & Yanıkoğlu (2024). Evaluating ChatGPT's Ability to Detect Hate Speech in Turkish Tweets. CASE 2024, pp. 54–59.**

ChatGPT with 7 examples vs fine-tuned BERTurk on one Turkish hate dataset; one training size.

**Pecher, Srba & Bielikova (2025). Comparing Specialised Small and General Large Language Models on Text Classification. EMNLP 2025, pp. 165–184.**

English break-even near 100 labels; we test a noisy Turkish two-class task with run variance.

**Schmitt & Schweter (2025). SindBERT, arXiv:2510.21364.**

Turkish encoders on OffensEval-TR with full data only; no LLMs or small label budgets.

**Şeker, Uludoğan, Önal & Özgür (2025). HATECAT-TR: A Turkish Hate Speech Dataset. Findings of EMNLP 2025.**

Turkish span-level hate; BERTurk 0.59 vs LLaMA-3.3-70B 0.53. We classify whole tweets and score probabilities.

**Karakaş & Şimşek (2026). arXiv:2606.29614.**

Zero-shot LLMs vs BERTurk on Turkish sentiment at one size; we add examples, calibration and a label curve.

## 5 · DATA

Source: OffensEval-TR 2020, "A Corpus of Turkish Offensive Language" (Çöltekin, LREC 2020), https://coltekin.github.io/offensive-turkish/. Licence: annotations CC BY 2.0. Language: Turkish tweets; @USER/URL already masked in the release.

| Split | Tweets | OFF | OFF % |
|---|---|---|---|
| Official train | 31,756 | 6,131 | 19.3 |
| Our train | 30,000 | 5,792 | 19.3 |
| Dev | 1,756 | 339 | 19.3 |
| Test (frozen) | 3,528 | 716 | 20.3 |

After preprocessing: only the released @USER/URL masking; no lowercasing or deletion. 9 duplicate texts in train; 1 test/train overlap. Example (OFF, id 33518):

*"Kırmızı ağır karar Allah belanı versin"*

"A red card is a harsh call, God damn you."

No labelled data of our own; no agreement study needed.

# Fields 6–9: method, protocol, results so far, error analysis

## 6 · METHOD AND BASELINE

Baseline as run: TF-IDF word 1–2-grams + char_wb 2–5-grams, min_df=2, sublinear, Turkish-aware lowercasing; logistic regression C=1.0, class_weight=balanced, max_iter=5000. Test 0.763 [0.745, 0.779].

Method implemented: BERTurk fine-tuned on every subset (128 tokens, batch 16, lr 2e-5, 10% warm-up, class-weighted loss, max(4 epochs, 400 updates), no early stopping; 36 runs + 10 XLM-R). Qwen3-8B and Gemma-2-9B in 4-bit; Turkish instructions, A/B options, 8 examples (4+4), score log P(A) − log P(B); threshold maximises macro-F1 on the other 742 labels. One change vs baseline: labels train weights vs choose examples and a threshold.

Compute used: about 2.5 L4-hours (9.4 Colab units) for 16 LLM passes and about 3 Colab units for the 46 fine-tuning runs; about 18 GPU-hours needed for the final (proposal estimate).

## 7 · EVALUATION PROTOCOL

Macro-F1; frozen 3,528-tweet test; 10 BERTurk runs at 250/750/2,000 and 3 at 6,000/30,000; 3 LLM runs at 750. Paired bootstrap, 10,000 resamples: a gap is real only if BERTurk wins on ≥95% and the mean gap is ≥0.02. Fixed before method results; dev is for code checks only.

## 8 · RESULTS SO FAR (MEAN ± SD OR 95% INTERVAL)

| System | Dev | Test |
|---|---|---|
| Always NOT | 0.447 | 0.444 |
| TF-IDF, 750 | 0.613 ± 0.015 | 0.620 ± 0.012 |
| TF-IDF, 30,000 | 0.763 [0.739, 0.787] | 0.763 [0.745, 0.779] |
| Qwen3-8B, zero-shot / calibrated | 0.162 / 0.628 ± 0.034 | — |
| Qwen3-14B, zero-shot / calibrated | 0.171 / 0.773 ± 0.009 | — |

| System | Dev | Test |
|---|---|---|
| Gemma-2-9B, zero-shot / calibrated | 0.412 / 0.500 ± 0.048 | — |
| Gemma-4-12B, zero-shot / calibrated | 0.763 / 0.790 ± 0.007 | — |
| BERTurk, 750 | 0.767 ± 0.014 | — |
| BERTurk, 30,000 | 0.832 ± 0.003 | — |
| XLM-R-base, 750 (Ablation A) | 0.670 ± 0.025 | — |

## 9 · ERROR ANALYSIS — 60 AUDITED OF 275 DEV ERRORS, ONE EXAMPLE PER CATEGORY

| False alarms (166) | n | Example |
|---|---|---|
| No insult / spurious cue | 9 | 12420 · fan poll; no insult |
| Political/religious criticism | 10 | 35124 · “Hırsız… İmamoğlu” |
| Sports criticism/banter | 5 | 13105 · “padişahlık zannediyor” |
| Personal criticism | 3 | 22409 · “fake hesapları sevmiyorum” |
| Sarcasm/irony | 1 | 28737 · “Ha bi sen eksiktin” |
| Label noise/ambiguous | 2 | 33218 · “Seni cehennem paklar” |

| Missed offensive (109) | n | Example |
|---|---|---|
| Implicit insult | 8 | 43325 · “parazit canlı türü yok” |
| Masked profanity | 5 | 15069 · “…kaldı amkk” |
| Veiled threat/violence | 3 | 35789 · “idam edicem” |
| Political/religious insult | 4 | 25929 · “Gerici yobazlar” |
| Institutional/sports criticism | 3 | 20333 · “ÖSYM… güvenmeyebilir” |
| Label noise / not offensive | 7 | 10001 · “veteriner okumaya…” |

# Fields 10–12: research lead, plan and risk, reproducibility

## 10 · RESEARCH LEAD SECTION — VESILE HAN (CSE 654), FINE-TUNING SIDE; GÜRKAN GÖZTEPELI (CSE 654), PROMPTING SIDE

Vesile Han. (1) Pecher, Srba & Bielikova, EMNLP 2025: small fine-tuned models catch up with general LLMs after about 100 labels on average, but need more on two-class tasks and once run variance is counted; all eight datasets are English. We test Turkish, a suffix-heavy language, on a noisy two-class task with 19.3% offensive tweets. (2) Schmitt & Schweter, SindBERT, arXiv:2510.21364 (2025): compare Turkish encoders on OffensEval-TR only with full training data, no LLMs and no small sizes. We add both. Ablation A: BERTurk vs multilingual XLM-R-base at 750 labels, 10 runs each; done on dev: +0.097 (95% CI +0.080 to +0.116). Published comparison: KUISAIL reports plain fine-tuned BERTurk at 0.816 on this test set; our 30,000-label runs score 0.832 ± 0.003 on dev, test after the freeze.

Gürkan Göztepeli. (1) Şeker, Uludoğan, Önal & Özgür, HATECAT-TR, Findings of EMNLP 2025: fine-tuned BERTurk (0.59 F1) beat LLaMA-3.3-70B with a few examples (0.53) on Turkish hate-span detection; one training set, span labels. We classify whole tweets, vary the label budget, and read probabilities so every answer is valid. (2) Karakaş & Şimşek, arXiv:2606.29614 (2026): zero-shot open LLMs vs fine-tuned BERTurk on Turkish review sentiment at one size. We add examples, threshold calibration and a label curve. Ablation B: Gemma-2-9B with English instructions, same examples and threshold method, 3 runs.

## 11 · PLAN AND RISK

Done 11 Nov: BERTurk curve (36 runs) and Ablation A XLM-R (10 runs) on dev. 21–24 Nov: Ablation B English instructions (Gürkan). 25–27 Nov: zero-shot + contamination check (Gürkan, Utku). 28–30 Nov: freeze methods, open test, final runs (all). 1–5 Dec: bootstrap, error analysis, paper (Utku, Vesile, Mert). 8 Dec: final report (all).

Biggest risk: a 26B+ model may not fit the L4; Gemma-4-26B-A4B OOM'd at 22 GB, so we used the 12B dense model. Fallback: Qwen3-14B alone. Result risk: the lines may never cross; the 750-label answer still stands. Contamination: give each LLM the first 200 test tweets and report exact completions. Proposal feedback: rubric asked for a test-set baseline; we scored the deterministic baseline once and kept methods on dev.

## 12 · REPRODUCIBILITY

Repository: github.com/paysis/offenseval-tr-midproject (code, splits, saved predictions, results JSON). One command: bash scripts/reproduce.sh gpu. Seeds: split 42, subsets 42+k, bootstrap 42. Versions: Python 3.13.16 on Colab (3.14.8 local), scikit-learn 1.9.1, transformers 5.22.1, torch 2.14.1, bitsandbytes 4-bit NF4.

Roles (from the proposal): Vesile Han fine-tuning and statistics; Gürkan Göztepeli prompting and demo; Mert Uğur data card and BERTurk errors; Utku Gökçek evaluation and LLM errors. AI tools: a coding assistant was used for code, analysis and drafting; every number in this deck is read from the saved result files and was checked by the team.