

# **SWIFT SHIP TRACKER**

Salesforce based Parcel Delivery Management System

**Group project**

**Submitted by**

Member 1: Vetriselvi.M (822223104003)

Member 2: Baranisri.k (822223104027)

Member 3: Abinaya.B (822223104049)

**Department:** Computer Science and Engineering

**College name :** University College of Engineering

Thirukuvalai

**Academic year :** 2026 – 2027

**Nm id:** 3EABAF99FAD9693A4084FCC41171F000

8D31A4ADC28475285FB44009827AE12B

E9FCF9CB590898BA4B9453EAB6B577B0

# TABLE OF CONTENTS

| S. No. | Contents                                                  | Page No. |
|--------|-----------------------------------------------------------|----------|
| 1      | Project Overview                                          | 1        |
| 2      | <b>Phase 1: Requirement Analysis and Planning</b>         | 2        |
| 3      | <b>Phase 2: Salesforce Development and Configuration</b>  | 3        |
| 3.1    | Salesforce Account and Custom Object Setup                | 3        |
| 3.2    | Fields, Relationships and Custom Tabs                     | 6        |
| 3.3    | Prompt Builder and Flow Builder                           | 9        |
| 3.4    | Testing                                                   | 11       |
| 4      | <b>Phase 3: Agentforce Setup and Configuration</b>        | 11       |
| 4.1    | Permission Sets and Agent User Permissions                | 11       |
| 4.2    | Agent Building, Configuration and Activation              | 13       |
| 5      | <b>Phase 4: Data Migration, Testing and Security</b>      | 15       |
| 5.1    | Agent Setup and Flow Validation                           | 16       |
| 5.2    | Agent Testing and Data Validation                         | 17       |
| 6      | <b>Phase 5: Deployment, Documentation and Maintenance</b> | 19       |
| 6.1    | Deployment and Testing                                    | 19       |
| 6.2    | Maintenance, Monitoring and Troubleshooting               | 20       |
| 6.3    | Documentation                                             | 21       |
| 7      | Conclusion                                                | 22       |

# **SWIFTSHIP TRACKER**

## **Salesforce-Based Parcel Delivery Management System**

### **Project Overview**

SwiftShip Tracker is a Salesforce-based parcel delivery management system designed to simplify parcel booking, shipment tracking, delivery updates, and customer communication. The system uses Salesforce custom objects, Flows, Prompt Builder, and Agentforce AI to manage the parcel delivery lifecycle in one centralized platform.

The project aims to reduce manual work, improve shipment visibility, automate notifications, and provide efficient parcel management for customers, delivery agents, and administrators.

# Phase 1: Requirement Analysis and Planning

## Project Overview

SwiftShip Tracker is a Salesforce-based parcel delivery management system that simplifies parcel booking, tracking, and delivery updates using Salesforce automation and Agentforce AI.

### 1.2 Project Objectives

- Simplify parcel booking and tracking.
- Automate delivery status updates and email notifications.
- Help delivery agents manage parcel records efficiently.
- Provide customers with shipment status information.
- Maintain data security through role-based access.

### 1.3 User Requirements

- **Customer:** Book parcels, track shipments, and receive notifications.
- **Delivery Agent:** View assigned parcels and update delivery status.
- **Admin:** Manage users, records, security, and reports.
- **Support Team:** Handle customer queries and delivery issues.

### 1.4 Salesforce Tools

Salesforce Developer Org, Custom Objects, Flow Builder, Prompt Builder, Agentforce AI, Apex, Email Alerts, Reports, and Dashboards.

### 1.5 Data Model Design

Four custom objects are planned:

- **Parcel\_\_c:** Stores Parcel ID, status, weight, and estimated delivery date.
- **Sender\_\_c:** Stores sender name, address, phone, and email.
- **Receiver\_\_c:** Stores receiver name, address, phone, and email.
- **Delivery\_\_c:** Stores delivery status, current location, and delivery date.

The Parcel object is linked to Sender and Receiver records, while Delivery records are linked to the corresponding Parcel.

## 1.6 Security Model

Profiles, Permission Sets, Role Hierarchy, Sharing Rules, and Field-Level Security control access for administrators, delivery agents, support staff, and customers.

## Phase 2: Salesforce Development – Backend and Configuration

### Milestone 1: Salesforce Account Setup

A Salesforce Developer Org is used to configure and test the SwiftShip Tracker application.

1) First name & Last name

2) Email

3) Job title: Developer

4) Company: College Name

5) Country: India

**Build for the Agentic Enterprise.**  
**Sign up for your Developer Edition.**  
The entire Salesforce platform - exposed as APIs, MCP tools, and CLI commands. Build apps, ship agents, and let coding agents do the heavy lifting with Salesforce Headless 360.

- ✓ Build AI agents with Agentforce, grounded in your data with Data 360
- ✓ Connect Claude Code, Cursor, or Codex to your org with hosted MCP
- ✓ Build in the browser with the Agentforce Vibes IDE - no setup required
- ✓ Drag-and-drop when you want it, Apex when you need it
- ✓ 60+ MCP tools and 30+ coding skills, ready out of the box

**Sign up for your Developer Edition**  
A free Salesforce Platform environment with Agentforce and Data 360

Country/region  
India ✓

State/province  
Tamil Nadu ✓

Work email  
vetri06vet@gmail.com ✓

☒ I agree to the [Main Services Agreement - Developer Services, Salesforce Program Agreement, and APL Terms of Service](#)

Your free trial may be provisioned on or migrated to Hyperforce, Salesforce's public cloud infrastructure.

I acknowledge, as described in the Developer Documentation: (1) the Developer Edition includes autonomous and other generative AI features; and (2) Salesforce may limit use of those features and the org, and may terminate any org that has been inactive for 45 days.

We value your privacy. To learn more, visit our [Privacy Statement](#)

**Sign me up**

### Milestone 2: Custom Object Creation

Created four custom objects: Parcel, Delivery, Sender, and Receiver, with appropriate record names and required settings.

| Label    | Plural Label | Record Name   |
|----------|--------------|---------------|
| Parcel   | Parcels      | Parcel Name   |
| Delivery | Deliveries   | Delivery Name |
| Sender   | Senders      | Sender Name   |
| Receiver | Receivers    | Receiver Name |

To create an object:

- 1.From the setup page
- 2.click on object manager
- 3.click on create>>click on custom object
- 4.enter the label name as parcel
- 5.enter plural label name as parcels
- 6.enter record name as parcel name
- 7.select data type as text : parcel name
- 8.select allow reports
- 9.select allow search
- 10.allow track field history

| Field                   | API Name                   | Type                                                      |
|-------------------------|----------------------------|-----------------------------------------------------------|
| Parcel ID               | Parcel_ID__c               | Auto Number, format P-{000}, starting number 1            |
| Status                  | Status__c                  | Picklist: Booked, In Transit, Out for Delivery, Delivered |
| Weight                  | Weight__c                  | Number                                                    |
| Estimated Delivery Date | Estimated_Delivery_Date__c | Date                                                      |
| Sender                  | Sender__c                  | Lookup (Sender)                                           |


The screenshot shows the Salesforce Developer Edition Setup page for the 'Parcel' object. The page is titled 'Developer Edition' and 'Parcel'. The left sidebar contains a navigation menu with options like 'Setup', 'Home', and 'Object Manager'. The main content area is divided into 'Details' and 'Options' sections. The 'Details' section includes fields for 'API Name' (Parcel\_\_c), 'Custom' (checked), 'Singular Label' (Parcel), and 'Plural Label' (Parcels). The 'Options' section includes checkboxes for 'Enable Reports', 'Track Activities', 'Track Field History', 'Deployment Status', and 'Help Settings'. A user profile dropdown is visible in the top right corner, showing the user 'vetriselvi Mariyappan' and options for 'Settings' and 'Log Out'.

To create an object:

- 1.From the setup page
- 2.click on object manager
- 3.click on create>>click on custom object
- 4.enter the label name as delivery
- 5.enter plural label name as deliveries
- 6.enter record name as delivery name
- 7.select data type as text : delivery name
- 8.select allow reports
- 9.select allow search
- 10.allow track field history

### Delivery

| Field                   | API Name                   | Type            |
|-------------------------|----------------------------|-----------------|
| Current Location        | Current_Location__c        | Geolocation     |
| Estimated Delivery Date | Estimated_Delivery_Date__c | Date            |
| Sender                  | Sender__c                  | Lookup (Sender) |
| Parcel                  | Parcel__c                  | Lookup (Parcel) |

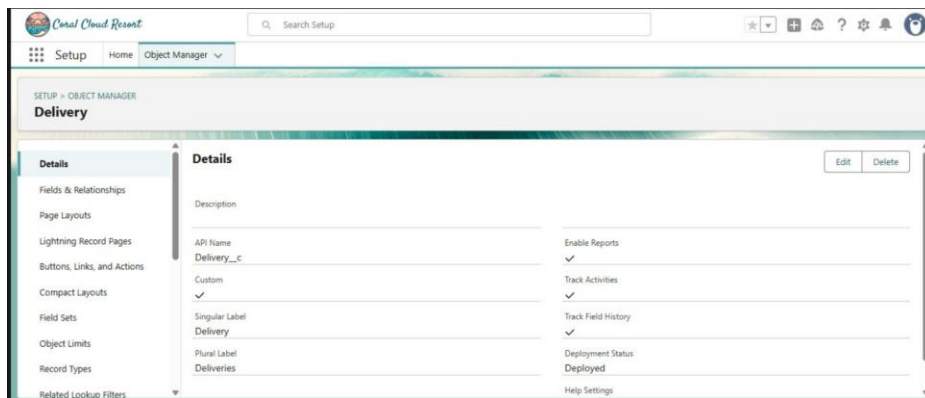

To create an object:

- 1.From the setup page
- 2.click on object manager
- 3.click on create>>click on custom object
- 4.enter the label name as sender
- 5.enter plural label name as sender's
- 6.enter record name as sender name

- 7.select data type as text : sender name
- 8.select allow reports
- 9.select allow search
- 10.allow track field history

#### Sender

| Field          | API Name          | Type        |
|----------------|-------------------|-------------|
| Sender Address | Sender_Address__c | Geolocation |
| Sender Contact | Sender_Contact__c | Phone       |
| Sender Email   | Sender_Email__c   | Email       |

The screenshot shows the Salesforce Setup interface for the 'Sender' object. The left sidebar contains a navigation menu with options like 'Fields & Relationships', 'Page Layouts', 'Lightning Record Pages', 'Buttons, Links, and Actions', 'Compact Layouts', 'Field Sets', 'Object Limits', 'Record Types', and 'Related Lookup Filters'. The main content area is titled 'Sender' and includes a 'Details' section with the following fields and values:

- Description: (empty)
- API Name: Sender\_\_c
- Custom: ☒
- Singular Label: Sender
- Plural Label: Senders
- Enable Reports: ☒
- Track Activities: ☒
- Track Field History: ☒
- Deployment Status: Deployed
- Help Settings: (link)

At the top right of the details section, there are 'Edit' and 'Delete' buttons.

To create an object:

- 1.From the setup page
- 2.click on object manager
- 3.click on create>>click on custom object
- 4.enter the label name as receiver
- 5.enter plural label name as receiver's
- 6.enter record name as receiver name
- 7.select data type as text : receiver name
- 8.select allow reports
- 9.select allow search
- 10.allow track field history

## Receiver

| Field            | API Name            | Type            |
|------------------|---------------------|-----------------|
| Receiver Address | Receiver_Address__c | Geolocation     |
| Receiver Contact | Receiver_Contact__c | Phone           |
| Receiver Email   | Receiver_Email__c   | Email           |
| Sender           | Sender__c           | Lookup (Sender) |
| Parcel           | Parcel__c           | Lookup (Parcel) |


The screenshot shows the Salesforce Setup interface for the 'Receiver' object. The top navigation bar includes the 'Coral Cloud Resort' logo, a search bar, and various utility icons. The left sidebar contains a menu with options like 'Setup', 'Home', and 'Object Manager'. The main content area is titled 'Receiver' and displays a 'Details' tab. This tab includes a 'Description' field, an 'API Name' field with the value 'Receiver\_\_c', a 'Custom' checkbox that is checked, and a 'Singular Label' field with the value 'Receiver'. On the right side of the details panel, there are several toggle switches: 'Enable Reports' (checked), 'Track Activities' (checked), 'Track Field History' (checked), 'Deployment Status' (set to 'Deployed'), and 'Help Settings'.

## Milestone 3: Custom Tab Creation

Created custom tabs for the four objects to provide easy navigation within the Salesforce application.

### Procedure:

1. Open Setup.
2. Search for Tabs.
3. Under Custom Object Tabs, click New.
4. Select the custom object.
5. Choose a tab style.
6. Click Next and configure visibility.
7. Add the tab to the required applications.
8. Click Save.

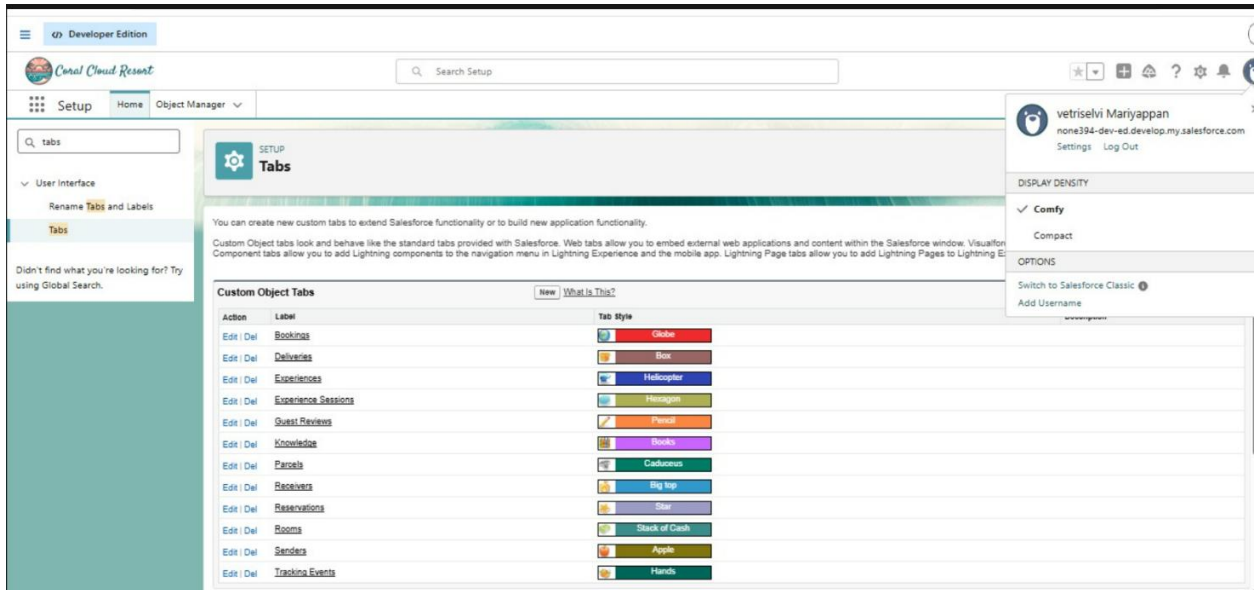


## Milestone 4: Fields and Relationships

Added fields such as Parcel ID, Status, Weight, Estimated Delivery Date, Address, Contact Number, and Email. Lookup relationships connect parcels with senders, receivers, and delivery records.

### Parcel\_\_c Fields

- Parcel\_ID\_\_c – Text or Auto Number, according to the selected ID design.
- Status\_\_c – Picklist.
- Weight\_\_c – Number.
- Estimated\_Delivery\_Date\_\_c – Date.
- Sender\_\_c – Lookup relationship to Sender.
- Receiver\_\_c – Lookup relationship to Receiver.

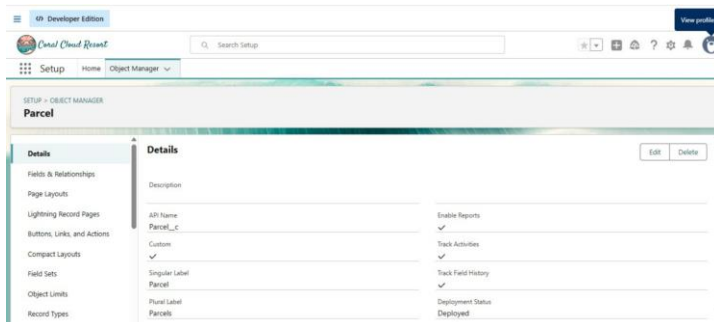

## Delivery\_\_c Fields

- Parcel\_\_c – Lookup relationship to Parcel.
- Delivery\_Status\_\_c – Picklist.
- Current\_Location\_\_c – Text.
- Assigned\_Agent\_\_c – Lookup to User, if required.
- Delivery\_Date\_\_c – Date.

The screenshot shows the Salesforce Setup interface for the 'Delivery' object. The left sidebar contains a 'Details' menu with options: Fields & Relationships, Page Layouts, Lightning Record Pages, Buttons, Links, and Actions, Compact Layouts, Field Sets, Object Limits, Record Types, and Related Lookup Filters. The main content area is titled 'Delivery' and includes a 'Details' section with the following fields:

| Field               | Value       |
|---------------------|-------------|
| Description         |             |
| API Name            | Delivery__c |
| Custom              | ✓           |
| Singular Label      | Delivery    |
| Plural Label        | Deliveries  |
| Enable Reports      | ✓           |
| Track Activities    | ✓           |
| Track Field History | ✓           |
| Deployment Status   | Deployed    |
| Help Settings       |             |

Buttons for 'Edit' and 'Delete' are located in the top right corner of the details section.

## Sender\_\_c Fields

- Sender\_Name\_\_c – Text.
- Address\_\_c – Text Area.
- Contact\_Number\_\_c – Phone.
- Email\_\_c – Email.


The screenshot shows the Salesforce Setup interface for the 'Sender' object. The left sidebar contains a 'Details' menu with options: Fields & Relationships, Page Layouts, Lightning Record Pages, Buttons, Links, and Actions, Compact Layouts, Field Sets, Object Limits, Record Types, and Related Lookup Filters. The main content area is titled 'Sender' and includes a 'Details' section with the following fields:

| Field               | Value     |
|---------------------|-----------|
| Description         |           |
| API Name            | Sender__c |
| Custom              | ✓         |
| Singular Label      | Sender    |
| Plural Label        | Senders   |
| Enable Reports      | ✓         |
| Track Activities    | ✓         |
| Track Field History | ✓         |
| Deployment Status   | Deployed  |
| Help Settings       |           |

Buttons for 'Edit' and 'Delete' are located in the top right corner of the details section.

## Receiver\_\_c Fields

- Receiver\_Name\_\_c – Text.
- Address\_\_c – Text Area.
- Contact\_Number\_\_c – Phone.
- Email\_\_c – Email.

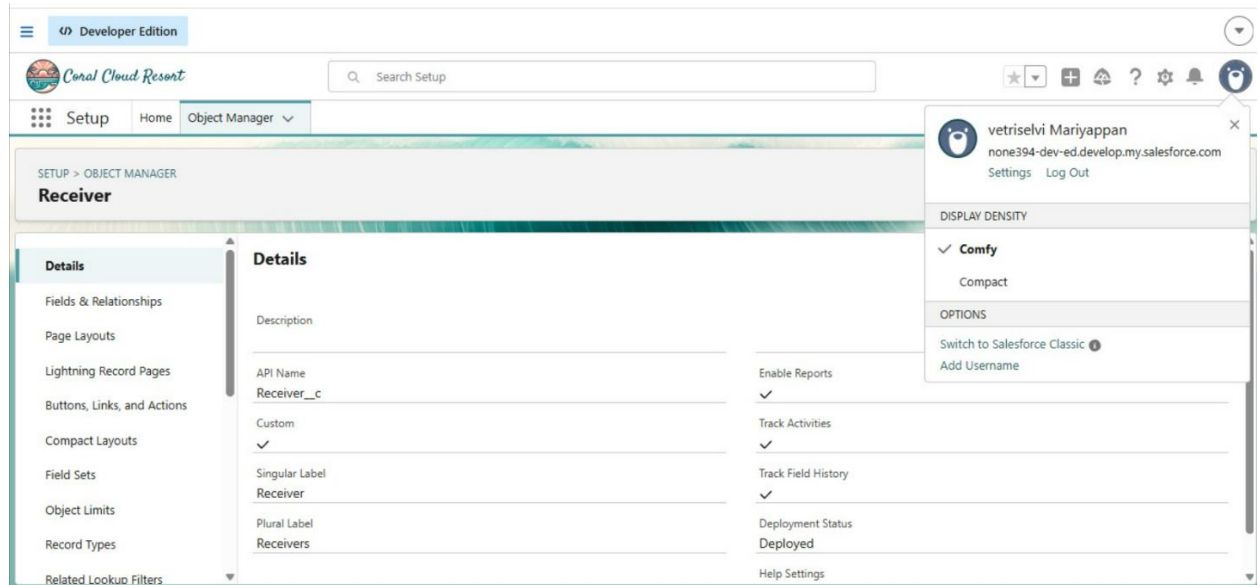

### Procedure:


1. Open Setup and Object Manager.
2. Select the required custom object.
3. Open Fields & Relationships.
4. Click New.
5. Select the field data type.
6. Enter the field label and configure its properties.
7. For relationship fields, select Lookup Relationship or Master-Detail Relationship as appropriate.
8. Configure field-level security and page layouts.
9. Save the field.

## Milestone 5: Prompt Builder

Created a prompt template to generate parcel tracking responses using retrieved Salesforce data. The prompt is designed to provide parcel status information and handle invalid Parcel IDs appropriately.

## Prompt Testing

1. Open Setup and search for Prompt Builder.
2. Create a suitable prompt template.
3. Configure the required input and available Salesforce data.
4. Add the prompt instructions.
5. Test with a valid Parcel ID.
6. Test with an invalid Parcel ID.
7. Verify that the response uses the correct parcel data.
8. Save and activate the template as required.

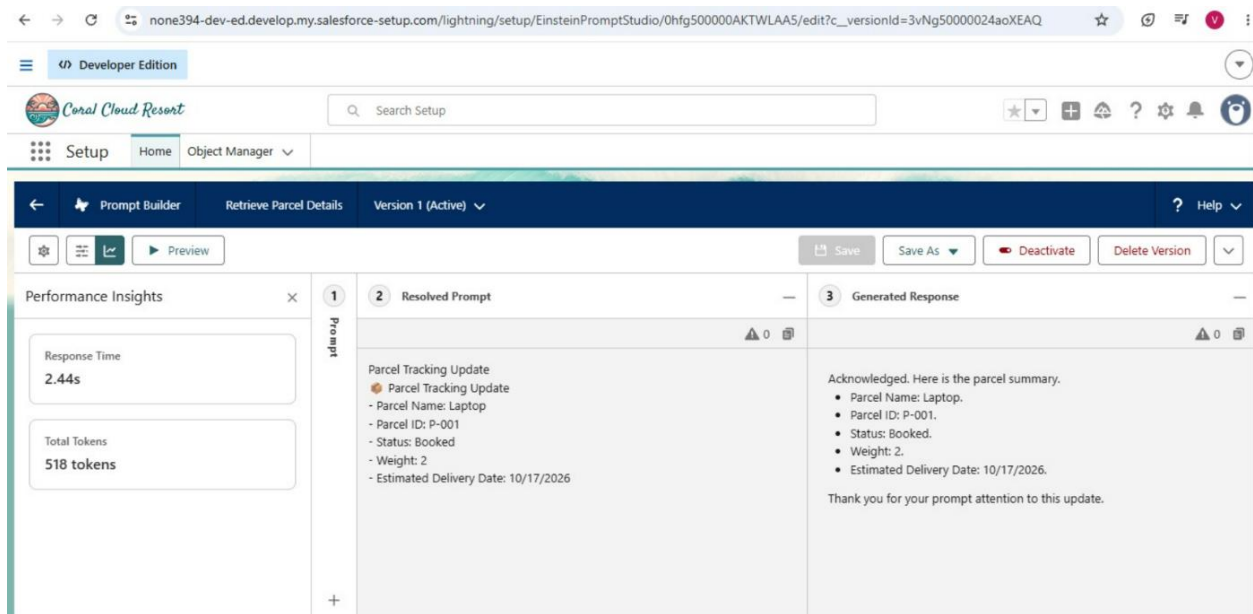


## Milestone 6: Flow Builder – Agent Parcel Updates

Created an Auto-Launched Flow to retrieve parcel details and return a response to the AI agent.

Steps:

1. Create an Auto-Launched Flow.
2. Create the input variable `ids` and output variable `Output`.
3. Use Get Records on `Parcel__c` to find a parcel where `Parcel_ID__c` equals `{!ids}`.
4. Add the configured Prompt Builder action.

5. Use an Assignment element to store the prompt response in Output.
6. Connect the elements, save, test, and activate the Flow.

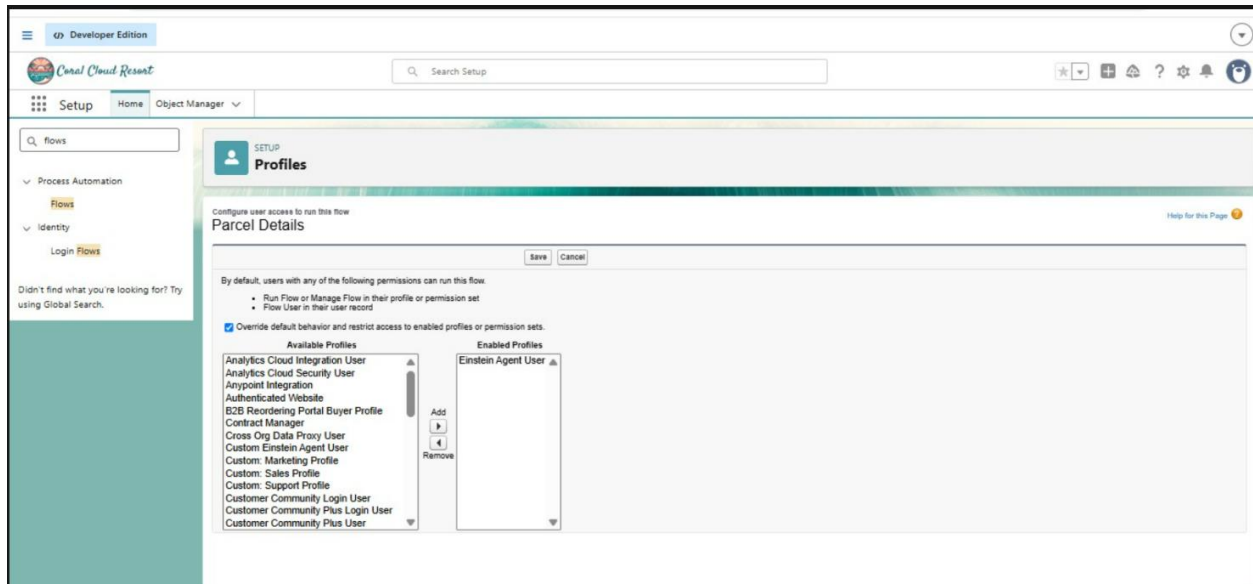

## 2.7 Testing

Tested parcel retrieval, valid and invalid Parcel IDs, Flow outputs, and access permissions to verify the configured functionality.

# PHASE 3: SALESFORCE AGENTFORCE SETUP AND CONFIGURATION

## Milestone 1: Creating Permission Sets

A permission set is created to provide the required permissions to the SwiftShip Agent.

### Procedure:

1. Go to Setup and search for Permission Sets.
2. Click New.
3. Enter the Label as **Swift Ship**.
4. Verify the API Name.
5. Select the License as **Einstein Agent**.
6. Click Save.

**Users**

On this page you can create, view, and manage users.

To get more licenses, use the Your Account app. [Let's Go](#)

View: [All Users](#) [Edit](#) [Create New View](#)

| Action               | Full Name                   | Alias    | Username                                                                   | Role                            | Active | Profile                          |
|----------------------|-----------------------------|----------|----------------------------------------------------------------------------|---------------------------------|--------|----------------------------------|
| <a href="#">Edit</a> | Admin, Pooled Org           | PAdmin   | admin-meh0d4okod1.8dshvdu2wio.nbuulz550q.8377hcf52u@example.com            | CEO                             | ✓      | System Administrator             |
| <a href="#">Edit</a> | Agent, Coral Cloud          | agent    | agent.hvnrh7vawuk.d8o3k4nczrbh.hunoxsuwfl.mowkmud.oed8haloqa@example.com   |                                 | ✓      | Standard User                    |
| <a href="#">Edit</a> | Charter, Expect             | Charter  | charter.00dsv000000heg0ear.n3axclup0u8a@chatter.salesforce.com             |                                 | ✓      | Charter Free User                |
| <a href="#">Edit</a> | Einstein Service Agent User | einstein | coral_cloud_experience_agent.t5k6ncvab3au.kf0aavmk.sleap7zaznu@example.com |                                 | ✓      | Custom Einstein Agent User       |
| <a href="#">Edit</a> | Einstein Agent User         | einstein | in_product_specialist.2xrbtefz3f.wdtrixapthi.nba.amap2uuvvvo@example.com   |                                 | ✓      | Einstein Agent User              |
| <a href="#">Edit</a> | Housekeeping                | House    | case4980.ub68cidgacl.0ho7at84ola.moutfvt7wem.h0noaa1paf7ol@example.com     | Installation & Repair Services  | ✓      | Service Supervisor               |
| <a href="#">Edit</a> | Marissa, vattisabvi         | vmari    | vatt00vett@gmail.com                                                       | Customer Support, North America | ✓      | System Administrator             |
| <a href="#">Edit</a> | Nelson, Asind               | anels    | anels3579.kieivewonacp.3d52wv62eys.dcvth00vo3a.dpcavonuar0@example.com     | SVP, Customer Service & Support | ✓      | Standard User                    |
| <a href="#">Edit</a> | Rodriquez, Sofia            | rsdr     | solfandriqvaz.7y6rv3jwv7o.fh12zythrw.hs590wibwbn.mfzeobaaodh@example.com   |                                 | ✓      | Customer Community Login User    |
| <a href="#">Edit</a> | User, Integration           | ntea     | integration@00dsv000000heg0ear.com                                         |                                 | ✓      | Analytics Cloud Integration User |
| <a href="#">Edit</a> | User, Security              | sec      | insightsecurity@00dsv000000heg0ear.com                                     |                                 | ✓      | Analytics Cloud Security User    |

Show me fewer records per list page

**Permission Sets**

On this page you can create, view, and manage permission sets.

[All Permission Sets](#) [Edit](#) [Delete](#) [Create New View](#)

| Action                | Permission Set Name                                     | Description                                                                         | License                           |
|-----------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------|
| <a href="#">Clone</a> | ILesacv1 Data Cloud Marketing Admin                     | Allows access to Data Cloud Setup if the user is also a Salesforce admin, manag...  | Customer Data Cloud for Marketing |
| <a href="#">Clone</a> | ILesacv1 Data Cloud for Marketing Data Aware Specialist | This Data Cloud permission set will be deprecated in Spring '24. Learn more at s... | Customer Data Cloud for Marketing |
| <a href="#">Clone</a> | ILesacv1 Data Cloud for Marketing Manager               | This Data Cloud permission set will be deprecated in Spring '24. Learn more at s... | Customer Data Cloud for Marketing |
| <a href="#">Clone</a> | ILesacv1 Data Cloud for Marketing Specialist            | This Data Cloud permission set will be deprecated in Spring '24. Learn more at s... | Customer Data Cloud for Marketing |
| <a href="#">Clone</a> | Access Agentforce Default Agent                         | Gives users access to the default Agentforce agent in Salesforce.                   | Agentforce (Default)              |
| <a href="#">Clone</a> | Access Agents                                           |                                                                                     |                                   |
| <a href="#">Clone</a> | Agentforce Agent Swift Ship Tracker Permissions         | Allows custom permissions for Agentforce Agent.                                     | Cloud Integration User            |
| <a href="#">Clone</a> | Agentforce Agent Swift Ship Tracker Permissions         | Allows custom permissions for Agentforce Agent.                                     |                                   |
| <a href="#">Clone</a> | Agentforce Default Admin                                | Allows users to build and manage in-org copilots. Also grants org-wide access to... | Agentforce (Default)              |
| <a href="#">Clone</a> | Agentforce Service Agent Configuration                  | Build and manage autonomous AI service agents. Also grants org-wide access t...     | Agentforce Service Agent Builder  |
| <a href="#">Clone</a> | Agentforce Service Agent Object Access                  | Access knowledge articles and manage cases and contacts as an autonomous A...       | Agentforce Service Agent User     |
| <a href="#">Clone</a> | Agentforce Service Agent Secure Base                    | Set up and use Agentforce Service Agent actions with enhanced data security.        | Agentforce Service Agent User     |

1-25 of 143 0 Selected

Page 1 of 8


## Milestone 2: Assigning Permissions to the Agent User

The permission set is assigned to the Einstein Service Agent user.

### Procedure:

1. In Setup, search for Users.
2. Open the Einstein Service Agent user record.
3. Find the Permission Set Assignments section.
4. Click Edit Assignments.
5. Select the Swift Ship permission set under Available Permission Sets.

6. Click Add to move it to Enabled Permission Sets.
7. Click Save.

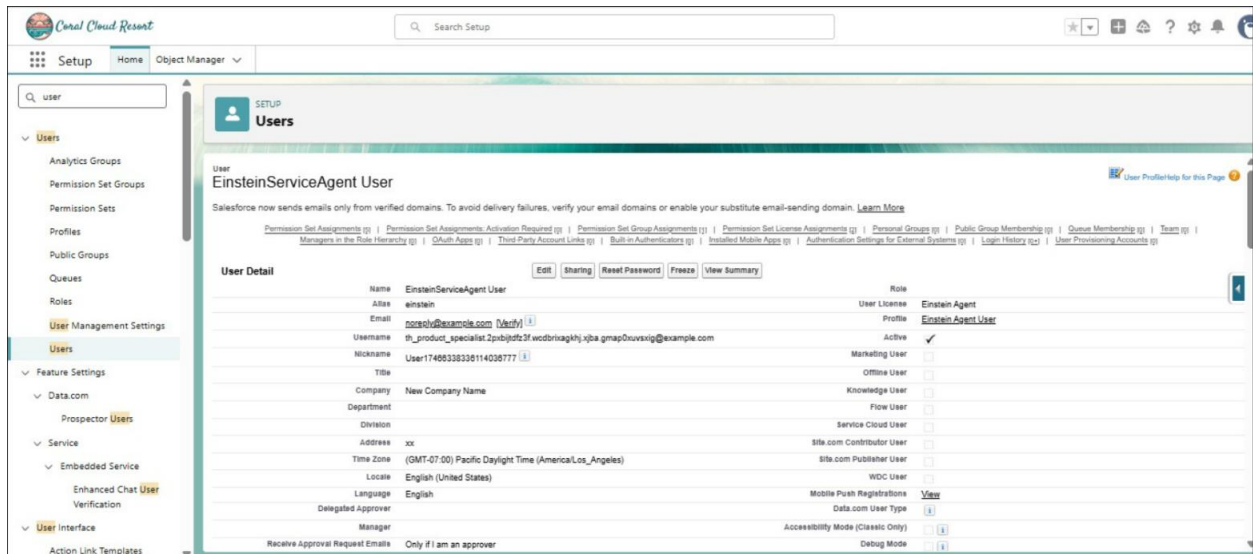


## Milestone 3: Org Setup for Agentforce

Agentforce and the required Einstein services are enabled in Salesforce Setup.

### Procedure:

1. Go to Setup and search for Einstein Setup.
2. Click Get Started if prompted.
3. Enable Einstein.
4. Enable Global Languages if required.
5. Enable Deploy Prompt Template if available.
6. Refresh the browser.
7. Search for Agentforce Agents in Setup.
8. Enable Agentforce and the Agentforce Default Agent if these options are available in the org.

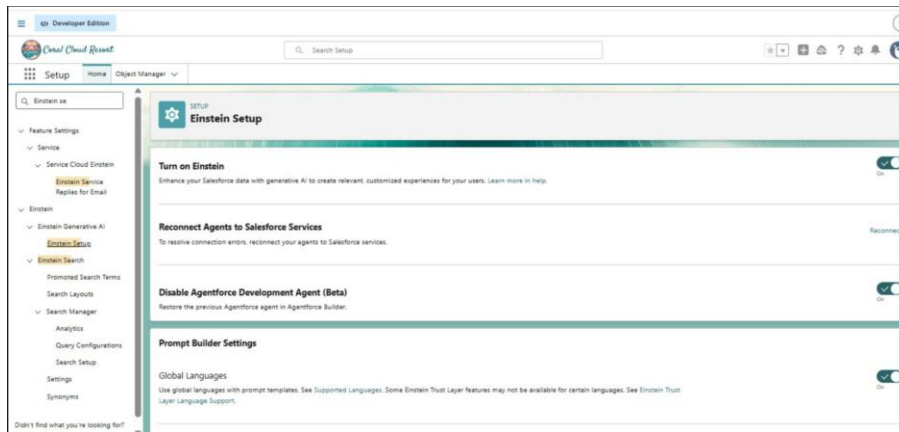


## Milestone 4: Building the Agent

A Service Agent is created for parcel tracking and customer assistance.

### Procedure:

1. Go to Setup and search for Agentforce Agents.
2. Click New Agent or Create Agent.
3. Select Agentforce Service Agent.
4. Enter the Label as **SwiftShip Tracker**.
5. Verify the automatically generated Developer Name.
6. Configure the agent's instructions and required topics.
7. Add the relevant actions, including the parcel tracking Flow.
8. Configure subagents and their actions if required.
9. Save the agent configuration.

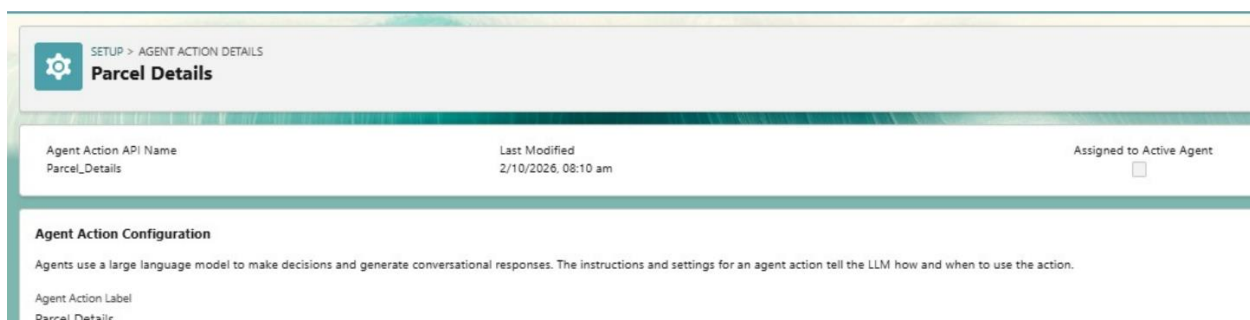


## Milestone 5: Assigning Permissions and Activating the Agent

The permission set is assigned to the appropriate agent user, and the agent is activated.

## Procedure:

1. Go to Setup and search for Permission Sets.
2. Open the Swift Ship permission set.
3. Click Manage Assignments.
4. Click Add Assignments.
5. Select the Einstein Agent user, such as EinsteinAgentUser.
6. Click Assign and then Done.
7. Return to the SwiftShip Tracker agent configuration.
8. Verify the configured topics, actions, and Flow access.
9. Click Commit Version.
10. Click Activate to activate the agent.

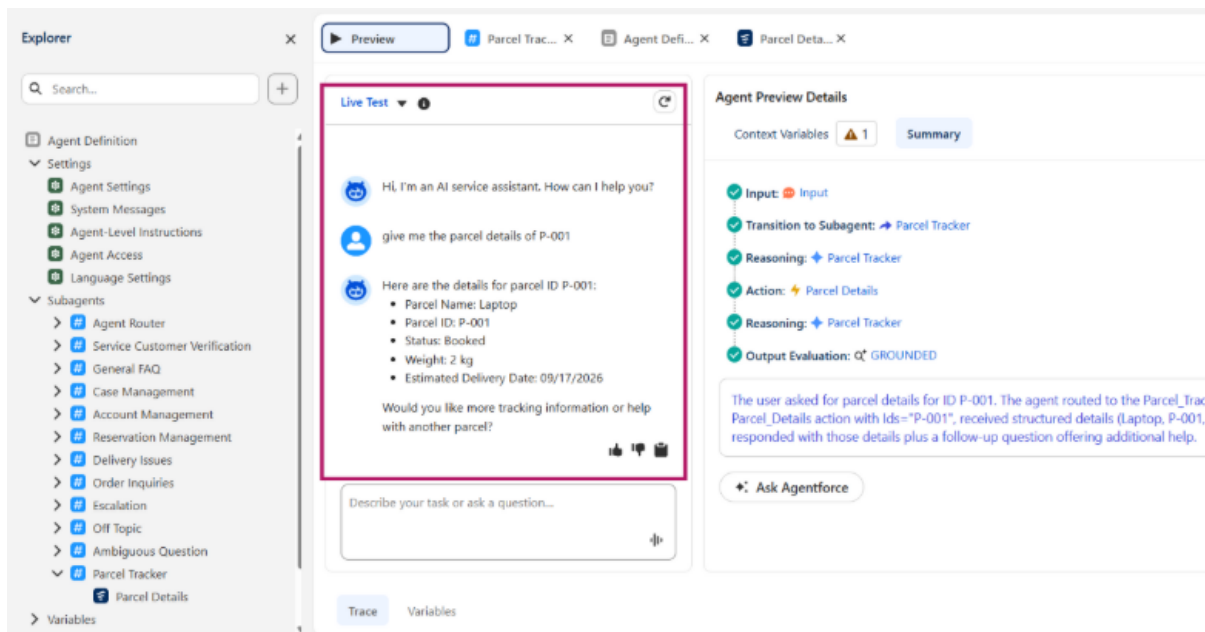

## Phase 4: Data Migration, Testing & Security Documentation

### Phase Objective

To validate the functionality and reliability of the Parcel Tracking Agent created in Agent Builder. This phase ensures that the agent correctly recognizes topics, triggers the assigned Flow (SwiftShip Tracker), retrieves or updates parcel data, and performs all intended actions without access or permission issues.


The primary goal is to confirm that the AI-driven agent operates seamlessly within Salesforce and provides accurate, real-time responses to parcel management queries.

## Verify Agent Setup

**Navigation:** Setup → Agentforce Agents

**Steps:**

1. Open the Agents list and verify that the created agent, **Parcel Tracking Agent** or **SwiftShip Tracker**, appears in the active agent repository.
2. Confirm the following details:
  - Agent Status
  - Description
  - Agent Type
3. Verify that the agent configuration is correct in the Salesforce Setup dashboard.

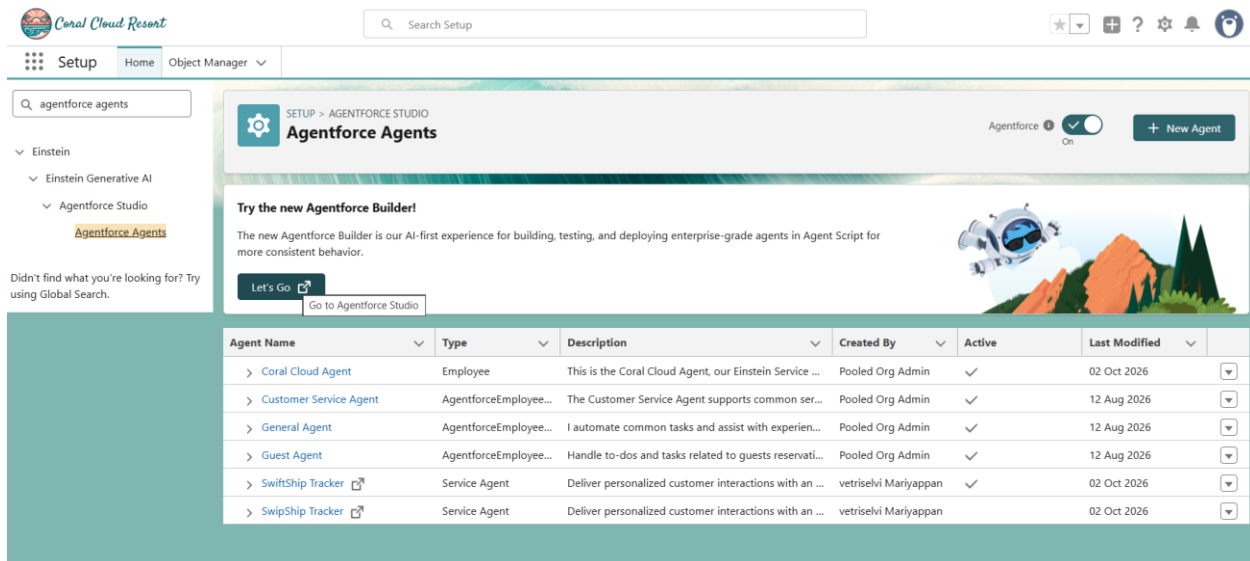

The screenshot shows the Salesforce Setup dashboard for Coral Cloud Resort. The left sidebar contains navigation links: Setup, Home, and Object Manager. The main content area is titled 'Agentforce Agents' and includes a search bar, a 'Try the new Agentforce Builder!' banner, and a table of agents.

| Agent Name               | Type                  | Description                                             | Created By            | Active | Last Modified |
|--------------------------|-----------------------|---------------------------------------------------------|-----------------------|--------|---------------|
| > Coral Cloud Agent      | Employee              | This is the Coral Cloud Agent, our Einstein Service ... | Pooled Org Admin      | ✓      | 02 Oct 2026   |
| > Customer Service Agent | AgentforceEmployee... | The Customer Service Agent supports common ser...       | Pooled Org Admin      | ✓      | 12 Aug 2026   |
| > General Agent          | AgentforceEmployee... | I automate common tasks and assist with experien...     | Pooled Org Admin      | ✓      | 12 Aug 2026   |
| > Guest Agent            | AgentforceEmployee... | Handle to-dos and tasks related to guests reservati...  | Pooled Org Admin      | ✓      | 12 Aug 2026   |
| > SwiftShip Tracker      | Service Agent         | Deliver personalized customer interactions with an ...  | vetriselvi Mariyappan | ✓      | 02 Oct 2026   |
| > SwipShip Tracker       | Service Agent         | Deliver personalized customer interactions with an ...  | vetriselvi Mariyappan | ✓      | 02 Oct 2026   |


## Check Flow Association

**Navigation:** Setup → Flows

Locate the Flow named **SwiftShip Tracker**.

**Verify the following configurations:**

- Flow status is **Activated**.
- The Flow contains the required logic to handle:
  - **Parcel ID Input:** Capturing the user's parcel ID.
  - **Parcel Details Retrieval:** Querying the Parcel\_\_c custom object.
  - **Status Updates:** Processing parcel tracking status modifications.
  - **Output Generation:** Returning confirmation or parcel details to the user.

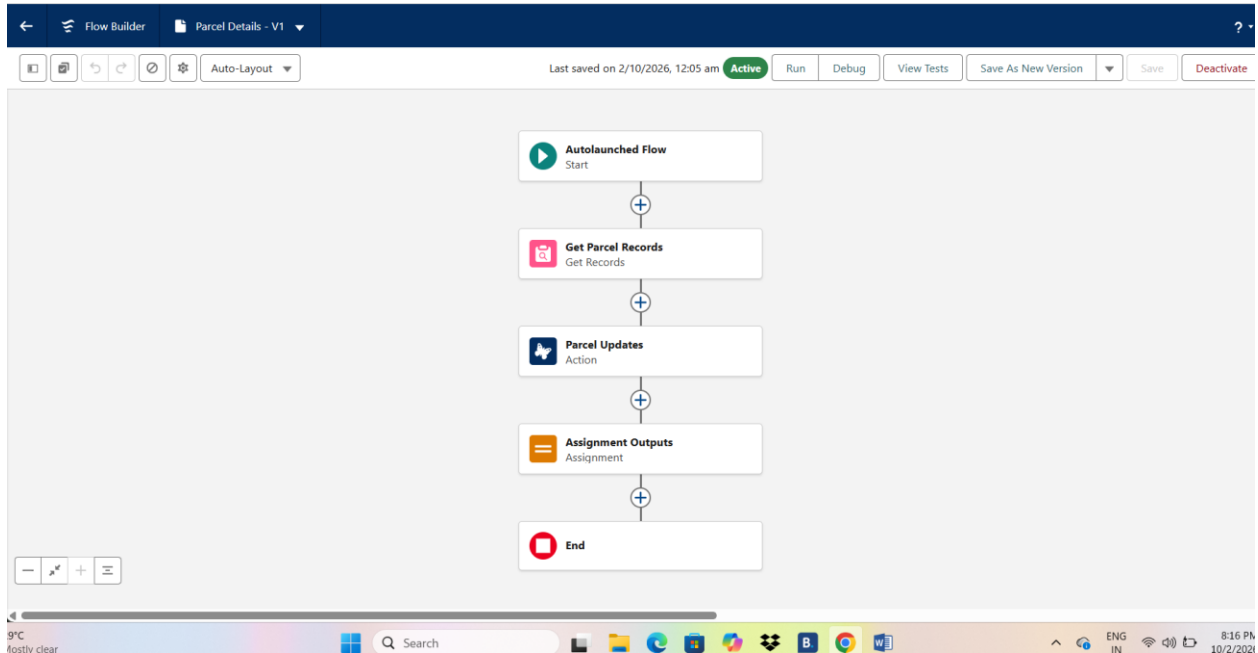

## Activate and Test the Agent

**Navigation:** Setup → Agent Builder → Parcel Tracking Agent


### Steps:

1. Activate the agent if it is not already activated.
2. Open the **Preview / Try It Out** mode.
3. Execute test queries such as:

### Query 1:

"Give me the parcel details of P-004."

Verify that the agent provides the expected response for each query.

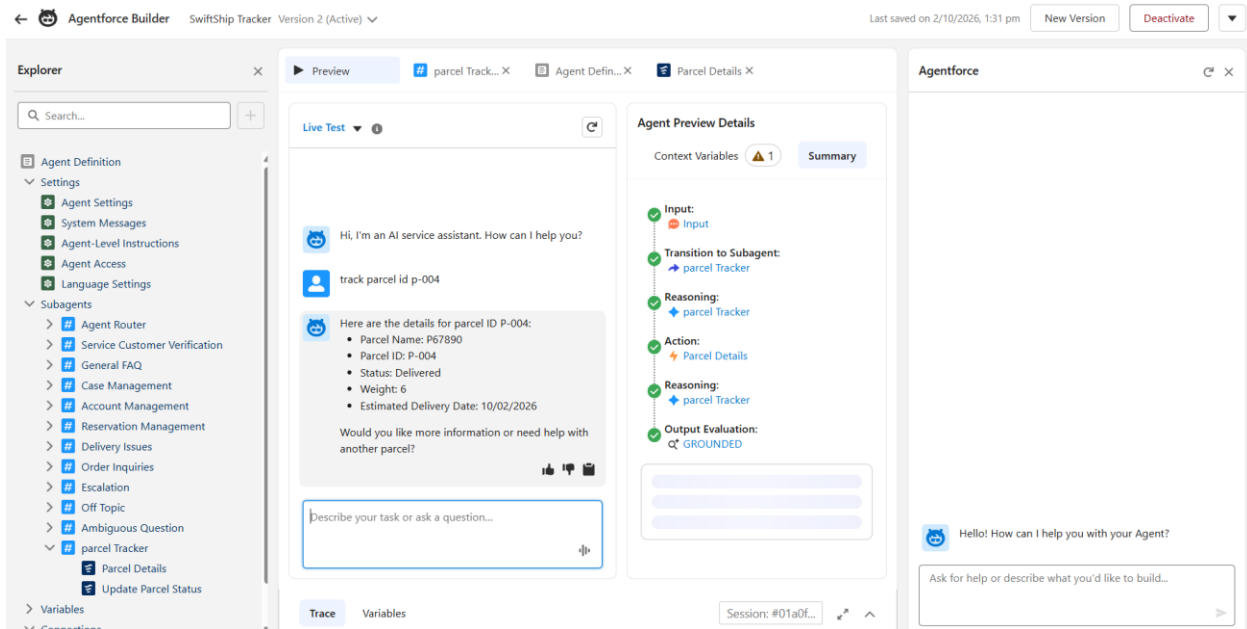

## Validate Data in Salesforce

To ensure end-to-end data integrity after execution, inspect the backend records.

### Steps:

1. Open the **App Launcher** in Salesforce.
2. Search for and select **Parcels (Parcel\_\_c)**.
3. Locate the Parcel ID used during testing.
4. Verify the following:

### Field Updates


Confirm that the `Status__c` or related field reflects the value modified during testing.

### Record Generation

Verify that any records created by the Flow, such as tracking logs, updates, or booking entries, are correctly displayed.

### Data Accuracy

Ensure that the information displayed by the agent matches the corresponding Salesforce record.

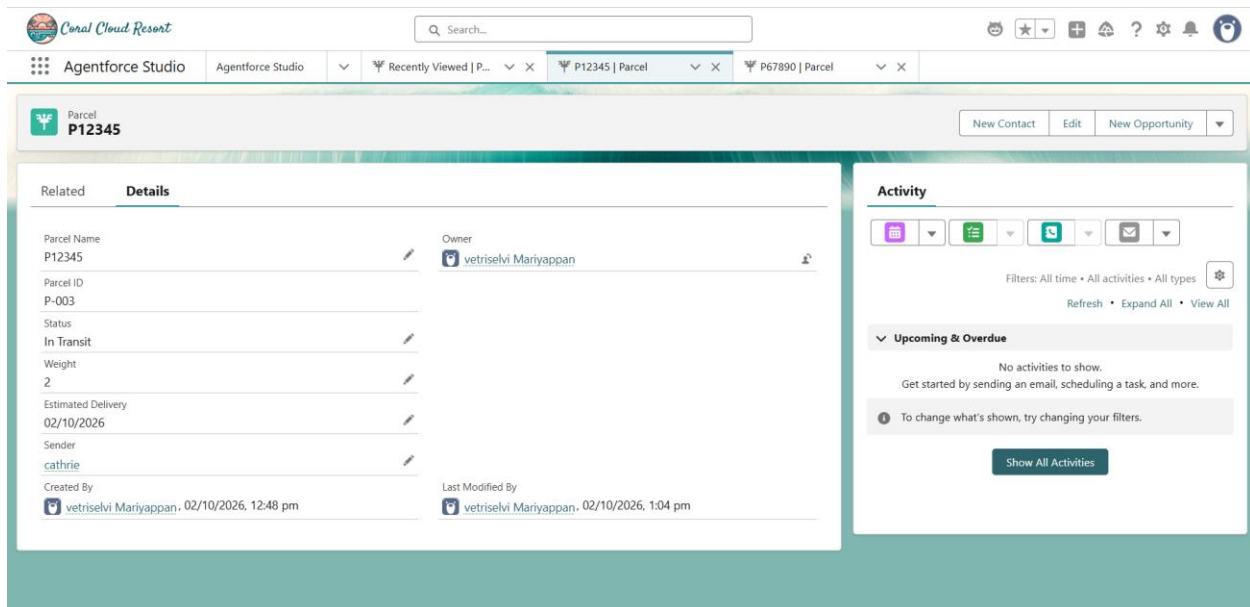

## Phase 5: Deployment, Documentation & Maintenance

### 5.1 Phase Overview

The purpose of this phase is to document the deployment, testing, maintenance, and troubleshooting activities of the **SwiftShip Tracker Agent**, developed using Salesforce Agentforce and Agent Builder.

The agent is designed to help users track parcel details and retrieve relevant information such as **Parcel, Customer, and Delivery** data from Salesforce.

### 5.2 Deployment

The SwiftShip Tracker Agent was configured and tested within the **Salesforce Developer Org** environment.

The deployment activities included:

- Configuring the Agentforce Agent.
- Setting up required topics and instructions.
- Connecting the agent with the **SwiftShip Tracker Flow**.
- Configuring Salesforce custom objects and required fields.
- Verifying the agent's access to relevant data.

- Testing agent responses and flow execution.

The project is implemented as an academic/prototype project within the Salesforce Developer Org. Production deployment is outside the scope of this project.

## 5.3 Testing and Validation

Testing was performed within the Salesforce Developer Org to verify that the agent functions correctly.

The following areas were tested:

- **Topic Recognition:** Verified that the agent identifies parcel tracking-related user queries correctly.
- **Flow Execution:** Verified that the SwiftShip Tracker Flow is triggered correctly.
- **Data Retrieval:** Verified that the agent retrieves the required parcel and customer information.
- **Agent Responses:** Checked whether the agent provides appropriate responses based on the retrieved data.
- **Permissions:** Verified that the required objects, fields, and flows are accessible to the agent.
- **Error Handling:** Tested incorrect or incomplete queries and checked the agent's response.

## 5.4 Maintenance and Monitoring

Regular maintenance is required to keep the SwiftShip Tracker Agent reliable and accurate.

Maintenance activities include:

- Updating parcel and customer data when required.
- Monitoring agent responses.
- Checking failed Flow executions.
- Updating topics and instructions when new requirements are introduced.
- Verifying object and field permissions.
- Improving prompts to provide clearer responses.
- Checking for configuration errors.

Regular monitoring helps identify issues such as **incorrect responses, failed flows, missing data, and access-related errors**.

## 5.5 Troubleshooting

Troubleshooting is performed whenever the agent does not provide the expected response.

Common troubleshooting activities include:

1. Checking whether the required topic is correctly configured.
2. Verifying the SwiftShip Tracker Flow.
3. Checking object and field permissions.
4. Verifying that required records are available.
5. Checking Flow input and output values.
6. Reviewing agent instructions and prompts.
7. Testing the agent again after making configuration changes.

These activities help maintain the reliability and functionality of the SwiftShip Tracker Agent.

## 5.6 Documentation

All major project configurations and testing activities are documented for future reference.

The documentation includes:

- Agent configuration
- Topics and instructions
- Flow configuration
- Salesforce objects and fields
- Testing procedures
- Test results
- Troubleshooting steps
- Maintenance activities

Proper documentation makes it easier to understand, maintain, and modify the project in the future.

## Conclusion

The SwiftShip Tracker project successfully demonstrates a Salesforce-based parcel delivery management system for managing parcel booking, tracking, delivery updates, and customer communication. The project uses Salesforce custom objects, Flow Builder, Prompt Builder, and Agentforce to support the complete parcel management process.

The system includes custom objects such as Parcel, Delivery, Sender, and Receiver, along with fields and relationships required for parcel management. Automation and Flow configuration help retrieve parcel information and provide responses through the AI agent. Agentforce was configured with the required permissions, topics, actions, and SwiftShip Tracker Flow.

Testing was performed to verify agent responses, Flow execution, data retrieval, permissions, and error handling. The project also includes deployment documentation, maintenance activities, troubleshooting procedures, and future reference documentation.

Overall, the SwiftShip Tracker project provides a centralized Salesforce solution that improves parcel visibility, reduces manual work, and supports efficient parcel tracking and management through automation and AI-powered assistance.