

# Internet and Web Programming

(CSE - 3002)

# DIGITAL ASSIGNMENT - 1

Name: Vibhu Kumar Singh


Reg. No: 19BCE0215

Teacher: Ms. Nalini N.

**Title:** Online Food Ordering System (Ratatouille.com)

Tech Stack Used: HTML, CSS, JavaScript, PHP and MYSQL

# **Document Structure:**

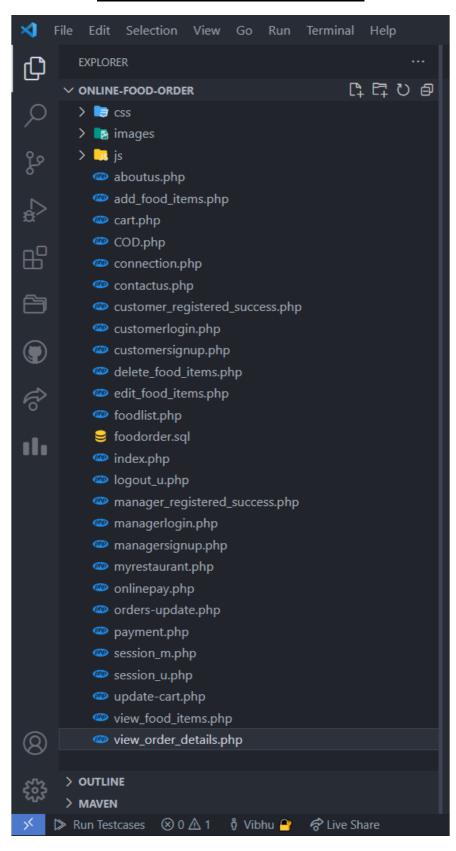

# Login page

#### For Customer:

```
<?php
include('login_u.php');
if(isset($_SESSION['login_user2'])){
header("location: foodlist.php");
?>
<!DOCTYPE html>
<html>
  <head>
    <title> Guest Login | Ratatouille.com </title>
  </head>
  <link rel="stylesheet" type = "text/css" href ="css/managerlogin.css">
  <link rel="stylesheet" type = "text/css" href ="css/bootstrap.css">
  <script type="text/javascript" src="js/jquery.min.js"></script>
  <script type="text/javascript" src="js/bootstrap.min.js"></script>
  <body style="background-image: url(bc.jpg); background-size: cover";>
    <button onclick="topFunction()" id="myBtn" title="Go to top">
      <span class="glyphicon glyphicon-chevron-up"></span>
    </button>
    <script type="text/javascript">
      window.onscroll = function()
        scrollFunction()
      };
      function scrollFunction(){
        if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
          document.getElementById("myBtn").style.display = "block";
          document.getElementById("myBtn").style.display = "none";
        }
      }
      function topFunction() {
        document.body.scrollTop = 0;
        document.documentElement.scrollTop = 0;
      }
    </script>
    <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search"</pre>
role="navigation">
      <div class="container">
        <div class="navbar-header">
          <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-</pre>
target="#myNavbar">
            <span class="sr-only">Toggle navigation</span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
        </button>
        <a class="navbar-brand" href="index.php">Ratatouille.com</a>
       </div>
       <div class="collapse navbar-collapse " id="myNavbar">
        <a href="index.php">Home</a>
          <a href="aboutus.php">About</a>
          <a href="contactus.php">Contact Us</a>
        <a href="#" class="dropdown-toggle active" data-toggle="dropdown"</li>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
user"></span> Sign Up <span class="caret"></span> </a>
              <a href="customersignup.php"> User Sign-up</a>
            <a href="managersignup.php"> Manager Sign-up</a>
          <a href="#" class="dropdown-toggle active" data-toggle="dropdown"</pre>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
log-in"></span> Login <span class="caret"></span></a>
            <a href="customerlogin.php"> User Login</a>
            <a href="managerlogin.php"> Manager Login</a>
          </div>
     </div>
   </nav>
   <div class="container">
   <div class="jumbotron">
    <h1 style="color: white">Hi Guest,<br> Welcome to Ratatouille.com </h1>
    <hr>>
  Feeling hungry? Then LOGIN ASAP
   </div>
   </div>
   <div class="container" style="margin-top: 4%; margin-bottom: 2%;">
     <div class="col-md-5 col-md-offset-4">
       <label style="margin-left: 5px;color: red;"><span> <?php echo $error; ?>
</span></label>
     <div class="panel panel-primary">
       <div class="panel-heading"> Login </div>
       <div class="panel-body">
       <form action="" method="POST">
       <div class="row">
         <div class="form-group col-xs-12">
          <label for="username"><span class="text-danger" style="margin-right:</pre>
5px;">*</span> Username: </label>
```

```
<div class="input-group">
              <input class="form-control" id="username" type="text" name="username"</pre>
placeholder="Username" required="" autofocus="">
              <span class="input-group-btn">
                <label class="btn btn-dark"><span class="glyphicon glyphicon-user" aria-</pre>
hidden="true"></label>
            </span>
              </span>
            </div>
          </div>
        </div>
        <div class="row">
          <div class="form-group col-xs-12">
            <label for="password"><span class="text-danger" style="margin-right:</pre>
5px;">*</span> Password: </label>
            <div class="input-group">
              <input class="form-control" id="password" type="password" name="password"</pre>
placeholder="Password" required="">
              <span class="input-group-btn">
                <label class="btn btn-dark"><span class="glyphicon glyphicon-lock" aria-</pre>
hidden="true"></span></label>
            </span>
            </div>
          </div>
        </div>
        <div class="row">
          <div class="form-group col-xs-4">
              <button class="btn btn-dark" name="submit" type="submit" value=" Login</pre>
">Submit</button>
          </div>
        </div>
        <label style="margin-left: 5px;">or</label> <br>
       <label style="margin-left: 5px;"><a href="customersignup.php">Create a new
account.</a></label>
        </form>
        </div>
      </div>
    </div>
    </div>
    </body>
</html>
```

```
customeriogingly X

customeriogingly X

customeriogingly X

customeriogingly X

include('login_upp');

include('login_upp');

include('login_upp');

beader('location: foodist.php');

beader('location: foodist.php');

include('login_upp');

deads

cuttomeriogingly X

discorpt title>

deads

cuttomeriogingly X

discorpt title>

discorpt type='text/css' bref 'scs/awagerlogin.cs'>

discorpt type='text/javascript' srcs' js/gery amin_js'x/script)

corrigt type='text/javascript' srcs' js/gery amin_js'x/script)

dody style='background-image: url(cc.jpg); background-sizes cover';>

deatton onclick-'toparaction()' id='mystem' title='Go to top'>

span class='glyphicon cheuron-up'x/spans


corrigt type='text/javascript' srcs' js/gents toparaction()'

script type='text/javascript'-y

window,onscroll = function()

script type-'text/javascript'-y

window,onscroll =
```

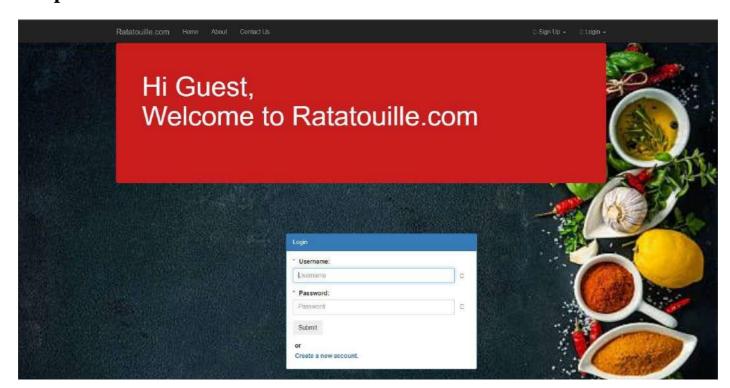

# For Manager(admin):

```
<?php
include('login_m.php'); // Includes Login Script
if(isset($_SESSION['login_user1'])){
header("location: myrestaurant.php"); //Redirecting to myrestaurant Page
}
?>
<!DOCTYPE html>
<html>
  <head>
    <title> Manager Login | Ratatouille.com </title>
  </head>
  <link rel="stylesheet" type = "text/css" href ="css/managerlogin.css">
  <link rel="stylesheet" type = "text/css" href ="css/bootstrap.css">
  <script type="text/javascript" src="js/jquery.min.js"></script>
  <script type="text/javascript" src="js/bootstrap.min.js"></script>
  <body style="background-image: url(bst.png); background-attachment: fixed; background-</pre>
size: cover">
    <button onclick="topFunction()" id="myBtn" title="Go to top">
      <span class="glyphicon glyphicon-chevron-up"></span>
    </button>
    <script type="text/javascript">
      window.onscroll = function()
        scrollFunction()
      };
      function scrollFunction(){
        if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
          document.getElementById("myBtn").style.display = "block";
        } else {
          document.getElementById("myBtn").style.display = "none";
        }
      }
      function topFunction() {
        document.body.scrollTop = 0;
        document.documentElement.scrollTop = 0;
    </script>
    <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search"</pre>
role="navigation">
      <div class="container">
        <div class="navbar-header">
          <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-</pre>
target="#myNavbar">
            <span class="sr-only">Toggle navigation</span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
```

```
</button>
        <a class="navbar-brand" href="index.php">Ratatouille.com</a>
       </div>
       <div class="collapse navbar-collapse " id="myNavbar">
        <a href="index.php">Home</a>
          <a href="aboutus.php">About</a>
          <a href="contactus.php">Contact Us</a>
        <a href="#" class="dropdown-toggle active" data-toggle="dropdown"</li>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
user"></span> Sign Up <span class="caret"></span> </a>
              <a href="customersignup.php"> User Sign-up</a>
            <a href="managersignup.php"> Manager Sign-up</a>
          <a href="#" class="dropdown-toggle active" data-toggle="dropdown"</pre>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
log-in"></span> Login <span class="caret"></span></a>
            <a href="customerlogin.php"> User Login</a>
            <a href="managerlogin.php"> Manager Login</a>
          </div>
     </div>
   </nav>
   <div class="container">
   <div class="jumbotron">
    <h1 style="color: white">Welcome to Ratatouille.com </h1>
  Kindly LOGIN to continue.
   </div>
   </div>
   <div class="container" style="margin-top: 4%; margin-bottom: 2%;">
     <div class="col-md-5 col-md-offset-4">
       <label style="margin-left: 5px;color: red;"><span> <?php echo $error; ?>
</span></label>
     <div class="panel panel-primary">
       <div class="panel-heading"> Login </div>
       <div class="panel-body">
       <form action="" method="POST">
       <div class="row">
        <div class="form-group col-xs-12">
          <label for="username"><span class="text-danger" style="margin-right:</pre>
5px;">*</span> Username: </label>
          <div class="input-group">
```

```
<input class="form-control" id="username" type="text" name="username"</pre>
placeholder="Username" required="" autofocus="">
              <span class="input-group-btn">
                <label class="btn btn-primary"><span class="glyphicon glyphicon-user" aria-</pre>
hidden="true"></label>
            </span>
              </span>
            </div>
          </div>
        </div>
        <div class="row">
          <div class="form-group col-xs-12">
            <label for="password"><span class="text-danger" style="margin-right:</pre>
5px;">*</span> Password: </label>
            <div class="input-group">
              <input class="form-control" id="password" type="password" name="password"</pre>
placeholder="Password" required="">
              <span class="input-group-btn">
                <label class="btn btn-primary"><span class="glyphicon glyphicon-lock" aria-</pre>
hidden="true"></span></label>
            </span>
            </div>
          </div>
        </div>
        <div class="row">
          <div class="form-group col-xs-4">
              <button class="btn btn-primary" name="submit" type="submit" value=" Login</pre>
">Submit</button>
          </div>
        </div>
        <label style="margin-left: 5px;">or</label> <br>
       <label style="margin-left: 5px;"><a href="managersignup.php">Create a new
account.</a></label>
        </form>
        </div>
      </div>
    </div>
    </div>
    </body>
</html>
```




# Signup pages

#### For Customer:

```
<?php
include('login_u.php');
if(isset($_SESSION['login_user2'])){
header("location: foodlist.php");
?>
<!DOCTYPE html>
<html>
  <head>
    <title> Guest Login | Ratatouille.com </title>
  </head>
  <link rel="stylesheet" type = "text/css" href ="css/managerlogin.css">
  <link rel="stylesheet" type = "text/css" href ="css/bootstrap.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
  <script type="text/javascript" src="js/bootstrap.min.js"></script>
  <body style="background-image: url(bc.jpg); background-size: cover";>
    <button onclick="topFunction()" id="myBtn" title="Go to top">
      <span class="glyphicon glyphicon-chevron-up"></span>
    </button>
    <script type="text/javascript">
      window.onscroll = function()
        scrollFunction()
      };
      function scrollFunction(){
        if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
          document.getElementById("myBtn").style.display = "block";
        } else {
          document.getElementById("myBtn").style.display = "none";
      }
      function topFunction() {
        document.body.scrollTop = 0;
        document.documentElement.scrollTop = 0;
      }
    </script>
    <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search"</pre>
role="navigation">
      <div class="container">
        <div class="navbar-header">
          <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-</pre>
target="#myNavbar">
            <span class="sr-only">Toggle navigation</span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
          </button>
          <a class="navbar-brand" href="index.php">Ratatouille.com</a>
        </div>
        <div class="collapse navbar-collapse " id="myNavbar">
```

```
<a href="index.php">Home</a>
           <a href="aboutus.php">About</a>
          <a href="contactus.php">Contact Us</a>
         <a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button"</pre>
aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up
<span class="caret"></span> </a>
              <a href="customersignup.php"> User Sign-up</a>
            <a href="managersignup.php"> Manager Sign-up</a>
           <a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button"</pre>
aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login
<span class="caret"></span></a>
            <a href="customerlogin.php"> User Login</a>
            <a href="managerlogin.php"> Manager Login</a>
          </div>
     </div>
   </nav>
   <div class="container">
   <div class="jumbotron">
    <h1 style="color: white">Hi Guest,<br> Welcome to Ratatouille.com </h1>
  Feeling hungry? Then LOGIN ASAP
   </div>
   </div>
   <div class="container" style="margin-top: 4%; margin-bottom: 2%;">
     <div class="col-md-5 col-md-offset-4">
       <label style="margin-left: 5px;color: red;"><span> <?php echo $error; ?> </span></label>
     <div class="panel panel-primary">
       <div class="panel-heading"> Login </div>
       <div class="panel-body">
       <form action="" method="POST">
       <div class="row">
         <div class="form-group col-xs-12">
          <label for="username"><span class="text-danger" style="margin-right: 5px;">*</span>
Username: </label>
          <div class="input-group">
            <input class="form-control" id="username" type="text" name="username"</pre>
placeholder="Username" required="" autofocus="">
            <span class="input-group-btn">
              <label class="btn btn-dark"><span class="glyphicon glyphicon-user" aria-</pre>
hidden="true"></label>
          </span>
            </span>
           </div>
         </div>
```

```
</div>
        <div class="row">
          <div class="form-group col-xs-12">
            <label for="password"><span class="text-danger" style="margin-right: 5px;">*</span>
Password: </label>
            <div class="input-group">
              <input class="form-control" id="password" type="password" name="password"</pre>
placeholder="Password" required="">
              <span class="input-group-btn">
                <label class="btn btn-dark"><span class="glyphicon glyphicon-lock" aria-</pre>
hidden="true"></span></label>
            </span>
            </div>
          </div>
        </div>
        <div class="row">
          <div class="form-group col-xs-4">
              <button class="btn btn-dark" name="submit" type="submit" value=" Login
">Submit</button>
          </div>
        </div>
        <label style="margin-left: 5px;">or</label> <br>
       <label style="margin-left: 5px;"><a href="customersignup.php">Create a new
account.</a></label>
        </form>
        </div>
      </div>
    </div>
    </div>
    </body>
</html>
```

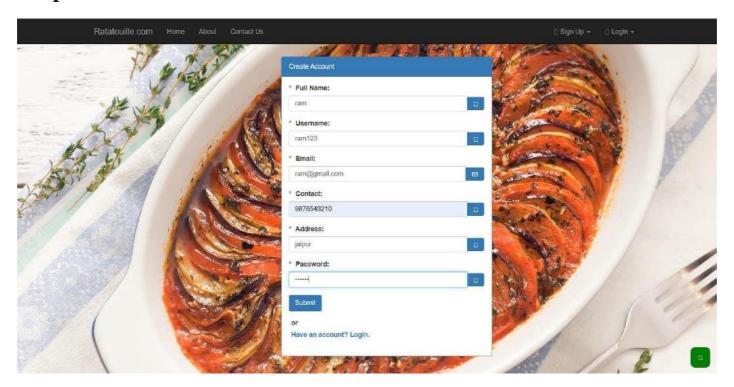

#### For Manager(admin):

```
<?php
include('login_m.php'); // Includes Login Script
if(isset($_SESSION['login_user1'])){
header("location: myrestaurant.php"); //Redirecting to myrestaurant Page
}
?>
<!DOCTYPE html>
<html>
  <head>
    <title> Manager Login | Ratatouille.com </title>
  </head>
  <link rel="stylesheet" type = "text/css" href ="css/managerlogin.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.css">
  <script type="text/javascript" src="js/jquery.min.js"></script>
  <script type="text/javascript" src="js/bootstrap.min.js"></script>
  <body style="background-image: url(bst.png); background-attachment: fixed; background-</pre>
size: cover">
    <button onclick="topFunction()" id="myBtn" title="Go to top">
      <span class="glyphicon glyphicon-chevron-up"></span>
    </button>
    <script type="text/javascript">
      window.onscroll = function()
      {
```

```
scrollFunction()
     };
     function scrollFunction(){
       if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
        document.getElementById("myBtn").style.display = "block";
         document.getElementById("myBtn").style.display = "none";
     }
     function topFunction() {
       document.body.scrollTop = 0;
       document.documentElement.scrollTop = 0;
     }
   </script>
   <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search"</pre>
role="navigation">
     <div class="container">
       <div class="navbar-header">
         <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-</pre>
target="#myNavbar">
          <span class="sr-only">Toggle navigation</span>
          <span class="icon-bar"></span>
          <span class="icon-bar"></span>
          <span class="icon-bar"></span>
         <a class="navbar-brand" href="index.php">Ratatouille.com</a>
       </div>
       <div class="collapse navbar-collapse " id="myNavbar">
         <a href="index.php">Home</a>
          <a href="aboutus.php">About</a>
          <a href="contactus.php">Contact Us</a>
         <a href="#" class="dropdown-toggle active" data-toggle="dropdown"</li>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
user"></span> Sign Up <span class="caret"></span> </a>
              <a href="customersignup.php"> User Sign-up</a>
            <a href="managersignup.php"> Manager Sign-up</a>
          <a href="#" class="dropdown-toggle active" data-toggle="dropdown"</li>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
log-in"></span> Login <span class="caret"></span></a>
            <a href="customerlogin.php"> User Login</a>
            <a href="managerlogin.php"> Manager Login</a>
          </div>
```

```
</div>
    </nav>
    <div class="container">
    <div class="jumbotron">
     <h1 style="color: white">Welcome to Ratatouille.com </h1>
   Kindly LOGIN to continue.
    </div>
    <div class="container" style="margin-top: 4%; margin-bottom: 2%;">
      <div class="col-md-5 col-md-offset-4">
        <label style="margin-left: 5px;color: red;"><span> <?php echo $error; ?>
</span></label>
      <div class="panel panel-primary">
        <div class="panel-heading"> Login </div>
        <div class="panel-body">
        <form action="" method="POST">
        <div class="row">
          <div class="form-group col-xs-12">
            <label for="username"><span class="text-danger" style="margin-right:</pre>
5px;">*</span> Username: </label>
            <div class="input-group">
              <input class="form-control" id="username" type="text" name="username"</pre>
placeholder="Username" required="" autofocus="">
              <span class="input-group-btn">
                <label class="btn btn-primary"><span class="glyphicon glyphicon-user" aria-</pre>
hidden="true"></label>
            </span>
              </span>
            </div>
          </div>
        </div>
        <div class="row">
          <div class="form-group col-xs-12">
            <label for="password"><span class="text-danger" style="margin-right:</pre>
5px;">*</span> Password: </label>
            <div class="input-group">
              <input class="form-control" id="password" type="password" name="password"</pre>
placeholder="Password" required="">
              <span class="input-group-btn">
                <label class="btn btn-primary"><span class="glyphicon glyphicon-lock" aria-</pre>
hidden="true"></span></label>
            </span>
            </div>
          </div>
        </div>
        <div class="row">
          <div class="form-group col-xs-4">
              <button class="btn btn-primary" name="submit" type="submit" value=" Login</pre>
">Submit</button>
          </div>
```

```
### File Edit Selection View Go Run Terminal Help minargaringspaphy-Online-food-Order-Visual Budio-Code

***Demonsparingspaphy X**

***Demonsparingspaphy > Q-bmil

| html
| thml
| dead)
| dead)
| dead-stylasheet* type = "text/css" herf ="css/managersignup.css">
| disk rol="stylasheet" type = "text/sss-min.js">
| disk rol="stylasheet" type = "text/sss-min.js">
| dosy style="background-image: url(lab.jpg); background-attacheent: fixed; background-size: cover">
| dosy style="background-image: url(lab.jpg); background-attacheent: fixed; background-size: cover">
| dost to occlick="teprinection() if "open to top">
| cspn class="glyphic on glyphic on chevron up">
| dost to occlick="teprinection() if "open to occlick="teprinection() if (document.dost) scrolling > 20 || document.dost chevron up">
| script type="text/javacript">
| function scrollinection() if (document.dost replication() if (document.
```




# **Customer Dashboard:**

```
<?php
session_start();
?>
<html>
  <head>
    <title> Home | Ratatouille </title>
  </head>
 <link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
 <link rel="stylesheet" type = "text/css" href ="css/index.css">
  <body style="background-color: f5f4ef">
    <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search"</pre>
role="navigation" id="color-of-navbar">
      <div class="container">
        <div class="navbar-header">
          <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-</pre>
target="#myNavbar">
            <span class="sr-only">Toggle navigation</span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
          </button>
          <a class="navbar-brand" href="index.php">Ratatouille.com</a>
        </div>
        <div class="collapse navbar-collapse " id="myNavbar">
```

```
<a href="index.php">Home</a>
         <a href="aboutus.php">About</a>
         <a href="contactus.php">Contact Us</a>
        <?php
if(isset($ SESSION['login user1'])){
?>
        <a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php</a>
echo $_SESSION['login_user1']; ?> </a>
         <a href="myrestaurant.php">MANAGER CONTROL PANEL</a>
         <a href="logout m.php"><span class="glyphicon glyphicon-log-out"></span> Log</a>
Out </a>
        <?php
}
else if (isset($_SESSION['login_user2'])) {
 ?>
         <a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php</a>
echo $_SESSION['login_user2']; ?> </a>
         <a href="foodlist.php"><span class="glyphicon glyphicon-cutlery"></span>
Food Zone </a>
         <a href="cart.php"><span class="glyphicon glyphicon-shopping-cart"></span></a>
Cart
           (<?php
           if(isset($_SESSION["cart"])){
           $count = count($_SESSION["cart"]);
           echo "$count";
         }
           else
             echo "0";
           >>)
          </a>
         <a href="logout_u.php"><span class="glyphicon glyphicon-log-out"></span> Log
Out </a>
        <?php
}
else {
 ?>
<a href="#" class="dropdown-toggle active" data-toggle="dropdown"</li>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
user"></span> Sign Up <span class="caret"></span> </a>
             <a href="customersignup.php"> User Sign-up</a>
           <a href="managersignup.php"> Manager Sign-up</a>
```

```
<a href="#" class="dropdown-toggle active" data-toggle="dropdown"</li>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
log-in"></span> Login <span class="caret"></span></a>
             <a href="customerlogin.php"> User Login</a>
             <a href="managerlogin.php"> Manager Login</a>
           <?php
}
?>
      </div>
     </div>
   </nav>
   <div class="wide">
       <div class="col-xs-5 line"><hr></div>
       <img src="images/Logozlatan.jpg">
   </div>
   <br>
   <div class="orderblock">
   <h2>Grab a Bite?</h2>
<a href="customerlogin.php" class="btn btn-danger btn-lg active" class="btn btn-outline-</pre>
dark" role="button" aria-pressed="true">Order Now</a>
   </div>
</body>
</html>
```

```
| The Lost Selection View Go Run Nemmind Help addresspre-Contentional Code
| Department | Depart
```

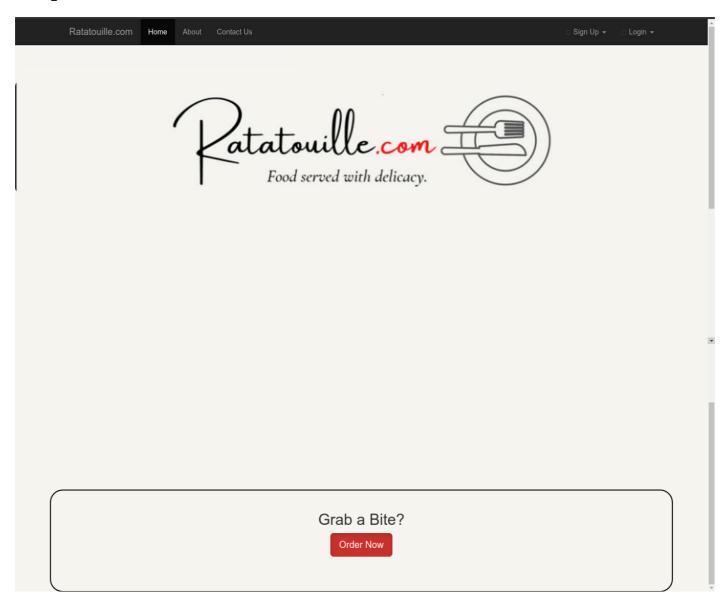

# **Explore Page (Food Items):**


```
<link rel="stylesheet" type = "text/css" href ="css/foodlist.css">
  <link rel="stylesheet" type = "text/css" href ="css/bootstrap.css">
  <script type="text/javascript" src="js/jquery.min.js"></script>
  <script type="text/javascript" src="js/bootstrap.min.js"></script>
  <body style="background-image: url(bat.jpg); background-attachment: fixed; background-</pre>
size: cover">
    <button onclick="topFunction()" id="myBtn" title="Go to top">
      <span class="glyphicon glyphicon-chevron-up"></span>
    </button>
    <script type="text/javascript">
     window.onscroll = function()
       scrollFunction()
      };
      function scrollFunction(){
        if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
          document.getElementById("myBtn").style.display = "block";
         document.getElementById("myBtn").style.display = "none";
        }
      }
      function topFunction() {
        document.body.scrollTop = 0;
        document.documentElement.scrollTop = 0;
      }
    </script>
    <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search"</pre>
role="navigation" id="nav-color">
      <div class="container">
        <div class="navbar-header">
          <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-</pre>
target="#myNavbar">
           <span class="sr-only">Toggle navigation</span>
           <span class="icon-bar"></span>
           <span class="icon-bar"></span>
            <span class="icon-bar"></span>
          </button>
          <a class="navbar-brand" href="index.php">Ratatouille.com</a>
        <div class="collapse navbar-collapse" id="myNavbar nav-color">
          <a href="index.php">Home</a>
            <a href="aboutus.php">About</a>
           <a href="contactus.php">Contact Us</a>
          if(isset($_SESSION['login_user1'])){
?>
```

```
<a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php</a>
echo $ SESSION['login user1']; ?> </a>
          <a href="myrestaurant.php">MANAGER CONTROL PANEL</a>
          <a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log
Out </a>
        <?php
}
else if (isset($_SESSION['login_user2'])) {
 ?>
         <a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php</a>
echo $_SESSION['login_user2']; ?> </a>
          <a href="foodlist.php"><span class="glyphicon glyphicon-</pre>
cutlery"></span> Food Zone </a>
          <a href="cart.php"><span class="glyphicon glyphicon-shopping-cart"></span></a>
Cart (<?php
           if(isset($ SESSION["cart"])){
           $count = count($_SESSION["cart"]);
           echo "$count";
         }
           else
             echo "0";
           ?>) </a>
          <a href="logout_u.php"><span class="glyphicon glyphicon-log-out"></span> Log
Out </a>
        <?php
}
else {
 ?>
<a href="#" class="dropdown-toggle active" data-toggle="dropdown"</pre>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
user"></span> Sign Up <span class="caret"></span> </a>
             <a href="customersignup.php"> User Sign-up</a>
           <a href="managersignup.php"> Manager Sign-up</a>
           <a href="#"> Admin Sign-up</a>
          <a href="#" class="dropdown-toggle active" data-toggle="dropdown"</li>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
log-in"></span> Login <span class="caret"></span></a>
           <a href="customerlogin.php"> User Login</a>
           <a href="managerlogin.php"> Manager Login</a>
           <a href="#"> Admin Login</a>
          <?php
}
?>
```


```
</div>
     </div>
   </nav>
   <div id="myCarousel" class="carousel slide" data-ride="carousel">
   <div class="carousel-inner">
     <div class="item active">
     <img src="images/slide002.jpg" style="width:100%;">
     <div class="carousel-caption">
     </div>
     </div>
     <!--div class="item">
     <img src="images/home.jpg" style="width:100%;">
     <div class="carousel-caption">
     </div>
     </div-->
     <div class="item">
     <img src="images/slide001.jpg" style="width:100%;">
     <div class="carousel-caption">
     </div>
     </div>
     <div class="item">
     <img src="images/slide003.jpg" style="width:100%;">
     <div class="carousel-caption">
     </div>
     </div>
   </div>
  <a class="left carousel-control" href="#myCarousel" data-slide="prev">
     <span class="glyphicon glyphicon-chevron-left"></span>
     <span class="sr-only">Previous</span>
   <a class="right carousel-control" href="#myCarousel" data-slide="next">
     <span class="glyphicon glyphicon-chevron-right"></span>
     <span class="sr-only">Next</span>
   </a>
   </div>
<div class="jumbotron">
 <div class="container text-center">
   <h1 style="color: white">Welcome To Ratatouille.com'</h1>
   <!--p>Let food be thy medicine and medicine be thy food</p-->
 </div>
</div>
<div class="container" style="width:95%;">
```


```
<!-- Display all Food from food table -->
<?php
require 'connection.php';
$conn = Connect();
$sql = "SELECT * FROM FOOD WHERE options = 'ENABLE' ORDER BY F_ID";
$result = mysqli query($conn, $sql);
if (mysqli num rows($result) > 0)
  $count=0;
  while($row = mysqli_fetch_assoc($result)){
    if ($count == 0)
      echo "<div class='row'>";
<div class="col-md-3">
<form method="post" action="cart.php?action=add&id=<?php echo $row["F_ID"]; ?>">
<div class="mypanel" align="center";>
<img src="<?php echo $row["images path"]; ?>" class="img-responsive">
<h4 class="text-dark"><?php echo $row["name"]; ?></h4>
<h5 class="text-info"><?php echo $row["description"]; ?></h5>
<h5 class="text-danger">&#8377; <?php echo $row["price"]; ?>/-</h5>
<h5 class="text-info">Quantity: <input type="number" min="1" max="25" name="quantity"</pre>
class="form-control" value="1" style="width: 60px;"> </h5>
<input type="hidden" name="hidden_name" value="<?php echo $row["name"]; ?>">
<input type="hidden" name="hidden_price" value="<?php echo $row["price"]; ?>">
<input type="hidden" name="hidden_RID" value="<?php echo $row["R_ID"]; ?>">
<input type="submit" name="add" style="margin-top:5px;" class="btn btn-danger" value="Add to</pre>
Cart">
</div>
</form>
</div>
<?php
$count++;
if($count==4)
{
  echo "</div>";
  $count=0;
}
}
?>
</div>
</div>
<?php
}
else
  ?>
  <div class="container">
    <div class="jumbotron">
      <center>
```

```
| No. | Ref. | Set. | S
```

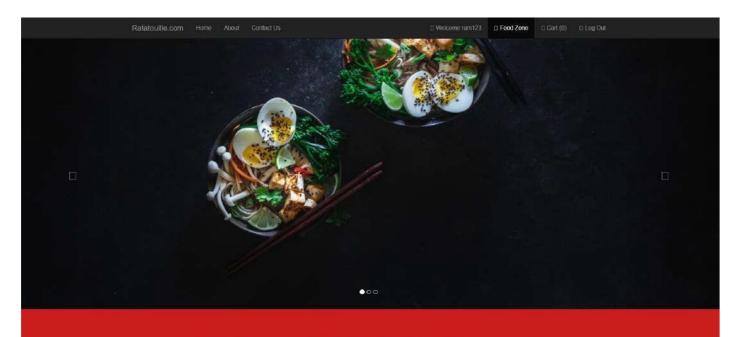

# Welcome To Ratatouille.com'

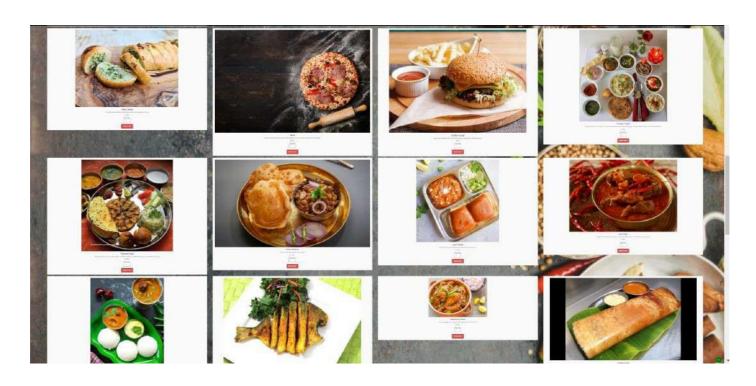

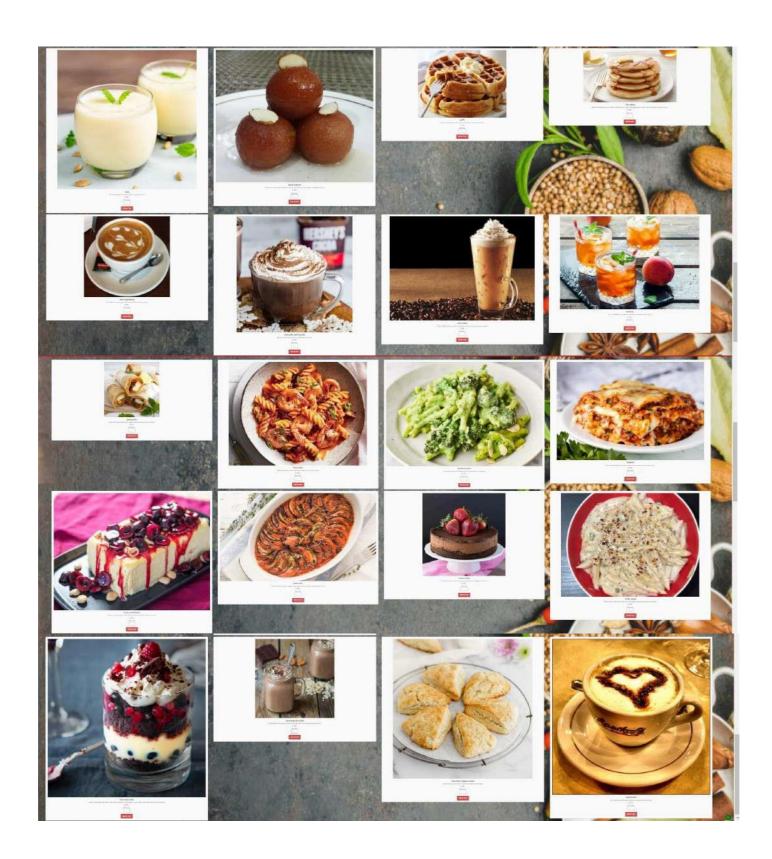

# **Cart Functionality:**


```
<?php
session_start();
require 'connection.php';
$conn = Connect();
if(!isset($_SESSION['login_user2'])){
header("location: customerlogin.php");
?>
<html>
  <head>
    <title> Cart | Ratatouille.com </title>
    <!-- <style>
      body { background: "ra.jp"; background-size: 100% 100% }
    </style> -->
  </head>
  <link rel="stylesheet" type = "text/css" href ="css/cart.css">
  <link rel="stylesheet" type = "text/css" href ="css/bootstrap.css">
  <script type="text/javascript" src="js/jquery.min.js"></script>
  <script type="text/javascript" src="js/bootstrap.min.js"></script>
  <body background="ra.jpg";>
    <button onclick="topFunction()" id="myBtn" title="Go to top">
      <span class="glyphicon glyphicon-chevron-up"></span>
    </button>
    <script type="text/javascript">
      window.onscroll = function()
        scrollFunction()
      };
      function scrollFunction(){
        if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
          document.getElementById("myBtn").style.display = "block";
          document.getElementById("myBtn").style.display = "none";
        }
      }
      function topFunction() {
        document.body.scrollTop = 0;
        document.documentElement.scrollTop = 0;
      }
    </script>
    <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search"</pre>
role="navigation">
      <div class="container">
        <div class="navbar-header">
          <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-</pre>
target="#myNavbar">
            <span class="sr-only">Toggle navigation</span>
```


```
<span class="icon-bar"></span>
          <span class="icon-bar"></span>
          <span class="icon-bar"></span>
        </button>
        <a class="navbar-brand" href="index.php">Ratatouille.com</a>
       </div>
       <div class="collapse navbar-collapse " id="myNavbar">
        <a href="index.php">Home</a>
          <a href="aboutus.php">About</a>
          <a href="contactus.php">Contact Us</a>
        <?php
if(isset($_SESSION['login_user1'])){
?>
        <a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php</a>
echo $ SESSION['login user1']; ?> </a>
          <a href="myrestaurant.php">MANAGER CONTROL PANEL</a>
          <a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log
Out </a>
        <?php
}
else if (isset($_SESSION['login_user2'])) {
 ?>
         <a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php</a>
echo $ SESSION['login user2']; ?> </a>
          <a href="foodlist.php"><span class="glyphicon glyphicon-cutlery"></span>
Food Zone </a>
          <a href="foodlist.php"><span class="glyphicon glyphicon-</pre>
shopping-cart"></span> Cart
           (<?php
            if(isset($ SESSION["cart"])){
            $count = count($ SESSION["cart"]);
            echo "$count";
          }
            else
             echo "0";
            </a>
          <a href="logout u.php"><span class="glyphicon glyphicon-log-out"></span> Log</a>
Out </a>
        <?php
}
else {
 ?>
<a href="#" class="dropdown-toggle active" data-toggle="dropdown"</li>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
user"></span> Sign Up <span class="caret"></span> </a>
```

```
<a href="customersignup.php"> User Sign-up</a>
          <a href="managersignup.php"> Manager Sign-up</a>
          <a href="#"> Admin Sign-up</a>
         <a href="#" class="dropdown-toggle active" data-toggle="dropdown"</li>
role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-
log-in"></span> Login <span class="caret"></span></a>
          <a href="customerlogin.php"> User Login</a>
          <a href="managerlogin.php"> Manager Login</a>
          <a href="#"> Admin Login</a>
         <?php
}
?>
      </div>
    </div>
   </nav>
<?php
if(!empty($_SESSION["cart"]))
{
 ?>
 <div class="container">
    <div class="jumbotron">
      <h1 style="color: white">Your Shopping Cart</h1>
      yummmmmmm!!!
    </div>
   </div>
   <div class="table-responsive" style="padding-left: 100px; padding-right: 100px;" >
<thead class="thead-dark">
Food Name
Quantity
Price Details
Order Total
Action
</thead>
<?php
total = 0;
foreach($ SESSION["cart"] as $keys => $values)
?>
<?php echo $values["food_name"]; ?>
```


```
<?php echo $values["food quantity"] ?>
₹ <?php echo $values["food_price"]; ?>
₹ <?php echo number_format($values["food_quantity"] * $values["food_price"], 2);
?>
<a href="cart.php?action=delete&id=<?php echo $values["food_id"]; ?>"><span class="text-
danger">Remove</span></a>
<?php
$total = $total + ($values["food quantity"] * $values["food price"]);
<?
Total
₹ <?php echo number_format($total, 2); ?>
<
<?php
 echo '<a href="cart.php?action=empty"><button class="btn btn-danger"><span
class="glyphicon glyphicon-trash"></span> Empty Cart</button></a>&nbsp;<a</pre>
href="foodlist.php"><button class="btn btn-warning">Continue Shopping</button></a>&nbsp;<a
href="payment.php"><button class="btn btn-success pull-right"><span class="glyphicon"</pre>
glyphicon-share-alt"></span> Check Out</button></a>';
?>
</div>
<?php
if(empty($_SESSION["cart"]))
 ?>
 <div class="container">
     <div class="jumbotron">
       <h1 style="color: white">Your Shopping Cart</h1>
       Oops! We can't smell any food here. Go back and <a</pre>
href="foodlist.php" style="color: black">order now.</a>
     </div>
   <?php
}
?>
<?php
if(isset($ POST["add"]))
if(isset($_SESSION["cart"]))
$item_array_id = array_column($_SESSION["cart"], "food_id");
if(!in_array($_GET["id"], $item_array_id))
$count = count($_SESSION["cart"]);
$item_array = array(
'food_id' => $_GET["id"],
'food name' => $ POST["hidden name"],
'food_price' => $_POST["hidden_price"],
```

```
'R ID' => $ POST["hidden RID"],
'food_quantity' => $_POST["quantity"]
$_SESSION["cart"][$count] = $item_array;
echo '<script>window.location="cart.php"</script>';
else
{
echo '<script>alert("Products already added to cart")</script>';
echo '<script>window.location="cart.php"</script>';
}
else
$item_array = array(
'food_id' => $_GET["id"],
'food name' => $ POST["hidden name"],
'food_price' => $_POST["hidden_price"],
'R_ID' => $_POST["hidden_RID"],
'food_quantity' => $_POST["quantity"]
$_SESSION["cart"][0] = $item_array;
if(isset($_GET["action"]))
if($_GET["action"] == "delete")
foreach($_SESSION["cart"] as $keys => $values)
{
if($values["food_id"] == $_GET["id"])
unset($ SESSION["cart"][$keys]);
echo '<script>alert("Food has been removed")</script>';
echo '<script>window.location="cart.php"</script>';
}
}
}
}
if(isset($_GET["action"]))
if($_GET["action"] == "empty")
foreach($_SESSION["cart"] as $keys => $values)
unset($ SESSION["cart"]);
echo '<script>alert("Cart is made empty!")</script>';
echo '<script>window.location="cart.php"</script>';
}
}
}
?>
<?php
?>
```

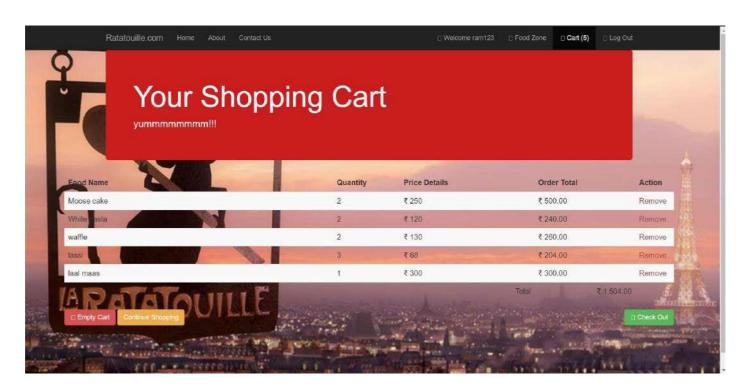

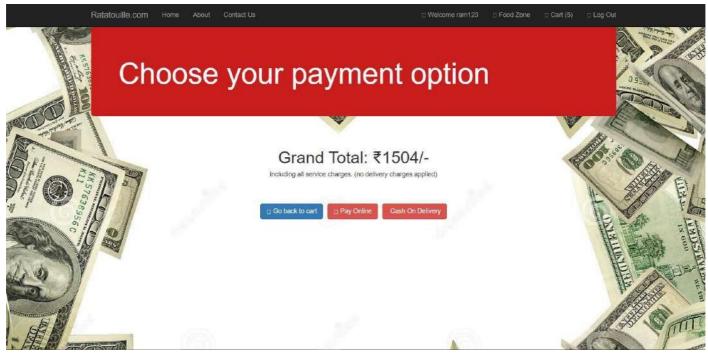



# **Resultant Page:**

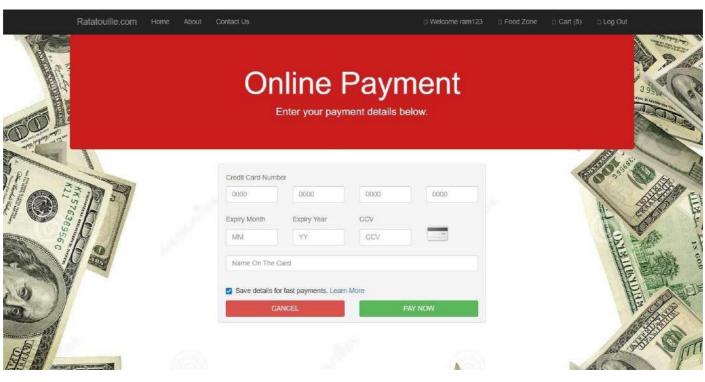



# **Admin Dashboard:**

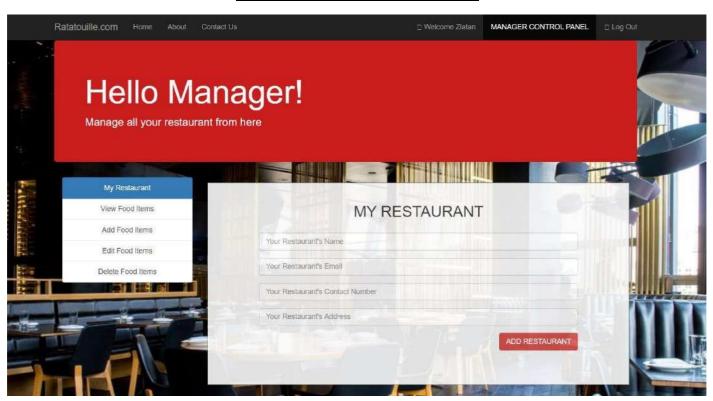

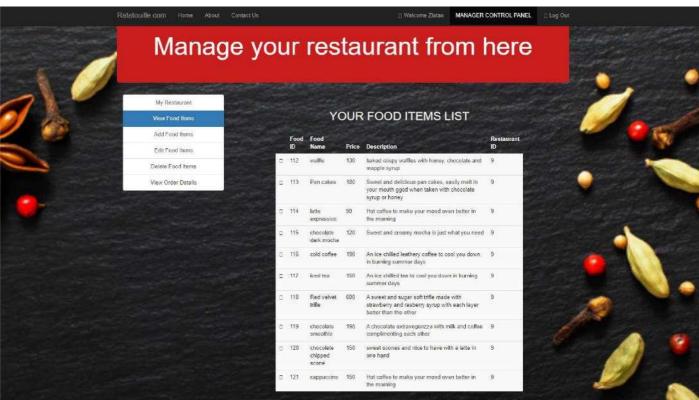


### **Admin Add Items:**

```
<?php
include('session_m.php');
if(!isset($login_session)){
header('Location: managerlogin.php');
}
?>
<!DOCTYPE html>
<html>
  <head>
    <title> Manager Login | Ratatouille.com </title>
  </head>
  <link rel="stylesheet" type = "text/css" href ="css/add food items.css">
  <link rel="stylesheet" type = "text/css" href ="css/bootstrap.css">
  <script type="text/javascript" src="js/jquery.min.js"></script>
  <script type="text/javascript" src="js/bootstrap.min.js"></script>
  <body style="background-image: url(pi.jpg); background-attachment: fixed; background-size:</pre>
cover">
    <button onclick="topFunction()" id="myBtn" title="Go to top">
      <span class="glyphicon glyphicon-chevron-up"></span>
    </button>
    <script type="text/javascript">
      window.onscroll = function()
      {
        scrollFunction()
      };
      function scrollFunction(){
        if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
          document.getElementById("myBtn").style.display = "block";
        } else {
          document.getElementById("myBtn").style.display = "none";
      }
      function topFunction() {
        document.body.scrollTop = 0;
        document.documentElement.scrollTop = 0;
      }
    </script>
    <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search"</pre>
role="navigation">
      <div class="container">
        <div class="navbar-header">
          <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-</pre>
target="#myNavbar">
            <span class="sr-only">Toggle navigation</span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
         </button>
         <a class="navbar-brand" href="index.php">Ratatouille.com</a>
       </div>
       <div class="collapse navbar-collapse " id="myNavbar">
         <a href="index.php">Home</a>
           <a href="aboutus.php">About</a>
           <a href="contactus.php">Contact Us</a>
         <a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php
echo $login_session; ?> </a>
            <a href="managerlogin.php">MANAGER CONTROL PANEL</a>
           <a href="logout m.php"><span class="glyphicon glyphicon-log-out"></span> Log</a>
Out </a>
         </div>
     </div>
   </nav>
<div class="container">
   <div class="jumbotron">
    <h1 style="color: white; text-align: center;">Manage your restaurant from here</h1>
   </div>
   </div>
<div class="container">
   <div class="container">
     <div class="col">
     </div>
   </div>
     <div class="col-xs-3" style="text-align: center;">
     <div class="list-group">
       <a href="myrestaurant.php" class="list-group-item ">My Restaurant</a>
       <a href="add_food_items.php" class="list-group-item active">Add Food Items</a>
       <a href="edit_food_items.php" class="list-group-item ">Edit Food Items</a>
       <a href="delete_food_items.php" class="list-group-item">Delete Food Items</a>
     </div>
   </div>
   <div class="col-xs-9">
     <div class="form-area" style="padding: 0px 100px 100px 100px;">
       <form action="add_food_items1.php" method="POST">
       <br style="clear: both">
         <h3 style="margin-bottom: 25px; text-align: center; font-size: 30px;"> ADD NEW
FOOD ITEM HERE </h3>
         <div class="form-group">
```

```
<input type="text" class="form-control" id="name" name="name" placeholder="Your</pre>
Food name" required="">
          </div>
          <div class="form-group">
            <input type="text" class="form-control" id="price" name="price"</pre>
placeholder="Your Food Price (INR)" required="">
          </div>
          <div class="form-group">
            <input type="text" class="form-control" id="description" name="description"</pre>
placeholder="Your Food Description" required="">
          </div>
          <div class="form-group">
            <input type="text" class="form-control" id="images_path" name="images_path"</pre>
placeholder="Your Food Image Path [images/<filename>.<extention>]" required="">
          </div>
          <div class="form-group">
          <button type="submit" id="submit" name="submit" class="btn btn-danger pull-right">
ADD FOOD </button>
      </div>
        </form>
        </div>
    </div>
</div>
  </body>
</html>
```

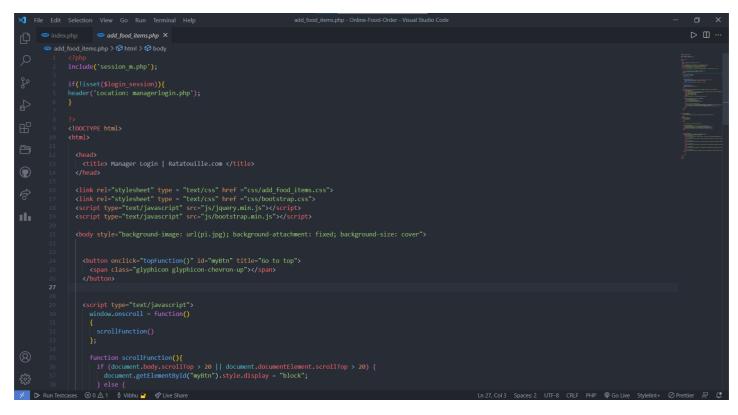

### **Admin Edit Items:**

```
<?php
include('session_m.php');
if(!isset($login_session)){
header('Location: managerlogin.php');
}
?>
<!DOCTYPE html>
<html>
  <head>
    <title> Manager Login | Ratatouille.com </title>
  </head>
  <link rel="stylesheet" type = "text/css" href ="css/edit food items.css">
  <link rel="stylesheet" type = "text/css" href ="css/bootstrap.css">
  <script type="text/javascript" src="js/jquery.min.js"></script>
  <script type="text/javascript" src="js/bootstrap.min.js"></script>
  <script type="text/javascript">
    function display_alert()
      alert("Data Updated Successfully...!!!");
  </script>
  <body style="background-image: url(wq.jpg); background-attachment: fixed; background-size:</pre>
cover">
    <button onclick="topFunction()" id="myBtn" title="Go to top">
      <span class="glyphicon glyphicon-chevron-up"></span>
    </button>
    <script type="text/javascript">
      window.onscroll = function()
        scrollFunction()
      };
      function scrollFunction(){
        if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
          document.getElementById("myBtn").style.display = "block";
        } else {
          document.getElementById("myBtn").style.display = "none";
        }
      }
      function topFunction() {
        document.body.scrollTop = 0;
        document.documentElement.scrollTop = 0;
      }
    </script>
    <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search"</pre>
role="navigation">
      <div class="container">
```

```
<div class="navbar-header">
         <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-</pre>
target="#myNavbar">
           <span class="sr-only">Toggle navigation</span>
           <span class="icon-bar"></span>
           <span class="icon-bar"></span>
           <span class="icon-bar"></span>
         <a class="navbar-brand" href="index.php">Ratatouille.com</a>
       <div class="collapse navbar-collapse " id="myNavbar">
         <a href="index.php">Home</a>
           <a href="aboutus.php">About</a>
           <a href="contactus.php">Contact Us</a>
         <a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php</a>
echo $login_session; ?> </a>
           class="active"> <a href="managerlogin.php">MANAGER CONTROL PANEL</a>
           <a href="logout m.php"><span class="glyphicon glyphicon-log-out"></span> Log
Out </a>
         </div>
     </div>
   </nav>
<div class="container">
   <div class="jumbotron">
    <h1 style="color: white; text-align: center;">Manage your restaurant from here</h1>
   </div>
   </div>
<div class="container">
   <div class="container">
     <div class="col">
     </div>
   </div>
     <div class="col-xs-3" style="text-align: center;">
     <div class="list-group">
       <a href="myrestaurant.php" class="list-group-item ">My Restaurant</a>
       <a href="view_food_items.php" class="list-group-item ">View Food Items</a>
       <a href="add_food_items.php" class="list-group-item ">Add Food Items</a>
       <a href="edit food items.php" class="list-group-item active">Edit Food Items</a>
       <a href="delete_food_items.php" class="list-group-item">Delete Food Items</a>
       <a href="view order details.php" class="list-group-item ">View Order Details</a>
     </div>
   </div>
```

```
<div class="col-xs-3">
  <div class="form-area" style="padding: 10px 10px 110px 10px; ">
    <div style="text-align: center;">
      <h3>Click On Menu <br><<br></h3>
    </div>
    <?php
    if (isset($_GET['submit'])) {
    $F_ID = $_GET['dfid'];
    $name = $ GET['dname'];
    $price = $_GET['dprice'];
    $description = $_GET['ddescription'];
    $query = mysqli_query($conn, "UPDATE food set
    name='$name', price='$price',
    description='$description' where F_ID='$F_ID'");
    $query = mysqli_query($conn, "SELECT * FROM food f WHERE f.R_ID IN (SELECT r.R_ID FROM
RESTAURANTS r WHERE r.M_ID='$user_check') ORDER BY F_ID");
    while ($row = mysqli_fetch_array($query)) {
      ?>
      <div class="list-group" style="text-align: center;">
      echo "<b><a href='edit_food_items.php?update= {$row['F_ID']}'>{$row['name']}</a></b>";
        ?>
      </div>
    <?php
    }
    ?>
    <?php
    if (isset($_GET['update'])) {
    $update = $_GET['update'];
    $query1 = mysqli_query($conn, "SELECT * FROM food WHERE F_ID=$update");
    while ($row1 = mysqli_fetch_array($query1)) {
    ?>
</div>
</div>
<div class="container">
<div class="col-md-6">
 <div class="form-area" style="padding: 0px 100px 100px 100px;">
        <form action="edit_food_items.php" method="GET">
        <br style="clear: both">
          <h3 style="margin-bottom: 25px; text-align: center; font-size: 30px;"> EDIT YOUR
FOOD ITEMS HERE </h3>
```

```
<div class="form-group">
            <input class='input' type='hidden' name="dfid" value=<?php echo $row1['F_ID'];</pre>
 ?> />
          </div>
          <div class="form-group">
            <label for="username"><span class="text-danger" style="margin-right:</pre>
5px;">*</span> Food Name: </label>
            <input type="text" class="form-control" id="dname" name="dname" value=<?php echo</pre>
$row1['name']; ?> placeholder="Your Food name" required="">
          </div>
          <div class="form-group">
            <label for="username"><span class="text-danger" style="margin-right:</pre>
5px;">*</span> Food Price: </label>
            <input type="text" class="form-control" id="dprice" name="dprice" value=<?php</pre>
echo $row1['price']; ?> placeholder="Your Food Price (INR)" required="">
          </div>
          <div class="form-group">
            <label for="username"><span class="text-danger" style="margin-right:</pre>
5px;">*</span> Food Description: </label>
            <input type="text" class="form-control" id="ddescription" name="ddescription"</pre>
value=<?php echo $row1['description']; ?> placeholder="Your Food Description" required="">
          </div>
          <div class="form-group">
          <button type="submit" id="submit" name="submit" class="btn btn-primary pull-right"</pre>
onclick="display_alert()" value="Display alert box" > Update </button>
      </div>
        </form>
    <?php
}
}
  ?>
  </div>
</div>
<?php
mysqli_close($conn);
?>
</div>
</div>
  </body>
<br>
</html>
```

## **Admin Delete Items:**


```
<?php
include('session_m.php');
if(!isset($login_session)){
header('Location: managerlogin.php');
}
?>
<!DOCTYPE html>
<html>
  <head>
    <title> Manager Login | Ratatouille.com </title>
  </head>
  <link rel="stylesheet" type = "text/css" href ="css/delete_food_items.css">
  <link rel="stylesheet" type = "text/css" href ="css/bootstrap.css">
  <script type="text/javascript" src="js/jquery.min.js"></script>
  <script type="text/javascript" src="js/bootstrap.min.js"></script>
  <body style="background-image: url(dt.jpg); background-attachment: fixed; background-size:</pre>
cover">
    <button onclick="topFunction()" id="myBtn" title="Go to top">
      <span class="glyphicon glyphicon-chevron-up"></span>
    </button>
    <script type="text/javascript">
      window.onscroll = function()
      {
        scrollFunction()
      };
```


```
function scrollFunction(){
       if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
         document.getElementById("myBtn").style.display = "block";
         document.getElementById("myBtn").style.display = "none";
       }
     }
     function topFunction() {
       document.body.scrollTop = 0;
       document.documentElement.scrollTop = 0;
     }
   </script>
   <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search"</pre>
role="navigation">
     <div class="container">
       <div class="navbar-header">
         <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-</pre>
target="#myNavbar">
           <span class="sr-only">Toggle navigation</span>
           <span class="icon-bar"></span>
           <span class="icon-bar"></span>
           <span class="icon-bar"></span>
         </button>
         <a class="navbar-brand" href="index.php">Ratatouille.com </a>
       <div class="collapse navbar-collapse " id="myNavbar">
         <a href="index.php">Home</a>
           <a href="aboutus.php">About</a>
           <a href="contactus.php">Contact Us</a>
         <a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php</pre>
echo $login_session; ?> </a>
            <a href="managerlogin.php">MANAGER CONTROL PANEL</a>
           <a href="logout m.php"><span class="glyphicon glyphicon-log-out"></span> Log</a>
Out </a>
         </div>
     </div>
   </nav>
<div class="container">
    <div class="jumbotron">
    <h1 style="color: white; text-align: center;">Manage your restaurant from here </h1>
   </div>
   </div>
<div class="container">
   <div class="container">
     <div class="col">
```


```
</div>
   </div>
     <div class="col-xs-3" style="text-align: center;">
     <div class="list-group">
       <a href="myrestaurant.php" class="list-group-item ">My Restaurant</a>
       <a href="view_food_items.php" class="list-group-item ">View Food Items</a>
       <a href="add_food_items.php" class="list-group-item ">Add Food Items</a>
       <a href="edit_food_items.php" class="list-group-item ">Edit Food Items</a>
       <a href="delete_food_items.php" class="list-group-item active">Delete Food Items</a>
       <a href="view_order_details.php" class="list-group-item ">View Order Details</a>
   </div>
   <div class="col-xs-9">
     <div class="form-area" style="padding: 0px 100px 100px 100px;">
       <form action="delete_food_items1.php" method="POST">
       <br style="clear: both">
         <h3 style="margin-bottom: 25px; text-align: center; font-size: 30px;"> DELETE YOUR
FOOD ITEMS FROM HERE </h3>
<?php
// Storing Session
$user_check=$_SESSION['login_user1'];
$sq1 = "SELECT * FROM food f WHERE f.options = 'ENABLE' AND f.R ID IN (SELECT r.R ID FROM
RESTAURANTS r WHERE r.M ID='$user check') ORDER BY F ID";
$result = mysqli_query($conn, $sql);
if (mysqli num rows($result) > 0)
 ?>
 <thead class="thead-dark">
      # 
        Food ID 
        Food Name 
        Price 
        Description 
        Restaurant ID 
     </thead>
   <?PHP
     //OUTPUT DATA OF EACH ROW
     while($row = mysqli_fetch_assoc($result)){
   ?>
```


```
 <input name="checkbox[]" type="checkbox" value="<?php echo $row['F ID']; ?>"/>
<?php echo $row["F_ID"]; ?>
     <?php echo $row["name"]; ?>
     <?php echo $row["price"]; ?>
     <?php echo $row["description"]; ?>
     <?php echo $row["R_ID"]; ?>
   <?php } ?>
 <br>
         <div class="form-group">
         <br/> <button type="submit" id="submit" name="delete" value="Delete" class="btn btn-
danger pull-right"> DELETE</button>
     </div>
 <?php } else { ?>
 <h4><center>0 RESULTS</center> </h4>
 <?php } ?>
       </form>
       </div>
   </div>
</div>
 </body>
</html>
```

```
| File | Side | Selection | View | Go | Run | Imminul | Helph | Selection | Content |
```

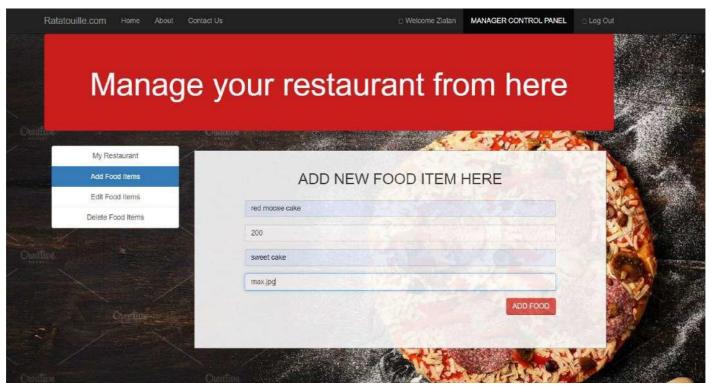


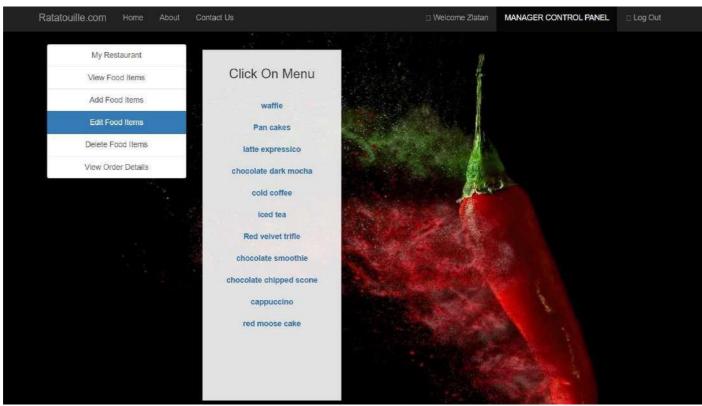


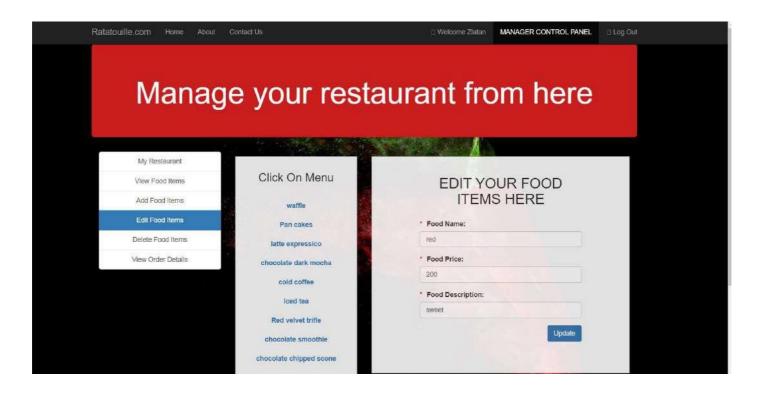

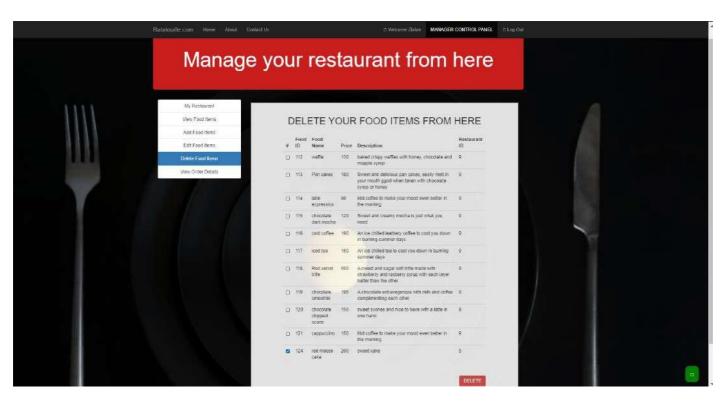



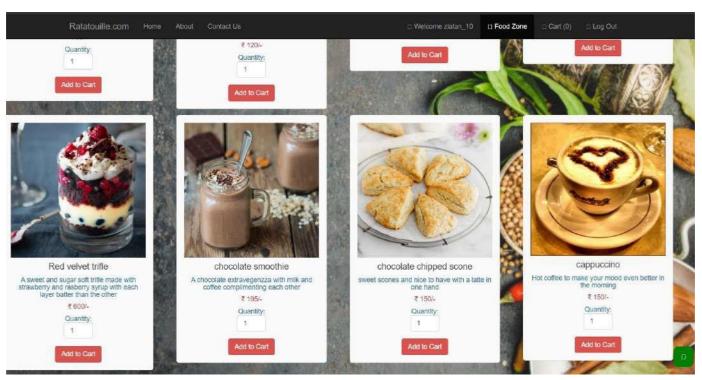

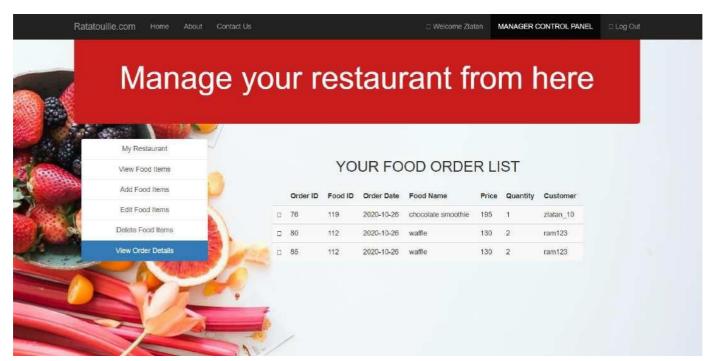

# **Connection File for SQL:**

```
function Connect()
{
    $dbhost = "localhost";
    $dbuser = "root";
    $dbpass = "";
    $dbname = "foodorder";

    //Create Connection
    $conn = new mysqli($dbhost, $dbuser, $dbpass, $dbname) or die($conn->connect_error);
    return $conn;
}
```

### **MYSQL FILE:**

```
SET SQL MODE = "NO AUTO VALUE ON ZERO";
START TRANSACTION;
SET time_zone = "+00:00";
CREATE TABLE `contact` (
  `Name` varchar(250) NOT NULL,
  `Email` varchar(250) NOT NULL,
  `Mobile` varchar(250) NOT NULL,
  `Subject` varchar(250) NOT NULL,
  `Message` varchar(250) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=latin1;
CREATE TABLE `customer` (
  `username` varchar(30) NOT NULL,
  `fullname` varchar(30) NOT NULL,
  `email` varchar(30) NOT NULL,
  `contact` varchar(30) NOT NULL,
  `address` varchar(50) NOT NULL,
  `password` varchar(30) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
INSERT INTO `customer` (`username`, `fullname`, `email`, `contact`, `address`, `password`)
VALUES
('atishey', 'atishay', 'atisay@gmail.com', '654321678', 'mumbai', 'qwerty'),
('avnish89', 'avnish', 'avnish@gmail.com', '7021318567', 'jaipur ', 'avnish'),
('rashi', 'rashi', 'rashi@gmail.com', '3214567890', 'mumbai', 'mumbai'), ('vibhu', 'vibhu', 'vibhu@gmail.com', '1234567890', 'delhi', 'hazard'),
('zlatan_10', 'Anamaya Vyas', 'anamayav@gmail.com', '7021318567', 'new york, central
perk', 'qwerty');
CREATE TABLE `food` (
  `F_ID` int(30) NOT NULL,
  `name` varchar(30) NOT NULL,
  `price` int(30) NOT NULL,
  `description` varchar(200) NOT NULL,
  `R ID` int(30) NOT NULL,
  `images path` varchar(200) NOT NULL,
  `options` varchar(10) NOT NULL DEFAULT 'ENABLE'
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
INSERT INTO `food` (`F_ID`, `name`, `price`, `description`, `R_ID`, `images_path`,
`options`) VALUES
(83, 'spring rolls', 79, 'deep fried spring rolls with veggie munchies just for your
parties', 7, 'qw.jpg', 'ENABLE'), (88, 'Red pasta', 120, 'Made with juicy red tomato sauce with peri peri garnishing', 7,
'image.jpg', 'ENABLE'),
(89, 'tandoori pasta', 175, 'made with indian and italian cuisine ingredients , a
delicacy', 7, 'green.jpg', 'ENABLE'),
(90, 'lasagna', 300, 'An exquisite italian dish with creamy parmegaene chesse and pasta',
7, 'lasa.jpg', 'ENABLE'),
(91, 'honey semifreddo', 200, 'sweet as honey your tummy needs one of this after a dinner
for sure', 7, 'hon.jpg', 'ENABLE'), (93, 'ratatouille', 465, 'A french delicacy with veggies and high nutrition values and
exquisite tatse', 7, 'rat.jpg', 'ENABLE'),
(94, 'Moose cake', 250, 'It melts in mouth, tastes so good that you can\'t really feel
full for it', 7, 'mo.jpg', 'ENABLE'),
```

```
(95, 'White pasta', 120, 'White sauce, with creamy cheese and origeno garnishing with
mushrooms', 7, 'wh.jpg', 'ENABLE'), (97, 'Garlic Bread', 175, 'Freshly baked Garlic bread sticks, with cheesy layers on top',
7, 'garlic.jpg', 'ENABLE'),
(98, 'pizza', 500, 'hand tossed mushroom pizza with jyellepno, corn tomato and peri peri
toppings', 7, 'pi.jpg', 'ENABLE'),
(99, 'chicken burger', 75, 'deep fried chicken with corriender sauce mixed with melting
cheese ', 7, 'burg.jpg', 'ENABLE'),
(100, 'Punjabi Thaali', 400, '2 gulaab jaamun, 2 Naan, 1 lachha parantha, sarson da saag,
gud, chawal, daal makhni and kadhai paneer', 8, 'pun.jpg', 'ENABLE'),
(101, 'Marwari thaali', 400, 'Daal baati, tairi, kair saangri, gatte, 4 fulka, binach,
masala baati, churma, mangorri ro haag', 8, 'raj.jpg', 'ENABLE'),
(102, 'cholle bhature', 175, 'deep fried bhature with spicy cholle', 8, 'ch.jpg',
'ENABLE'),
(103, 'paav bhaaji', 120, 'hot baked paav with spicy and tasty bhaaji to die for', 8,
'pav.jpg', 'ENABLE'),
(104, 'laal maas', 300, 'A rajasthani delicacy made on typical chullah and a royal dish
from rajwaad', 8, 'laal.jpg', 'ENABLE'),
(105, 'iddli sambhar', 90, 'Healthy and tasty iddli sambhar with coconut chutney', 8,
'idli.jpg', 'ENABLE'),
(107, 'rawa fish', 250, 'fried with coconut oil, the occoi fish is mouth watering', 8,
'rawa.jpg', 'ENABLE'),
(108, 'Kadhaai chicken', 500, 'A extraveggenza of spices with rightly cooked chicken', 8,
'kadhaai.jpg', 'ENABLE'),
(109, 'masala dosai', 180, 'paper thin dosaa with spice masala, coconut chutney with
pudhina and sambhar', 8, 'dosa.jpg', 'ENABLE'),
(110, 'lassi', 68, 'curd centrifugated with love with honey sweetness', 8, 'lassi.jpg',
'ENABLE'),
(111, 'gulab jaamun', 190, 'A feast is not complete without a dessert and that not too
without a gulaab jaamun', 8, 'gja.jpg', 'ENABLE'),
(112, 'waffle', 130, 'baked crispy waffles with honey, chocolate and mapple syrup', 9,
'waa.jpg', 'ENABLE'),
(113, 'Pan cakes', 180, 'Sweet and delicious pan cakes, easily melt in your mouth ggod
when taken with chocolate syrup or honey', 9, 'pan.jpg', 'ENABLE'),
(114, 'latte expressico', 90, 'Hot coffee to make your mood even better in the morning',
9, 'latte.jpg', 'ENABLE'),
(115, 'chocolate dark mocha', 120, 'Sweet and creamy mocha is just what you need', 9,
'mocha.jpg', 'ENABLE'),
(116, 'cold coffee', 190, 'An ice chilled leathery coffee to cool you down in burning
summer days', 9, 'cof.jpg', 'ENABLE'), (117, 'iced tea', 150, 'An ice chilled tea to cool you down in burning summer days', 9,
'ice.jpg', 'ENABLE'),
(118, 'Red velvet trifle', 600, 'A sweet and sugar soft trifle made with strawberry and
rasberry syrup with each layer batter than the other', 9, 'rvt.jpg', 'ENABLE'),
(119, 'chocolate smoothie', 195, 'A chocolate extravegenzza with milk and coffee
complimenting each other', 9, 'sm.jpg', 'ENABLE'),
(120, 'chocolate chipped scone', 150, 'sweet scones and nice to have with a latte in one
hand', 9, 'scone.jpg', 'ENABLE'),
(121, 'cappuccino', 150, 'Hot coffee to make your mood even better in the morning', 9,
'cap.jpg', 'ENABLE'),
(124, 'red moose cake', 200, 'sweet cake ', 9, 'max.jpg', 'DISABLE');
CREATE TABLE `manager` (
  `username` varchar(30) NOT NULL,
  `fullname` varchar(30) NOT NULL,
  `email` varchar(30) NOT NULL,
  `contact` varchar(30) NOT NULL,
  `address` varchar(50) NOT NULL,
  `password` varchar(30) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
```

```
INSERT INTO `manager` (`username`, `fullname`, `email`, `contact`, `address`, `password`)
VALUES
('avnish123', 'Avnish Tiwari', 'avnish@gmail.com', '7021318567', 'new york, central perk',
'qwerty'),
('Hazardous', 'vibhu kumar singh', 'vibhu@gmail.com', '876543210', 'Gaziyabad',
'vibhu1224'),
('Zlatan', 'Anamaya Vyas', 'anamayav@gmail.com', '8824969031', 'c-scheme', 'qwerty');
-- Table structure for table `orders`
CREATE TABLE `orders` (
   `order ID` int(30) NOT NULL,
  `F ID` int(30) NOT NULL,
  `foodname` varchar(30) NOT NULL,
   `price` int(30) NOT NULL,
  `quantity` int(30) NOT NULL,
  `order date` date NOT NULL,
  `username` varchar(30) NOT NULL,
  `R ID` int(30) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
INSERT INTO `orders` (`order_ID`, `F_ID`, `foodname`, `price`, `quantity`, `order_date`,
`username`, `R_ID`) VALUES
(70, 99, 'chicken burger', 75, 1, '2020-10-26', 'zlatan_10', 7), (71, 98, 'pizza', 500, 1, '2020-10-26', 'zlatan_10', 7),
(72, 97, 'Garlic Bread', 175, 1, '2020-10-26', 'zlatan_10', 7), (73, 99, 'chicken burger', 75, 1, '2020-10-26', 'zlatan_10', 7),
(74, 98, 'pizza', 500, 1, '2020-10-26', 'zlatan_10', 7),
(74, 98, pizza, 500, 1, 2020-10-20, ziatai_10, 7),
(75, 97, 'Garlic Bread', 175, 1, '2020-10-26', 'zlatan_10', 7),
(76, 119, 'chocolate smoothie', 195, 1, '2020-10-26', 'zlatan_10', 9),
(77, 104, 'laal maas', 300, 1, '2020-10-26', 'zlatan_10', 8),
(78, 94, 'Moose cake', 250, 2, '2020-10-26', 'ram123', 7),
(79, 95, 'White pasta', 120, 2, '2020-10-26', 'ram123', 7),
(80, 112, 'waffle', 130, 2, '2020-10-26', 'ram123', 9),
(81, 110, 'lassi', 68, 3, '2020-10-26', 'ram123', 8),
(82, 104, 'laal maas', 300, 1, '2020-10-26', 'ram123', 8), (83, 94, 'Moose cake', 250, 2, '2020-10-26', 'ram123', 7), (84, 95, 'White pasta', 120, 2, '2020-10-26', 'ram123', 7),
(85, 112, 'waffle', 130, 2, '2020-10-26', 'ram123', 9),
(86, 110, 'lassi', 68, 3, '2020-10-26', 'ram123', 8),
(87, 104, 'laal maas', 300, 1, '2020-10-26', 'ram123', 8);
CREATE TABLE `restaurants` (
   `R_ID` int(30) NOT NULL,
  `name` varchar(30) NOT NULL,
  `email` varchar(30) NOT NULL,
  `contact` varchar(30) NOT NULL,
  `address` varchar(50) NOT NULL,
  `M_ID` varchar(30) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
INSERT INTO `restaurants` (`R_ID`, `name`, `email`, `contact`, `address`, `M_ID`) VALUES
(7, 'Gourmette salud', 'gourmettesalud@gmail.com', '9876543210', 'new york, central perk',
'avnish123'),
```

```
(8, 'Zilla Gaziayabad', 'zillagaziyabad@gmail.com', '7021318567', 'Gaziyabad',
'Hazardous'),
(9, 'Lion\'s Cafetaria', 'lions@gmail.com', '8824969031', 'c-scheme', 'Zlatan');
ALTER TABLE `customer`
 ADD PRIMARY KEY (`username`);
ALTER TABLE `food`
  ADD PRIMARY KEY (`F_ID`, `R_ID`),
 ADD KEY `R_ID` (`R_ID`);
ALTER TABLE `manager`
 ADD PRIMARY KEY (`username`);
ALTER TABLE `orders`
 ADD PRIMARY KEY (`order ID`),
 ADD KEY `F_ID` (`F_ID`),
 ADD KEY `username` (`username`),
 ADD KEY `R_ID` (`R_ID`);
ALTER TABLE `restaurants`
  ADD PRIMARY KEY (`R_ID`),
 ADD UNIQUE KEY 'M ID 2' ('M ID'),
 ADD KEY `M_ID` (`M_ID`);
ALTER TABLE `food`
 MODIFY `F ID` int(30) NOT NULL AUTO INCREMENT, AUTO INCREMENT=125;
ALTER TABLE `orders`
 MODIFY `order_ID` int(30) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=88;
ALTER TABLE `restaurants`
 MODIFY `R_ID` int(30) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=10;
ALTER TABLE `food`
 ADD CONSTRAINT `food_ibfk_1` FOREIGN KEY (`R_ID`) REFERENCES `restaurants` (`R_ID`);
ALTER TABLE `orders`
 ADD CONSTRAINT `orders_ibfk_1` FOREIGN KEY (`F_ID`) REFERENCES `food` (`F_ID`),
 ADD CONSTRAINT `orders_ibfk_2` FOREIGN KEY (`username`) REFERENCES `customer`
(`username`),
  ADD CONSTRAINT `orders ibfk 3` FOREIGN KEY (`R ID`) REFERENCES `restaurants` (`R ID`);
ALTER TABLE `restaurants`
  ADD CONSTRAINT `restaurants_ibfk_1` FOREIGN KEY (`M_ID`) REFERENCES `manager`
(`username`);
COMMIT;
```

### PHP MYADMIN DASHBOARD(SQL):

