



Array sin claves

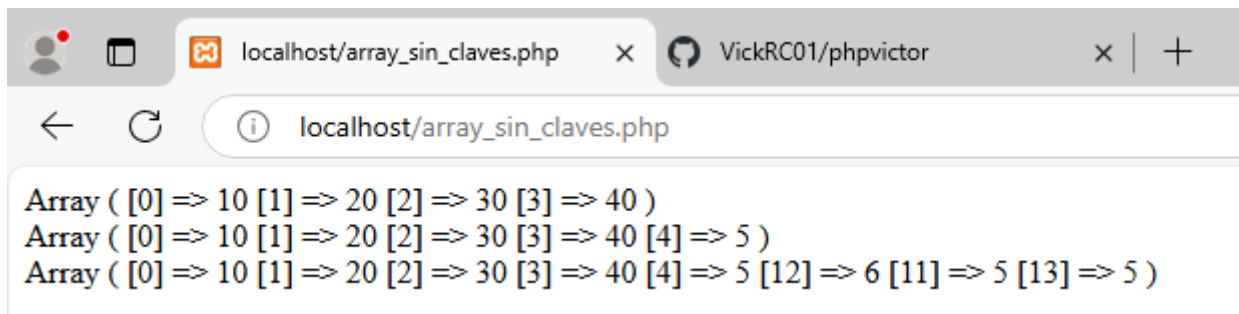


```
Array ( [0] => 10 [1] => 20 [2] => 30 [3] => 40 )
Array ( [0] => 10 [1] => 20 [2] => 30 [3] => 40 [4] => 5 )
Array ( [0] => 10 [1] => 20 [2] => 30 [3] => 40 [4] => 5 [12] => 6 [11] => 5 [13] => 5 )
```

Arrays foreach

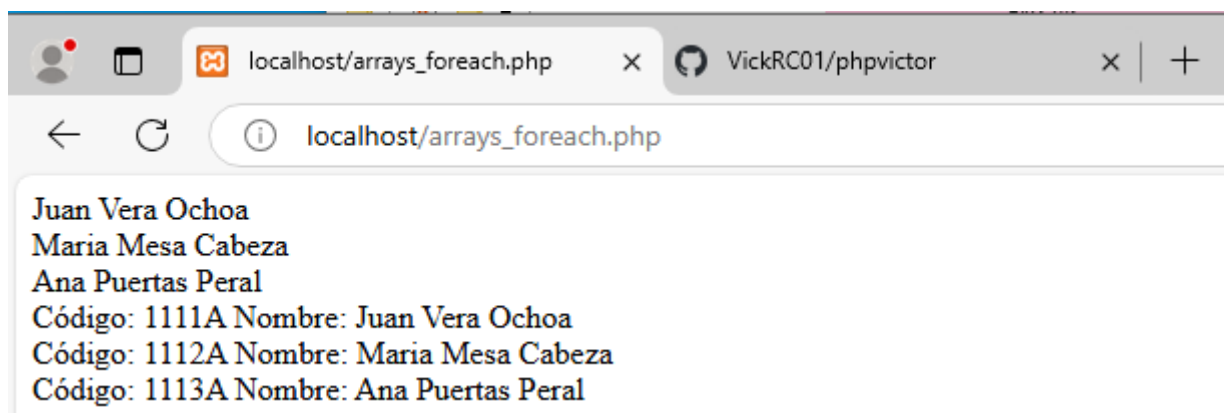


```
Juan Vera Ochoa
Maria Mesa Cabeza
Ana Puertas Peral
Código: 1111A Nombre: Juan Vera Ochoa
Código: 1112A Nombre: Maria Mesa Cabeza
Código: 1113A Nombre: Ana Puertas Peral
```

Arrays operadores

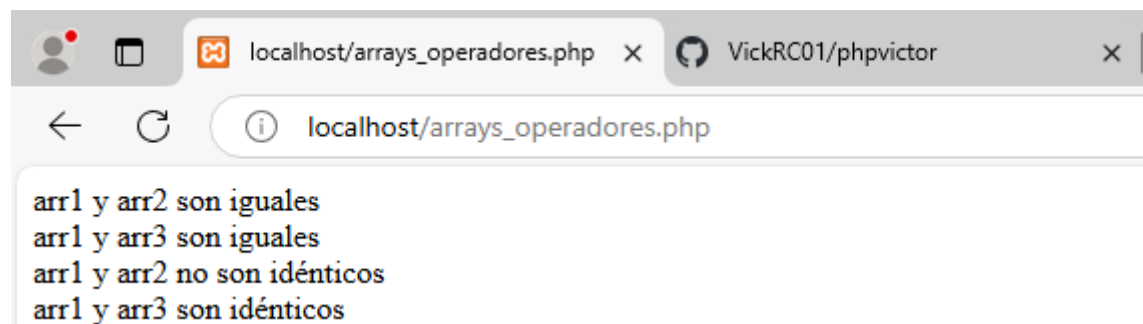


```
arr1 y arr2 son iguales
arr1 y arr3 son iguales
arr1 y arr2 no son idénticos
arr1 y arr3 son idénticos
```

Arrays union

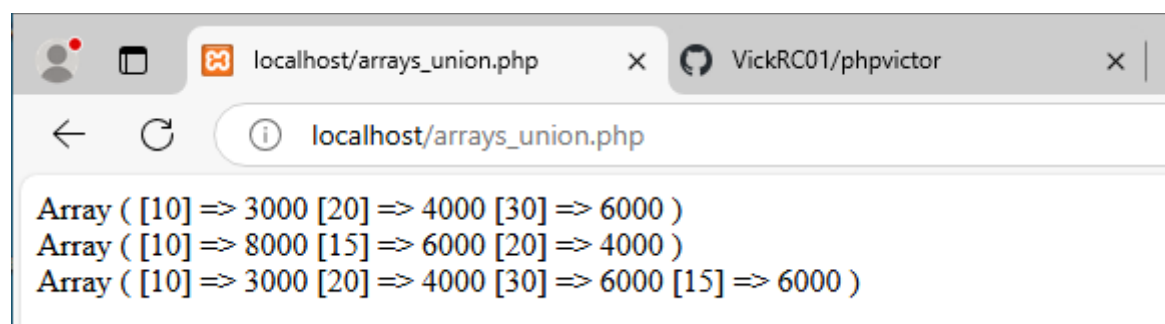

```
Array ( [10] => 3000 [20] => 4000 [30] => 6000 )
Array ( [10] => 8000 [15] => 6000 [20] => 4000 )
Array ( [10] => 3000 [20] => 4000 [30] => 6000 [15] => 6000 )
```

Arrays1

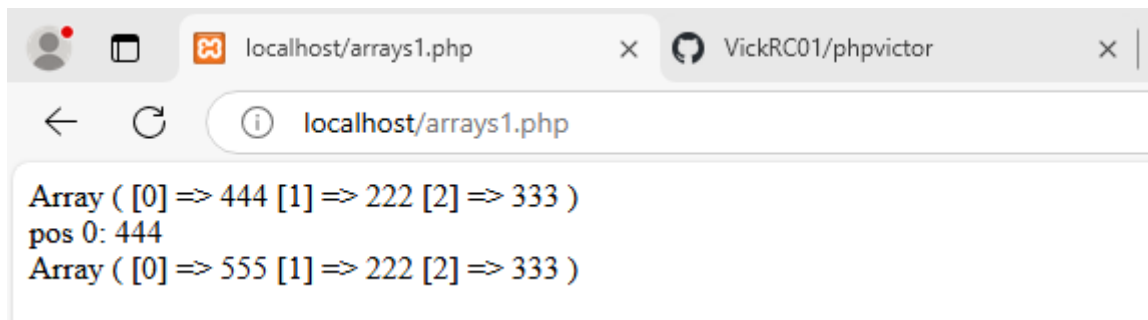


```

Array ( [0] => 444 [1] => 222 [2] => 333 )
pos 0: 444
Array ( [0] => 555 [1] => 222 [2] => 333 )

```

Break

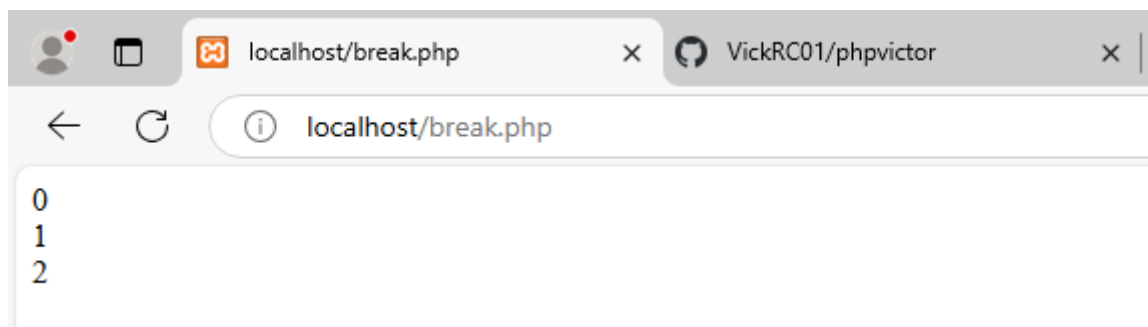


```

0
1
2

```

Break anidado

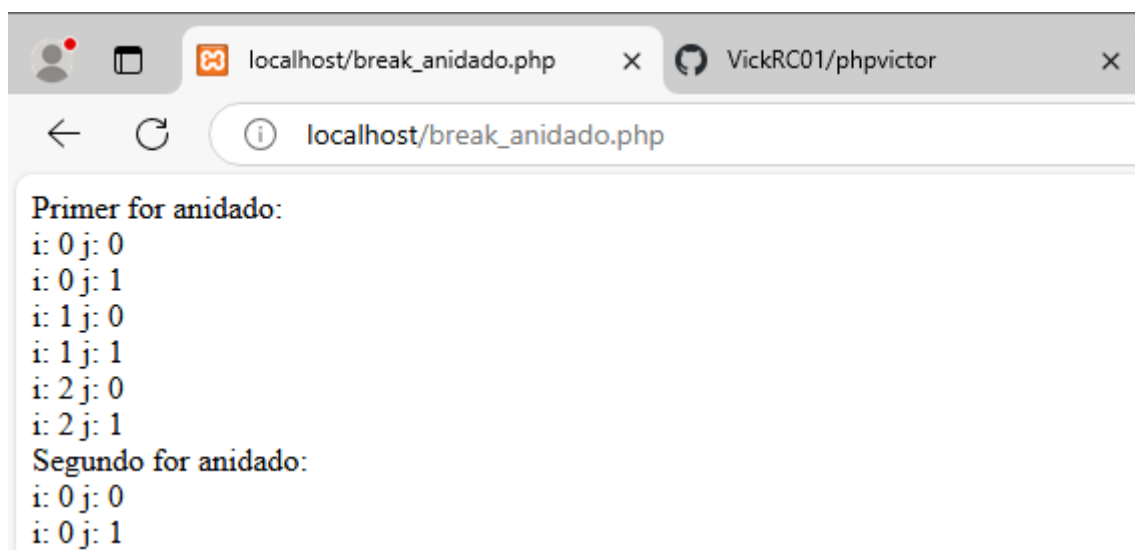


```

Primer for anidado:
i: 0 j: 0
i: 0 j: 1
i: 1 j: 0
i: 1 j: 1
i: 2 j: 0
i: 2 j: 1
Segundo for anidado:
i: 0 j: 0
i: 0 j: 1

```

Break switch

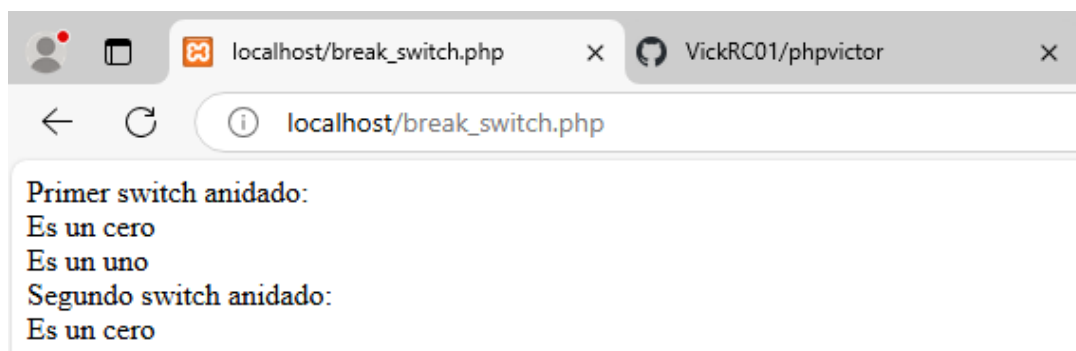


```


Primer switch anidado:
Es un cero
Es un uno
Segundo switch anidado:
Es un cero

```


Bucle diferencia while dowhile

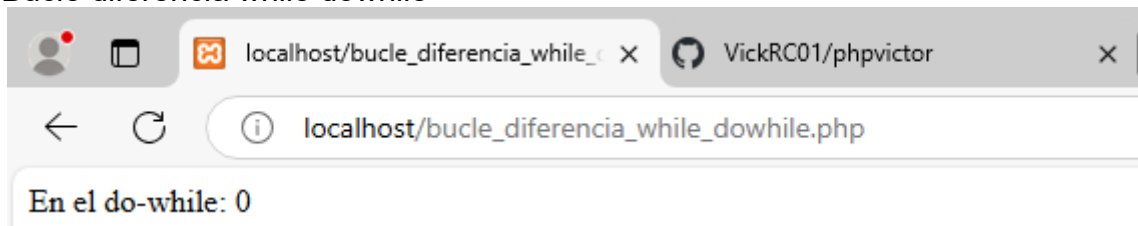


Bucle dowhile

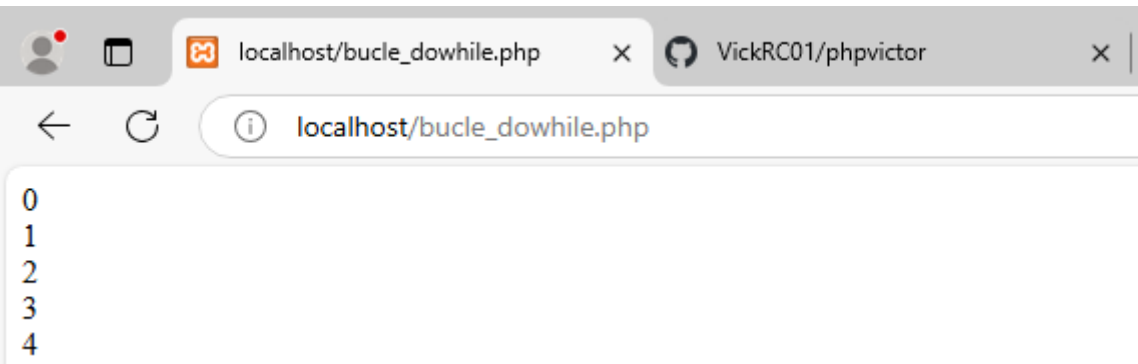


Bucle for

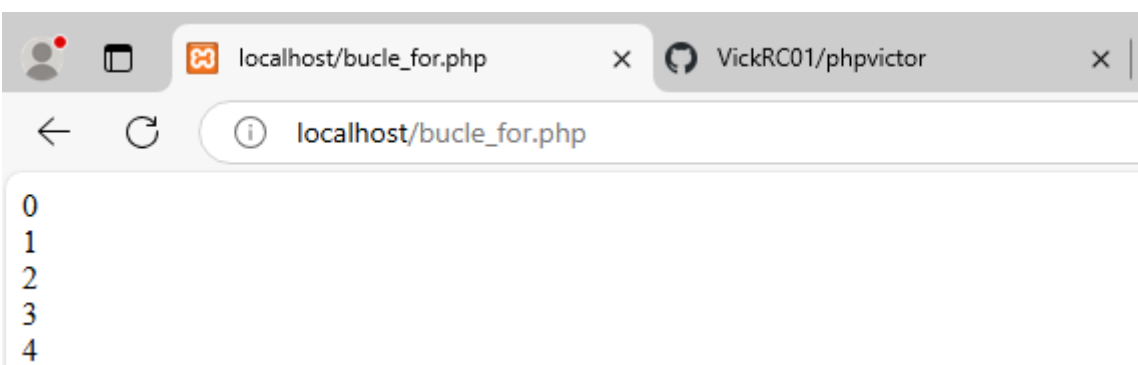


Bucle while

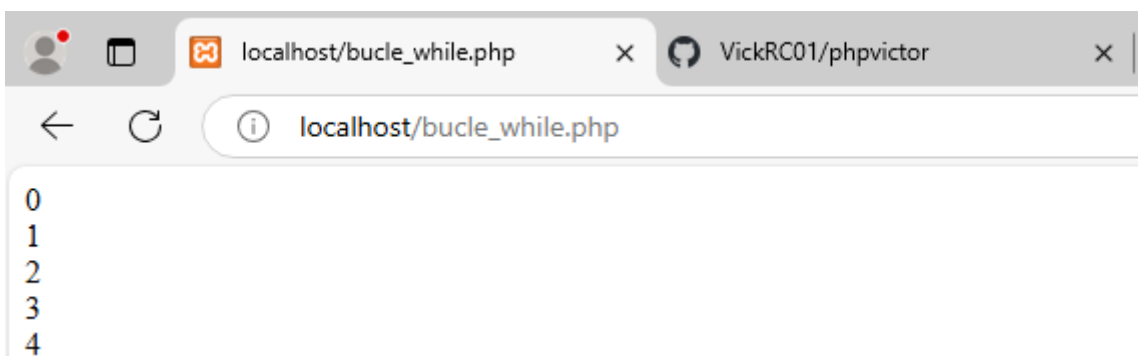


Calculador

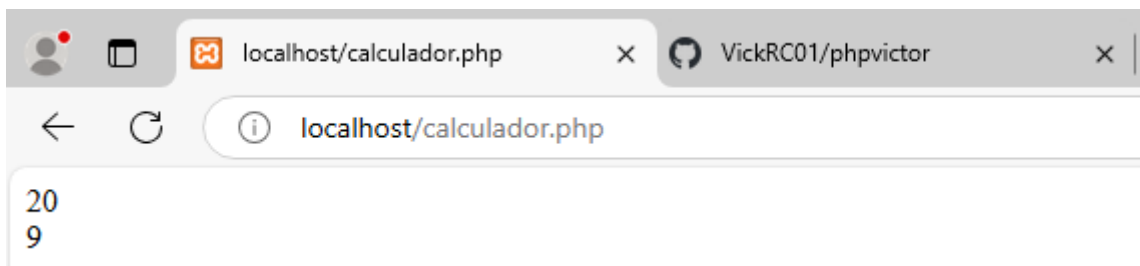

Comentarios

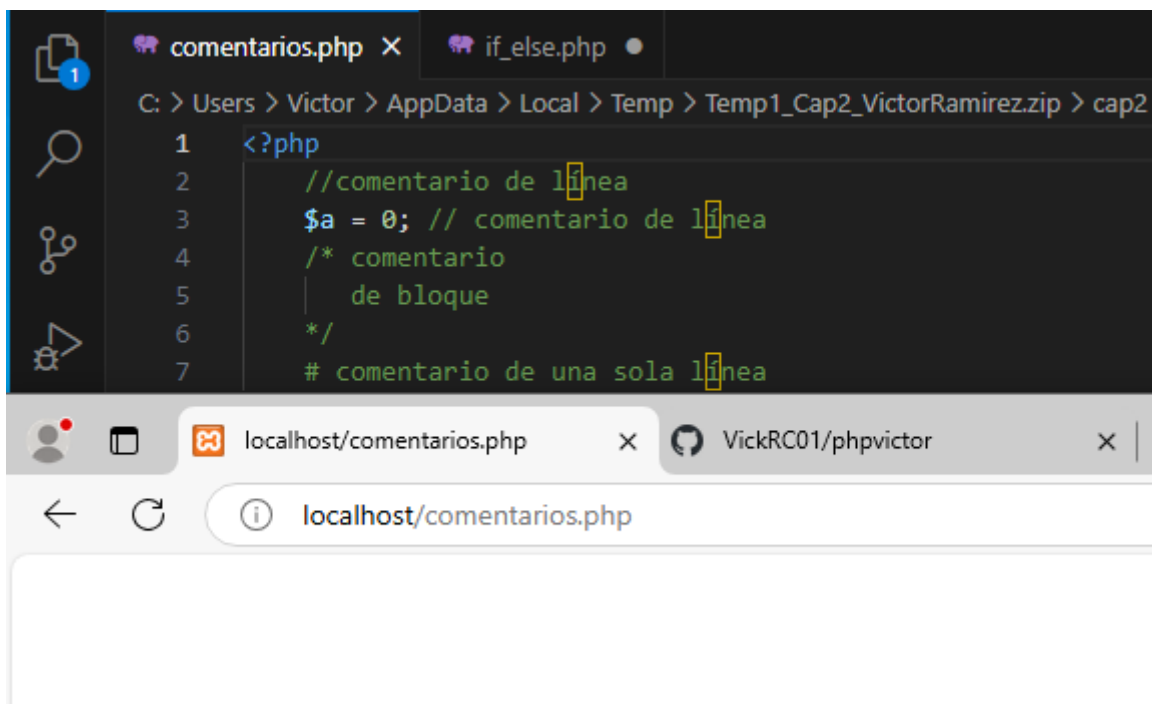

Comillas magicas

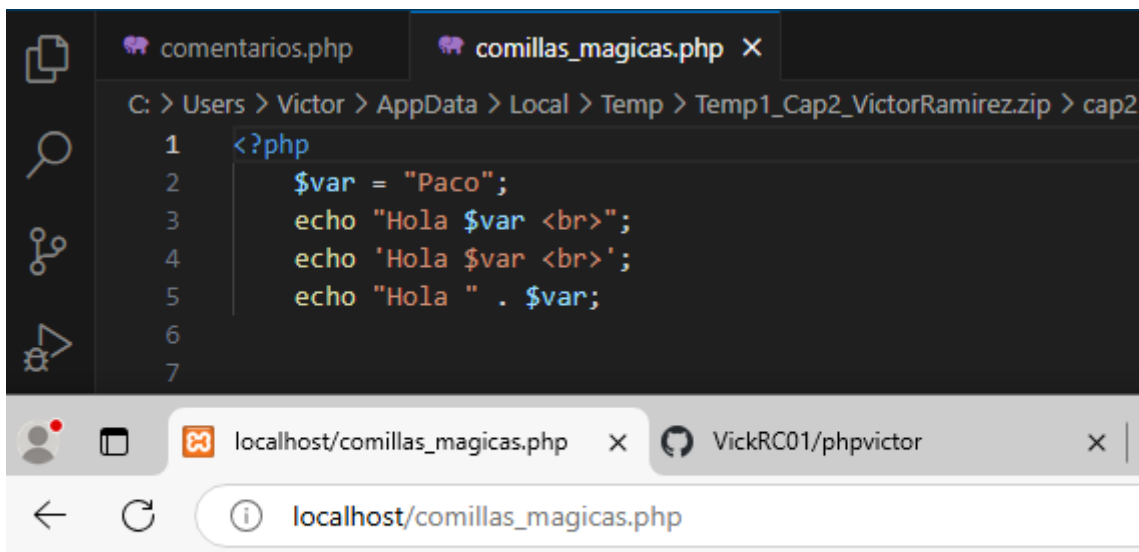


The screenshot shows a code editor with two tabs: `comentarios.php` and `comillas_magicas.php`. The active tab `comillas_magicas.php` contains the following PHP code:

```
1 <?php
2     $var = "Paco";
3     echo "Hola $var <br>";
4     echo 'Hola $var <br>';
5     echo "Hola " . $var;
6
7
```

Below the editor, a browser window shows the URL `localhost/comillas_magicas.php`. The browser's address bar also displays `localhost/comillas_magicas.php`.

Hola Paco
Hola \$var
Hola Paco


Continue

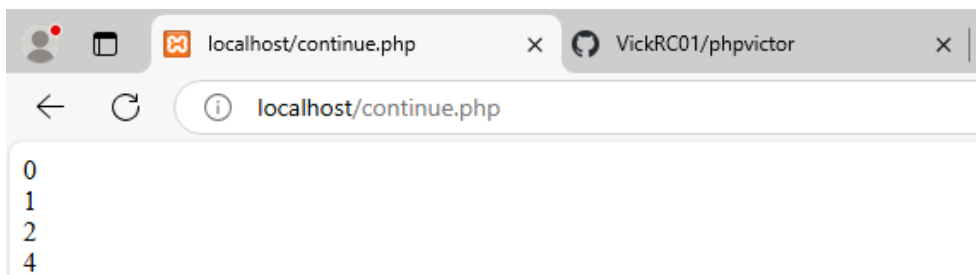

The screenshot shows a browser window with the URL `localhost/continue.php`. The browser's address bar also displays `localhost/continue.php`. The output of the script is:

```
0
1
2
4
```


Copia

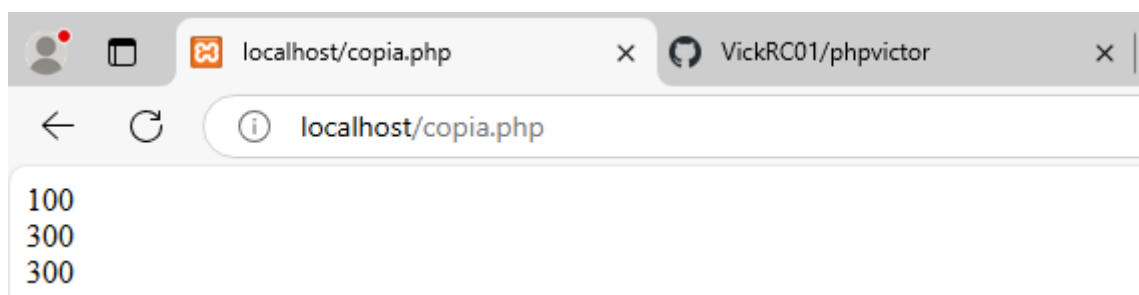

The screenshot shows a browser window with the URL `localhost/copia.php`. The browser's address bar also displays `localhost/copia.php`. The output of the script is:

```
100
300
300
```


Duplicar

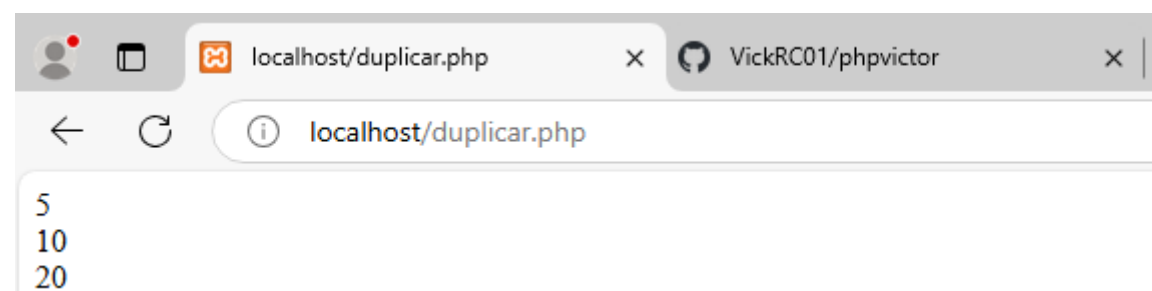


The screenshot shows a browser window with the URL `localhost/duplicar.php`. The browser's address bar also displays `localhost/duplicar.php`. The output of the script is:

```
5
10
20
```


Ejerequerido

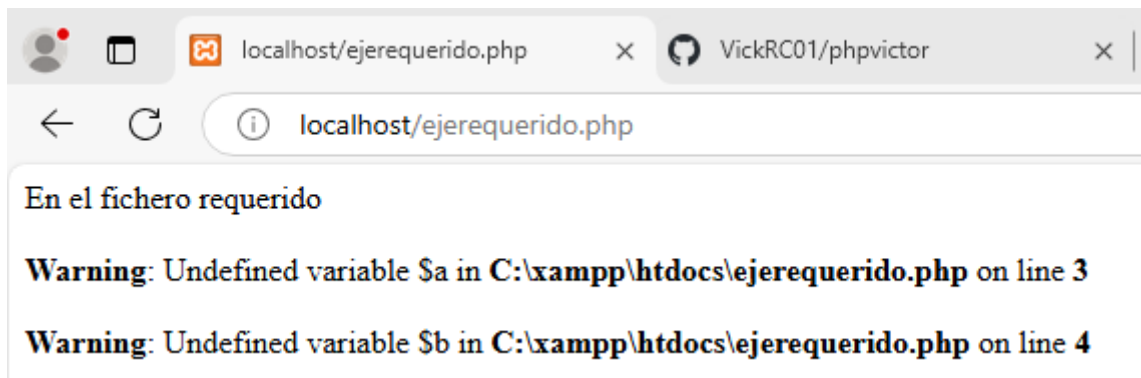


Error handler

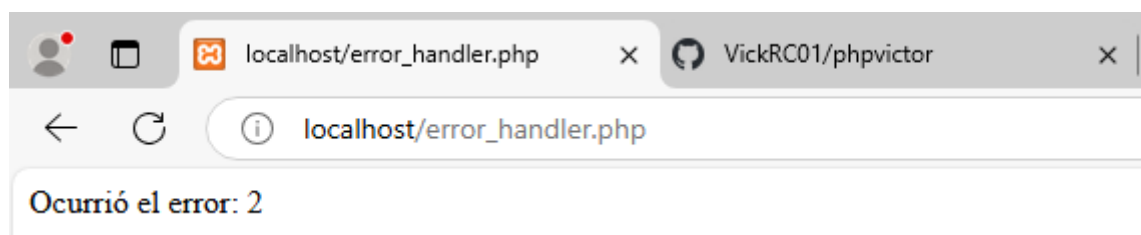


Excepciones

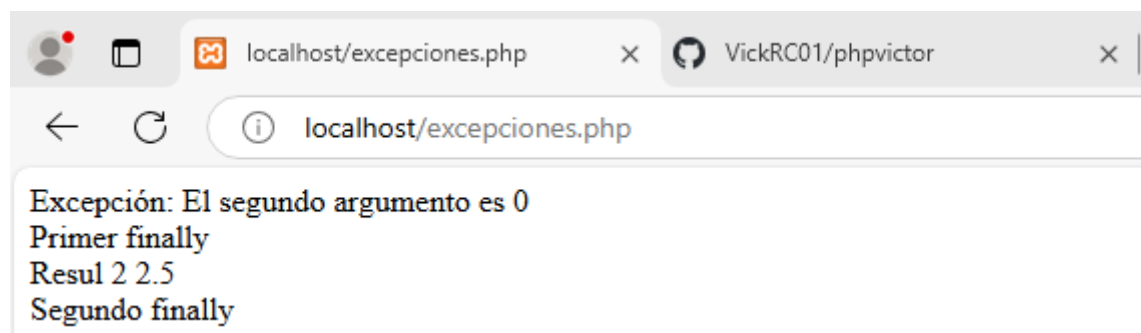


Foreach modificar

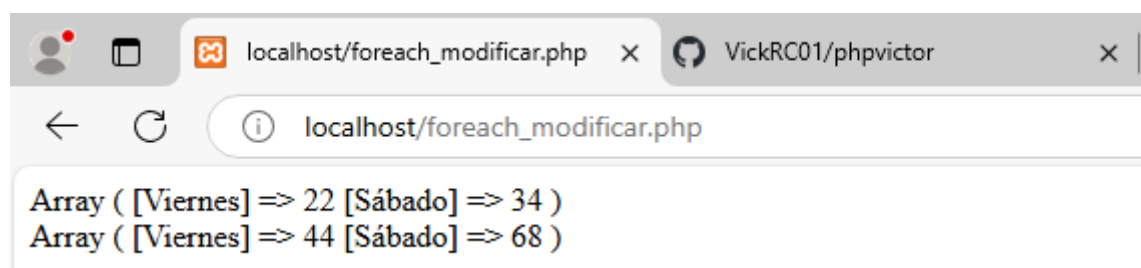


Funciones variables

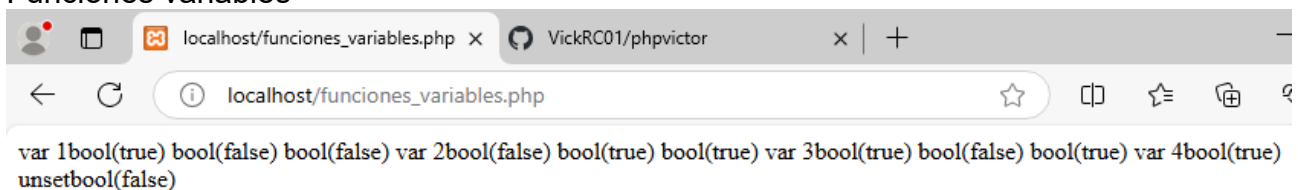


Global server

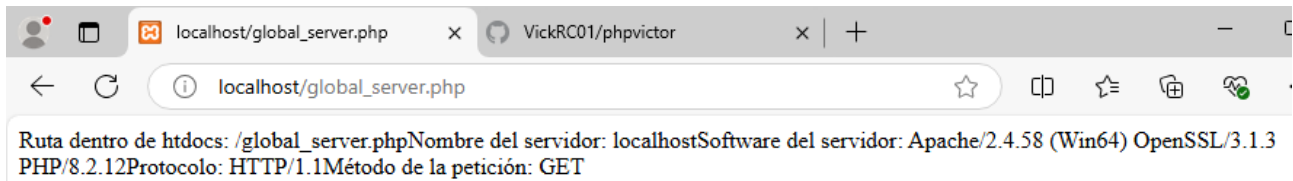


Hola mundo

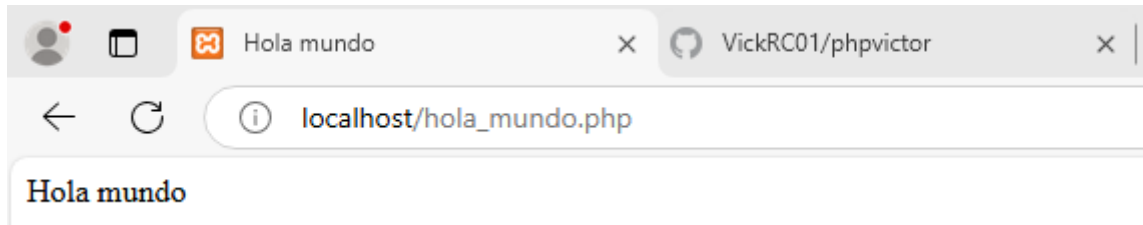


If basico

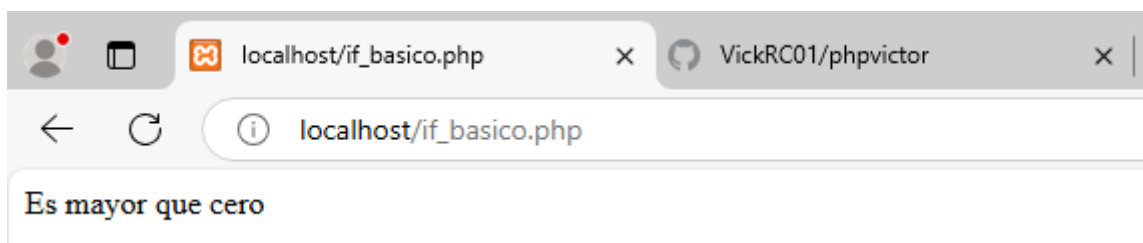


If else

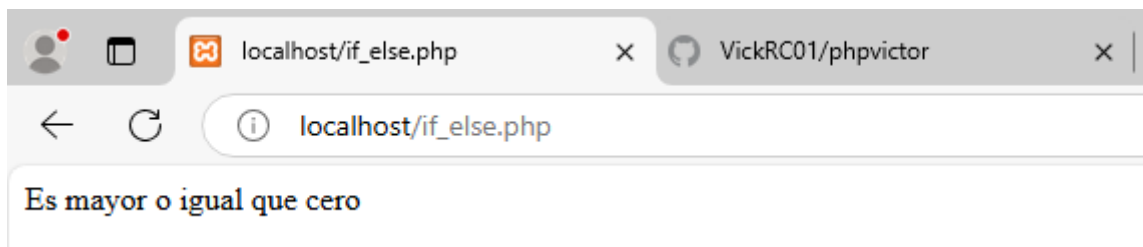


If elseif

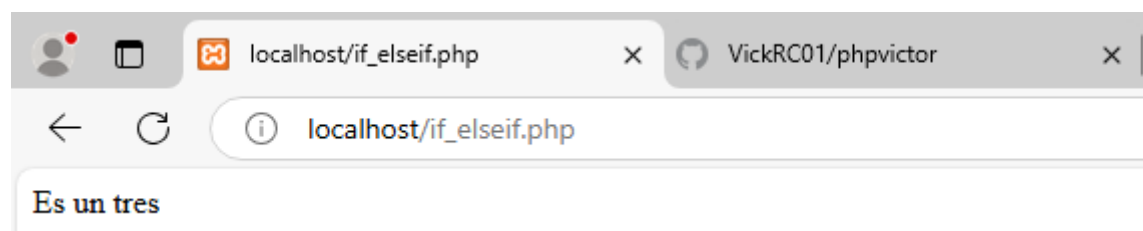


Indentico

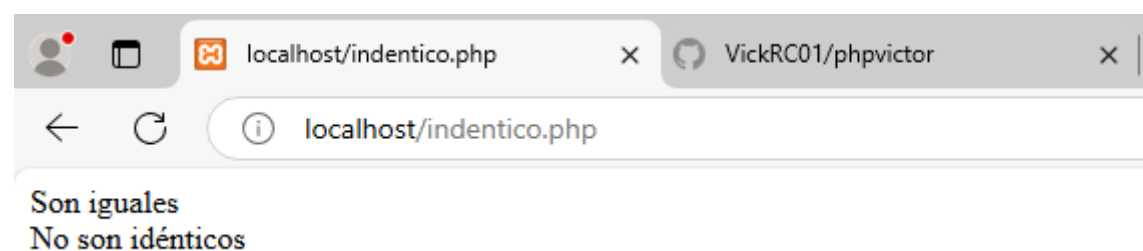


No init

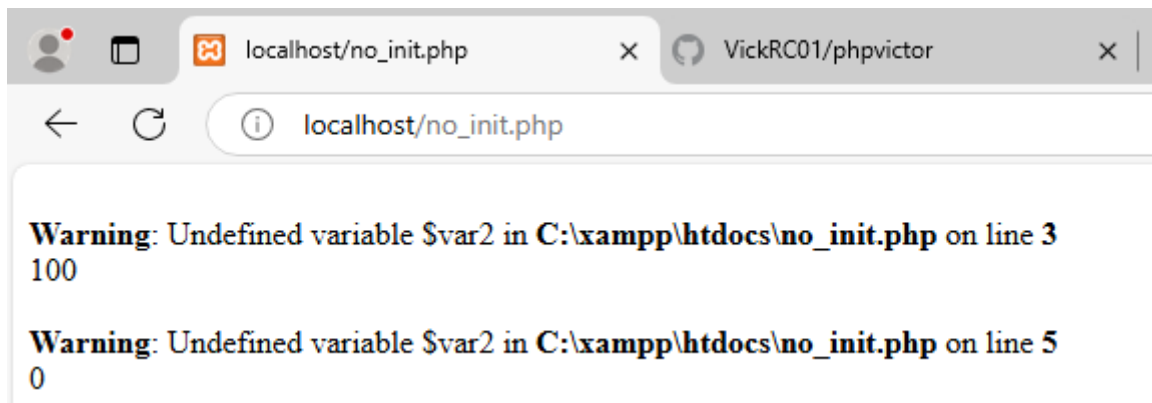


Persona y Cliente

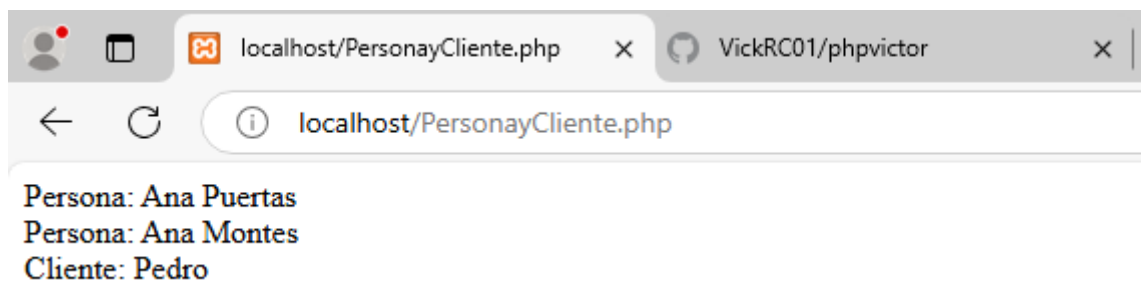


Requerir

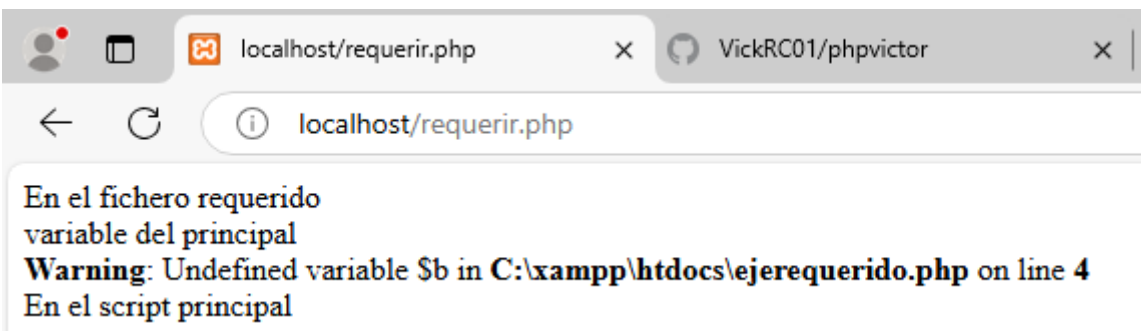


Return

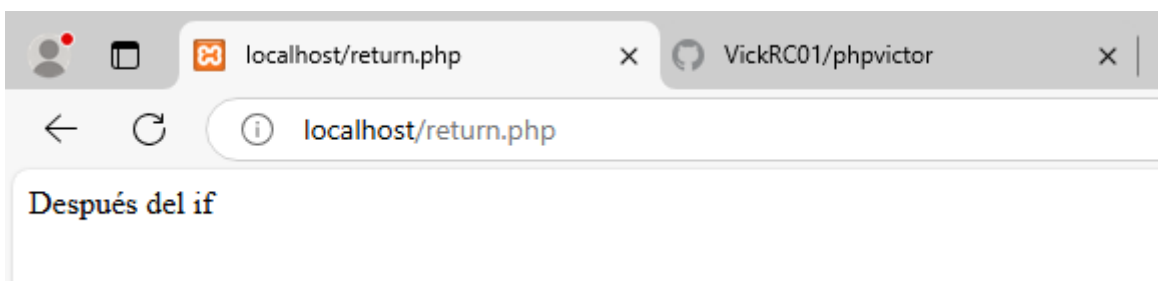


Saludar

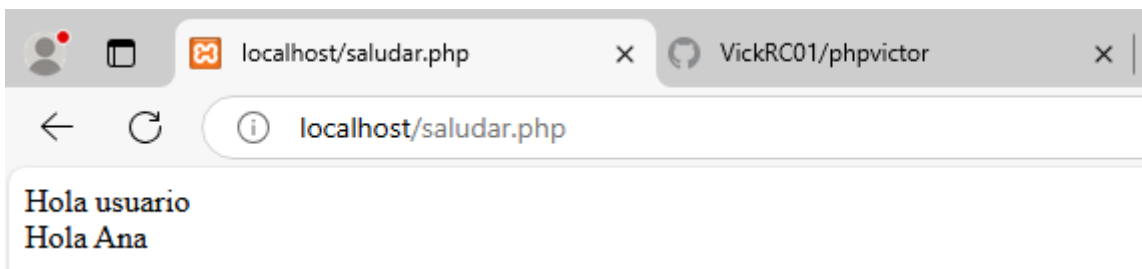


Suma

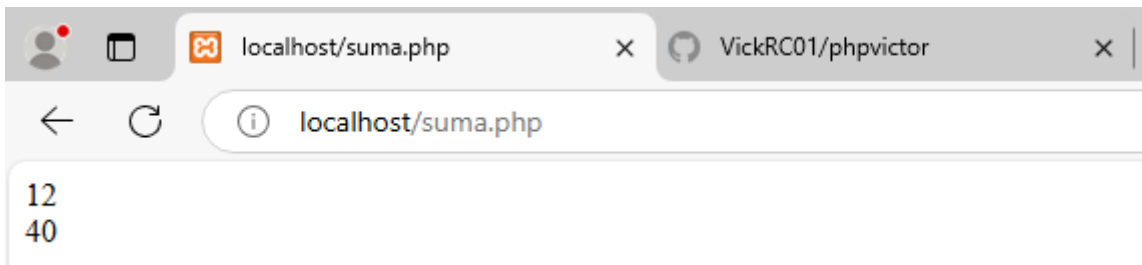

Switch

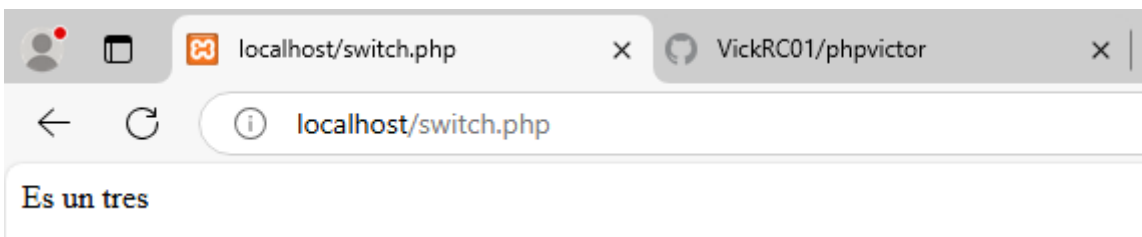

Tipos dato

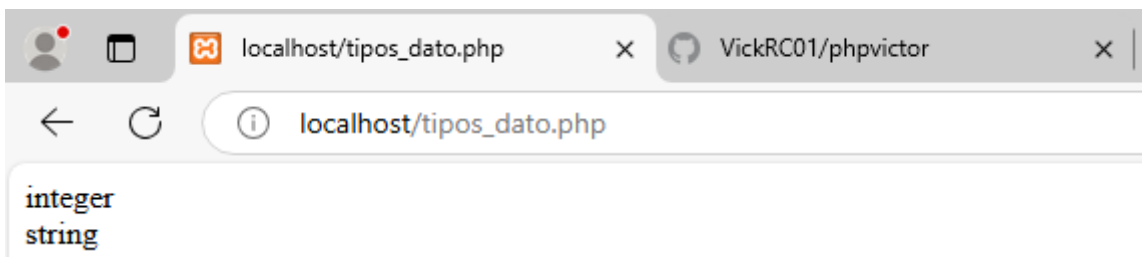

Tipos numéricos

