webdasar.html

webdasar.css

```
Web ‘Dasar’ {
    [#4 : Basic CSS]


        < Maresha Caroline >


}
```

```
Today's 'Topic' {
```

- CSS syntax
- CSS usage
- CSS selector
- Some common basic css

```
}
```

What is ‘CSS’ {

HTML is not enough to specify formatting for a document rather than its contents

Formatting tags/attribute such as <font> or color makes the page harder to read and longer not to mention annoying

CSS defines HOW HTML elements are to be displayed

}

```
CSS 'syntax'{
    how to write your css code
}
```

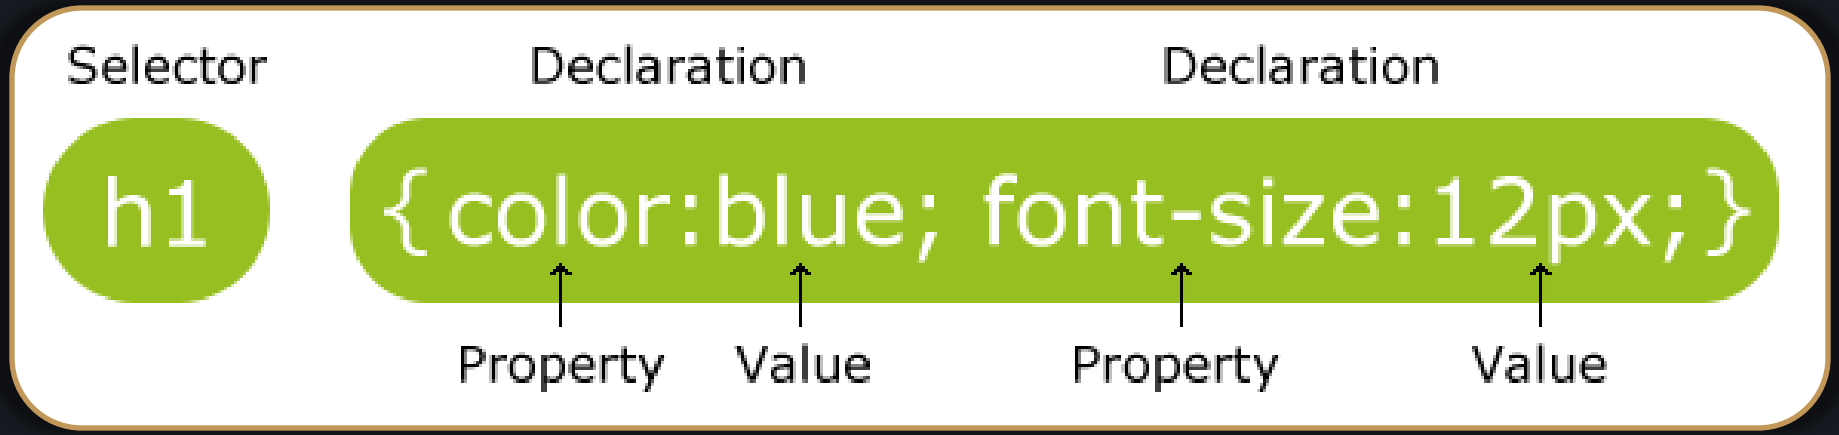

CSS‘Selector’ {

Selector could be

- A html tag
- A class
- An Id

Selector can also be grouped

}

```
<style>
  h1 {
    color: red;
    text-align: center;
  }
  p, div {
    color : blue;
    text-align: right;
  }
</style>
```

Include ‘CSS’ {

- External stylesheets
  - Write css on external file, with .css extension
  - E.g. : <link rel="stylesheet" href="style.css">
- Internal Stylesheets
  - Write css within the html file within <head>
  - E.g. : <style>h1 {color: red;}</style>
- Inline style
  - Inside the html tag in question
  - E.g. : <h1 style="color: blue;">css rock</h1>

}

Multiple ‘CSS Style ’ {

- Note : when multiple rules are applied to the same element the more specific one will win
- From order of priority
    1. Inline style
    2. Internal style
    3. External style
    4. Browser default

}

CSS ‘checks’{

you can view css through your browser

}

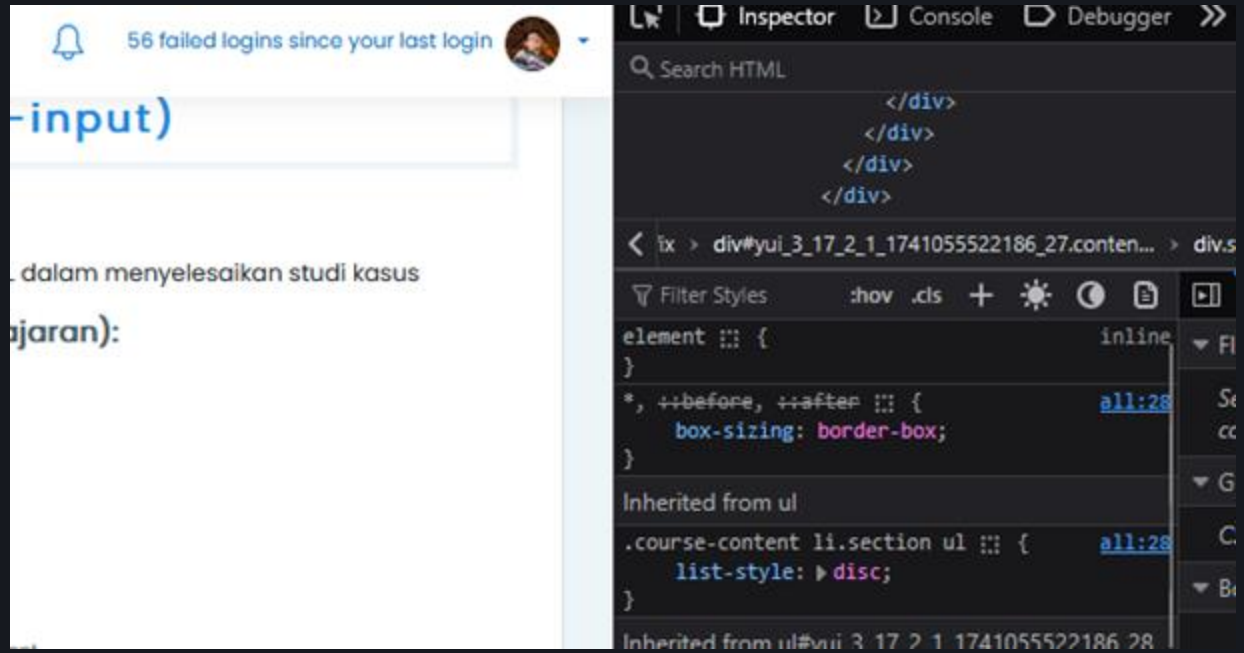

CSS ‘background prop’ {

To define background effect on an element

- **background-color**
  - Hexa value (#ff00ff), RGB value (rgb(255,0,0)), color name (red)
- **background-image**
  - url (‘’)
- **background-repeat**
  - No-repeat, repeat-x, repeat-y,repeat(default)
- **background-attachment**
  - Scroll, fixed
- **background-position**
  - **hpos[left,right,center] vpost[top, center,bottom],**
  - **%x %y, xpos ypos**

}

CSS ‘background prop’ {

- **background-size**
  - Px or %
- **background-clip**
  - Border-box, padding-box, content-box;
  - -webkit-background-clip:content-box; /* Safari */
- **Background-origin**
  - Border-box, padding-box, content-box;

}

forbeginners.html

workshop.css

CSS ‘shorthand prop’ {

```
h1 {
  background-color: lime;
  background-image: url('./image/logo.png');
  background-size: contain;
}

h2 {
  background:  rgb(114, 194, 114) url('./image/logo.png') ;
  background-size: contain;
}
```

}

Programming Language

CSS ‘Box Model’ {

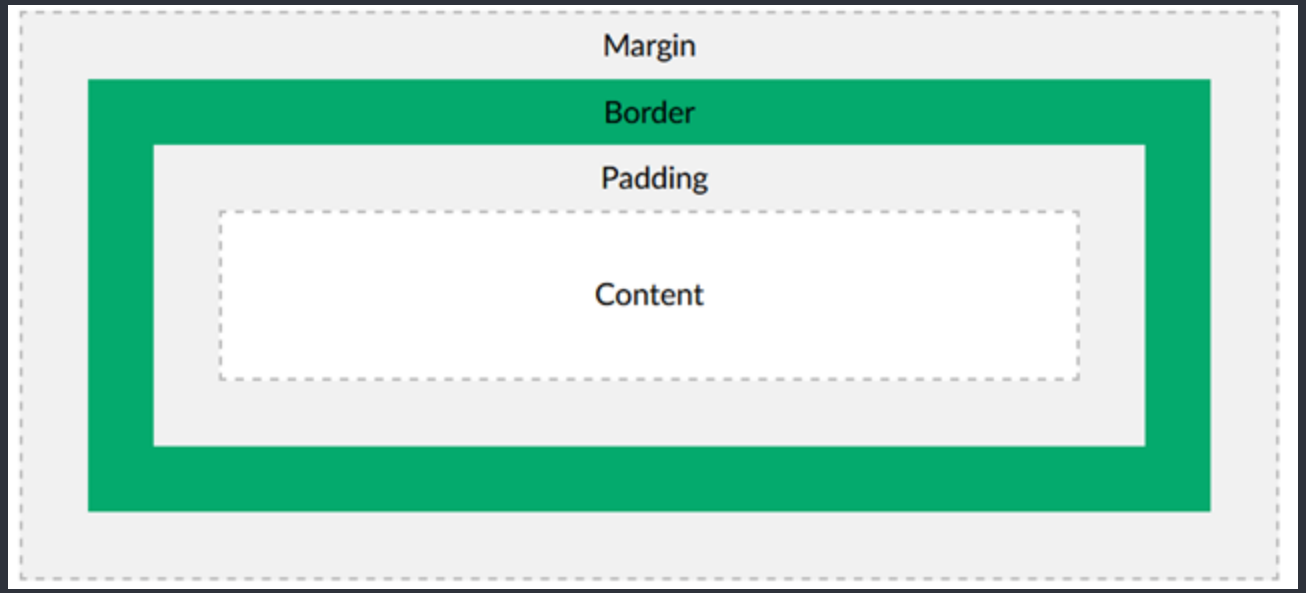

}

CSS‘Padding’ {

Padding property

- Padding-top
- Padding-right
- Padding-bottom
- Padding-left

- Padding : 25px (all padding 25px)
- Padding : 10px 20px (vertical and horizontal)
- Padding : 10px 20px 30px 40px

}

CSS‘Margin’ {

Margin property

- Margin-top
- Margin-right
- Margin-bottom
- Margin-left

}

CSS‘Width and height’ {

Property :

- Height
- Max-height
- Min-height
- Width
- Max-width
- Min-width

}

CSS‘Text property’ {

- **Color** : web color
- **Direction** : [ltr,rtl]
- **Letter-spacing** : [normal, *length*]
- **Line-height** : [1-4,*length*,%]
- **Text-align** [left,right,center,justify]
- **Text-decoration** : [underline,overline,line-through, blink,none]
- **Text-indent** : [*length,* %]
- **Text-transform** : [none, capitalize, uppercase, lowercase]
- **Vertical-align** : [length, %, baseline, sub, super, top, text-top, middle, bottom, text-bottom]
- **White-space** : [normal, nowrap, pre, pre-wrap, pre-line]
- **Word-spacing** :[normal, *length*]

}

CSS‘Font property’ {

Font-family

Family-name, generic-family

Font-size

xx-smaller,x-smaller,small, medium,larger,x-larger,xx-larger,%,px

Font-variant

Normal, small-caps

Font-weight

Normal, bold, bolder, lighter, 100-900

}

CSS‘absolute unit’ {

Unit	Description
cm	centimeters
mm	millimeters
in	inches (1in = 96px = 2.54cm)
px *	pixels (1px = 1/96th of 1in)
pt	points (1pt = 1/72 of 1in)
pc	picas (1pc = 12 pt)

}

CSS‘relative unit’ {

Unit	Description
em	Relative to the font-size of the element (2em means 2 times the size of the current font)
ex	Relative to the x-height of the current font (rarely used)
ch	Relative to the width of the "0" (zero)
rem	Relative to font-size of the root element
vw	Relative to 1% of the width of the viewport*
vh	Relative to 1% of the height of the viewport*
vmin	Relative to 1% of viewport's* smaller dimension
vmax	Relative to 1% of viewport's* larger dimension
%	Relative to the parent element

}

```
CSS‘Link’ {

    Link has 4 state
        a:link –  normal unvisited link
        a:visited – link after visited
        a:hover – link when mouse is hovering
        a:active – link when activated



}
```

CSS‘Link’ {

Link has 4 state

a:link – normal unvisited link

a:visited – link after visited

a:hover – link when mouse is hovering

a:active – link when activated

Example : a:link { font-size : 2em;}

}

CSS‘List’ {

- **List-style-image** : [url,none]
- **List-style-position** : [inside,outside]
- **List-style-type** : [disc, square, lower-greek, hiragana, etc]

Shorthand :

- **List-style**

}

forbeginners.html

workshop.css

```
CSS‘table’ {

}
```

Table border : [size type color]
Width, height : [size, %]
Border-collapse :[collapse]

Programming Language

forbeginners.html

workshop.css

```
CSS‘table’ {
    tr:nth-child(even) td {
        background-color: #2a2a2a;
    }
    tr:nth-child(odd) td {
        background-color: #222222;
    }
    tr:hover td {
        background-color: #3d0000;
    }

}
```

Programming Language

CSS‘id / class’ {

- In addition to adding style to html element
- You can also specify style for your own selector
- Namely id & class

- Id is meant for specific instance of element
- Class is meant for a group of element

}

forbeginners.html

workshop.css

CSS‘id’ {

```html
<h1 id="contoh">css rock</h1>
```

```css
#contoh {
  color : red;
  padding :20px;
  border-radius: 20px;
  border : 1px solid black;
}
```

}

forbeginners.html

workshop.css

CSS‘class’ {

```html
<h1 class="contoh">css rock</h1>
<div class="contoh" >css rock</h2>
```

```css
.contoh {
  color : red;
  padding :20px;
  border-radius: 20px;
  border : 1px solid black;
}
```

}

CSS‘combinator’ {

Name	Sign	Example	Example Result
Child combinator	>	div > p	Selects every <p> element that are direct children of a element
Descendant combinator	(single space)	div p	Selects all <p> elements inside elements
Namespace separator	|	ns | h2	Selects all <h2> elements in namespace ns
Next-sibling combinator	+	div + p	Selects the first <p> element that is placed immediately after elements
Selector list	,	div, p	Selects all elements and all <p> elements
Subsequent-sibling combinator	~	p ~ ul	Selects all <ul> elements that are preceded by a <p> element

}

CSS‘pseudo-classes’ {

Pseudo-class	Examples	Example description
:active	a:active	Selects the active link
:any-link	a:anylink area:anylink	Selects any <a> or <area> element with an href attribute
:auto-fill	input:autofill	Selects any <input> element with its value autofilled by the browser
:checked	input:checked option:checked	Matches any <input> or <option> element that is checked
:default	input:default button:default option:default	Selects form elements that are default in a group of related elements
:defined	:defined	Selects any element that has been defined (standard or custom elements)
:dir()	:dir(ltr) :dir(rtl)	Selects any element with the specified text direction

}

```
CSS'pseudo-element' {
}
```

Pseudo-element	Example	Example description
::after	p::after div::after	Inserts something after the content of the specified element
::backdrop	dialog::backdrop	Styles the viewbox behind a dialog box or popover element
::before	p::before div::before	Inserts something before the content of the specified element
::file-selector-button	::file-selector-button	Selects any button of type <input type="file">
::first-letter	p::first-letter	Selects the first letter of every <p> element
::first-line	p::first-line	Selects the first line of every <p> element
::grammar-error	::grammar-error	Styles a text that the browser has flagged as grammatically incorrect
::highlight()	::highlight(custom-name)	Selects a custom highlight
::marker	::marker	Selects the markers of list items

Thank You