

Optimization Services 1.0 User's Manual

Robert Fourer, Jun Ma, Kipp Martin

July 30, 2007

Abstract

This is the User's Manual for the Optimization Services (OS) project. The objective of (OS) is to provide a set of standards for representing optimization instances, results, solver options, and communication between clients and solvers in a distributed environment using Web Services. This COIN-OR project provides C++ source code for libraries and executable programs that implement OS standards. The OS library includes a robust solver and modeling language interface (API) for linear and nonlinear optimization problems. Also included is the C++ source code for a command line executable `OSSolverService` for reading problem instances (OSiL format, nl format, MPS format) and calling a solver either locally or on a remote server. Finally, both Java source code and a Java war, is provided for users who wish to set up a solver service on a server running Apache Tomcat. See the Optimization Services (OS) Home Site www.optimizationservices.org and the COIN-OR Trac page projects.coin-or.org for more information.

Contents

1	The Optimization Services (OS) Project	5
2	Quick Roadmap	5
3	Download and Installation	6
3.1	Obtaining the Source Code Subversion Repository (SVN)	6
3.2	Obtaining the OS Source Code From a Tarball or Zip File	8
3.3	Obtaining the Java Server Source Code	8
3.4	Obtaining the Binaries	8
3.5	Obtaining and Installing a Visual Studio Project	9
3.6	Third Party Software	10
3.6.1	AMPL	10
3.6.2	Cplex	11
3.6.3	GLPK	11
3.6.4	Ipopt	11
3.6.5	Knitro	12
3.6.6	LINDO	12
3.6.7	MATLAB	12
3.6.8	Library Paths	12
3.7	Bug Reporting	12
3.8	Documentation	12
3.9	Platforms	13
4	The OS Project Components	13
5	OS Protocols	17
6	The OS Library Components	22
6.1	OSAgent	22
6.2	OSCommonInterfaces	22
6.2.1	The OSInstance Class	22
6.2.2	Creating an OSInstance Object	22
6.2.3	Mapping Rules	23
6.2.4	The OSExpressionTree OSnLNode Classes	25
6.3	OSModelInterfaces	27
6.3.1	Converting MPS Files	27
6.3.2	Converting AMPL nl Files	27
6.3.3	Using MATLAB	28
6.4	OSParsers	30
6.5	OSSolverInterfaces	31
6.6	OSUtils	32
7	The OSInstance API	33
7.1	Get Methods	33
7.2	Set Methods	34
7.3	Calculate Methods	34

8	The OS Algorithmic Differentiation Implementation	34
8.1	Algorithmic Differentiation: Brief Review	34
8.2	Using OSInstance Methods: Low Level Calls	35
8.2.1	First Derivative Reverse Sweep Calculations	39
8.2.2	Second Derivative Reverse Sweep Calculations	39
8.3	Using OSInstance Methods: High Level Calls	40
8.3.1	Sparsity Methods	40
8.3.2	Function Evaluation Methods	41
8.3.3	Gradient Evaluation Methods	43
8.3.4	Hessian Evaluation Methods	44
9	The OSSolverService	44
9.1	OSSolverService Input Parameters	44
9.2	Solving Problems Locally	46
9.3	Solving Problems Remotely with Web Services	47
9.3.1	The <code>solve</code> Service Method	48
9.3.2	The <code>send</code> Service Method	49
9.3.3	The <code>retrieve</code> Service Method	51
9.3.4	The <code>getJobID</code> Service Method	52
9.3.5	The <code>knock</code> Service Method	52
9.3.6	The <code>kill</code> Service Method	53
9.3.7	Summary	54
10	Setting up a Solver Service with Tomcat	55
11	Examples	57
11.1	AMPL Client: Hooking AMPL to Solvers	57
11.2	Algorithmic Differentiation: Using the OS Algorithmic Differentiation Methods . . .	57
11.3	File Upload: Using a File Upload Package	58
11.4	Instance Generator: Using the OSInstance API to Generate Instances	59
11.5	osTestCode	60
12	Appendix	60
12.1	Building a Model in MATLAB	60
12.2	OSiL representation for problem given in (1)–(4)	62
12.3	OSiL representation for problem given in (20)–(23)	64

List of Figures

1	The OS binary distribution.	9
2	The OS project root directory.	14
3	The OS directory.	16
4	The <code><variables></code> element for the example (1)–(4).	18
5	The <code>Variables</code> complexType in the OSiL schema.	18
6	The <code>Variable</code> complexType in the OSiL schema.	19
7	The <code><linearConstraintCoefficients></code> element for constraints (2) and (3).	20
8	The <code><quadraticCoefficients></code> element for constraint (2).	20
9	The <code><nl></code> element for the nonlinear part of the objective (1).	21

10	Creating an OSInstance Object	23
11	The OSInstance class	23
12	The InstanceData class	23
13	The <variables> element as an OSInstance object	24
14	Conceptual expression tree for the nonlinear part of the objective (1).	25
15	The function calculation method for the “plus” node class with polymorphism	26
16	A local call to solve	46
17	A remote call to solve	48
18	Downloading the instance from a remote source.	50
19	Input and output for solve , send , and getJobID methods.	55
20	Input and output for knock , retrieve , and kill methods.	56

List of Tables

1	Tested Platforms for Solvers	13
2	Platform Description	15

1 The Optimization Services (OS) Project

The objective of Optimization Services (OS) is to provide a set of standards for representing optimization instances, results, solver options, and communication between clients and solvers in a distributed environment using Web Services. This COIN-OR project provides source code for libraries and executable programs that implement OS standards. See the Optimization Services (OS) Home Site www.optimizationservices.org and the COIN-OR Trac page projects.coin-or.org for more information. The OS project provides the following:

1. A set of XML based standards for representing optimization instances (OSiL), optimization results (OSrL), and optimization solver options (OSoL). There are other standards, but these are the main ones. The schemas for these standards are described in Section 5.
2. A robust solver and modeling language interface (API) for linear and nonlinear optimization problems. Corresponding to the OSiL problem instance representation there is an in-memory object, `OSInstance`, along with a set of `get()`, `set()`, and `calculate()` methods for accessing and creating problem instances. This is a very general API for linear, integer, and nonlinear programs. Any modeling language that can produce OSiL can easily communicate with any solver that uses the `OSInstance` API. The `OSInstance` object is described in more detail in Section 7. The nonlinear part of the API is based on the COIN-OR project projects.coin-or.org/CppAD by Brad Bell but is written in a very general manner and could be used with other algorithmic differentiation packages. More detail on algorithmic differentiation is provided in Section 8.
3. A command line executable `OSSolverService` for reading problem instances (OSiL format, nl format, MPS format) and calling a solver either locally or on a remote server. This is described in Section 9.
4. Utilities that convert AMPL nl files into the OSiL XML format and MPS files into the OSiL XML format. This is described in Section 6.3.
5. Standards that facilitate the communication between clients and optimization solvers using Web Services. In Section 6.1 we describe the `OSAgent` part of the OS library that is used to create Web Services SOAP packages with OSiL instances and contact a server for solution.
6. An executable program `amplClient` that is designed to work with the AMPL modeling language. The `amplClient` appears as a “solver” to AMPL and, based on options given in AMPL, contact solvers either remotely or locally to solve instances created in AMPL. This is described in Section 11.1.
7. Server software that works with Apache Tomcat and Apache Axis. This software uses Web Services technology and acts a middleware between the client that creates the instance and solver on the server that optimizes the instance and returns the result. This is illustrated in Section 10

2 Quick Roadmap

If you want to:

- Download and install the OS code – see Section 3.

- Use the OS library to build model instances or use solver APIs – see Sections 6.3, 6.5, and 7.
- Use the OSSolverService to read files in nl, OSiL, or MPS format and call a solver locally or remotely – see Section 9.
- Use AMPL to solve problems either locally or remotely with a COIN-OR solver, Cplex, GLPK, Knitro, or LINDO – see Section 11.1.
- Build a remote solver service using Apache Tomcat – see Section 10.
- Use MATLAB to generate problem instances in OSiL format and call a solver either remotely or locally – see Section 6.3.3.
- Use the OS library for algorithmic differentiation (in conjunction with COIN-OR CppAD) – see Section 8.

3 Download and Installation

OS is released as open source code under the Common Public License (CPL). This project was created by Robert Fourer, Jun Ma, and Kipp Martin. The code has been written primarily by Jun Ma, Kipp Martin, Robert Fourer, and Huanyuan Sheng. Jun Ma and Kipp Martin are the COIN project leaders for OS. Below we describe different methods for obtaining the C++ source code and binaries.

3.1 Obtaining the Source Code Subversion Repository (SVN)

The C++ source code can be obtained using Subversion. Users with Unix operating systems will most likely have an svn client. For Windows users wishing to obtain an SVN client we recommend TortoiseSVN. See tortoisesvn.tigris.org.

The OS project page with a Wiki is available at projects.coin-or.org/OS. Execute the following steps to get the source code using SVN.

Step 1: Connect to a directory where you want the OS project to go. The following command will download the project into the directory COIN-OS

```
svn co https://projects.coin-or.org/svn/OS/stable/1.0 COIN-OS
```

Step 2: Connect to the distribution root directory.

```
cd COIN-OS
```

Step 3: Run the configure script that will generate the makefiles.

```
./configure
```

For more information and options on the `./configure` script see <https://projects.coin-or.org/BuildTools/wiki/user-configure#PreparingtheCompilation>.

Step 4: Run the make files.

```
make
```

Step 5: Run the unitTest.

`make test`

Depending upon which third party software you have installed, the result of running the `unitTest` should look something like:

HERE ARE THE UNIT TEST RESULTS:

```
Solved problem avion2.osil with Ipopt
Solved problem HS071.osil with Ipopt
Solved problem rosenbrockmod.osil with Ipopt
Solved problem parincQuadratic.osil with Ipopt
Solved problem parincLinear.osil with Ipopt
Solved problem callBack.osil with Ipopt
Solved problem callBackRowMajor.osil with Ipopt
Solved problem parincLinear.osil with Clp
Solved problem p0033.osil with Cbc
Solved problem rosenbrockmod.osil with Knitro
Solved problem callBackTest.osil with Knitro
Solved problem parincQuadratic.osil with Knitro
Solved problem HS071_NLP.osil with Knitro
Solved problem p0033.osil with SYMPHONY
Solved problem parincLinear.osil with DyLP
Solved problem volumeTest.osil with Vol
Solved problem p0033.osil with GLPK
Solved problem lindoapiaddins.osil with Lindo
Solved problem rosenbrockmod.osil with Lindo
Solved problem parincQuadratic.osil with Lindo
Solved problem wayneQuadratic.osil with Lindo
Test the MPS -> OSiL converter on parinc.mps usig Cbc
Test the AMPL nl -> OSiL converter on hs71.nl using LINDO
Test a problem written in b64 and then converted to OSInstance
Successful test of OSiL parser on problem parincLinear.osil
Successful test of OSrL parser on problem parincLinear.osrl
Successful test of prefix and postfix conversion routines on problem rosenbrockmod.osil
Successful test of all of the nonlinear operators on file testOperators.osil
Successful test of AD gradient and Hessian calculations on problem CppADTestLag.osil
```

CONGRATULATIONS! YOU PASSED THE UNIT TEST

If you do not see

CONGRATULATIONS! YOU PASSED THE UNIT TEST

then you have not passed the `unitTest` and hopefully some semi-inteligble error message was given.

Step 6: Install the libraries. In addition you will have the following directories.

`make install`

This will install all of the libraries in the `lib` directory under the distribution root. In particular, the main OS library `libOS` along with the libraries of the other COIN-OR project that download with the OS project will get installed in the `lib` directory. In addition the `make install` command will install four executable programs in the `bin` directory. One of these binaries is `OSSolverService` which is main OS project executable. This is described in Section 9. In addition `clp`, `cbc`, `cbc-generic`, and `symphony` get installed in the `bin` directory.

3.2 Obtaining the OS Source Code From a Tarball or Zip File

The OS source code can also be obtained from either a tarball or zip file. This may be preferred for users who are not managing other COIN-OR projects wish to only work with periodic release versions of the code. In order to obtain the code from a Tarball or Zip file do the following.

Step 1: In a browser go the link <http://www.coin-or.org/Tarballs/OS/>. Listed at this page are files in the format:

```
OS-release_number.tgz
OS-release_number.zip
```

Step 2: Click on either the `tgz` or `zip` file and download to the desired directory.

Step 3: Upack the files. For `tgz` do the following at the command line:

```
gunzip OS-release_number.tgz
tar -xvf OS-release_number.tar
```

Windows users should be able to double click on the file `OS-release_number.zip` and have the directory unpacked.

Step 4: Rename `OS-release_number` to `COIN-OS`. Next follow Steps 2 - 6 outlined in Section 3.1.

3.3 Obtaining the Java Server Source Code

The Java source code for the setting up a solver service with Apache Tomcat is checked out as follows:

```
svn co https://projects.coin-or.org/svn/branches/OSjava OSJava
```

For users just wishing to setup the Tomcat solver service, all of the necessary binaries are available at

```
\url{http://www.coin-or.org/Binaries/OS/os-distribution-release_number.zip}
```

For more detail see Section 3.4 below and Section 10.

3.4 Obtaining the Binaries

If the user does not wish to compile source code, the OS library, `OSSolverService` executable, and Tomcat server software configuration are available at <http://www.coin-or.org/Binaries/OS> in binary format. In the binary OS root there are `cpp` and `java` directories for the compiled C++ and Java code.

In the `cpp` directory you will find binaries for the OS library (see Section 6), along with the necessary COIN-OR supporting libraries, and the `OSSolverService` (see Section 9) executable. All the files are packaged together as a `tgz` file for Unix distributions and `zip` for Windows. The distribution follows the following naming convention:

```
OS-release_number-operating_system-chip-compiler-tgz (zip)
```

For example, Release 1.0 on Linux is



Figure 1: The OS binary distribution.

`OS-1.0-linux-ix86-gcc3.4.tgz`

and on Windows

`OS-1.0-win32-msvc-v7.zip`

After unpacking the `tgz` or `zip` archives, the files in the resulting OS binary distribution are illustrated in Figure 1. In the `bin` directory is the executable file `OSSolverService`. The `doc` directory contains this document, `osUsersManual_1.pdf`. In the `include` directory are the header files that are required if the user wishes to write code to link to OS library or any other supporting COIN-OR library in the `lib` directory.

In the `java` directory are the binary files required to build a an Apache Tomcat-based Web service that will take SOAP envelopes with model instances in OSiL format, call the `OSSolverService`, and return the optimization result. This distribution is named

`os-distribution-release_number.zip`

and the details and use of this distribution is described in Section 10.

3.5 Obtaining and Installing a Visual Studio Project

Microsoft Visual Studio solution files are provided for users of Windows and the Microsoft Visual Studio IDE. There is a directory `MSVisualStudio` in the OS root directory. The `MSVisualStudio` contains root directories organized by the version of Visual Studio. We currently provide a solution file for Version 7. The Microsoft Visual Studio files are automatically downloaded with an SVN checkout. They are also contained in the tarballs. See Section 3.2.

The solution file contains an OS project file that will compile all of the OS source code into the `OSLibrary` and point to the necessary include files. There is also a project file for the

OSSolverService. The solution file also contains the project files for the other COIN-OR projects. It is assumed that the user has installed a copy of Microsoft Visual Studio.

3.6 Third Party Software

The default OS project is configured out-of-the-box with the COIN-OR projects Cbc, Clp, Cgl, CoinUtils, CppAD, DyLP, SYMPHONY, and Vol. However, the project is also designed to work with other COIN-OR projects and several other open source and commercial software projects.

In many of the header files there are `#include` statements inside `#ifdef` statements. For example,

```
#ifdef COIN_HAS_LINDO
#include "LindoSolver.h"
#endif
#ifdef COIN_HAS_IPOPT
#include "Ipsolver.h"
#endif
```

In the `inc` subdirectory of the OS directory, there is a header file, `config_os.h` that defines the values of the

`COIN_HAS_****`

variables. If the project is configured with the simple `./configure` command given in Step 3 with no arguments, then in the `config_os.h` these variables associated with the third-party software will be undefined. For example.

```
/* Define to 1 if the Cplex package is used */
/* #undef COIN_HAS_CPX */
```

unlike the configured COIN-OR projects that appear as

```
/* Define to 1 if the Clp package is used */
#define COIN_HAS_CLP 1
```

In the following subsections we describe how to incorporate various third-party packages into the OS project and see to it that the

`COIN_HAS_****`

variable is defined in `config_os.h`.

3.6.1 AMPL

The OS library contains a class, `OSnl2osil` (see Section (6.3.2)) and `amplClient` (see Section (11.1)) that require the use of the AMPL ASL library. See <http://netlib.sandia.gov/ampl/> and . See Users with a Unix system should locate the ASL folder that is part of the distribution. The ASL folder is in the `ThirdParty` folder which is in the project root folder. Locate and execute the `get.ASL` script. Do this prior to running the `configure` script. The `configure` script will build the correct ASL library.

Microsoft Visual Studio users will have to build the ASL library separately and then link it with the OS lib in the OS project file. The necessary source files are at <http://netlib.sandia.gov/cgi-bin/netlib/netlibfiles.tar?filename=netlib/ampl/solvers>. After unpacking the distribution build the source code with the utility `nmake` which should be part of the Visual Studio distribution. The appropriate command is

```
nmake -f makefile.vc" .
```

If the OS project is properly configured with the ASL library, `config_os.h` will contain the lines

```
/* If defined, the Ampl Solver Library is available. */
#define COIN_HAS_AS_L 1
```

At this point the reader may wish to view <https://projects.coin-or.org/BuildTools/wiki/user-configure#CommandLineArgumentsforconfigure> for more information on command line arguments that illustrated in the subsections below.

3.6.2 Cplex

Cplex is a linear, integer, and quadratic solver. See <http://www.ilog.com/products/cplex/?CFID=4534586&CFTOKEN=61400951>. Cplex does provide source code and you can only download the platform dependent binaries. After installing the binaries and include files in an appropriate run configure to point to the include and library directory. An example is given below.

```
configure --with-cplex-lib="-L$(CPLEXDIR)/lib/$(SYSTEM)/$(LIBFORMAT)
-lcplex -lilocplex -lm -lpthread" --with-cplex-incdir= $(CPLEXDIR)/include
```

You may also need the following environment variables.

```
SYSTEM      =i86_linux2_glibc2.3_gcc3.2
LIBFORMAT   =static_pic
CPLEXDIR     =/usr/local/ilog/cplex90
OBJECTCPLEX=CplexContinuousRun.o
CPLEXLIBPATH= -L$(CPLEXDIR)/lib/$(SYSTEM)/$(LIBFORMAT)
CPLEXINCDIR = $(CPLEXDIR)/include
CPLEX_LIBS=-lcplex -lilocplex -lm -lpthread
```

3.6.3 GLPK

GLPK is a an open-source linear and integer-programming solver from the GNU organization. See <http://www.gnu.org/software/glpk/>. In order to use GLPK with OS first go to any GNU mirror site (<http://www.gnu.org/prep/ftp.html>) and download the GLPK software in the directory `/gnu/glpk/`. Follow the instructions in the `INSTALL` file. After installing GLPK, run the configure script with the path to the GLPK library and include directory. An example is given below.

```
./config --with-glpk-lib="-L/home/kmartin/files/code/glpk/linux/lib -lglpk "
--with-glpk-incdir=/home/kmartin/files/code/glpk/linux/include
```

3.6.4 Ipopt

Ipopt is a COIN-OR project. In order to use Ipopt with OS, follow the instructions at [projects.coin-or.org\Ipopt](https://projects.coin-or.org/Ipopt) and build the project. Then when running configure point to the include directory and library directory. An example is given below.

```
./configure --with-ipopt-lib="-L/home/kmartin/files/code/ipopt/linux/Ipopt-3.2.2_clean/lib -lipopt
'cat /home/kmartin/files/code/ipopt/linux/Ipopt-3.2.2_clean/lib/ipopt_addlibs_cpp.txt'"
--with-ipopt-incdir=/home/kmartin/files/code/ipopt/linux/Ipopt-3.2.2_clean/include/ipopt
```

3.6.5 Knitro

Knitro is a nonlinear solver. See <http://www.ziena.com/>. Knitro does provide source code and you are can only download the platform dependent binaries. After installing the binaries and include files in an appropriate run configure to point to the include and library directory. An example is given below.

```
./configure --with-knitro-lib="-L/home/kmartin/files/code/knitro/linux/lib -lknitro "
--with-knitro-incdir=/home/kmartin/files/code/knitro/linux/include
```

3.6.6 LINDO

LINDO is a commercial linear, integer, and nonlinear solver. See www.lindo.com. LINDO does provide source code and you are can only download the platform dependent binaries. After installing the binaries and include files in an appropriate run configure to point to the include and library directory. An example is given below.

```
--with-lindo-lib="-L/home/kmartin/files/code/lindo/linux/lib -llindo -lmosek"
--with-lindo-incdir=/home/kmartin/files/code/lindo/linux/include
```

3.6.7 MATLAB

Install MATLAB on the client machine and follow the instruction in Section 6.3.3.

3.6.8 Library Paths

After running `configure` as described above, on Unix systems, it will be necessary to set the `LD_LIBRARY_PATH` or `DYLD_LIBRARY_PATH` (on Mac OS X) to environment variables to point to the location of the installed third party libraries in the case that the libraries are dynamic and not static libraries.

3.7 Bug Reporting

Bug reporting is done through the project Trac page. This is at <http://projects.coin-or.org/OS>. To report a bug, you must be a registered user. For instructions on how to register go to <http://www.coin-or.org/usingTrac.html> After registering, log in and then file a trouble ticket by going to <http://projects.coin-or.org/OS/newticket>.

3.8 Documentation

If you have Doxygen www.doxygen.org available (the executable `doxygen` should be in the `path` command) then executing

```
make doxydoc
```

in the project root directory will result in the Doxygen documentation being generated and stored in the `doxydoc` folder in the project root.

In order to view the documentation, open a browser and open the file

```
projectroot/doxydoc/html/index.html
```

Table 1: Tested Platforms for Solvers

	Mac	Linux	Cyg-gcc	Msys-cl	Msys-gcc	MSVS
AMPL-Client	x	x		x		
MATLAB	x					
Cbc	x	x	x	x		
Clp	x	x	x	x		
Cplex	x	x				
DyLP	x	x	x	x		
Ipopt	x	x				
Knitro	x	x				
Lindo	x	x		x		
SYMPHONY	x	x	x	x		
Vol	x	x	x	x		

Running Doxygen will generate documentation for only the OS project. Documentation will not be generated for the other COIN-OR projects in the project root. In the `doxydoc` folder is a configuration file `doxygen.conf`. This configuration for file contains for the `EXCLUDE` parameter

```
EXCLUDE = Cbc \
          Cgl \
          Clp \
          CoinUtils \
          cppad \
          SYMPHONY \
          Vol \
          DyLP \
          ThirdParty \
          Osi \
          include
```

This file can be edited, and any project for which documentation is desired, can be deleted from the `EXCLUDE` list.

3.9 Platforms

The build process described in Section 3.1 has been tested on Linux, Mac OS X, and on Windows using MINGW/MSYS and CYGWIN. The gcc/g++ and Microsoft cl compiler have been tested. A number of solvers have also been tested with the OS library. For a list of tested solvers and platforms see Table 1. More detail on the platforms listed in Table 1 is given in Table 2.

Kipp – ask Jun which platforms he has tested.

4 The OS Project Components

The directories in the project root are outlined in Figure 2.

If you download the OS package, you get these additional COIN-OR projects. The links to the project home pages are provided below and give more information on these projects.

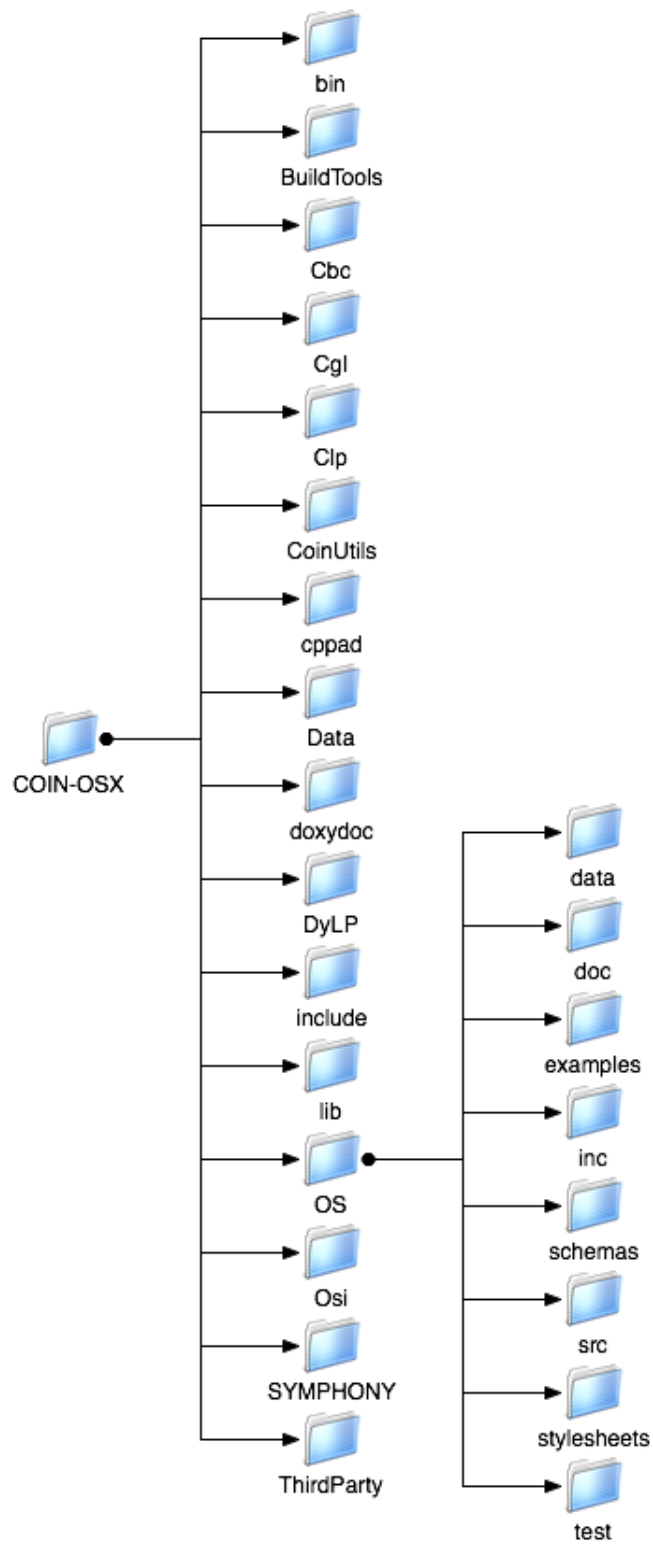


Figure 2: The OS project root directory.

Table 2: Platform Description

	Operating System	Compiler	Hardware
Mac	Mac OS X 10.4.9	gcc 4.0.1	Power PC
Linux	Red Hat 3.4.6-8	gcc 3.4.6	Dell Intel 32 bit chip
Cyg-gcc	Windows 2003 Server	gcc 3.4.4	Dell Intel 32 bit chip
Msys-cl	Windows XP	Visual Studio 2003	Dell Intel 32 bit chip
Msys-gcc			
MSVS	Windows XP	Visual Studio 2003	Dell Intel 32 bit chip

- BuildTools `projects.coin-or.org\BuildTools`
- Cbc `projects.coin-or.org\Cbc`
- Cgl `projects.coin-or.org\Cgl`
- Clp `projects.coin-or.org\Clp`
- CppAD `projects.coin-or.org\CppAD`
- Dylp `projects.coin-or.org\Dylp`
- Osi `projects.coin-or.org\Osi`
- SYMPHONY `projects.coin-or.org\SYMPHONY`
- Vol `projects.coin-or.org\Vol`

The following directories are also in the project root.

- `bin` after executing `make install` the `bin` directory will contain `OSSolverService`, `clp`, `cbc`, `cbc-generic` and `symphony`.
- `Data` this directory contains numerous test problems that are used by some of the COIN-OR project's `unitTest`.
- `doxydoc` is a folder for documentation
- `include` is a directory for header files. If the user wishes to write code to link against any of the libraries in the `lib` directory, it may be necessary to include these header files.
- `lib` is a directory of libraries. After running `make install` the OS library along with all other COIN-OR libraries are installed in `lib`.
- `ThirdParty` is a directory for third party software. For example, if AMPL related software is used such as `amplClient` is used, then certain AMPL libraries need to be present. This should go into the `ASL` directory in `ThirdParty`.

The directories in the OS directory are outlined in Figure 3.

The OS directories include the following:

- `data` is a directory that holds test problems. These test problems are used by the `unitTest`. Many of these files are also used to illustrate how the `OSSovlerService` works. See Section 9.

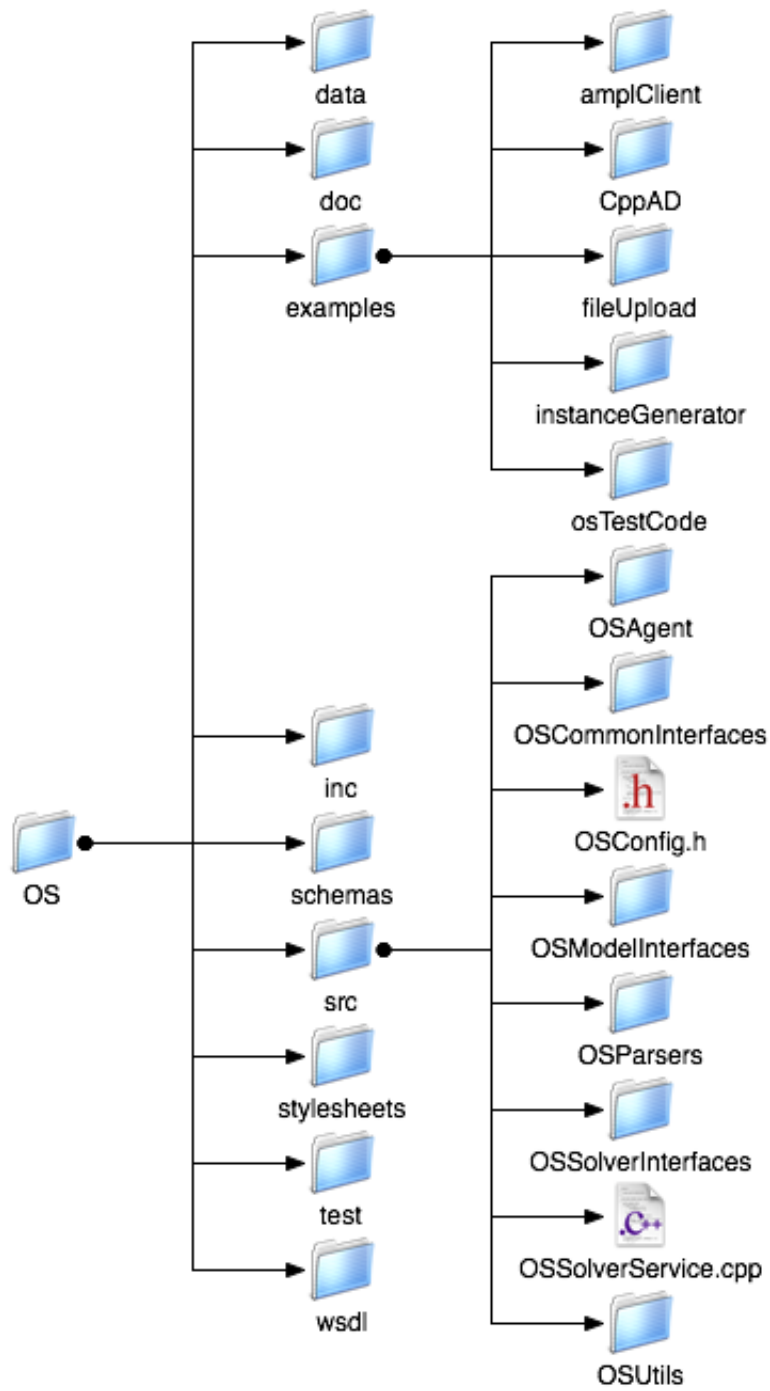


Figure 3: The OS directory.

- `doc` is the directory with documentation, include this *OS User's Manual*.
- `examples` is a directory with code examples that illustrate various aspects of the OS project. These are described in Section 11.
- `inc` is the directory with the `config/os.h` file which has information about which projects are included in the distribution.
- `MSVisualStudio` is a directory that contains solution files for the Microsoft Visual Studio IDE. The subdirectories are organized by the version of Visual Studio. We currently provide a solution file for Version 7.
- `schemas` is the directory that contains the W3C XSD (see www.w3c.org) schemas that are behind the OS standards. These are described in more detail in Section 5.
- `src` is the directory with all of the source code for the OS Library and for the executable `OSSolverService`. The OS Library components are described in Section 6.
- `stylesheets` this directory contains the XSLT stylesheet that is used to transform the solution instance in OSrL format into HTML so that it can be displayed in a browser.
- `test` this directory contains the `unitTest`.
- `wsdl` is a directory of WSDL (Web Services Discovery Language) files. These are used to specify the inputs and outputs for the methods provided by a Web service. The most relevant file for the current version of the OS project is `OShL.wsdl`. This describes the set of inputs and outputs for the methods implemented in the `OSSolverService`. See Section 9.
- `kipp` – talk about MS Visual Studio and where it goes

5 OS Protocols

The objective of (OS) is to provide a set of standards for representing optimization instances, results, solver options, and communication between clients and solvers in a distributed environment using Web Services. These standards are specified by W3C XSD schemas. The schemas for the OS project are contained in the `schemas` folder under the `OS` root. There are numerous schemas in this directory that are part of the OS standard. For a full description of all the schemas see Ma [4]. We briefly discuss the standards most relevant to the current version of the OS project.

OSiL (Optimization Services instance Language): an XML-based language for representing instances of large-scale optimization problems including linear programs, mixed-integer programs, quadratic programs, and very general nonlinear programs.

OSiL, stores optimization problem instances as XML files. Consider the following problem instance that is a modification of an example of Rosenbrock [5]:

$$\text{Minimize } (1 - x_0)^2 + 100(x_1 - x_0^2)^2 + 9x_1 \quad (1)$$

$$\text{s.t. } x_0 + 10.5x_0^2 + 11.7x_1^2 + 3x_0x_1 \leq 25 \quad (2)$$

$$\ln(x_0x_1) + 7.5x_0 + 5.25x_1 \geq 10 \quad (3)$$

$$x_0, x_1 \geq 0 \quad (4)$$

There are two continuous variables, x_0 and x_1 , in this instance, each with a lower bound of 0. Figure 4 shows how we represent this information in an XML-based OSiL file. Like all XML files, this is a text file that contains both *markup* and *data*. In this case there are two types of markup, *elements* (or *tags*) and *attributes* that describe the elements. Specifically, there are a `<variables>` element and two `<var>` elements. Each `<var>` element has attributes `lb`, `name`, and `type` that describe properties of a decision variable: its lower bound, “name”, and domain type.

To be useful for communication between solvers and modeling languages, OSiL instance files must conform to a standard. An XML-based representation standard is imposed through the use of a *W3C XML Schema*. The W3C, or World Wide Web Consortium (www.w3.org), promotes standards for the evolution of the web and for interoperability between web products. XML Schema (www.w3.org/XML/Schema) is one such standard. A schema specifies the elements and attributes that define a specific XML vocabulary. The W3C XML Schema is thus a schema for schemas; it specifies the elements and attributes for a schema that in turn specifies elements and attributes for an XML vocabulary such as OSiL. An XML file that conforms to a schema is called *valid* for that schema.

By analogy to object-oriented programming, a schema is akin to a header file in C++ that defines the members and methods in a class. Just as a class in C++ very explicitly describes member and method names and properties, a schema explicitly describes element and attribute names and properties.

Figure 5 is a piece of our schema for OSiL. In W3C XML Schema jargon, it defines a *complexType*, whose purpose is to specify elements and attributes that are allowed to appear in a valid XML instance file such as the one excerpted in Figure 4. In particular, Figure 5 defines the complexType named `Variables`, which comprises an element named `<var>` and an attribute named `numberOfVariables`. The `numberOfVariables` attribute is of a standard type `positiveInteger`, whereas the `<var>` element is a user-defined complexType named `Variable`. Thus the complexType `Variables` contains a sequence of `<var>` elements that are

```
<variables numberOfVariables="2">
  <var lb="0" name="x0" type="C"/>
  <var lb="0" name="x1" type="C"/>
</variables>
```

Figure 4: The `<variables>` element for the example (1)–(4).

```
<xs:complexType name="Variables">
  <xs:sequence>
    <xs:element name="var" type="Variable" maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:attribute name="numberOfVariables"
    type="xs:positiveInteger" use="required"/>
</xs:complexType>
```

Figure 5: The `Variables` complexType in the OSiL schema.

of complexType **Variable**. OSiL's schema must also provide a specification for the **Variable** complexType, which is shown in Figure 6.

In OSiL the linear part of the problem is stored in the `<linearConstraintCoefficients>` element, which stores the coefficient matrix using three arrays as proposed in the earlier LPFML schema [2]. There is a child element of `<linearConstraintCoefficients>` to represent each array: `<value>` for an array of nonzero coefficients, `<rowIdx>` or `<colIdx>` for a corresponding array of row indices or column indices, and `<start>` for an array that indicates where each row or column begins in the previous two arrays.

The quadratic part of the problem is represented as follows.

The nonlinear part of the problem is given in Figure 9.

The complete OSiL representation is given in the Appendix.

OSrL (Optimization Services result Language): an XML-based language for representing the solution of large-scale optimization problems including linear programs, mixed-integer programs, quadratic programs, and very general nonlinear programs. As example solution (for the problem given in (1)–(4)) in OSrL format is given below.

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml-stylesheet type = "text/xsl"
    href = "/Users/kmartin/Documents/files/code/cpp/OScpp/COIN-OSX/OS/stylesheets/OSrL.xsl" />
<osrl xmlns="os.optimizationservices.org"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="os.optimizationservices.org
    http://www.optimizationservices.org/schemas/OSrL.xsd">
    <resultHeader>
        <generalStatus type="success"/>
        <serviceName>Solved using a LINDO service</serviceName>
        <instanceName>Modified Rosenbrock</instanceName>
```

```
<xs:complexType name="Variable">
    <xs:attribute name="name" type="xs:string" use="optional"/>
    <xs:attribute name="init" type="xs:string" use="optional"/>
    <xs:attribute name="type" use="optional" default="C">
        <xs:simpleType>
            <xs:restriction base="xs:string">
                <xs:enumeration value="C"/>
                <xs:enumeration value="B"/>
                <xs:enumeration value="I"/>
                <xs:enumeration value="S"/>
            </xs:restriction>
        </xs:simpleType>
    </xs:attribute>
    <xs:attribute name="lb" type="xs:double" use="optional" default="0"/>
    <xs:attribute name="ub" type="xs:double" use="optional" default="INF"/>
</xs:complexType>
```

Figure 6: The **Variable** complexType in the OSiL schema.

```

<linearConstraintCoefficients numberOfValues="3">
  <start>
    <el>0</el><el>2</el><el>3</el>
  </start>
  <rowIdx>
    <el>0</el><el>1</el><el>1</el>
  </rowIdx>
  <value>
    <el>1.</el><el>7.5</el><el>5.25</el>
  </value>
</linearConstraintCoefficients>

```

Figure 7: The <linearConstraintCoefficients> element for constraints (2) and (3).

```

<quadraticCoefficients numberOfQuadraticTerms="3">
  <qTerm idx="0" idxOne="0" idxTwo="0" coef="10.5"/>
  <qTerm idx="0" idxOne="1" idxTwo="1" coef="11.7"/>
  <qTerm idx="0" idxOne="0" idxTwo="1" coef="3."/>
</quadraticCoefficients>

```

Figure 8: The <quadraticCoefficients> element for constraint (2).

```

</resultHeader>
<resultData>
  <optimization numberOfSolutions="1" numberOfVariables="2" numberOfConstraints="2"
    numberOfObjectives="1">
    <solution objectiveIdx="-1">
      <status type="optimal"/>
      <variables>
        <values>
          <var idx="0">0.87243</var>
          <var idx="1">0.741417</var>
        </values>
        <other name="reduced costs" description="the variable reduced costs">
          <var idx="0">-4.06909e-08</var>
          <var idx="1">0</var>
        </other>
      </variables>
      <objectives>
        <values>
          <obj idx="-1">6.7279</obj>
        </values>
      </objectives>
      <constraints>
        <dualValues>
          <con idx="0">0</con>

```

```

<nl idx="-1">
  <plus>
    <power>
      <minus>
        <number value="1.0"/>
        <variable coef="1.0" idx="0"/>
      </minus>
      <number value="2.0"/>
    </power>
    <times>
      <power>
        <minus>
          <variable coef="1.0" idx="0"/>
          <power>
            <variable coef="1.0" idx="1"/>
            <number value="2.0"/>
          </power>
        </minus>
        <number value="2.0"/>
      </power>
      <number value="100"/>
    </times>
  </plus>
</nl>

```

Figure 9: The `<nl>` element for the nonlinear part of the objective (1).

```

    <con idx="1">0.766294</con>
  </dualValues>
</constraints>
</solution>
</optimization>

```

OSoL (Optimization Services option Language): an XML-based language for representing options that get passed to an optimization solver.

OSnL (Optimization Services nonlinear Language): The OSnL schema is imported by the OSiL schema and is used to represent the nonlinear part of an optimization instance. This is explained in greater detail in Section 6.2.4. Also refer to Figure 9 for an illustration of elements from the OSnL standard.

OSpL (Optimization Services process Language): is a standard for dynamic process information that is kept by the Optimization Services registry. It is the result of a **knock** operation. See the example given in Section 9.3.5.

6 The OS Library Components

6.1 OSAgent

The **OSAgent** part of the library is used to facilitate communication with remote solvers. It is not used if the solver is invoked locally (i.e. on the same machine). There are two key classes in the **OSAgent** component of the OS library. The two classes are **OSSolverAgent** and **WSUtil**.

The **OSSolverAgent** class is used to contact a remote solver service. For example, assume that **sOSiL** is a string with a problem instance and **sOSoL** is a string with solver options. Then the following code will call a solver service and invoke the **solve** method.

```
OSSolverAgent *osagent;  
string serviceLocation = http://128.135.130.17:8080/os/OSSolverService.jws  
osagent = new OSSolverAgent( serviceLocation );  
osagent->solve(sOSiL, sOSoL);
```

Other methods in the **OSSolverAgent** class are **send**, **retrieve**, **getJobID**, **knock**, and **kill**. The use of these methods is described in Section 9.3.

The methods in the **OSSolverAgent** class call methods in the **WSUtil** class that perform such tasks as creating and parsing SOAP messages and making low level socket calls to the server running the solver service. The average user will not use methods in the **WSUtil** class, but they are available to anyone wanting to make socket calls or create SOAP messages.

There is also a method, **fileUpload** in the **OSAgentClass** that is used to upload files from the hard drive of a client to the server. It is very fast and does not involve SOAP or Web Services. The **fileUpload** method is illustrated and described in the example code **fileUpload.cpp** described in Section 11.3.

6.2 OSCommonInterfaces

The classes in the **OSCommonInterfaces** component of the OS library are used to read and write files and strings in the **OSiL** and **OSrL** protocols. See Section 5 for more detail on **OSiL**, **OSrL**, and other OS protocols. For a complete listing of all of the files in **OSCommonInterfaces** see the Doxygen documentation in the **doxydoc** folder (see Section 5). Below we highlight some key classes.

6.2.1 The OSInstance Class

The **OSInstance** class is the in-memory representation of an optimization instance and is a key class for users of the OS project. This class has an API defined by a collection of **get()** methods for extracting various components (such as bounds and coefficients) from a problem instance, a collection of **set()** methods for modifying or generating an optimization instance, and a collection of **calculate()** methods for function, gradient, and Hessian evaluations. See Section 7. We now describe how to create an **OSInstance** object and the close relationship between the **OSiL** schema and the **OSInstance** class.

6.2.2 Creating an OSInstance Object

The **OSCommonInterfaces** component contains an **OSiLReader** class for reading an instance in an **OSiL** string and creating an in-memory **OSInstance** object. Assume that **sOSiL** is a string with an instance in **OSiL** format. Creating an **OSInstance** object is illustrated in Figure 10.

```

OSiLReader *osilreader = NULL;
OSInstance *osinstance = NULL;
osilreader = new OSiLReader();
osinstance = osilreader->readOSiL( sOSiL);

```

Figure 10: Creating an OSInstance Object

6.2.3 Mapping Rules

The `OSInstance` class has two member classes, `InstanceHeader` and `InstanceData`. These correspond to the OSiL schema's complexTypes `instanceHeader` and `instanceData`, and to the XML elements `<instanceHeader>` and `<instanceData>`.

Moving down one level, Figure 12 shows that the `InstanceData` class has in turn the member classes `Variables`, `Objectives`, `Constraints`, `LinearConstraintCoefficients`, `QuadraticCoefficients`, and `NonlinearExpressions`, corresponding to the respective elements in the OSiL schema with the same name.

```

class OSInstance{
public:
    OSInstance();
    InstanceHeader *instanceHeader;
    InstanceData *instanceData;
}; //class OSInstance

```

Figure 11: The OSInstance class

```

class InstanceData{
public:
    InstanceData();
    Variables *variables;
    Objectives *objectives;
    Constraints *constraints;
    LinearConstraintCoefficients *linearConstraintCoefficients;
    QuadraticCoefficients *quadraticCoefficients;
    NonlinearExpressions *nonlinearExpressions;
}; // class InstanceData

```

Figure 12: The InstanceData class

Figure 13 uses the `Variables` class to provide a closer look at the correspondence between schema and class. On the right, the `Variables` class contains a `number` data member and a sequence of `var` objects of class `Variable`. The `Variable` class has `lb` (double), `ub` (double), `name` (string), `init` (double), and `type` (char) data members. On the left the corresponding XML

complexTypees are shown, with arrows indicating the correspondences. The following rules describe the mapping between the OSiL schema and the OSInstance class.

- ▷ Each complexType in an OSiL schema corresponds to a class in OSInstance. Thus the OSiL schema's complexType **Variable** corresponds to OSInstance's class **Variable**. Elements in an actual XML file then correspond to objects in OSInstance; for example, the `<var>` element that is of type **Variable** in an OSiL file corresponds to a `var` object in class **Variable** of OSInstance.
- ▷ An attribute or element used in the definition of a complexType is a member of the corresponding OSInstance class, and the type of the attribute or element matches the type of the member. In Figure 13, for example, `lb` is an attribute of the OSiL complexType named **Variable**, and `lb` is a member of the OSInstance class **Variable**; both have type `double`. Similarly, `var` is an element in the definition of the OSiL complexType named **Variables**,

Schema complexType	In-memory class
<pre> <xs:complexType name="Variables"> <xs:sequence> <xs:element name="var" type="Variable" maxOccurs="unbounded"/> </xs:sequence> <xs:attribute name="number" type="xs:positiveInteger" use="required"/> </xs:complexType> </pre>	<pre> class Variables{ public: Variables(); Variable *var; int number; }; // class Variables </pre>
<pre> <xs:complexType name="Variable"> <xs:attribute name="name" type="xs:string" use="optional"/> <xs:attribute name="init" type="xs:double" use="optional"/> <xs:attribute name="initString" type="xs:string" use="optional"/> <xs:attribute name="type" use="optional" default="C"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="C"/> <xs:enumeration value="B"/> <xs:enumeration value="I"/> <xs:enumeration value="S"/> </xs:restriction> </xs:simpleType> </xs:attribute> <xs:attribute name="lb" type="xs:double" use="optional" default="0"/> <xs:attribute name="ub" type="xs:double" use="optional" default="INF"/> </xs:complexType> </pre>	<pre> class Variable{ public: Variable(); string name; double init; string initString; char type; double lb; double ub; }; // class Variable </pre>
OSiL elements	In-memory objects
<pre> <variables number="2"> <var lb="0" name="x0" type="C"/> <var lb="0" name="x1" type="C"/> </variables> </pre>	<pre> OSInstance osinstance; osinstance.instanceData.variables.number=2; osinstance.instanceData.variables.var=new Var[2]; osinstance.instanceData.variables.var[0].lb=0; osinstance.instanceData.variables.var[0].name=x0; osinstance.instanceData.variables.var[0].type=C; osinstance.instanceData.variables.var[1].lb=0; osinstance.instanceData.variables.var[1].name=x1; osinstance.instanceData.variables.var[1].type=C; </pre>

Figure 13: The `<variables>` element as an OSInstance object

and `var` is a member of the `OSInstance` class `Variables`; the `var` element has type `Variable` and the `var` member is a `Variable` object.

- ▷ A schema sequence corresponds to an array. For example, in Figure 13 the complexType `Variables` has a sequence of `<var>` elements that are of type `Variable`, and the corresponding `Variables` class has a member that is an array of type `Variable`.

General nonlinear terms are stored in the data structure as `OSExpressionTree` objects, which are the subject of the next section.

The `OSInstance` class has a set of `get()`, `set()`, and `calculate()` methods that act as an API for the optimization instance and described in Section 7.

6.2.4 The `OSExpressionTree` `OSnLNode` Classes

The `OSExpressionTree` class provides the in-memory representation of the nonlinear terms. Our design goal is to allow for efficient parsing of OSiL instances, while providing an API that meets the needs of diverse solvers. Conceptually, any nonlinear expression in the objective or constraints is represented by a tree. The expression tree for the nonlinear part of the objective function (1), for example, has the form illustrated in Figure 14. The choice of a data structure to store such a tree — along with the associated methods of an API — is a key aspect in the design of the `OSInstance` class.

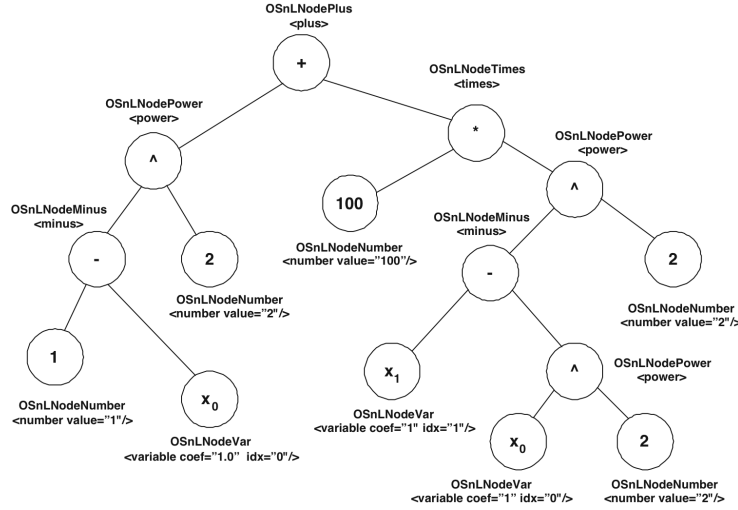


Figure 14: Conceptual expression tree for the nonlinear part of the objective (1).

A base abstract class `OSnLNode` is defined and all of an OSiL file's operator and operand elements used in defining a nonlinear expression are extensions of the base element type `OSnLNode`. There is an element type `OSnLNodePlus`, for example, that extends `OSnLNode`; then in an OSiL instance file, there are `<plus>` elements that are of type `OSnLNodePlus`. Each `OSExpressionTree` object contains a pointer to an `OSnLNode` object that is the root of the corresponding expression tree. To every element that extends the `OSnLNode` type in an OSiL instance file, there corresponds a class that derives from the `OSnLNode` class in an `OSInstance` data structure. Thus we can construct an expression tree of homogenous nodes, and methods that operate on the expression tree to calculate function values, derivatives, postfix notation, and the like do not require switches or complicated logic.

```

double OSnLNodePlus::calculateFunction(double *x){
    m_dFunctionValue =
        m_mChildren[0]->calculateFunction(x) +
        m_mChildren[1]->calculateFunction(x);
    return m_dFunctionValue;
} //calculateFunction

```

Figure 15: The function calculation method for the “plus” node class with polymorphism

The `OSInstance` class has a variety of `calculate()` methods, based on two pure virtual functions in the `OSInstance` class. The first of these, `calculateFunction()`, takes an array of `double` values corresponding to decision variables, and evaluates the expression tree for those values. Every class that extends `OSnLNode` must implement this method. As an example, the `calculateFunction` method for the `OSnLNodePlus` class is shown in Figure 15. Because the `OSiL` instance file must be validated against its schema, and in the schema each `<OSnLNodePlus>` element is specified to have exactly two child elements, this `calculateFunction` method can assume that there are exactly two children of the node that it is operating on. Thus through the use of polymorphism and recursion the need for switches like those in Figure ?? is eliminated. This design makes adding new operator elements easy; it is simply a matter of adding a new class and implementing the `calculateFunction()` method for it.

The following `OSnLNode` classes are currently supported.

- `OSnLNodeVariable`
- `OSnLNodeTimes`
- `OSnLNodePlus`
- `OSnLNodeSum`
- `OSnLNodeMinus`
- `OSnLNodeNegate`
- `OSnLNodeDivide`
- `OSnLNodePower`
- `OSnLNodeProduct`
- `OSnLNodeLn`
- `OSnLNodeSqrt`
- `OSnLNodeSquare`
- `OSnLNodeSin`
- `OSnLNodeCos`
- `OSnLNodeExp`
- `OSnLNodeif`

- OSnLNodeAbs
- OSnLNodeMax
- OSnLNodeMin
- OSnLNodeE
- OSnLNodePI
- OSnLNodeAllDiff

6.3 OSModelInterfaces

This part of the OS library is designed to help integrate the OS standards with other standards and modeling systems.

6.3.1 Converting MPS Files

The MPS standard is still a popular format for representing linear and integer programming problems. In `OSModelInterfaces`, there is a class `OSmps2osil` that can be used to convert files in MPS format into the OSiL standard. It is used as follows.

```
OSmps2osil *mps2osil = NULL;
DefaultSolver *solver = NULL;
solver = new CoinSolver();
solver->sSolverName = "cbc";
mps2osil = new OSmps2osil( mpsFileName);
mps2osil->createOSInstance() ;
solver->osinstance = mps2osil->osinstance;
solver->solve();
```

The `OSmps2osil` class constructor takes a string which should be the file name of the instance in MPS format. The constructor then uses the `CoinUtils` library to read and parse the MPS file. The class method `createOSInstance` then builds an in-memory `osinstance` object that can be used by a solver.

6.3.2 Converting AMPL nl Files

AMPL is a popular modeling language that saves model instances in the AMPL nl format. The `OSModelInterfaces` library provides a class, `OSnl2osil` for reading in an nl file and creating a corresponding in-memory `osinstance` object. It is used as follows.

```
OSnl2osil *nl2osil = NULL;
DefaultSolver *solver = NULL;
solver = new LindoSolver();
nl2osil = new OSnl2osil( nlFileName);
nl2osil->createOSInstance() ;
solver->osinstance = nl2osil->osinstance;
solver->solve();
```

The `OSnl2osil` class works much like the `OSmps2osil` class. The `OSnl2osil` class constructor takes a string which should be the file name of the instance in nl format. The constructor then uses the AMPL ASL library routines to read and parse the nl file. The class method `createOSInstance` then builds an in-memory `osintance` object that can be used by a solver.

In Section 11.1 we describe the `amplClient` executable that acts a “solver” for AMPL. The `amplClient` uses the `OSnl2osil` class to convert the instance in nl format to OSiL format before calling a solver either locally or remotely.

6.3.3 Using MATLAB

Linear, integer, and quadratic problems can be formulated in MATLAB and then optimized either locally or over the network using the OS Library. The `OSMatlab` class functions much like `OSnl2osil` and `OSmps2osil` and takes MATLAB arrays and creates an OSiL instance. This class is part of the OS library. In order to use the OS library with MATLAB the user should do the following. In order to use the `OSMatlab` class it is necessary to compile `matlabSolver.cpp` into a MATLAB Executable file. The `matlabSolver.cpp` file is in the `OSModelInterfaces` directory even though it is not part of the OS library. The following steps should be followed.

Step 1: In the project root run `make install`.

Step 2: Either leave `matlabSolver.cpp` in the `OSModelInterfaces` or copy it to another desired directory.

Step 3: Edit the MATLAB `mexopts.sh` (UNIX) or `mexopts.bat` so that the `CXXFLAGS` option includes the header files in the `cppad` directory and the `include` directory in the project root. For example, it should look like:

```
CXXFLAGS='-fno-common -no-cpp-precomp -fexceptions
-I/Users/kmartin/Documents/files/code/cpp/OScpp/COIN-OSX/
-I/Users/kmartin/Documents/files/code/cpp/OScpp/COIN-OSX/include'
```

Next edit the `CXXLIBS` flag so that the OS and supporting libraries are included. For example, it should look like:

```
CXXLIBS="$MLIBS -lstdc++
-L/Users/kmartin/Documents/files/code/ipopt/macosx/Ipopt-3.2.2/lib
-L/Users/kmartin/Documents/files/code/cpp/OScpp/COIN-OSX/lib
-lOS -lIpopt -l0siCbc -l0siClp -lCbc -lCgl -l0si -lClp -lCoinUtils -lm"
```

For a UNIX system the `mexopts.sh` file will usually be found in a directory with the release name in `~/matlab`. For example, `~/matlab/R14SP3`.

On a Windows system, the `mexopts.bat` file will usually be in a directory with the release name in `C:\Documents and Settings\Username\Application Data\Mathworks\MATLAB`

Step 4: Build the MATLAB executable file. Start MATLAB and in the MATLAB command window connect to the directory containing the file `matlabSolver.cpp`. Execute the command:

```
mex -v matlabSolver.cpp
```

On a MAC OS X the resulting executable will be named `matlabSolver.mexmac`. On the Windows system the file we named `matlabSolver.mexw32`.

Step 5: Set the MATLAB path to include the directory with the `matlabSolver` executable. Also, put the *m – file* `callMatlabSolver.m` in a directory which is on a MATLAB path. The `callMatlabSolver.m` m-file is in the `OSModelInterfaces` directory.

To use the `matlabSolver` it is necessary to put the coefficients from a linear, integer, or quadratic problem into MATLAB arrays.

$$\text{Minimize} \quad 10x_1 + 9x_2 \quad (5)$$

$$\text{Subject to} \quad .7x_1 + x_2 \leq 630 \quad (6)$$

$$.5x_1 + (5/6)x_2 \leq 600 \quad (7)$$

$$x_1 + (2/3)x_2 \leq 708 \quad (8)$$

$$.1x_1 + .25x_2 \leq 135 \quad (9)$$

$$x_1, x_2 \geq 0 \quad (10)$$

The MATLAB representation of this problem in MATLAB arrays is

```
% the number of constraints
numCon = 4;
% the number of variables
numVar = 2;
% variable types
VarType='CC';
% constraint types
A = [.7 1; .5 5/6; 1 2/3 ; .1 .25];
BU = [630 600 708 135];
BL = [];
OBJ = [10 9];
VL = [-inf -inf];
VU = [];
ObjType = 1;
% leave Q empty if there are no quadratic terms
Q = [];
prob_name = 'ParInc Example'
password = 'chicagoesmuyFRIO';
%
%
%the solver
solverName = 'lindo';
%the remote service service address
%if left empty we solve locally
serviceAddress='http://128.135.130.17:8080/os/OSSolverService.jws';
% now solve
callMatlabSolver( numVar, numCon, A, BL, BU, OBJ, VL, VU, ObjType, ...
    VarType, Q, prob_name, password, solverName, serviceAddress)
```

This example m-file is in the `data` directory and is file `parincLinear.m`. Note that in addition to the problem formulation we can specify which solver to use through the `solverName` variable. If solution with a remote solver is desired this can be specified with the `serviceAddress` variable. If the `serviceAddress` is left empty, i.e.

```
serviceAddress='';
```

then a local solver is used. In this case it is crucial that the appropriate solver is linked in with the `matlabSolver` executable using the `CXXLIBS` option.

The data directory also contains the m-file `template.m` which contains extensive comments about how to formulate the problems in MATLAB. A second example which is a quadratic problem is given in the Appendix. The appropriate m-file is `markowitz.m`.

6.4 OSParsers

The OSParsers component of the OS library contains reentrant parsers that read OSiL and OSrL strings and build, respectively, in-memory OSInstance and OSResult objects.

The OSiL parser is invoked through an OSiLReader object as illustrated below. Assume `osil` is a string with the problem instance.

```
OSiLReader *osilreader = NULL;
OSInstance *osinstance = NULL;
osilreader = new OSiLReader();
osinstance = osilreader->readOSiL( &osil);
```

The `readOSiL` method has a single argument which is a pointer to a string. The `readOSiL` method then calls an underlying method `yygetOSInstance` that parses the OSiL string. The major components of the OSiL schema are recognized by the parser.

```
<instanceHeader>
<variables>
<objectives>
<constraints>
<linearConstraintCoefficients>
<quadraticCoefficients>
<nonlinearExpressions>
```

There are other components in the OSiL schema, but they are not yet implemented. In most large-scale applications the `<variables>`, `<objectives>`, `<constraints>`, and will comprise the bulk of the instance memory. Because of this, we have “hard-coded” the OSiL parser to read these specific elements very efficiently. The parsing of the `<quadraticCoefficients>` and `<nonlinearExpressions>` is done using code generated by `flex` and `bison`. In the OSParsers the file `parseosil.l` is used by `flex` to generate `parseosil.cpp` and the file `parseosil.y` is used by `bison` to generate `parseosil.tab.cpp`. In `parseosil.l` we use the `reentrant` option and in `parseosil.y` we use the `pure-parser` option to generate reentrant parsers. The `parseosil.y` file contains both our “hard-coded” parser and the grammar rules for the `<quadraticCoefficients>` and `<nonlinearExpressions>` sections. We are currently using GNU Bison version 3.2 and `flex` 2.5.33.

The typical OS user will have no need to edit either `parseosil.l` or `parseosil.y` and therefore will not have to worry about running either `flex` or `bison` to generate the parsers. The generated parser code from `flex` and `bison` is distributed with the project and works on all of the platforms

listed in Table 1. If the user does edit either `parseosil.l` or `parseosil.y` then `parseosil.cpp` and `parseosil.tab.cpp` need to be regenerated with `flex` and `bison`. If these programs are present, in the OS directory execute

```
make run_parsers
```

The files `parseosrl.l` and `parseosrl.y` are used by `flex` and `bison` to generate the code `parseosrl.cpp` and `parseosrl.tab.cpp` for parsing strings in OSrL format. The comments made above about the OSiL parser apply to the OSrL parser. The OSrL parser, like the OSiL parser, is invoked using an OSrL reading object. This is illustrated below (`osrl` is a string in OSrL format).

```
OSrLReader *osrlreader = NULL;
osrlreader = new OSrLReader();
OSResult *osresult = NULL;
osresult = new OSResult();
osresult = osrlreader->readOSrL( osrl);
```

There is also a lexer `parseossss.l` for tokenizing the command line for the `OSSolverService` executable described in Section 9.

We hope to have a parser for OSoL in a future version of the project.

6.5 OSSolverInterfaces

The `OSSolverInterfaces` library is designed to facilitate linking the OS library with various solver APIs. We first describe how to take a problem instance in OSiL format and connect to a solver that has a COIN-OR OSI interface. See the OSI project www.projects.coin-or.org/0si. We then describe hooking to the COIN-OR nonlinear code Ipopt. See www.projects.coin-or.org/Ipopt. Finally we describe hooking to two commercial solvers KNITRO and LINDO.

The OS library has been tested with the following solvers using the Osi Interface.

- Cbc
- Clp
- Cplex
- DyLP
- Glpk
- SYMPHONY
- Vol

In the `OSSolverInterfaces` library there is an abstract class `DefaultSolver` that has the following key members:

```
std::string osil;
std::string osol;
std::string osrl;
OSInstance *osinstance;
OSResult *osresult;
```

and the pure virtual function

```
virtual void solve() = 0 ;
```

In order to use a solver through the COIN-OR `Osi` interface it is necessary to an object in the `CoinSolver` class which inherits from the `DefaultSolver` class and implements the appropriate `solve()` function. We illustrate with the `Clp` solver.

```
DefaultSolver *solver = NULL;
solver = new CoinSolver();
solver->m_sSolverName = "clp";
```

Assume that the data file containing the problem has been read into the string `osil` and the solver options are in the string `osol`. Then the `Clp` solver is invoked as follows.

```
solver->osil = osil;
solver->osol = osol;
solver->solve();
```

Finally, get the solution in `OSrL` format as follows

```
cout << solver->osrl << endl;
```

Even though LINDO and KNITRO are commercial solvers and do not have a COIN-OR `Osi` interface these solvers are used in exactly the same manner as a COIN-OR solver. For example, to invoke the LINDO solver we do the following.

```
solver = new LindoSolver();
```

Similarly for KNITRO and Ipopt. In the case of the KNITRO, the `KnitroSolver` class inherits from both `DefaultSolver` class and the `KNITRO NlpProblemDef` class. See <http://www.ziena.com/docs/knitroman.pdf> for more information on the KNITRO solver C++ implementation and the `NlpProblemDef` class. Similarly, for Ipopt the `IpoptSolver` class inherits from both the `DefaultSolver` class and the `Ipopt TNLP` class. See <https://projects.coin-or.org/Ipopt/browser/stable/3.2/Ipopt/doc/documentation.pdf?format=raw> for more information on the Ipopt solver C++ implementation and the `TNLP` calss.

In the examples above the problem instance was assumed to be read from a file into the string `osil` and then into the class member `solver->osil`. However, everything can be done entirely in memory. For example, it is possible to use the `OSInstance` class to create an in-memory problem representation and give this representation directly to a solver class that inherits from `DefaultSolver`. The class member to use is `osinstance`. This is illustrated in the example given in Section 11.5.

6.6 OSUtils

The `OSUtils` component of the `OS` library contains utility codes. For example, the `FileUtil` class contains useful methods for reading files into `string` or `char*` and writing files from `string` and `char*`. The `OSDataStructures` class holds other classes for things such as sparse vectors, sparse Jacobians, and sparse Hessians. The `MathUtil` class contains a method for converting between sparse matrices in row and column major form.

7 The OSInstance API

The OSInstance API can be used to:

- get information about model parameters, or convert the `OSExpressionTree` into a prefix or postfix representation through a set of `get` methods,
- modify, or even create an instance from scratch, using a set of `set` methods,
- provide information to solvers that require function evaluations, Jacobian and Hessian sparsity patterns, function gradient evaluations, and Hessian evaluations.

7.1 Get Methods

The `get()` methods are used by other classes to access data in an existing `OSInstance` object or get an expression tree representation of an instance in postfix or prefix format. Assume `osinstance` is an object in the `OSInstance` class created as illustrated in Figure 10. Then, for example,

```
osinstance->getVariableNumber();
```

will return an integer which is the number of variables in the problem,

```
osinstance->getVariableTypes();
```

will return a `char` pointer to the variable types (C for continuous, B for binary, and I for general integer),

```
getVariableLowerBounds();
```

will return a `double` pointer to the lower bound on each variable. There are similar `get` methods for the constraints. There are numerous `get` methods for the data in the `<linearConstraintCoefficients>` element, the `<quadraticCoefficients>` element, and the `<nonlinearExpressions>` element.

When an `osinstance` object is created, it is stored as an expression tree in an `OSExpressionTree` object. However, some solver APIs (e.g. LINDO) may take the data in a different format such as postfix and prefix. There are methods to return the data in either postfix or prefix format.

First define a vector of pointers to `OSnLNode` objects.

```
std::vector<OSnLNode*> postfixVec;
```

then get the expression tree for the objective function (index = -1) as a postfix vector of nodes.

```
postfixVec = osinstance->getNonlinearExpressionTreeInPostfix( -1);
```

If, for example, the `osinstance` object was the in-memory representation of the instance illustrated in Section 12.2 then the code

```
for (i = 0 ; i < n; i++){  
  cout << postfixVec[i]->snodeName << endl;  
}
```

will produce

```

number
variable
minus
number
power
number
variable
variable
number
power
minus
number
power
times
plus

```

The method, `processNonlinearExpressions()` in the `LindoSolver` class in the `OSSolverInterfaces` library component illustrates using a postfix vector of `OSnLNode` objects to build a Lindo model instance.

7.2 Set Methods

The `set` methods can be used to build an in-memory `OSInstance` object. A code example of how to do this is in Section 11.5.

7.3 Calculate Methods

The calculate methods are described in Section 8.

8 The OS Algorithmic Differentiation Implementation

The OS library provides a set of `calculate` methods for calculating function values, gradients, and Hessians. The `calculate` methods are part of the `OSInstance` class and are designed to work with solver APIs.

8.1 Algorithmic Differentiation: Brief Review

First and second derivative calculations are made using *algorithmic differentiation*. Here we provide a brief review of algorithmic differentiation. For an excellent reference on algorithmic differentiation see Griewank [3]. The OS package uses the COIN-OR package CppAD which is also an excellent resource with extensive documentation and information about algorithmic differentiation. See the documentation written by Brad Bell [1]. The development here is from the CppAD documentation. Consider the function $f : X \rightarrow Y$ from \mathbb{R}^n to \mathbb{R}^m .

Express the input vector as scalar function of t by

$$X(t) = x^{(0)} + x^{(1)}t + x^{(2)}t^2 \quad (11)$$

where $x^{(0)}$, $x^{(1)}$, and $x^{(2)}$ are vectors in \mathbb{R}^n . Then

$$\begin{aligned} X(0) &= x^{(0)} \\ X'(0) &= x^{(1)} \\ X''(0) &= 2x^{(2)} \end{aligned}$$

In general the $x^{(k)}$ correspond to the $k'th$ order Taylor coefficient, i.e.

$$x^{(k)} = \frac{1}{k!} X^{(k)}(0), \quad k = 0, 1, 2 \quad (12)$$

Then $Y(t) = f(X(t))$ is a function from \mathbb{R}^1 to \mathbb{R}^m and it is expressed in terms of its Taylor series expansion as

$$Y(t) = y^{(0)} + y^{(1)}t + y^{(2)}t^2 + o(t^3) \quad (13)$$

where

$$y^{(k)} = \frac{1}{k!} Y^{(k)}(0), \quad k = 0, 1, 2 \quad (14)$$

It is shown by Bell <http://www.coin-or.org/CppAD/> that:

$$y^{(0)} = f(x^{(0)}) \quad (15)$$

Let $e^{(i)}$ denote the $i'th$ unit vector. If $x^{(1)} = e^{(i)}$ then $y^{(1)}$ is equal to the $i'th$ column of the Jacobian matrix of $f(x)$ evaluated at $x^{(0)}$. That is

$$y^{(1)} = \frac{\partial f}{\partial x_i}(x^{(0)}). \quad (16)$$

If $x^{(1)} = e^{(i)}$ and $x^{(2)} = 0$ then for function $f_k(x)$,

$$y_k^{(2)} = \frac{1}{2} \frac{\partial^2 f_k(x^{(0)})}{\partial x_i \partial x_i} \quad (17)$$

If $x^{(1)} = e^{(i)} + e^{(j)}$ and $x^{(2)} = 0$ then for function $f_k(x)$,

$$y_k^{(2)} = \frac{1}{2} \left(\frac{\partial^2 f_k(x^{(0)})}{\partial x_i \partial x_i} + \frac{\partial^2 f_k(x^{(0)})}{\partial x_i \partial x_j} + \frac{\partial^2 f_k(x^{(0)})}{\partial x_j \partial x_i} + \frac{\partial^2 f_k(x^{(0)})}{\partial x_j \partial x_j} \right) \quad (18)$$

or, expressed in terms of the mixed partials,

$$\frac{\partial^2 f_k(x^{(0)})}{\partial x_i \partial x_j} = y_k^{(2)} - \frac{1}{2} \left(\frac{\partial^2 f_k(x^{(0)})}{\partial x_i \partial x_i} + \frac{\partial^2 f_k(x^{(0)})}{\partial x_j \partial x_j} \right) \quad (19)$$

8.2 Using OSInstance Methods: Low Level Calls

The code snippets used in this section are from the example code `algorithmicDiffTest.cpp` in the `algorithmicDiffTest` folder in the `examples` folder. The code is based on the following example.

$$\text{Minimize} \quad x_0^2 + 9x_1 \quad (20)$$

$$\text{s.t.} \quad 33 - 105 + 1.37x_1 + 2x_3 + 5x_1 \leq 10 \quad (21)$$

$$\ln(x_0x_3) + 7x_2 \geq 10 \quad (22)$$

$$x_0, x_1, x_2, x_3 \geq 0 \quad (23)$$

The OSiL representation of the instance (20)-(23) is given in Appendix 12.3. This example is designed to illustrate several features of OSiL. Note that in equation (21) the constant 33 appears in the `<con>` element corresponding to this constraint and the constant 105 appears as a `<number>` OSnL node in the `<nonlinearExpressions>` section. There are no nonlinear terms in the instance that involve variable x_1 . The $5x_1$ term in equation (21) is expressed in the `<linearConstraintCoefficients>` section. However, the $1.37x_1$ term in equation (21) is expressed in the `<nonlinearExpressions>` section. Hence, in the OSInstance API, variable x_1 is treated as a nonlinear variable for purposes of algorithmic differentiation. Variable x_2 never appears in the `<nonlinearExpressions>` section and is therefore treated as a linear variable and not used in any algorithmic differentiation calculations.

Ignoring the nonnegativity constraints, instance (20)-(23) defines the following function $f : X \rightarrow Y$ from \mathbb{R}^4 to \mathbb{R}^3 .

$$f(x) = \begin{bmatrix} f_1(x) \\ f_2(x) \\ f_3(x) \end{bmatrix} = \begin{bmatrix} x_0^2 + 9x_1 \\ 33 - 105 + 1.37x_1 + 2x_3 + 5x_1 \\ \ln(x_0x_3) + 7x_2 \end{bmatrix} \quad (24)$$

The OSiL representation for the instance in (20)-(23) is read into an in-memory OSInstance object as follows (we assume that `osil` is a `string` with the OSiL instance)

```
osilreader = new OSiLReader();
osinstance = osilreader->readOSiL( &osil);
```

There is a method in the OSInstance class, `initForAlgDiff()` that is used to initialize the nonlinear data structures. A call to this method

```
osinstance->initForAlgDiff( );
```

will generate a map of the indices of the nonlinear variables. This is critical because the algorithmic differentiation only operates on variables that appear in the `<nonlinearExpressions>` section. An example of this map follows.

```
std::map<int, int> varIndexMap;
std::map<int, int>::iterator posVarIndexMap;
varIndexMap = osinstance->getAllNonlinearVariablesIndexMap( );
for(posVarIndexMap = varIndexMap.begin(); posVarIndexMap
!= varIndexMap.end(); ++posVarIndexMap){
std::cout << "Variable Index = " << posVarIndexMap->first << std::endl ;
}
```

The variable indices listed are 0, 1, and 3. Variable 2 does not appear in the `<nonlinearExpressions>` section and is not included in `varIndexMap`.

Once the nonlinear structures are initialized it is possible to take derivatives using algorithmic differentiation. Algorithmic differentiation is done using either a forward or reverse sweep through

an expression tree (or operation sequence) representation of f . The two key algorithmic differentiation **public** methods in the **OSInstance** class are **forwardAD** and **reverseAD**. These are actually generic “wrappers” around the corresponding CppAD methods with the same signature. This keeps the OS API public methods independent of any underlying algorithmic differentiation package.

The **forwardAD** signature is

```
std::vector<double> forwardAD(int k, std::vector<double> vdX);
```

where k is the highest order Taylor coefficient of f to be returned, **vdX** is vector of doubles in \mathbb{R}^n , and the function return is a vector of doubles in \mathbb{R}^m . Thus, k corresponds to the k in Equations (12) and (14), where **vdX** corresponds to the $x^{(k)}$ in Equation (12) and the $y^{(k)}$ in Equation (14) is the vector in range space returned by the call to **forwardAD**. For example, by Equation (15) the following call will evaluate each component function defined in (24).

```
funVals = osinstance->forwardAD(0, x0);
```

Since there are three components in the vector defined by (24), the return value **funVals** will have three components. For an input vector,

```
x0[0] = 1; // the value for variable x0
x0[1] = 5; // the value for variable x1
x0[2] = 5; // the value for variable x3
```

the values returned by **osinstance->forwardAD(0, x0)** are 1, -63.15, and 1.6094, respectively. The Jacobian of the example in (24) is

$$J = \begin{bmatrix} 2x_0 & 9.00 & 0.00 & 0.00 \\ 0.00 & 6.37 & 0.00 & 2.00 \\ 1/x_0 & 0.00 & 7.00 & 1/x_3 \end{bmatrix} \quad (25)$$

when $x_0 = 1$, $x_1 = 5$, $x_2 = 10$, and $x_3 = 5$ the Jacobian is

$$J = \begin{bmatrix} 2.00 & 9.00 & 0.00 & 0.00 \\ 0.00 & 6.37 & 0.00 & 2.00 \\ 1.00 & 0.00 & 7.00 & 0.20 \end{bmatrix} \quad (26)$$

A forward sweep with $k = 1$ will calculate the Jacobian column-wise. See (16). The following code will return column 4 of the Jacobian (26) which corresponds to nonlinear variable x_3 .

```
x1[0] = 0;
x1[1] = 0;
x1[2] = 1;
osinstance->forwardAD(1, x1);
```

Now calculate second derivatives. To illustrate we use the results in (17)-(19) and calculate

$$\frac{\partial^2 f_k(x^{(0)})}{\partial x_0 \partial x_3} \quad k = 1, 2, 3.$$

Variables x_0 and x_3 are the first and third nonlinear variables so by (18) the $x^{(1)}$ should be the sum of the $e^{(1)}$ and e^3 unit vectors and used in first-order forward sweep calculation.

```

x1[0] = 1;
x1[1] = 0;
x1[2] = 1;
osinstance->forwardAD(1, x1);

```

Next set $x^{(2)} = 0$ and do a second-order forward sweep.

```

std::vector<double> x2( n);
x2[0] = 0;
x2[1] = 0;
x2[2] = 0;
osinstance->forwardAD(2, x2);

```

This call returns the vector of values

$$y_1^{(2)} = 1, \quad y_2^{(2)} = 0, \quad y_3^{(2)} = -.52$$

By inspection,

$$\begin{aligned}
\frac{\partial^2 f_1(x^{(0)})}{\partial x_0 \partial x_0} &= 2 \\
\frac{\partial^2 f_2(x^{(0)})}{\partial x_0 \partial x_0} &= 0 \\
\frac{\partial^2 f_3(x^{(0)})}{\partial x_0 \partial x_0} &= -1 \\
\frac{\partial^2 f_1(x^{(0)})}{\partial x_3 \partial x_3} &= 0 \\
\frac{\partial^2 f_2(x^{(0)})}{\partial x_3 \partial x_3} &= 0 \\
\frac{\partial^2 f_3(x^{(0)})}{\partial x_3 \partial x_3} &= -.04
\end{aligned}$$

Then by (19),

$$\begin{aligned}
\frac{\partial^2 f_1(x^{(0)})}{\partial x_0 \partial x_3} &= y_1^{(2)} - \frac{1}{2} \left(\frac{\partial^2 f_1(x^{(0)})}{\partial x_0 \partial x_0} + \frac{\partial^2 f_k(x^{(0)})}{\partial x_3 \partial x_3} \right) = 1 - \frac{1}{2}(2 + 0) = 0 \\
\frac{\partial^2 f_2(x^{(0)})}{\partial x_0 \partial x_3} &= y_2^{(2)} - \frac{1}{2} \left(\frac{\partial^2 f_2(x^{(0)})}{\partial x_0 \partial x_0} + \frac{\partial^2 f_k(x^{(0)})}{\partial x_3 \partial x_3} \right) = 0 - \frac{1}{2}(0 + 0) = 0 \\
\frac{\partial^2 f_3(x^{(0)})}{\partial x_0 \partial x_3} &= y_3^{(2)} - \frac{1}{2} \left(\frac{\partial^2 f_3(x^{(0)})}{\partial x_0 \partial x_0} + \frac{\partial^2 f_k(x^{(0)})}{\partial x_3 \partial x_3} \right) = -52 - \frac{1}{2}(-1 - .04) = 0
\end{aligned}$$

Making all of the first and second derivative calculations using forward sweeps is most effective when the number of rows exceeds the number of variables.

The **reverseAD** signature is

```

std::vector<double> reverseAD(int k, std::vector<double> vdlambda);

```

where **vdlambda** is a vector of Lagrange multipliers. This method returns a vector in the range space. If a reverse sweep of order k is called, a forward sweep of order at $k - 1$ must have been made prior to the call.

8.2.1 First Derivative Reverse Sweep Calculations

In order to calculate first derivatives execute the following sequence of calls.

```
x0[0] = 1;
x0[1] = 5;
x0[2] = 5;
std::vector<double> vlamba(3);
vlamba[0] = 0;
vlamba[1] = 0;
vlamba[2] = 1;
osinstance->forwardAD(0, x0);
osinstance->reverseAD(1, vlamba);
```

Since the `vlamba` only includes the third function $f_1(x)$ the sequence of calls will produce the third row of the Jacobian, i.e.

$$\frac{\partial f_3(x^{(0)})}{\partial x_0} = 1, \quad \frac{\partial f_3(x^{(0)})}{\partial x_1} = 0, \quad \frac{\partial f_3(x^{(0)})}{\partial x_3} = .2$$

8.2.2 Second Derivative Reverse Sweep Calculations

In order to calculate second derivatives using `reverseAD` forward sweeps of order 0 and 1 must be finished. The call to `reverseAD(2, vlamba)` will return a vector of dimension $2n$ where n is the number of variables. If the zero-order forward sweep is `forward(0,x0)` and the first-order forward sweep is `forwardAD(1, x1)` where $x1 = e^{(i)}$, then the return vector $z = \text{reverseAD}(2, \text{vlamba})$ is

$$z[2j - 2] = \frac{\partial L(x^{(0)}, \lambda^{(0)})}{\partial x_j}, \quad j = 1, \dots, n \quad (27)$$

$$z[2j - 1] = \frac{\partial^2 L(x^{(0)}, \lambda^{(0)})}{\partial x_i \partial x_j}, \quad j = 1, \dots, n \quad (28)$$

where

$$L(x, \lambda) = \sum_{k=1}^m \lambda_k f_k(x) \quad (29)$$

For example, the following calls will calculate the third row (column) of the Hessian of the Lagrangian.

```
x0[0] = 1;
x0[1] = 5;
x0[2] = 5;
osinstance->forwardAD(0, x0);
x1[0] = 0;
x1[1] = 0;
x1[2] = 1;
osinstance->forwardAD(1, x1);
vlamba[0] = 1;
```

```

vlambda[1] = 2;
vlambda[2] = 1;
osinstance->reverseAD(2, vlambda);

```

This returns

$$\frac{\partial L(x^{(0)}, \lambda^{(0)})}{\partial x_1} = 3, \quad \frac{\partial L(x^{(0)}, \lambda^{(0)})}{\partial x_2} = 12.74, \quad \frac{\partial L(x^{(0)}, \lambda^{(0)})}{\partial x_3} = 4.2$$

$$\frac{\partial^2 L(x^{(0)}, \lambda^{(0)})}{\partial x_3 \partial x_0} = 0, \quad \frac{\partial^2 L(x^{(0)}, \lambda^{(0)})}{\partial x_3 \partial x_1} = 0, \quad \frac{\partial^2 L(x^{(0)}, \lambda^{(0)})}{\partial x_3 \partial x_3} = -0.04$$

The reason that

$$\frac{\partial L(x^{(0)}, \lambda^{(0)})}{\partial x_2} = 2 \times 6.37 = 12.74$$

and not

$$\frac{\partial L(x^{(0)}, \lambda^{(0)})}{\partial x_2} = 1 \times 9 + 2 \times 6.37 = 12.74 = 21.74$$

is that the $9x_1$ term in the objective is captured in the `<coef>` element in the `<objectives>` section and therefore does not appear as a nonlinear term in `<nonlinearExpressions>`. Again, `forwardAD` and `reverseAD` only operate on variables and terms in either the `<quadraticCoefficients>` or `<nonlinearExpressions>` sections.

8.3 Using OSInstance Methods: High Level Calls

The methods `forwardAD` and `reverseAD` are low level calls and are not designed to work directly with solver APIs. The `OSInstance` API has other methods that most users will want to invoke when linking with solver APIs. We describe these now.

8.3.1 Sparsity Methods

Many solvers such as Ipopt (projects.coin-or.org/Ipopt) or Knitro (www.ziena.com) require the sparsity pattern of the Jacobian of the constraint matrix and the Hessian of the Lagrangian function. The following code illustrates how to get the sparsity pattern of the constraint Jacobian matrix

```

SparseJacobianMatrix *sparseJac;
sparseJac = osinstance->getJacobianSparsityPattern();
for(idx = 0; idx < sparseJac->startSize; idx++){
    std::cout << "number constant terms in constraint " << idx << " is "
    << *(sparseJac->conVals + idx) << std::endl;
    for(k = *(sparseJac->starts + idx); k < *(sparseJac->starts + idx + 1); k++){
        std::cout << "row idx = " << idx << "
        col idx = "<< *(sparseJac->indexes + k) << std::endl;
    }
}

```

For the example problem this will produce


```

JACOBIAN SPARSITY PATTERN
number constant terms in constraint 0 is 0
row idx = 0  col idx = 1
row idx = 0  col idx = 3
number constant terms in constraint 1 is 1
row idx = 1  col idx = 2
row idx = 1  col idx = 0
row idx = 1  col idx = 3

```

The `SparseJacobianMatrix` object has a data member `starts` which is the index of the start of each constraint row. The `int` data member `indexes` is the variable index of a potential nonzero derivative. There is also a `double` data member `values` that will the value of the partial derivative of the corresponding index at each iteration. Finally, there is an `int` data member `conVals` that is the number of constant terms in each gradient. A constant term is a partial derivative that cannot change at an iteration. A variable is considered a constant variable if it appears in the `<linearConstraintCoefficients>` section but not in the `nonlinearExpressions`. For a row indexed by `idx` the variable indices are in the `indexes` array between the elements `sparseJac->starts + idx` and `sparseJac->starts + idx + 1`. The first `sparseJac->conVals + idx` variables listed are indices of constant variables. In this example, when `idx` is 1, there is one constant variable and it is variable x_2 . The constant variables never appear in the AD evaluation.

The following code illustrates how to get the sparsity pattern of the Hessian of the Lagrangian.

```

SparseHessianMatrix *sparseHessian;
sparseHessian = osinstance->getLagrangianHessianSparsityPattern( );
for(idx = 0; idx < sparseHessian->hessDimension; idx++){
std::cout << "Row Index = " << *(sparseHessian->hessRowIdx + idx) ;
std::cout << " Column Index = " << *(sparseHessian->hessColIdx + idx);
}

```

The `SparseHessianMatrix` class has the `int` data members `hessRowIdx` and `hessColIdx` for indexing potential nonzero elements in the Hessian matrix. The `double` data member `hessValues` holds the value of the respective second derivative at each iteration. If `numVars` is the number of nonlinear variables, each array in `sparseHessian` is of size

$$numVars * (numVars + 1) / 2;$$

All mixed partials of nonlinear terms are considered to be potential nonzeros. Hopefully, a future implementation of the OS library will be more robust in preserving sparsity.

8.3.2 Function Evaluation Methods

There are several overloaded methods for calculating objective and constraint values. The method

```
double *calculateAllConstraintFunctionValues(double* x, bool new_x)
```

will return a `double` pointer to an array of constraint function values evaluated at `x`. If the value of `x` has not changed since the last function call, then `new_x` should be set to `false` and the most recent function values are returned. When using this method, with this signature, all function values are calculated in `double` using an `OSExpressionTree` object.

A second signature for the `calculateAllConstraintFunctionValues` is

```
double *calculateAllConstraintFunctionValues(double* x, double *objLambda,
double *conLambda, bool new_x, int highestOrder)
```

In this signature, `x` is a pointer to the current primal values, `objLambda` is a vector of dual multipliers, `conLambda` is a vector of dual multipliers on the constraints, `new_x` is true if any components of `x` have changed since the last evaluation, and `highestOrder` is the highest order of derivative to be calculated at this iteration. The following code snippet illustrates defining a set of variable values for the example we are using and then the function call.

```
double* x = new double[4]; //primal variables
double* z = new double[2]; //Lagrange multipliers on constraints
double* w = new double[1]; //Lagrange multiplier on objective
x[ 0] = 1;    // primal variable 0
x[ 1] = 5;    // primal variable 1
x[ 2] = 10;   // primal variable 2
x[ 3] = 5;    // primal variable 3
z[ 0] = 2;    // Lagrange multiplier on constraint 0
z[ 1] = 1;    // Lagrange multiplier on constraint 1
w[ 0] = 1;    // Lagrange multiplier on the objective function
calculateAllConstraintFunctionValues(x, w, z, true, 0);
```

When making all high level calls for function, gradient, and Hessian evaluations we use pass all the primal variables in the `x` argument, not just the nonlinear variables. Underneath the call, the nonlinear variables are identified and used in AD function calls.

The use of the parameters `new_x` and `highestOrder` is important and requires further explanation. The parameter `highestOrder` is an integer variable that will take on the value 0, 1, or 2 (actually higher values if we want third derivatives etc.). The value of this variable is the highest order derivative that is required of the current iterate. For example, if a callback requires a function evaluation and `highestOrder = 0` then only the function is evaluated at the current iterate. However, if `highestOrder = 2` then the function call

```
calculateAllConstraintFunctionValues(x, w, z, true, 2)
```

will trigger first and second derivative evaluations in addition to the function evaluations.

In the `OSInstance` class code, every time a forward (`forwardAD`) or reverse sweep (`reverseAD`) is executed a private member, `m_iHighestOrderEvaluated` is set to the order of the sweep. For example, `forwardAD(1, x)` will result in `m_iHighestOrderEvaluated = 1`. Just knowing the value of `new_x` alone is not sufficient. It is also necessary to know `highestOrder` and compare it with `m_iHighestOrderEvaluated`. For example, if `new_x` is false, but `m_iHighestOrderEvaluated = 0`, and the callback requires a Hessian calculation, then it is necessary to calculate the first and second derivatives at the current iterate.

There are *exactly two* conditions that require a new function or derivative evaluation. A new evaluation is required if and only if

1. The value of `new_x` is true

–OR–

2. For the callback function the value of the input parameter `highestOrder` is strictly greater than the current value of `m_iHighestOrderEvaluated`.

For an efficient implementation of AD it is important to be able to get the Lagrange multipliers and highest order derivative that is required from inside *any* callback – not just the Hessian evaluation callback. For example, in `Ipopt`, if `eval_g` or `eval_f` are called, and for the current iterate, `eval_jac` and `eval_hess` are also going to be called, then a more efficient AD implementation is possible if the Lagrange multipliers are available for `eval_g` and `eval_f`.

Currently, whenever `new_x = true` in the underlying AD implementation we do not retape the function. This is because we currently throw an exception if there are any logical operators involved in the AD calculations. This may change in a future implementation.

There are also similar methods for objective function evaluations. There is also a method

```
double calculateFunctionValue(int idx, double* x, bool new_x);
```

that will return the value of any constraint or objective function indexed by `idx`. This method works strictly with `double` data using an `OSExpressionTree` object.

There is also a public variable, `bUseExpTreeForFunEval` that, if set to `true`, will cause the method

```
calculateAllConstraintFunctionValues(x, objLambda, conLambda, true, highestOrder)
```

to also use the OS expression tree for function evaluations when `highestOrder = 0` rather than use the operator overloading in the CppAD tape.

8.3.3 Gradient Evaluation Methods

One `OSInstance` method for gradient calculations is

```
SparseJacobianMatrix *calculateAllConstraintFunctionGradients(double* x, double *objLambda,
    double *conLambda, bool new_x, int highestOrder)
```

If a call has been placed to `calculateAllConstraintFunctionValues` with `highestOrder = 0`, then the appropriate call to get gradient evaluations is

```
calculateAllConstraintFunctionGradients( x, NULL, NULL, false, 1);
```

Note that in this function call `new_x = false`. This prevents a call to `forwardAD()` with order 0 to get the function values.

If, at the current iterate, the Hessian of the Lagrangian function is also desired then an appropriate call is

```
calculateAllConstraintFunctionGradients(objLambda, conLambda, false, 2);
```

In this case, if there was a prior call

```
calculateAllConstraintFunctionValues(x, w, z, true, 0);
```

then only first and second derivatives are calculated, not function values.

When calculating the gradients, if the number of nonlinear variables exceeds or is equal to the number of rows, a `forwardAD(0, x)` sweep is used to get the function values, and a `reverseAD(1, e^k)` sweep for each unit vector e^k in the row space is used to get the vector of first order partials for each row in the constraint Jacobian. If the number of nonlinear variables is less than the number of rows then a `forwardAD(0, x)` sweep is used to get the function values and a `forwardAD(1, e^i)` sweep for each unit vector e^i in the column space is used to get the vector of first order partials for each column in the constraint Jacobian.

Two other gradient methods are

```
SparseVector *calculateConstraintFunctionGradient(double* x,
double *objLambda, double *conLambda, int idx, bool new_x, int highestOrder);
```

and

```
SparseVector *calculateConstraintFunctionGradient(double* x, int idx,
bool new_x );
```

Similar methods are available for the objective function, however the objective function gradient methods treat the gradient of each objective function as a dense vector.

8.3.4 Hessian Evaluation Methods

There are two methods for Hessian calculations. The first method has the signature

```
SparseHessianMatrix *calculateLagrangianHessian( double* x,
double *objLambda, double *conLambda, bool new_x, int highestOrder);
```

so if either function or first derivatives have been calculated an appropriate call is

```
calculateLagrangianHessian( x, w, z, false, 2);
```

If the Hessian of a single row or objective function is desired the following method is available

```
SparseHessianMatrix *calculateHessian( double* x, int idx, bool new_x);
```

9 The OSSolverService

The `OSSolverService` is a command line executable designed to pass problem instances in either OSiL, AMPL nl, or MPS format to solvers and get the optimization result back to be displayed either to standard output or a specified browser. The `OSSovlerService` can be used to invoke a solver locally or on a remote server. It can work either synchronously or asynchronously.

9.1 OSSolverService Input Parameters

At present, the `OSSolverService` takes the following parameters. The order of the parameters is irrelevant. Not all the parameters are required. However, if the `solve` or `send` service methods are invoked a problem instance location must be specified.

-osil xxx.osil this is the name of the file that contains the optimization instance in OSiL format. It is assumed that this file is available in a directory on the machine that is running `OSSolverService`. If this option is not specified then the instance location must be specified in the OSoL solver options file.

-osol xxx.osol this is the name of the file that contains the solver options. It is assumed that this file is available in a directory on the machine that is running `OSSolverService`. It is not necessary to specify this option.

-osrl xxx.osrl this is the name of the file that contains the solver solution. A valid file path must be given on the machine that is running `OSSolverService`. It is not necessary to specify this option.

-serviceLocation is the URL of the solver service. This is not required, and if not specified it is assumed that the problem is solved locally.

-serviceMethod method this is the solver service required. The options are **solve**, **send**, **kill**, **knock**, **getJobID**, and **retrieve**. The use of these options is illustrated in the examples below. This option is not required, and the default value is **solve**.

-mps xxx.mps this is the name of the mps file if the problem instance is in mps format. It is assumed that this file is available in a directory on the machine that is running **OSSolverService**. The default file format is OSiL so this option is not required.

-nl xxx.nl this is the name of the AMPL nl file if the problem instance is in AMPL nl format. It is assumed that this file is available in a directory on the machine that is running **OSSolverService**. The default file format is OSiL so this option is not required.

-solver solverName Possible values for default OS installation are **tt clp** (COIN-OR Clp), **cbc** (COIN-OR Cbc), **dylp** (COIN-OR DyLP), and **symphony** (COIN-OR SYMPHONY). Other solvers supported (if the necessary libraries are present) are **cplex** (Cplex through COIN-OR Osi), **glpk** (glpk through COIN-OR Osi), **ipopt** (COIN-OR Ipopt), **knitro** (Knitro), and **lindo** LINDO. If no value is specified for this parameter, then **cbc** is the default value of this parameter if the **solve** or **send** service methods are used.

-browser browserName this parameter is a path to the browser on the local machine. If this optional parameter is specified then the solver result in OSrL format is transformed using XSLT into HTML and displayed in the browser.

-config pathToConfigureFile this parameter specifies a path on the local machine to a text file containing values for the input parameters. This is convenient for the user not wishing to constantly retype parameter values.

The input parameters to the **OSSolverService** may be given entirely in the command line or in a configuration file. We first illustrate giving all the parameters in the command line. The following command will invoke the **Clp** solver on the local machine to solve the problem instance **parincLinear.osil**.

```
OSSolverService -solver clp -osil ../data/osilFiles/parincLinear.osil
```

Alternatively, these parameters can be put into a configuration file. Assume that the configuration file of interest is **testlocalclp.config**. It would contain the two lines of information

```
-osil ../data/osilFiles/parincLinear.osil  
-solver clp
```

Then the command line is

```
OSSolverService -config ../data/configFiles/testlocalclp.config
```

Some Rules:

1. When using the **send()** or **solve()** methods a problem instance file location *must* be specified either at the command line, in the configuration file, or in the **<instanceLocation>** element in the OSoL options file file.

OSSolverService

Solve Method - Local

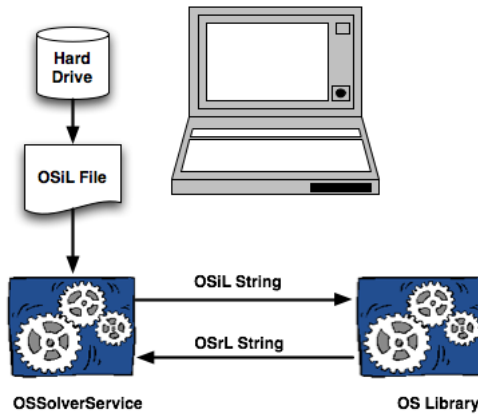


Figure 16: A local call to `solve`.

2. The default `serviceMethod` is `solve` if another service method is not specified. The service method cannot be specified in the OSoL options file.
3. If the `solver` option is not specified, the COIN-OR solver `Cbc` is the default solver used. In this case an error is thrown if the problem instance has quadratic or other nonlinear terms.
4. If the options `send`, `kill`, `knock`, `getJobID`, or `retrieve` are specified, a `serviceLocation` must be specified.

Parameters specified in the configure file are overridden by parameters specified at the command line. This is convenient if a user has a base configure file and wishes to override only a few options. For example,

```
OSSolverService -config ../data/configFiles/testlocalclp.config -solver lindo
```

or

```
OSSolverService -solver lindo -config ../data/configFiles/testlocalclp.config
```

will result in the LINDO solver being used even though Clp is specified in the `testlocalclp` configure file.

9.2 Solving Problems Locally

Generally, when solving a problem locally the user will use the `solve` service method. The `solve` method is invoked synchronously and waits for the solver to return the result. This is illustrated in Figure 17. As illustrated, the `OSSolverService` reads a file on the hard drive with the optimization instance, usually in OSiL format. The optimization instance is parsed into a string which is passed to the `OSLibrary` which is linked with various solvers. The result of the optimization is passed back to the `OSSolverService` as a string in OSrL format.

Here is an example of using a configure file, `testlocal.config`, to invoke `Ipopt` locally using the `solve` command.

```

-osil ../data/osilFiles/parincQuadratic.osil
-solver ipopt
-serviceMethod solve
-browser /Applications/Firefox.app/Contents/MacOS/firefox
-osrl /Users/kmartin/temp/test.osrl

```

The first line of `testlocal.config` gives the local location of the OSiL file, `parincQuadratic.osil`, that contains the problem instance. The second parameter, `-solver ipopt`, is the solver to be invoked, in this case COIN-OR Ipopt. The third parameter `-serviceMethod solve` is not really needed, but included only for illustration. The default solver service is `solve`. The fourth parameter is the location of the browser on the local machine. It will read the OSrL file on the local machine using the path specified by the value of the `osrl` parameter, in this case `/Users/kmartin/temp/test.osrl`.

Parameters may also be contained in an XML-file in OSoL format. In the configuration file `testlocalosol.config` we illustrate specifying the instance location in an OSoL file.

```

-osol ../data/osolFiles/demo.osol
-solver clp

```

The file `demo.osol` is

```

<?xml version="1.0" encoding="UTF-8"?>
<osol xmlns="os.optimizationservices.org">
  <general>
    <instanceLocation locationType="local">
      ../data/osilFiles/parincLinear.osil
    </instanceLocation>
  </general>
</osol>

```

9.3 Solving Problems Remotely with Web Services

In many cases the client machine may be a “weak client” and using a more powerful machine to solve a hard optimization instance is required. Indeed, one of the major purposes of Optimization Services is to facilitate optimization in a distributed environment. We now provide examples that illustrate using the `OSSolverService` executable to call a remote solver service. By remote solver service we mean a solver service that is called using Web Services. The OS implementation of the solver service uses Apache Tomcat. See tomcat.apache.org. The Web Service running on the server is a Java program based on Apache Axis. See ws.apache.org/axis. This is described in greater detail in Section 10. This Web Service is called `OSSolverService.jws`. It is not necessary to use the Tomcat/Axis combination.

See Figure 17 for an illustration of this process. The client machine uses `OSSolverService` executable to call one of the six service methods, e.g. `solve`. The information such as the problem instance in OSiL format and solver options in OSoL format are packaged into a SOAP envelope and sent to the server. The server is running the Java Web Service `OSSolverService.jws`. This Java program running in the Tomcat Java Servlet container implements the six service methods. If a `solve` or `send` request is sent to the server from the client, an optimization problem must be solved. The Java solver service solves the optimization instance by calling the `OSSolverService` on the server. So there is an `OSSolverService` on the client that calls the Web Service `OSSolverService.jws` that



Figure 17: A remote call to solve.

in turn calls the executable `OSSovlerService` on the server. The Java solver service passes options to the local `OSSolverService` such as where the OSiL file is located and where to write the solution result.

In the following sections we illustrate each of the six service methods.

9.3.1 The solve Service Method

First we illustrate a simple call to `OSSolverService.jws` and request a solution using the COIN-OR Clp solver. The call on the client machine is

```
OSSolverService -config ../data/configFiles/testremote.config
```

where the `testremote.config` file is

```
-osil ../data/osilFiles/parincLinear.osil
-serviceLocation http://128.135.130.17:8080/os/OSSolverService.jws
```

No solver is specified so by default the Cbc solver will be used on the server.

Now use an OSoL options file

```
OSSolverService -osol ../data/osolFiles/remoteSolve1.osol -osil ../data/parincLinear.osil
```

where `remoteSolve1.osol` is

```
<?xml version="1.0" encoding="UTF-8"?>
<osol xmlns="os.optimizationservices.org">
  <general>
    <serviceURI>http://128.135.130.17:8080/os/OSSolverService.jws</serviceURI>
  </general>
  <optimization>
    <other name="os_solver">clp</other>
  </optimization>
</osol>
```


In this case we specify a solver to use, name Clp.

Next we illustrate a call to the remote SolverService and specify an OSiL instance that is on the remote machine.

```
OSSolverService -osol ../data/osolFiles/remoteSolve2.osol
```

where the remoteSolve2.osol file is

```
<?xml version="1.0" encoding="UTF-8"?>
<osol xmlns="os.optimizationservices.org">
  <general>
    <serviceURI>http://128.135.130.17:8080/os/OSSolverService.jws</serviceURI>
    <instanceLocation locationType="local">
      /home/kmartin/files/code/OSRepository/linear/continuous/pilot.osil
    </instanceLocation>
  </general>
  <optimization>
    <other name="os_solver">clp</other>
  </optimization>
</osol>
```

If we were to change to the locationType attribute in the <instanceLocation> element to http then we could specify the instance location to be on yet another machine. This is illustrated below for remoteSolve3.osol. The scenario is depicted in Figure 18. The OSiL string passed from the client to the solver service is empty. However, the OSoL element <instanceLocation> has an attribute locationType equal to http. In this case, the text of the <instanceLocation> element contains the URL of a third machine which has the problem instance parincLinear.osil. The solver service will contact the machine with URL gsbkip.chicagogsb.edu and download this test problem.

```
<?xml version="1.0" encoding="UTF-8"?>
<osol xmlns="os.optimizationservices.org">
  <general>
    <serviceURI>http://128.135.130.17:8080/os/OSSolverService.jws</serviceURI>
    <instanceLocation locationType="http">
      http://gsbkip.chicagogsb.edu/testproblems/parincLinear.osil
    </instanceLocation>
  </general>
  <optimization>
    <other name="os_solver">clp</other>
  </optimization>
</osol>
```

9.3.2 The send Service Method

When the solve service method is used, the OSSolverService does not finish execution until the solution is returned from the remote solver service. The solve method communicates synchronously with the remote solver service. This may not be desirable for large problems when the user does not want to wait for a response. The send service method should be used when asynchronous communication is desired. When the send method is used the instance is communicated to the remote service and the OSSolverService terminates after submission. An example of this is

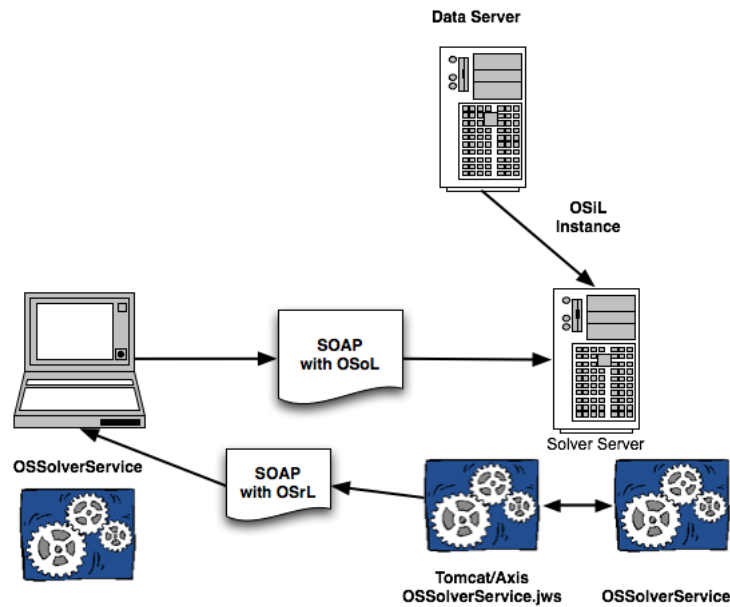


Figure 18: Downloading the instance from a remote source.

```
OSSolverService -config ../data/configFiles/testremoteSend.config
```

where the `testremoteSend.config` file is

```
-nl ../data/amplFiles/hs71.nl
-serviceLocation http://128.135.130.17:8080/os/OSSolverService.jws
-serviceMethod send
```

In this example the COIN-OR `Ipopt` solver is specified. The input file `hs71.nl` is in AMPL format. Before sending this to the remote solver service the `OSSolverService` executable converts the `nl` format into the OSiL XML format and packages this into the SOAP envelope used by Web Services.

Since the `send` method involves asynchronous communication the remote solver service must keep track of jobs. The `send` method requires a `JobID`. In the above example no `JobID` was specified. When no `JobID` is specified the `OSSolverService` method first invokes the `getJobID` service method to get a `JobID` and then puts this information into a created OSoL file and send the information to the server. More information on the `getJobID` service method is provided in Section 9.3.4. The `OSSolverService` prints the OSoL file to standard output before termination. This is illustrated below,

```
<?xml version="1.0" encoding="UTF-8"?>
<osol xmlns="os.optimizationservices.org">
  <general>
    <jobID>
      gsbrkm4__127.0.0.1__2007-06-16T15.46.46.075-05.00149771253
    </jobID>
  </general>
  <optimization>
    <other name="os_solver">ipopt</other>
```

```

    </optimization>
</osol>

```

The JobID is one that is randomly generated by the server and passed back to the `OSSolverService`. The user can also provide a JobID in their OSoL file. For example, below is a user-provided OSoL file that could be specified in a configuration file or on the command line.

```

<?xml version="1.0" encoding="UTF-8"?>
<osol xmlns="os.optimizationservices.org">
  <general>
    <jobID>123456abcd</jobID>
  </general>
  <optimization>
    <other name="os_solver">ipopt</other>
  </optimization>
</osol>

```

In order to be of any use, it is necessary to get the result of the optimization. This is described in Section 9.3.3. Before proceeding to this section, we describe two ways for knowing when the optimization is complete. One feature of the standard OS remote SolverService is the ability to send an email when the job is complete. Below is an example of the OSoL that uses the email feature.

```

<?xml version="1.0" encoding="UTF-8"?>
<osol xmlns="os.optimizationservices.org">
  <general>
    <jobID>123456abcd</jobID>
    <contact transportType="smtp">
      kipp.martin@chicagogsb.edu
    </contact>
  </general>
  <optimization>
    <other name="os_solver">lindo</other>
  </optimization>
</osol>

```

The remote Solver Service will send an email to the above address when the job is complete. A second option for knowing when a job is complete is to use the knock method.

Note that in all of these examples we provided a value for the `name` attribute in the `<other>` element. The remote solver service will use Cbc if another solver is not specified.

9.3.3 The retrieve Service Method

The `retrieve` has a single string argument which is an OSoL instance. Here is an example of using the `retrieve` method with `OSSolverService`.

```
OSSolverService -config ../data/configFiles/testremoteRetrieve.config
```

The `testremoteRetrieve.config` file is

```
-serviceLocation http://128.135.130.17:8080/os/OSSolverService.jws
-osol ../data/osolFiles/retrieve.osol
-serviceMethod retrieve
-osrl /home/kmartin/temp/test.osrl
```

and the `retrieve.osol` file is

```
<?xml version="1.0" encoding="UTF-8"?>
<osol xmlns="os.optimizationservices.org">
  <general>
    <jobID>123456abcd</jobID>
  </general>
</osol>
```

The OSoL file `retrieve.osol` contains a tag `<jobID>` that is communicated to the remote service. The remote service locates the result returns it as a string. The string that is returned is an OSrL instance.

9.3.4 The `getJobID` Service Method

Before submitting a job with the `send` method a `JobID` is required. The `OSSolverService` can get a `JobID` as follows

```
-serviceLocation http://128.135.130.17:8080/os/OSSolverService.jws
-serviceMethod getJobID
```

Note that no OSoL input file is specified. In this case, the `OSSolverService` sends an empty string. A string is returned with the `JobID`. This `JobID` is then put into a `<jobID>` element in an OSoL string that would be used by the `send` method.

9.3.5 The `knock` Service Method

The `OSSolverService` terminates after executing the `send` method. Therefore, it is necessary to know when the job is completed on the remote server. One way is to include an email address in the `<contact>` element with the attribute `transportType` set to `smtp`. This was illustrated in Section 9.3.1. A second way to check on the status of a job is to use the `knock` service method. For example, assume a user wants to know if the job with `JobID 123456abcd` is complete. A user would make the request

```
OSSolverService -config ../data/configFiles/testRemoteKnock.config
```

where the `testRemoteKnock.config` file is

```
-serviceLocation http://128.135.130.17:8080/os/OSSolverService.jws
-osplInput ../data/osolFiles/demo.ospl
-osol ../data/osolFiles/retrieve.osol
-serviceMethod knock
```

the `demo.ospl` file is

```
<?xml version="1.0" encoding="UTF-8"?>
<ospl xmlns="os.optimizationservices.org">
<processHeader>
<request action="getAll"/>
</processHeader>
<processData/>
</ospl>
```

and the retrieve.osol file is

```
<?xml version="1.0" encoding="UTF-8"?>
<osol xmlns="os.optimizationservices.org">
  <general>
    <jobID>123456abcd</jobID>
  </general>
</osol>
```

The result of this request is a string in OSrL format. Part of the return format is illustrated below.

```
<jobs>
  <job jobID="123456abcd">
    <state>finished</state>
    <serviceURI>http://128.135.130.17:8080/ipopt/IPOPTSolverService.jws</serviceURI>
    <submitTime>2007-06-16T14:57:36.678-05:00</submitTime>
    <startTime>2007-06-16T14:57:36.678-05:00</startTime>
    <endTime>2007-06-16T14:57:39.404-05:00</endTime>
    <duration>2.726</duration>
  </job>
</jobs>
```

Notice the `<state>` element indicating that the job is finished.

When making a knock request, the OSoL string can be empty. In this example, if the OSoL string had been empty the status of all jobs kept in the file `ospl.xml` is reported. In our default solver service implementation, there is a configuration file `OSParameter` that has a parameter `MAX_JOBIDS_TO_KEEP`. The current default setting is 100. In a large-scale or commercial implementation it might be wise to keep problem results and statistics in a database. Also, there are values other than `getAll` for the OSpL `action` attribute in the `<request>` tag. For example, the `action` can be set to a value of `ping` if the user just wants to check if the remote solver service is up and running.

9.3.6 The kill Service Method

If the user submits a job that is taking too long or is a mistake it is possible to kill the job on the remote server using the kill service method. For example to kill job 123456abcd. At the command line type

```
OSSolverService -config ../data/configFiles/kill.config
```

where the configure file `kill.config` is

```
-osol ../data/osolFiles/kill.osol
-serviceLocation http://128.135.130.17:8080/os/OSSolverService.jws
-serviceMethod kill
```

and the `kill.osol` file is

```
<?xml version="1.0" encoding="UTF-8"?>
<osol xmlns="os.optimizationservices.org">
  <general>
    <jobID>123456abcd</jobID>
  </general>
</osol>
```

9.3.7 Summary

Below is a summary of the inputs and outputs of the six service methods. See also Figures 19 and 20.

- `solve(osil, osol):`
 - Inputs: a string with the instance in OSiL format and a string with the solver options in OSoL format
 - Returns: a string with the solver solution in OSrL format
 - Synchronous call, blocking request/response
- `send(osil, osol)`
 - Inputs: a string with the instance in OSiL format and a string with the solver options in OSoL format
 - Returns: a boolean, true if the problem was successfully submitted, false otherwise
 - Has the same signature as `solve`
 - Asynchronous (server side), non-blocking call
 - The `osol` string should have a `JobID` in the `<jobID>` element
- `getJobID(osol)`
 - Inputs: a string with the solver options in OSoL format (in this case, the string may be empty because no options are required to get the `JobID`)
 - Returns: a string which is the unique job id generated by the solver service
 - Used to maintain session and state on a distributed system
- `knock(osp1, osol)`
 - Inputs: a string in OSpL format and a string with the solver options in OSoL format
 - Returns: process and job status information from the remote server in OSpL format
- `retrieve(osol)`
 - Inputs: a string with the solver options in OSoL format
 - Returns: a string with the solver solution in OSrL format
 - The `osol` string should have a `JobID` in the `<jobID>` element

- `kill(osol)`
 - Inputs: a string with the solver options in OSoL format
 - Returns: process and job status information from the remote server in OSpL format
 - Critical in long running optimization jobs

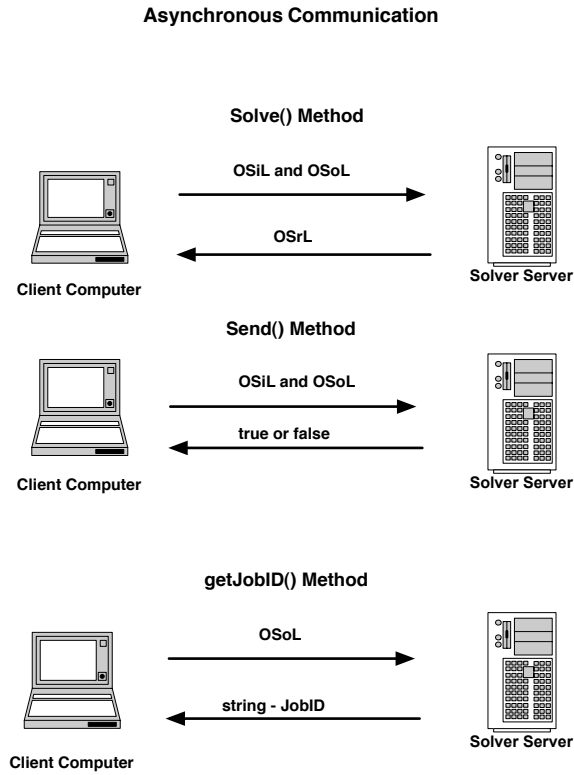


Figure 19: Input and output for `solve`, `send`, and `getJobID` methods.

10 Setting up a Solver Service with Tomcat

Download the java binary distribution at

`os-distribution-release_number.zip`

After unpacking `os-distribution-release_number.zip` there is a directory `os-server-1.0` and a single file `os.war`. For users that have not installed the Tomcat server, `os-server-1.0` contains all of the necessary files for a OS Solver Service. If you do not have a Tomcat server running do the following to setup a Tomcat server with the OS Solver Service (these instructions are operating system independent):

1. Put the folder `os-server-1.0` in the desired location for the OS Solver Service on the server machine.

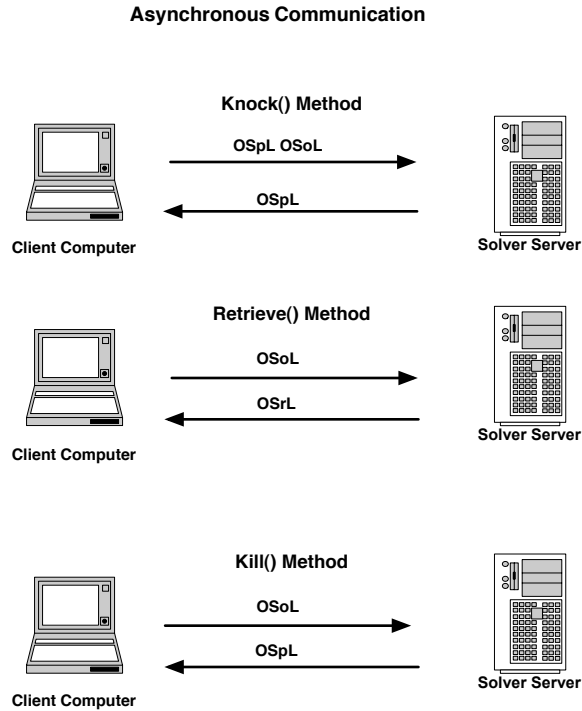


Figure 20: Input and output for knock, retrieve, and kill methods.

2. Set the environment variable `CATALINA_HOME` to point to the directory `os-server-1.0`.
3. Connect to the Tomcat `bin` directory in the `os-server-1.0` root and execute `startup.sh` in a Unix environment or `startup.bat` in a Windows environment.
4. Open a browser on the server and enter the URL

```
os/OSSolverService.jws
```

You should see a message `Click to see the WSDL`. Click on the link and you should see an XML description of the various methods available from the `OSSolverService`.

5. On a client machine, create the file `testremote.config` with the following lines of text

```
-serviceLocation http://***.***.***.***:8080/os/OSSolverService.jws
-osil /parincLinear.osil
```

where `***.***.***.***` is the IP address of the solver. Then, assuming the files `testremote.config` and `parincLinear.osil` are in the same directory on the client machine as the `OSSolverService` execute:

```
OSSolverService -config testremote.config
```

You should get back an `OSrL` message saying the problem was optimized.

If you already have a Tomcat server with Axis installed do the following:

1. copy the file `os.war` into the Tomcat `WEB-INF` directory in the `ROOT` folder under `webapps`.
2. Follow Steps 2-5 outlined above.

In the directory,

`os-server-1.0/webapps/os/WEB-INF/code/OSConfig`

there is a configuration file `OSParameter.xml` that can be modified to fit individual user needs.

11 Examples

11.1 AMPL Client: Hooking AMPL to Solvers

The `amplClient` executable is designed to work with the AMPL program. See www.ampl.com. The `amplClient` acts like an AMPL “solver.” The `amplClient` is linked with the OS library and can be used to solve problems either locally or remotely. In both cases the `amplClient` uses the `OSnl2osil` class to convert the AMPL generated `nl` file (which represents the problem instance) into the corresponding instance representation in the OSiL format.

For example, assume that there is a problem instance, `hs71.mod` in AMPL model format. To solve this problem locally by calling the `amplClient` from AMPL first start AMPL and then execute the following commands. In this case we are assuming that the local solver used is `Ipopt`.

```
# take in problem 71 in Hock and Schittkowski
# assume the problem is in the AMPL directory
model hs71.mod;
# tell AMPL that the solver is amplClient
option solver amplClient;
# now tell amplClient to use Ipopt
option amplClient_options "solver ipopt";
# the name of the nl file (this is optional)
write gtestfile;
# now solve the problem
solve;
```

This will invoke `Ipopt` locally and the result in OSrL format will be displayed on the screen. In order to call a remote solver service, after the command

```
option amplClient_options "solver ipopt";
```

provide an option which has the address of the remote solver service.

```
option ipopt_options "http://128.135.130.17:8080/os/OSSolverService.jws";
```

11.2 Algorithmic Differentiation: Using the OS Algorithmic Differentiation Methods

In the `algorithmicDiff` folder is test code `algorithmicDiffTest.cpp`. This code illustrates the key methods in the `OSInstance` API that are used for algorithmic differentiation. These methods were described in Section 8.

11.3 File Upload: Using a File Upload Package

When the `OSAgent` class methods `solve` and `send` are used, the problem instance in OSiL format is packaged into a SOAP envelope and communication with the server is done using Web Services (for example Tomcat Axis). However, packing an XML file into a SOAP envelope may add considerably to the size of the file (each `<` is replaced with `<` and each `>` is replaced with `>`). Also, communicating with a Web Services servlet can also slow down the communication process. This could be a problem for large instances. An alternative approach is to use the `fileUpload` executable on the client end and the Java servlet `OSFileUpload` on the server end. The `fileUpload` client executable is contained in the `fileUpload` directory inside the `examples` directory.

This servlet is based upon the Apache Commons FileUpload. See <http://jakarta.apache.org/commons/fileupload/>. The `OSFileUpload` Java servlet code, `OSFileUpload.java` is in the directory

```
/OSCommon/src/org/optimizationservices/oscommon/util
```

relative to the `OSJava` directory.

The `fileUpload` client executable takes one argument on the command line which is the location of the file on the local directory to upload to the server. For example,

```
fileUpload ../../data/osilFiles/parincQuadratic.osil
\end{verbatim}
```

The `{\tt fileUpload}` executable first creates an `{\tt OSAgent}` object.

```
\begin{verbatim}
```

```
OSSolverAgent* osagent = NULL;
osagent = new OSSolverAgent("http://128.135.130.17:8080/fileupload/servlet/OSFileUpload");
```

The `OSAgent` has a method `fileUpload` with the signature

```
std::string fileUpload(std::string osilFileName, std::string osil);
```

where `osilFileName` is the name of the OSiL problem instance to be written on the server and `osil` is the string with the actual instance. Then

```
osagent->fileUpload(osilFileName, osil);
```

will place a call to the server, upload the problem instance in the `osil` string, and cause the server to write a file on its hard drive named `osilFileName`.

Once the file is on the server, invoke the local `OSSolverService` by

```
OSSolverService -config ../data/configFiles/testremote.config
```

where the `config` file is

```
-osol ../data/osolFiles/remoteSolve2.osol
-serviceLocation http://128.135.130.17:8080/os/OSSolverService.jws
-serviceMethod solve
```

and the `osol` file is

```
<osol>
  <general>
    <instanceLocation locationType="local">
```

```

        /home/kmartin/temp/parincQuadratic.osil
    </instanceLocation>
</general>
<optimization>
    <other name="os_solver">ipopt</other>
</optimization>
</osol>

```

As an alternative to using the command line executable `fileUpload`, there is also an html form `fileupload.html` that can be used to upload files. For example, the URL

```
http://128.135.130.17:8080/os/fileupload.html
```

will bring up the necessary form that allows the user to browse a directory and select the file to upload. This URL is based on the assumption that the `OSJava` classes were deployed as described in Section 10. The file `fileupload.html` is in the `WebContent` directory directly under the `OSJava` root.

11.4 Instance Generator: Using the `OSInstance` API to Generate Instances

This example is found in the `instanceGenerator` folder in the `examples` folder. This example illustrates how to build a complete in-memory model instance using the `OSInstance` API. See the code `instanceGenerator.cpp` for the complete example. Here provide a few highlights to illustrate the power of the API.

The first step is to create an `OSInstance` object.

```

tt
OSInstance *osinstance;
osinstance = new OSInstance();

```

Assume that the instance has two variables, x_0 and x_1 . Variable x_0 is a continuous variable with lower bound of -100 and upper bound of 100. Variable x_1 is a binary variable. First declare the instance to have two variables.

```
osinstance->setVariableNumber( 2);
```

Next, add each variable. There is an `addVariable` method with the signature

```
addVariable(int index, string name, double lowerBound, double upperBound,
char type, double init, string initString);
```

Then the calls for these two variables are

```

osinstance->addVariable(0, "x0", -100, 100, 'C', OSNAN, "");
osinstance->addVariable(1, "x1", 0, 1, 'B', OSNAN, "");

```

There is also a method `setVariables` for adding more than one variable simultaneously. The objective function(s) and constraints are added through similar calls.

Nonlinear terms are also easily added. The following code illustrates how to add a nonlinear term $x_0 * x_1$ in the `<nonlinearExpressions>` section of `OSiL`.

```

osinstance->instanceData->nonlinearExpressions->nl[ 1] = new Nl();
osinstance->instanceData->nonlinearExpressions->nl[ 1]->idx = 1;
osinstance->instanceData->nonlinearExpressions->nl[ 1]->osExpressionTree =
new OSExpressionTree();
// create a variable nl node for x0
nlNodeVariablePoint = new OSnLNodeVariable();
nlNodeVariablePoint->idx=0;
nlNodeVec.push_back( nlNodeVariablePoint);
// create the nl node for x1
nlNodeVariablePoint = new OSnLNodeVariable();
nlNodeVariablePoint->idx=1;
nlNodeVec.push_back( nlNodeVariablePoint);
// create the nl node for *
nlNodePoint = new OSnLNodeTimes();
nlNodeVec.push_back( nlNodePoint);
// the vectors are in postfix format
// now the expression tree
osinstance->instanceData->nonlinearExpressions->nl[ 1]->osExpressionTree->m_treeRoot =
nlNodeVec[ 0]->createExpressionTreeFromPostfix( nlNodeVec);

```

11.5 osTestCode

The `osTestCode` example directory holds the file `osTestCode.cpp`. This is not designed to do anything specific and is simply a holder for testing out code and features of the OS library.

12 Appendix

12.1 Building a Model in MATLAB

We illustrate how to build a simple Markowitz portfolio optimization problem (a quadratic programming problem) from **template.m**. First copy **template.m** to **markowitz.m**.

Assume that there are three stocks (variables) and two constraints (do not count the upper limit investment of .75 on the variables.).

```

% the number of constraints
numCon = 2;
% the number of variables
numVar = 3;

```

All the variables are continuous

```
VarType='CCC';
```

Next define the constraint upper and lower bounds. There are two constraints. A unity constraint (an $=$) and a lower bound on portfolio return of .15 (an \geq). These two constraints are expressed as

```

BU = [1 inf];
BL = [1 .15];

```

The variables are nonnegative and have upper limits of .75 (no stock can comprise more than 75% of the portfolio). This is written as

$$\begin{aligned} \text{VL} &= []; \\ \text{VU} &= [.75 \ .75 \ .75]; \end{aligned}$$

There are no nonzero linear coefficients in the objective function, but the objective function vector must always be defined and the number of components of this vector is the number of variables.

$$\text{OBJ} = [0 \ 0 \ 0]$$

Now the linear constraints. In the model the two linear constraints are

$$\begin{aligned} 0.3221x_1 + 0.0963x_2 + 0.1187x_3 &\geq .15 \\ x_1 + x_2 + x_3 &= 1 \end{aligned}$$

These are expressed as

$$\begin{aligned} \text{A} &= \begin{bmatrix} 1 & 1 & 1 \\ 0.3221 & 0.0963 & 0.1187 \end{bmatrix}; \end{aligned}$$

Now for the quadratic terms. The only quadratic terms are in the objective function. The objective function is

$$\begin{aligned} \min & 0.4253x_1^2 + 0.4458x_2^2 + 0.2314x_3^2 + 2 \times 0.1852x_1x_2 \\ & + 2 \times 0.1393x_1x_3 + 2 \times 0.1388x_2x_3 \end{aligned}$$

The quadratic matrix Q has 4 rows and a column for each quadratic term. In this example there are six quadratic terms. The first row of Q is the row index where the terms appear. By convention, the objective function has index -1 and we count constraints starting at 0. The first row of Q is

$$-1 \ -1 \ -1 \ -1 \ -1 \ -1$$

The second row of Q is the index of the first variable in the quadratic term. We use zero based counting. Variable x_1 has index, variable x_2 has index 1, and variable x_3 has index 2. Therefore, the second row of Q is

$$0 \ 1 \ 2 \ 0 \ 0 \ 1$$

The third row of Q is the index of the second variable in the quadratic term. Therefore, the third row of Q is

$$0 \ 1 \ 2 \ 1 \ 2 \ 2$$

The last (fourth) row is the coefficient. Therefore, the fourth row is

```
.425349654 .445784443 0.231430983
.370437388 .27862509 .27763384
```

The quadratic matrix is

```
Q = [ -1 -1 -1 -1 -1 -1;
0 1 2 0 0 1 ;
0 1 2 1 2 2;
.425349654 .445784443 0.231430983 ...
.370437388 .27862509 .27763384];
```

Finally, name the problem, specify the solver (in this case `ipopt`), the service address (and password if required by the service), and call the solver.

```
prob_name = 'Markowitz Example from Anderson, Sweeney, Williams, and Martin'
password = 'chicagoesmuyFRIO';
%
%the solver
solverName = 'ipopt';
%the remote service service address
%if left empty we solve locally
serviceAddress='http://128.135.130.17:8080/os/OSSolverService.jws';
% now solve
callMatlabSolver( numVar, numCon, A, BL, BU, OBJ, VL, VU, ObjType, VarType, ...
    Q, prob_name, password, solverName, serviceAddress)
```

12.2 OSiL representation for problem given in (1)–(4)

```
<?xml version="1.0" encoding="UTF-8"?>
<osil xmlns="os.optimizationservices.org">
  <instanceHeader>
    <name>Modified Rosenbrock</name>
    <source>Computing Journal 3:175-184, 1960</source>
    <description>Rosenbrock problem with constraints</description>
  </instanceHeader>
  <instanceData>
    <variables numberOfVariables="2">
      <var lb="0" name="x0" type="C"/>
      <var lb="0" name="x1" type="C"/>
    </variables>
    <objectives numberOfObjectives="1">
      <obj maxOrMin="min" name="minCost" numberOfObjCoef="1">
        <coef idx="1">9.0</coef>
      </obj>
    </objectives>
    <constraints numberOfConstraints="2">
```

```

        <con ub="25.0"/>
        <con lb="10.0"/>
    </constraints>
    <linearConstraintCoefficients numberOfValues="3">
        <start>
            <el>0</el><el>2</el><el>3</el>
        </start>
        <rowIdx>
            <el>0</el><el>1</el><el>1</el>
        </rowIdx>
        <value>
            <el>1.</el><el>7.5</el><el>5.25</el>
        </value>
    </linearConstraintCoefficients>
    <quadraticCoefficients numberOfQuadraticTerms="3">
        <qTerm idx="0" idxOne="0" idxTwo="0" coef="10.5"/>
        <qTerm idx="0" idxOne="1" idxTwo="1" coef="11.7"/>
        <qTerm idx="0" idxOne="0" idxTwo="1" coef="3."/>
    </quadraticCoefficients>

```

```

<nonlinearExpressions numberOfNonlinearExpressions="2">
  <nl idx="-1">
    <plus>
      <power>
        <minus>
          <number type="real" value="1.0"/>
          <variable coef="1.0" idx="0"/>
        </minus>
        <number type="real" value="2.0"/>
      </power>
      <times>
        <power>
          <minus>
            <variable coef="1.0" idx="0"/>
            <power>
              <variable coef="1.0" idx="1"/>
              <number type="real" value="2.0"/>
            </power>
          </minus>
          <number type="real" value="2.0"/>
        </power>
        <number type="real" value="100"/>
      </times>
    </plus>
  </nl>
  <nl idx="1">
    <ln>
      <times>
        <variable coef="1.0" idx="0"/>
        <variable coef="1.0" idx="1"/>
      </times>
    </ln>
  </nl>
</nonlinearExpressions>
</instanceData>
</osil>

```

12.3 OSiL representation for problem given in (20)–(23)

```

<?xml version="1.0" encoding="UTF-8"?>
<osil xmlns="os.optimizationservices.org"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"

```



```

xsi:schemaLocation="os.optimizationservices.org
http://www.optimizationservices.org/schemas/OSiL.xsd">
  <instanceHeader>
    <description>A test problem for Algorithmic Differentiation</description>
  </instanceHeader>
  <instanceData>
    <variables numberOfVariables="4">
      <var lb="0" name="x0" type="C"/>
      <var lb="0" name="x1" type="C"/>
      <var lb="0" name="x2" type="C"/>
      <var lb="0" name="x3" type="C"/>
    </variables>
    <objectives numberOfObjectives=" 1">
      <obj maxOrMin="min" name="minCost" numberOfObjCoef="1">
        <coef idx="1">9.0</coef>
      </obj>
    </objectives>
    <constraints numberOfConstraints="2">
      <con ub="10.0" constant="33"/>
      <con lb="10.0"/>
    </constraints>
    <linearConstraintCoefficients numberOfValues="2">
      <start>
        <el>0</el>
        <el>0</el>
        <el>1</el>
        <el>1</el>
        <el>2</el>
      </start>
      <rowIdx>
        <el>0</el>
        <el>1</el>
      </rowIdx>
      <value>
        <el>5</el>
        <el>7</el>
      </value>
    </linearConstraintCoefficients>
    <nonlinearExpressions numberOfNonlinearExpressions="3">
      <nl idx="1">
        <ln>
          <times>
            <variable coef="1.0" idx="0"/>
            <variable coef="1.0" idx="2"/>
          </times>
        </ln>
      </nl>
      <nl idx="0">

```

```

        <sum>
            <number type="real" value="-105"/>
            <variable coef="1.37" idx="1"/>
            <variable coef="2" idx="2"/>
        </sum>
    </nl>
    <nl idx="-1">
        <power>
            <variable coef="1.0" idx="0"/>
            <number type="real" value="2.0"/>
        </power>
    </nl>
</nonlinearExpressions>
</instanceData>
</osil>

```

References

- [1] Bradley Bell. CppAD Documentation, 2007. <http://www.coin-or.org/CppAD/Doc/cppad.xml>.
- [2] R. Fourer, L. Lopes, and K. Martin. LPFML: A W3C XML schema for linear and integer programming. *INFORMS Journal on Computing*, 17:139–158, 2005.
- [3] Andreas Griewank. *Evaluating Derivatives: Principles and Techniques of Algorithmic Differentiation*. SIAM, Philadelphia, PA, 2000.
- [4] J. Ma. Optimization services (OS), a general framework for optimization modeling systems, 2005. Ph.D. Dissertation, Department of Industrial Engineering & Management Sciences, Northwestern University, Evanston, IL.
- [5] H.H. Rosenbrock. An automatic method for finding the greatest or least value of a function. *Comp. J.*, 3:175–184, 1960.