


# Chapter 4: Threads

---



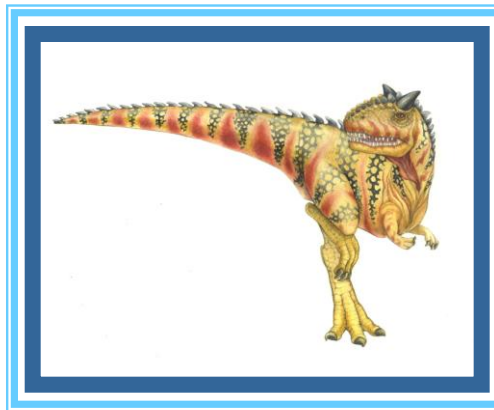

# Chapter 4: Threads

---

- Overview
- Multicore Programming
- Multithreading Models
- Thread Libraries
- Implicit Threading
- Threading Issues
- Operating System Examples





# Objectives

---

- To introduce the notion of a thread—a fundamental unit of CPU utilization that forms the basis of multithreaded computer systems
- To discuss the APIs for the Pthreads, Windows, and Java thread libraries
- To explore several strategies that provide implicit threading
- To examine issues related to multithreaded programming
- To cover operating system support for threads in Windows and Linux





# Motivation


---

- Most modern applications are multithreaded
- Threads run within application
- Multiple tasks with the application can be implemented by separate threads
  - Update display
  - Fetch data
  - Spell checking
  - Answer a network request
- Process creation is heavy-weight while thread creation is light-weight
- Can simplify code, increase efficiency
- Kernels are generally multithreaded





# Multithreaded Server Architecture

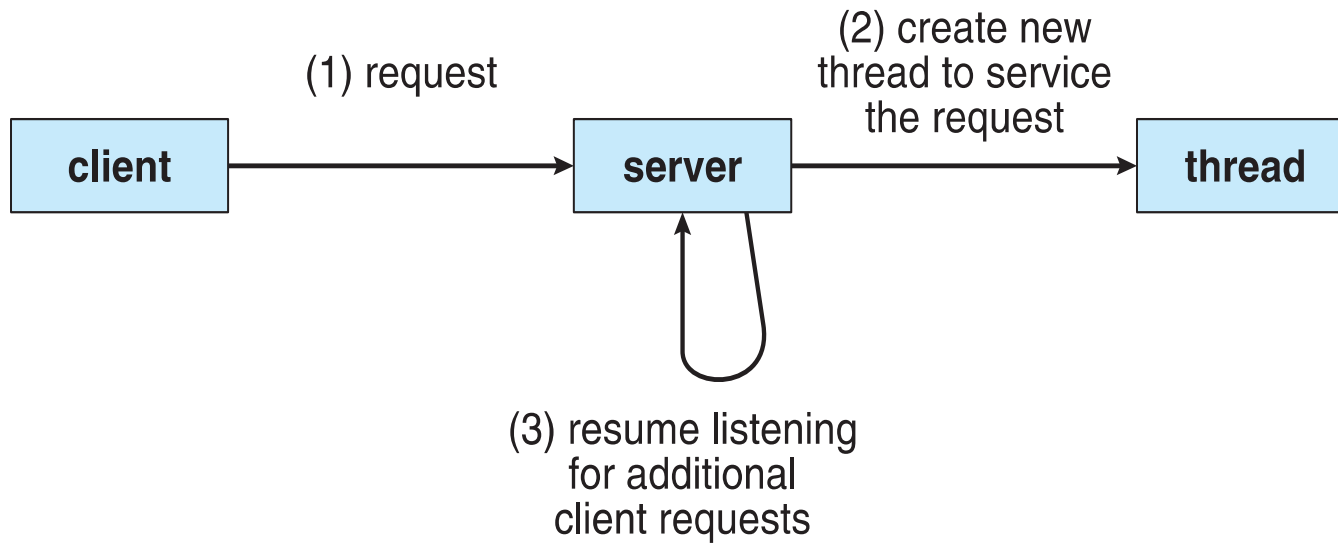



# Benefits

---

- **Responsiveness** – may allow continued execution if part of process is blocked, especially important for user interfaces
- **Resource Sharing** – threads share resources of process, easier than shared memory or message passing
- **Economy** – cheaper than process creation, thread switching lower overhead than context switching
- **Scalability** – process can take advantage of multiprocessor architectures





# Multicore Programming

---

- **Multicore** or **multiprocessor** systems putting pressure on programmers, challenges include:
  - **Dividing activities**
  - **Balance**
  - **Data splitting**
  - **Data dependency**
  - **Testing and debugging**
- **Parallelism** implies a system can perform more than one task simultaneously
- **Concurrency** supports more than one task making progress
  - Single processor / core, scheduler providing concurrency





# Multicore Programming (Cont.)


- Types of parallelism
  - **Data parallelism** – distributes subsets of the same data across multiple cores, same operation on each
  - **Task parallelism** – distributing threads across cores, each thread performing unique operation
- As # of threads grows, so does architectural support for threading
  - CPUs have cores as well as **hardware threads**
  - Consider Oracle SPARC T4 with 8 cores, and 8 hardware threads per core






# Concurrency vs. Parallelism

## ■ Concurrent execution on single-core system:

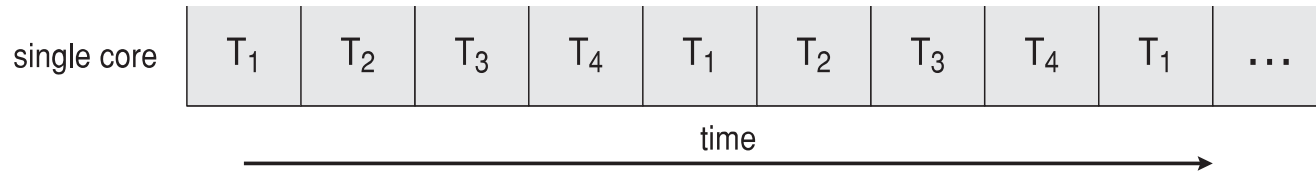


## ■ Parallelism on a multi-core system:

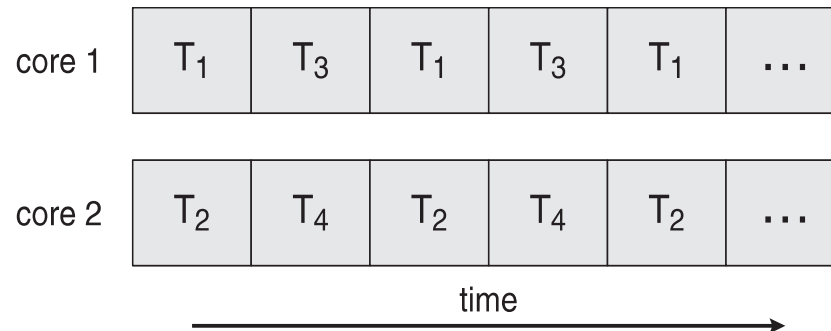




# Single and Multithreaded Processes

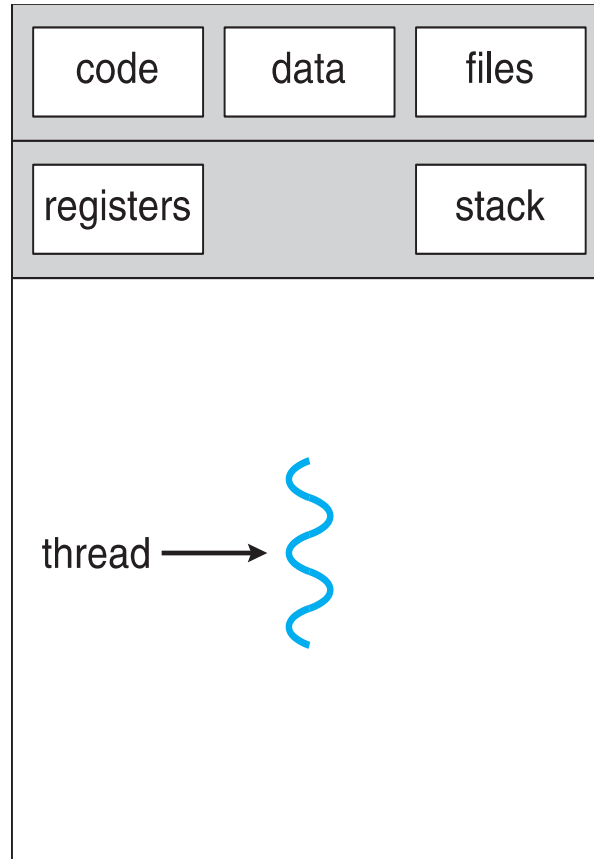

single-threaded process

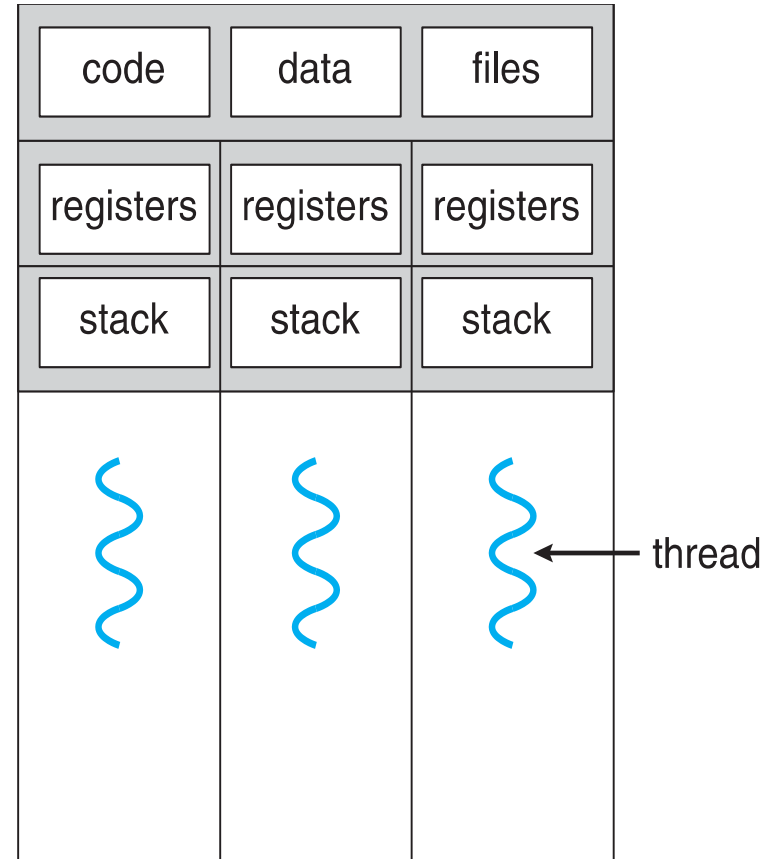

multithreaded process





# Amdahl's Law

- Identifies performance gains from adding additional cores to an application that has both serial and parallel components
- $S$  is serial portion
- $N$  processing cores

$$speedup \leq \frac{1}{S + \frac{(1-S)}{N}}$$

- That is, if application is 75% parallel / 25% serial, moving from 1 to 2 cores results in speedup of 1.6 times
- As  $N$  approaches infinity, speedup approaches  $1 / S$

**Serial portion of an application has disproportionate effect on performance gained by adding additional cores**

- But does the law take into account contemporary multicore systems?





# User Threads and Kernel Threads

---

- **User threads** - management done by user-level threads library
- Three primary thread libraries:
  - POSIX **Pthreads**
  - Windows threads
  - Java threads
- **Kernel threads** - Supported by the Kernel
- Examples – virtually all general purpose operating systems, including:
  - Windows
  - Solaris
  - Linux
  - Tru64 UNIX
  - Mac OS X





# Multithreading Models

---


- Many-to-One
- One-to-One
- Many-to-Many





# Many-to-One


- Many user-level threads mapped to single kernel thread
- One thread blocking causes all to block
- Multiple threads may not run in parallel on multicore system because only one may be in kernel at a time
- Few systems currently use this model
- Examples:
  - **Solaris Green Threads**
  - **GNU Portable Threads**

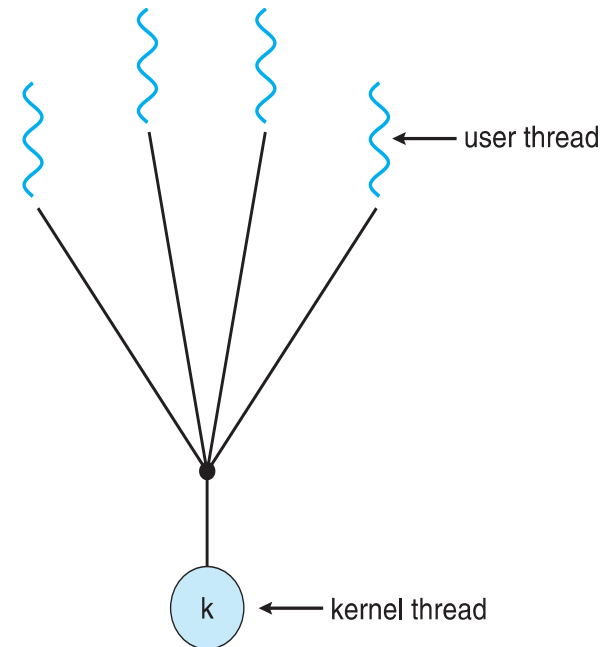



# One-to-One


- Each user-level thread maps to kernel thread
- Creating a user-level thread creates a kernel thread
- More concurrency than many-to-one
- Number of threads per process sometimes restricted due to overhead
- Examples
  - Windows
  - Linux
  - Solaris 9 and later

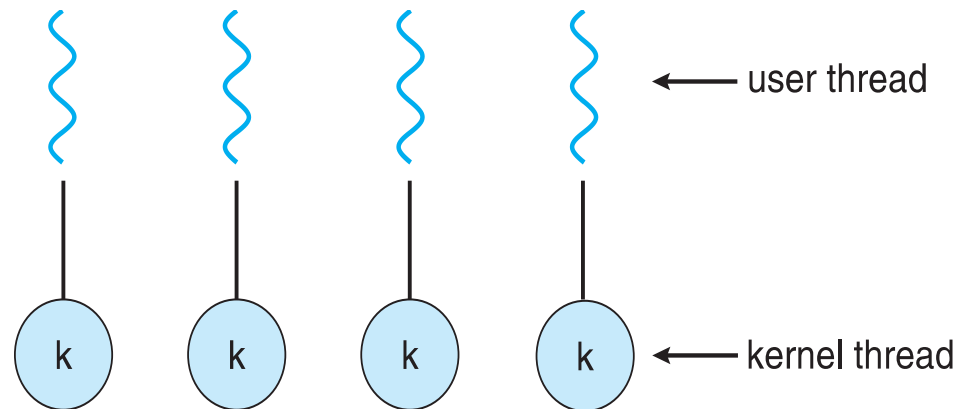



# Many-to-Many Model


- Allows many user level threads to be mapped to many kernel threads
- Allows the operating system to create a sufficient number of kernel threads
- Solaris prior to version 9
- Windows with the *ThreadFiber* package

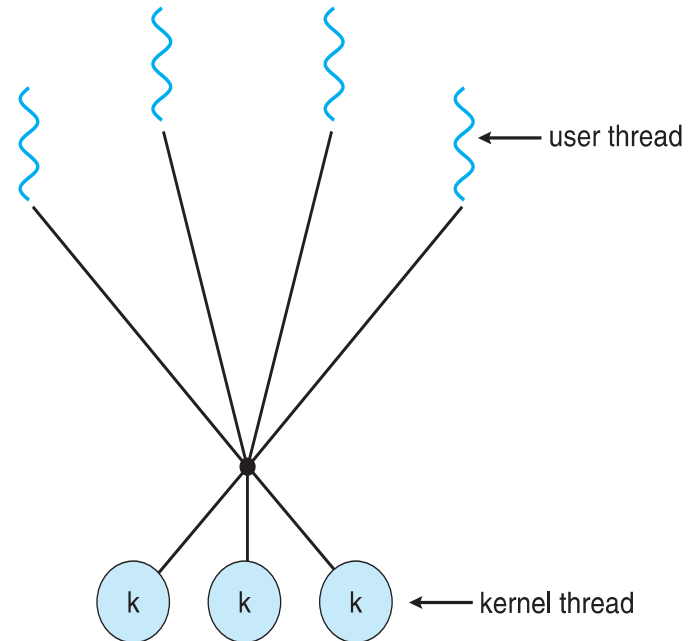



# Two-level Model

- Similar to M:M, except that it allows a user thread to be **bound** to kernel thread
- Examples
  - IRIX
  - HP-UX
  - Tru64 UNIX
  - Solaris 8 and earlier

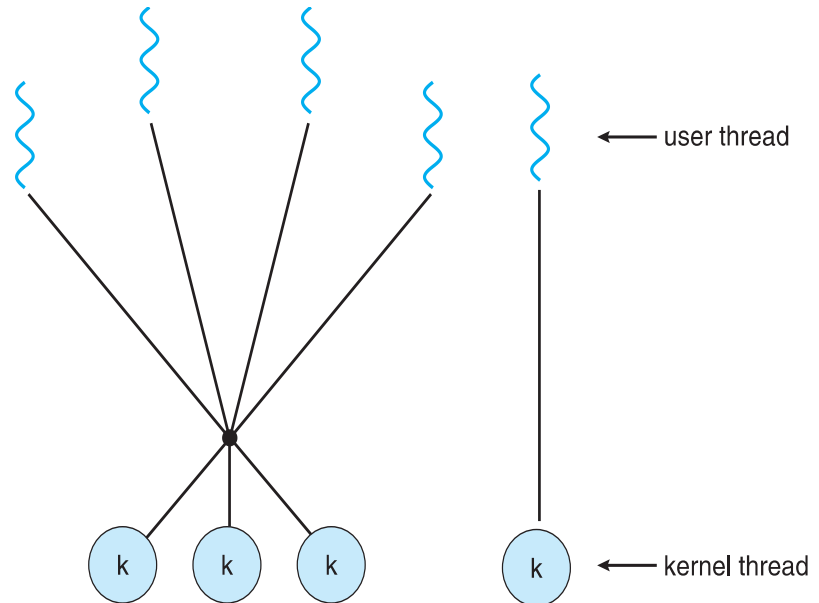

# End of Chapter 4

---

