


File-System Interface

OPERATING SYSTEMS



Windows



Linux



Ubuntu




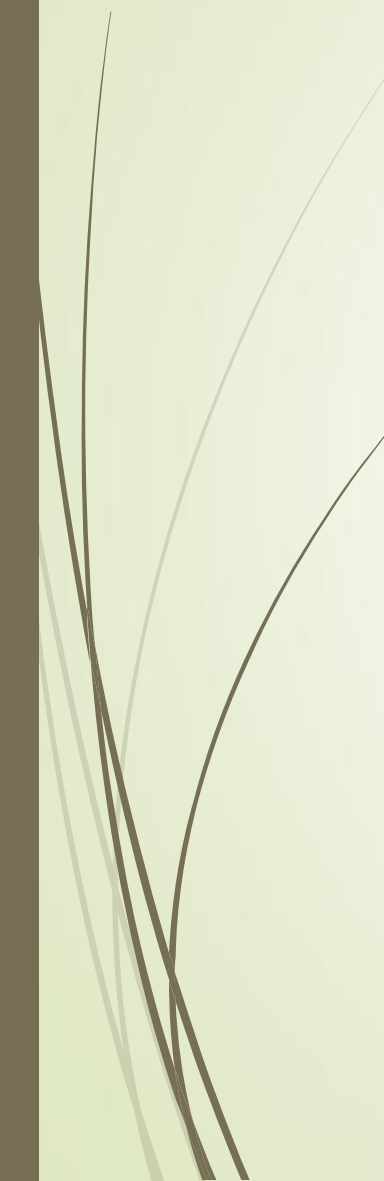
MAC ios




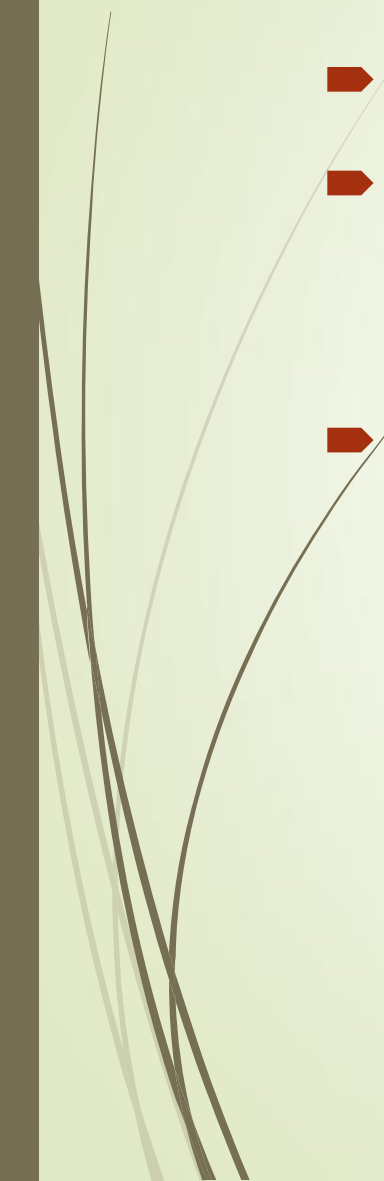
Anriod

- It acts as an intermediary between user and hardware
- Resource manager which manages system resources in a unbiased fashion both h/w and s/w
- It provides a platform on which other applications are installed

File-System Interface

- 
- **File Concept**
 - **Access Methods**
 - **Disk and Directory Structure**
 - **File-System Mounting**
 - **File Sharing**
 - **Protection**
- 

Objectives

- 
- To explain the function of file systems
 - To describe the interfaces to file systems
 - To discuss file-system design tradeoffs, including access methods, file sharing, file locking, and directory structures
 - To explore file-system protection
- 

File Concept

- Contiguous logical address space
- Types:
 - **Data**
 - numeric
 - character
 - binary
 - **Program**
- Contents defined by file's creator
 - Many types
 - Consider **text file, source file, executable file**

File Attributes

- **Name** – only information kept in human-readable form
- **Identifier** – unique tag (number) identifies file within file system
- **Type** – needed for systems that support different types
- **Location** – pointer to a device and location to a file on the device
- **Size** – current file size
- **Protection** – controls who can do reading, writing, executing
- **Time, date, and user identification** – data for protection, security, and usage monitoring
- Information about files are kept in the directory structure, which is maintained on the disk
- Many variations, including extended file attributes such as file checksum
- Information kept in the directory structure

File info Window on Mac OS X



File Operations

- File is an **abstract data type**
- **Create**
- **Write** – at **write pointer** location
- **Read** – at **read pointer** location
- **Reposition within file - seek**
- **Delete**
- **Truncate**
- *Open(F_i)* – search the directory structure on disk for entry F_i , and move the content of entry to memory
- *Close (F_i)* – move the content of entry F_i in memory to directory structure on disk

Open Files

➤ Several pieces of data are needed to manage open files:

- **Open-file table:** tracks open files

File pointer: pointer to last read/write location, per process that has the file open

File-open count: counter of number of times a file is open – to allow removal of data from open-file table when last processes closes it

Disk location of the file: cache of data access information

Access rights: per-process access mode information

Open File Locking

- Provided by some operating systems and file systems

Similar to reader-writer locks

Shared lock similar to reader lock – several processes can acquire concurrently

Exclusive lock similar to writer lock

- Mediates access to a file
- Mandatory or advisory:

Mandatory – access is denied depending on locks held and requested

Advisory – processes can find status of locks and decide what to do


File Types – Name, Extension

file type	usual extension	function
executable	exe, com, bin or none	ready-to-run machine- language program
object	obj, o	compiled, machine language, not linked
source code	c, cc, java, pas, asm, a	source code in various languages
batch	bat, sh	commands to the command interpreter
text	txt, doc	textual data, documents
word processor	wp, tex, rtf, doc	various word-processor formats
library	lib, a, so, dll	libraries of routines for programmers
print or view	ps, pdf, jpg	ASCII or binary file in a format for printing or viewing
archive	arc, zip, tar	related files grouped into one file, sometimes com- pressed, for archiving or storage
multimedia	mpeg, mov, rm, mp3, avi	binary file containing audio or A/V information

File Structure

- None - sequence of words, bytes
- Simple record structure
 - Lines
 - Fixed length
 - Variable length
- Complex Structures
 - Formatted document
 - Relocatable load file
- Can simulate last two with first method by inserting appropriate control characters
- Who decides:
 - Operating system
 - Program

Sequential-access File

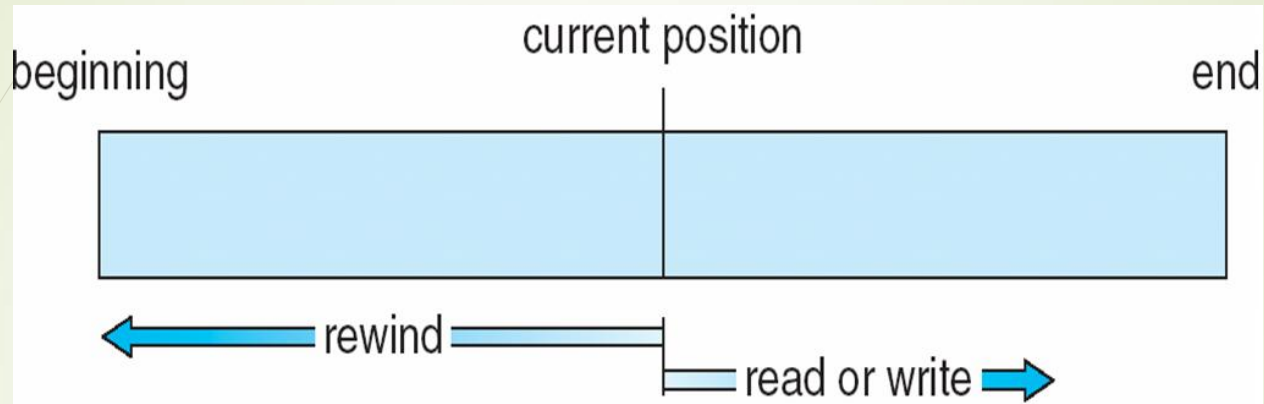

Access Methods

➤ Sequential Access

read next
write next
reset
no read after last write
(rewrite)

➤ Direct Access – file is fixed length **logical records**

read n
write n
position to n
read next
write next
rewrite n

n = **relative block number**

➤ Relative block numbers allow OS to decide where file should be placed

➤ See **allocation problem** in Ch 12


Simulation of Sequential Access on Direct-access File

sequential access	implementation for direct access
<i>reset</i>	<i>cp = 0;</i>
<i>read next</i>	<i>read cp;</i> <i>cp = cp + 1;</i>
<i>write next</i>	<i>write cp;</i> <i>cp = cp + 1;</i>

Other Access Methods


- Can be built on top of base methods
- General involve creation of an **index** for the file
- Keep index in memory for fast determination of location of data to be operated on (consider UPC code plus record of data about that item)
- If too large, index (in memory) of the index (on disk)
- IBM indexed sequential-access method (ISAM)
 - Small master index, points to disk blocks of secondary index
 - File kept sorted on a defined key
 - All done by the OS
- VMS operating system provides index and relative files as another example (see next slide)

Example of Index and Relative Files

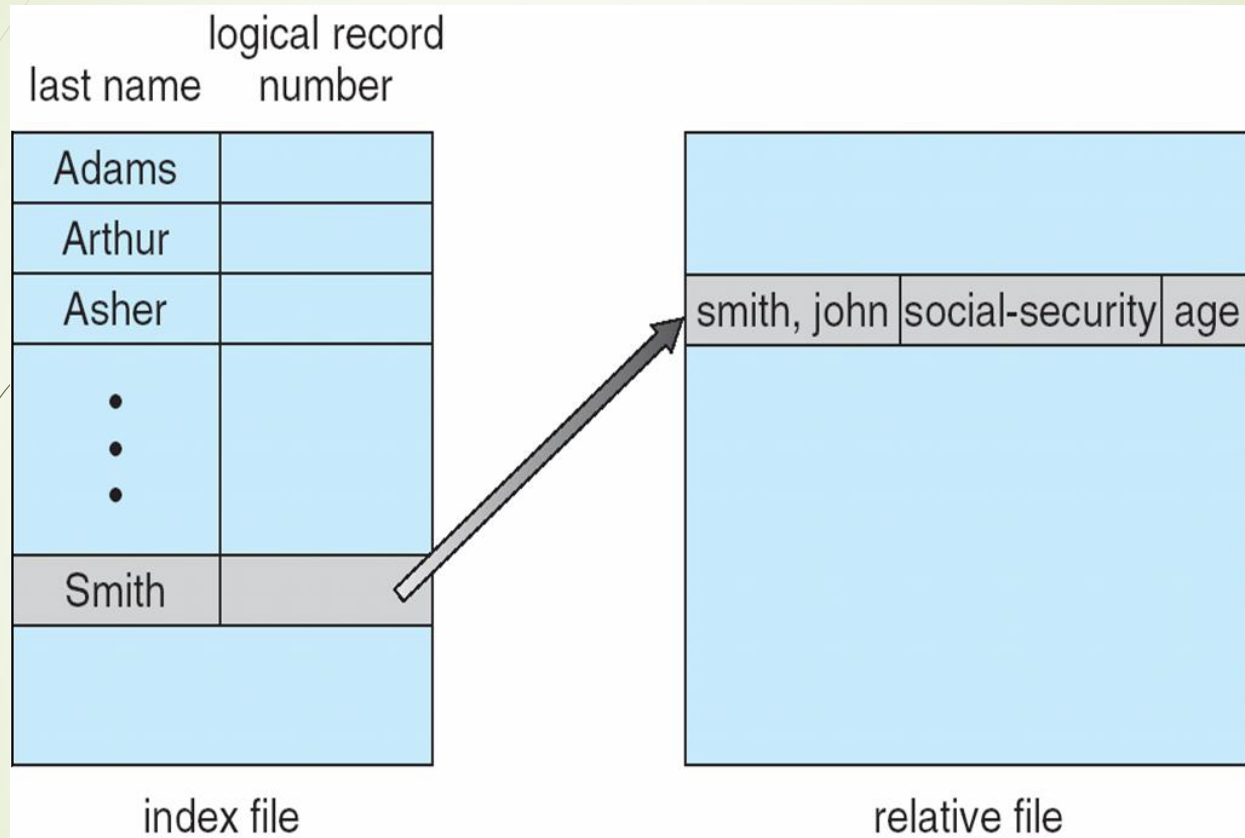

Directory Structure

- A collection of nodes containing information about all files

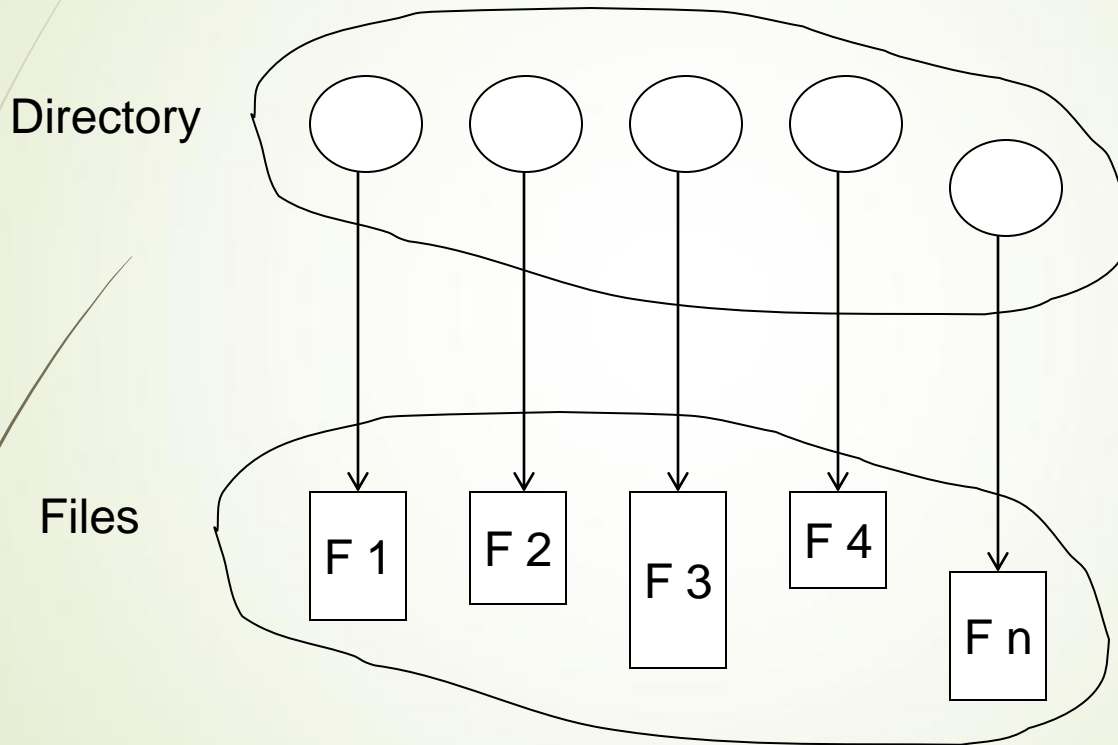


Both the directory structure and the files reside on disk

Disk Structure

- Disk can be subdivided into **partitions**
- Disks or partitions can be **RAID** protected against failure
- Disk or partition can be used **raw** – without a file system, or **formatted** with a file system
- Partitions also known as minidisks, slices
- Entity containing file system known as a **volume**
- Each volume containing file system also tracks that file system's info in **device directory** or **volume table of contents**
- As well as **general-purpose file systems** there are many **special-purpose file systems**, frequently all within the same operating system or computer

A Typical File-system Organization

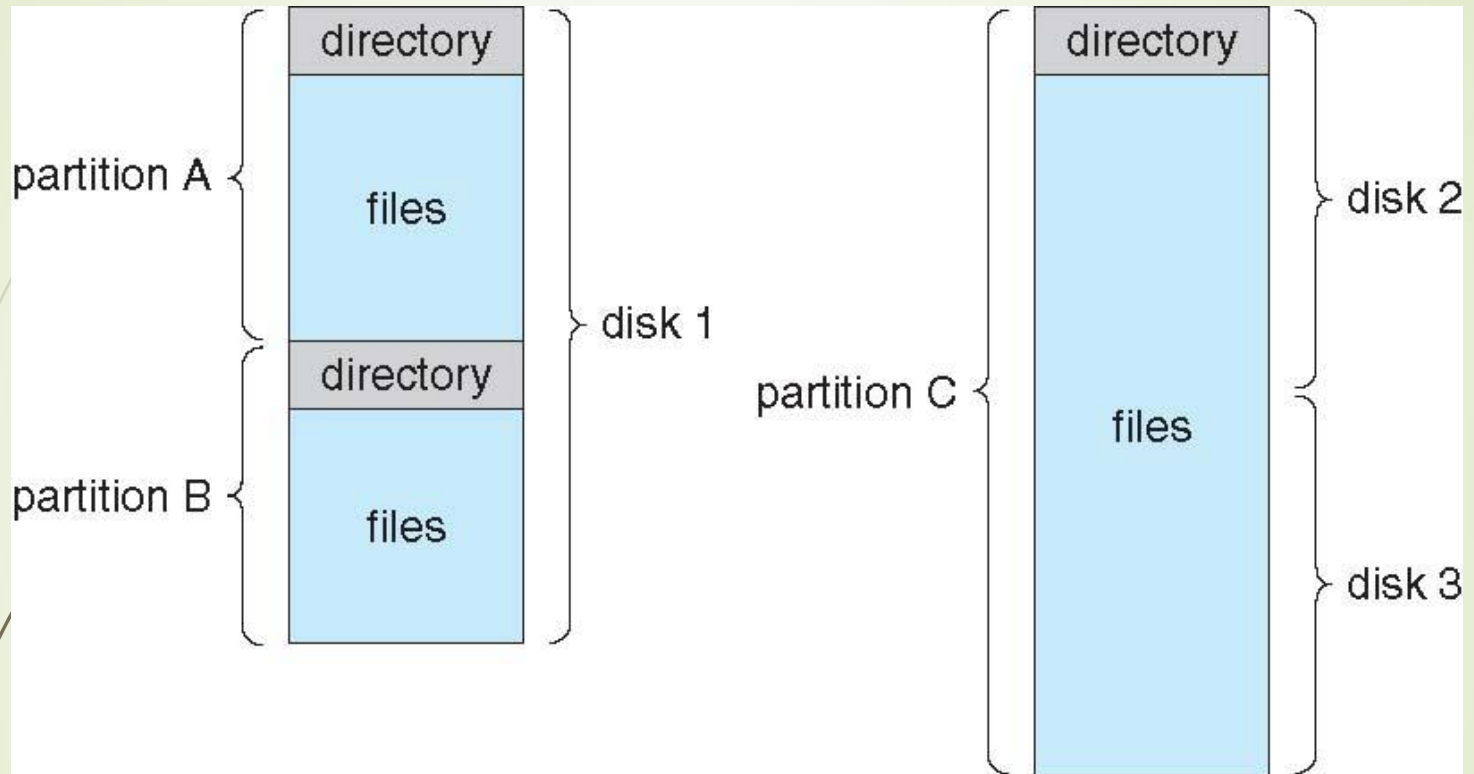

Types of File Systems

- We mostly talk of general-purpose file systems
- But systems frequently have many file systems, some general- and some special- purpose
- Consider Solaris has
 - tmpfs – memory-based volatile FS for fast, temporary I/O
 - objfs – interface into kernel memory to get kernel symbols for debugging
 - ctfs – contract file system for managing daemons
 - lofs – loopback file system allows one FS to be accessed in place of another
 - procfs – kernel interface to process structures
 - ufs, zfs – general purpose file systems

Operations Performed on Directory

- 
- Search for a file
 - Create a file
 - Delete a file
 - List a directory
 - Rename a file
 - Traverse the file system
- 


Directory Organization

The directory is organized logically to obtain

- Efficiency – locating a file quickly
- Naming – convenient to users
 - Two users can have same name for different files
 - The same file can have several different names
- Grouping – logical grouping of files by properties, (e.g., all Java programs, all games, ...)

Single-Level Directory


A single directory for all users

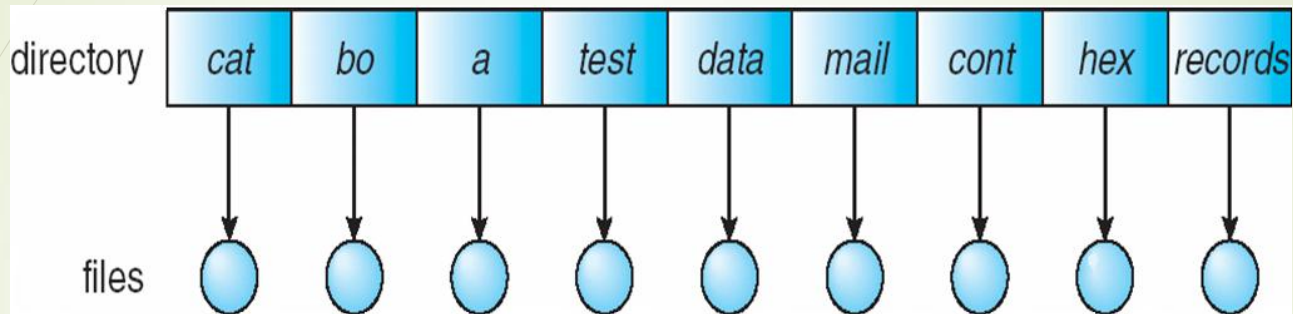

- Naming problem
- Grouping problem


Two-Level Directory

- Separate directory for each user

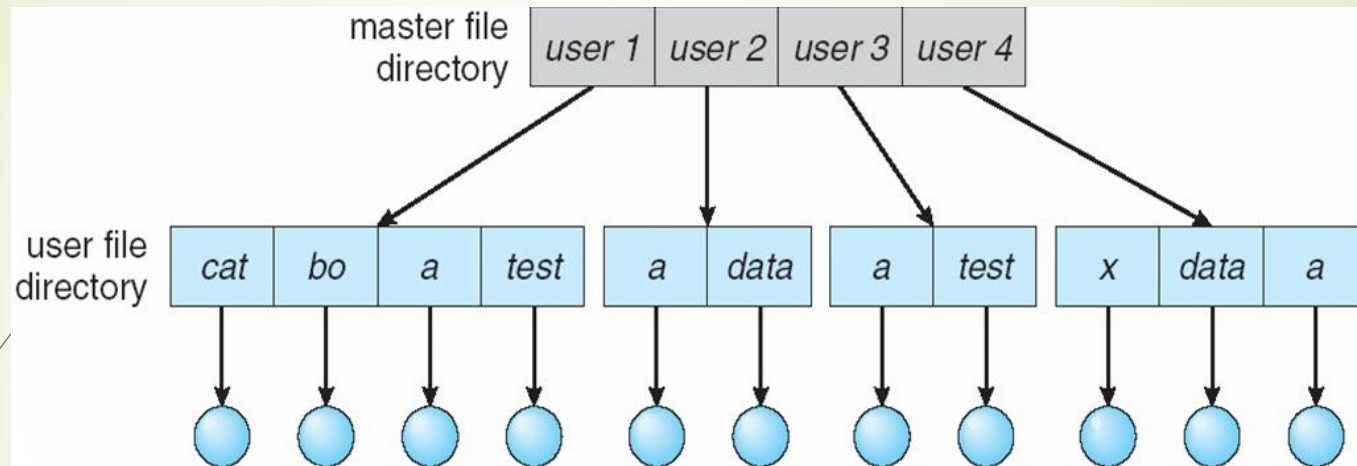

- Path name
- Can have the same file name for different user
- Efficient searching
- No grouping capability

Tree-Structured Directories

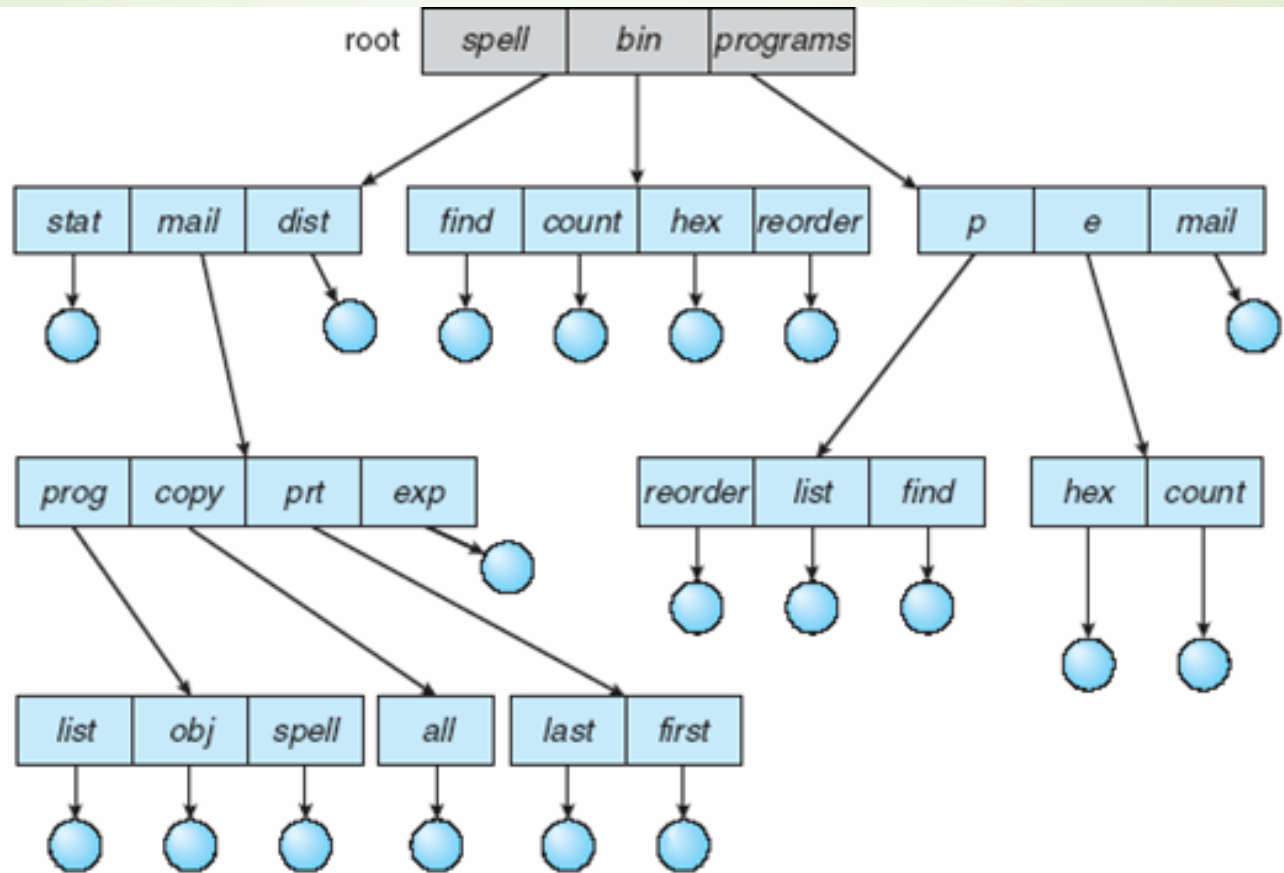

Tree-Structured Directories (Cont.)

- Efficient searching
- Grouping Capability
- Current directory (working directory)
 - **cd /spell/mail/prog**
 - **type list**

Tree-Structured Directories (Cont)

- **Absolute** or **relative** path name
- Creating a new file is done in current directory
- Delete a file


rm <file-name>

- Creating a new subdirectory is done in current directory

mkdir <dir-name>

Example: if in current directory **/mail**


mkdir count

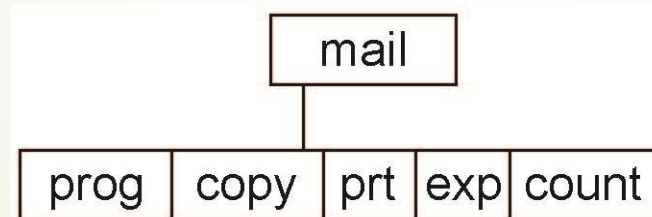

Deleting “mail” \Rightarrow deleting the entire subtree rooted by “mail”

Acyclic-Graph Directories

- Have shared subdirectories and files

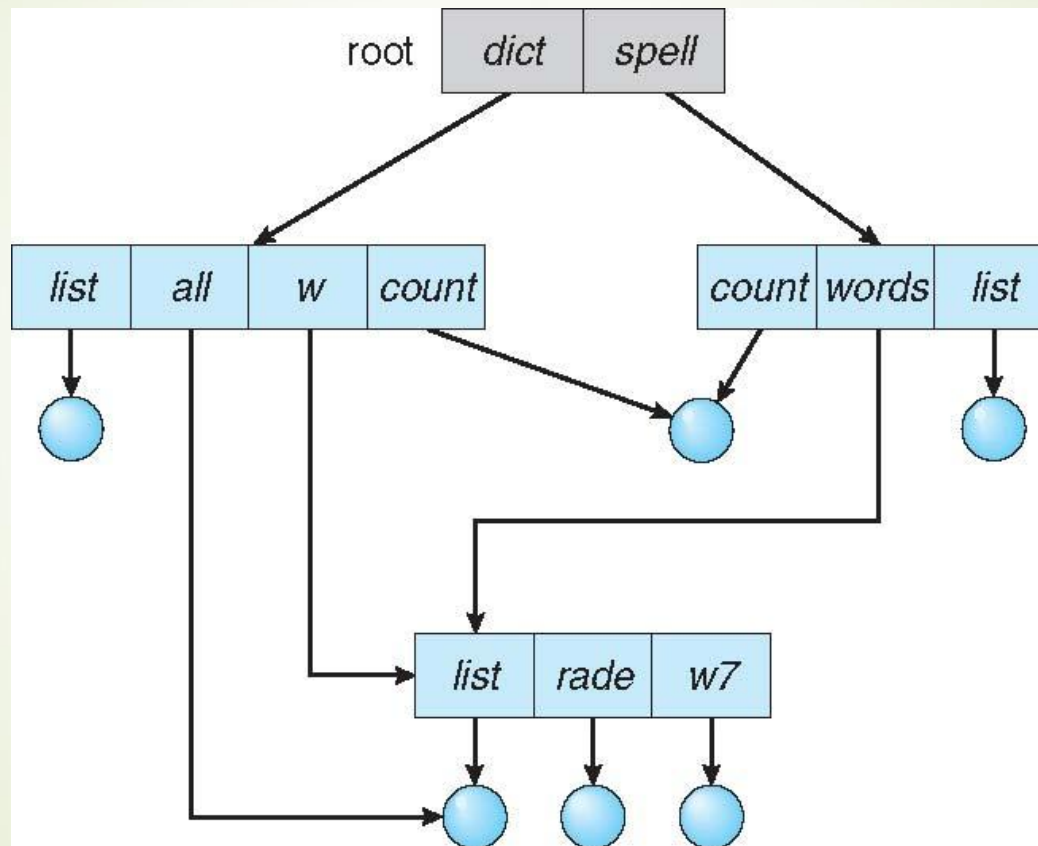


Acyclic-Graph Directories (Cont.)

- Two different names (aliasing)
- If **dict** deletes **list** \Rightarrow dangling pointer

Solutions:

- Backpointers, so we can delete all pointers
Variable size records a problem
- Backpointers using a daisy chain organization
- Entry-hold-count solution
- New directory entry type
 - **Link** – another name (pointer) to an existing file
 - **Resolve the link** – follow pointer to locate the file

General Graph Directory

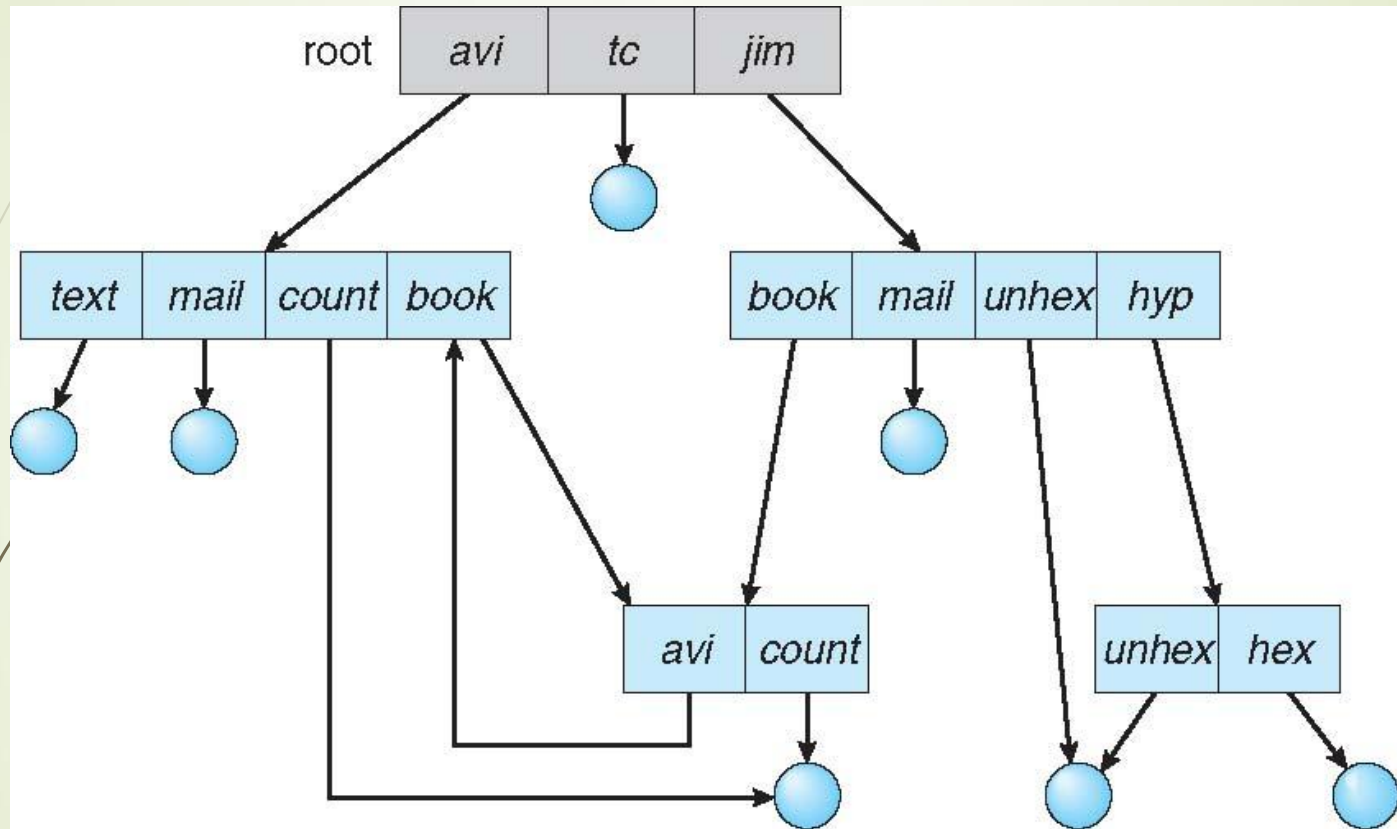

General Graph Directory (Cont.)

- ▶ How do we guarantee no cycles?
 - ▶ Allow only links to file not subdirectories
 - ▶ **Garbage collection**
 - ▶ Every time a new link is added use a cycle detection algorithm to determine whether it is OK

File Sharing

- Sharing of files on multi-user systems is desirable
- Sharing may be done through a **protection** scheme
- On distributed systems, files may be shared across a network
- Network File System (NFS) is a common distributed file-sharing method
- If multi-user system
 - **User IDs** identify users, allowing permissions and protections to be per-user
 - **Group IDs** allow users to be in groups, permitting group access rights
 - Owner of a file / directory
 - Group of a file / directory

File Sharing – Remote File Systems

- Uses networking to allow file system access between systems
 - Manually via programs like FTP
 - Automatically, seamlessly using **distributed file systems**
 - Semi automatically via the **world wide web**
- **Client-server** model allows clients to mount remote file systems from servers
 - Server can serve multiple clients
 - Client and user-on-client identification is insecure or complicated
 - **NFS** is standard UNIX client-server file sharing protocol
 - **CIFS** is standard Windows protocol
 - Standard operating system file calls are translated into remote calls
- Distributed Information Systems (**distributed naming services**) such as LDAP, DNS, NIS, Active Directory implement unified access to information needed for remote computing


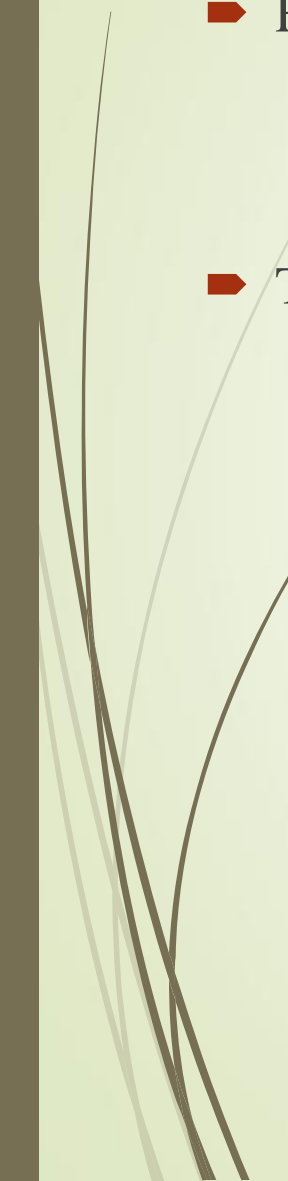
File Sharing – Failure Modes

- All file systems have failure modes
 - For example corruption of directory structures or other non-user data, called **metadata**
- Remote file systems add new failure modes, due to network failure, server failure
- Recovery from failure can involve **state information** about status of each remote request
- **Stateless** protocols such as NFS v3 include all information in each request, allowing easy recovery but less security

File Sharing – Consistency Semantics

- Specify how multiple users are to access a shared file simultaneously
 - Similar to Ch 5 process synchronization algorithms
 - Tend to be less complex due to disk I/O and network latency (for remote file systems)
 - Andrew File System (AFS) implemented complex remote file sharing semantics
 - Unix file system (UFS) implements:
 - Writes to an open file visible immediately to other users of the same open file
 - Sharing file pointer to allow multiple users to read and write concurrently
 - AFS has session semantics
 - Writes only visible to sessions starting after the file is closed

Protection


- 
- File owner/creator should be able to control:
 - what can be done
 - by whom
 - Types of access
 - **Read**
 - **Write**
 - **Execute**
 - **Append**
 - **Delete**
 - **List**
- 

Access Lists and Groups

- Mode of access: read, write, execute
- Three classes of users on Unix / Linux

			RWX
a) owner access	7	⇒	1 1 1
			RWX
b) group access	6	⇒	1 1 0
			RWX
c) public access	1	⇒	0 0 1


- Ask manager to create a group (unique name), say G, and add some users to the group.
- For a particular file (say *game*) or subdirectory, define an appropriate access.

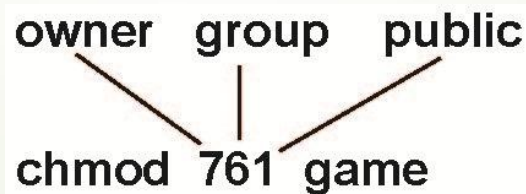

Attach a group to a file

chgrp **G** **game**

Windows 7 Access-Control List Management

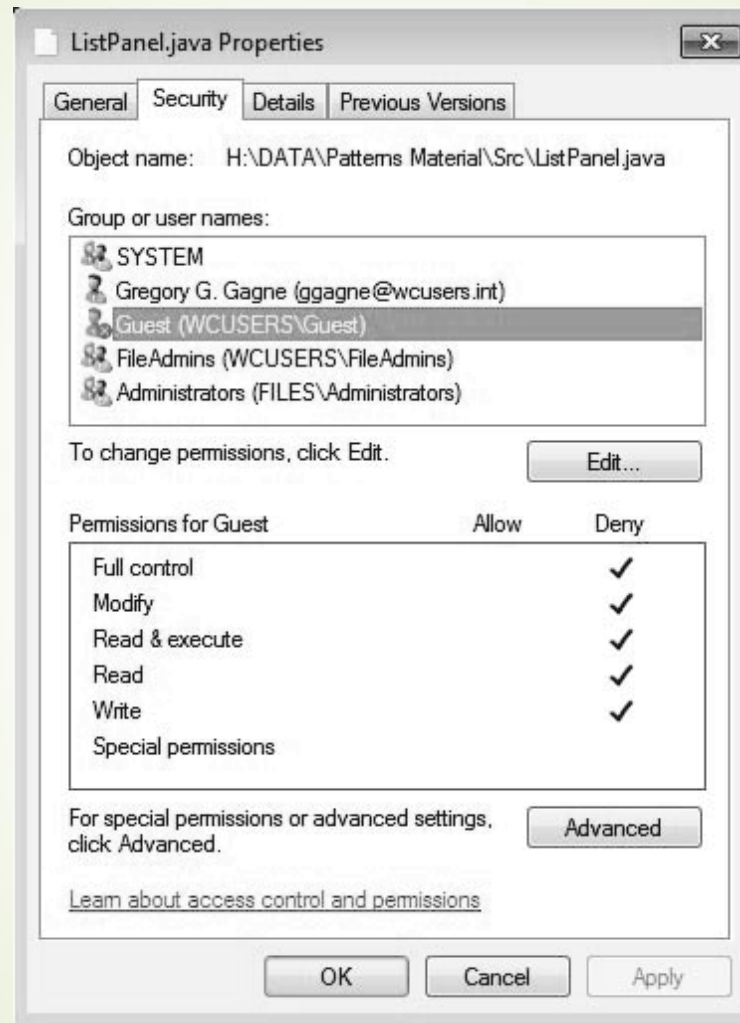

A Sample UNIX Directory Listing

-rw-rw-r--	1 pbg	staff	31200	Sep 3 08:30	intro.ps
drwx-----	5 pbg	staff	512	Jul 8 09:33	private/
drwxrwxr-x	2 pbg	staff	512	Jul 8 09:35	doc/
drwxrwx---	2 pbg	student	512	Aug 3 14:13	student-proj/
-rw-r--r--	1 pbg	staff	9423	Feb 24 2003	program.c
-rwxr-xr-x	1 pbg	staff	20471	Feb 24 2003	program
drwx--x--x	4 pbg	faculty	512	Jul 31 10:31	lib/
drwx-----	3 pbg	staff	1024	Aug 29 06:52	mail/
drwxrwxrwx	3 pbg	staff	512	Jul 8 09:35	test/

THANKS