Exp No: 7	**Flow Control at Data Link Layer using Sliding Window Protocol**


AIM:

To write a program that implements flow control at the data link layer using the Sliding Window Protocol (Go-Back-N) and to simulate the flow of frames from one node to another.

ALGORITHM / PROCEDURE:

1. Read the total number of frames and the window size N. The sender may send up to N frames without waiting for an acknowledgement.
2. Keep two pointers at the sender: `base` (oldest unacknowledged frame) and `nxt` (next frame to send).
3. While `nxt < base + N`, send frame number nxt and increase nxt.
4. The receiver accepts frames in order. For each correct frame it sends an acknowledgement ACK (frame number + 1).
5. When the sender receives an ACK, the window slides forward by one position (base = base + 1).
6. If a frame is lost the receiver discards the later frames, the sender times out and sends again from the lost frame (Go-Back-N).
7. Repeat until all the frames are acknowledged and display the sequence of events.

Fig 1: Sender window over the frame sequence

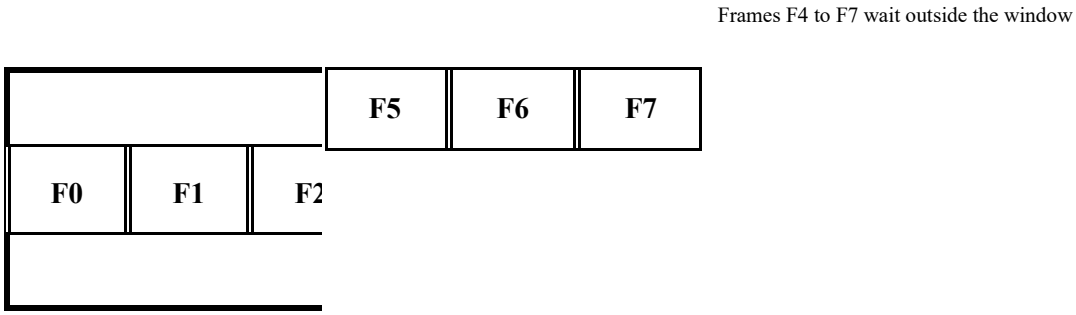

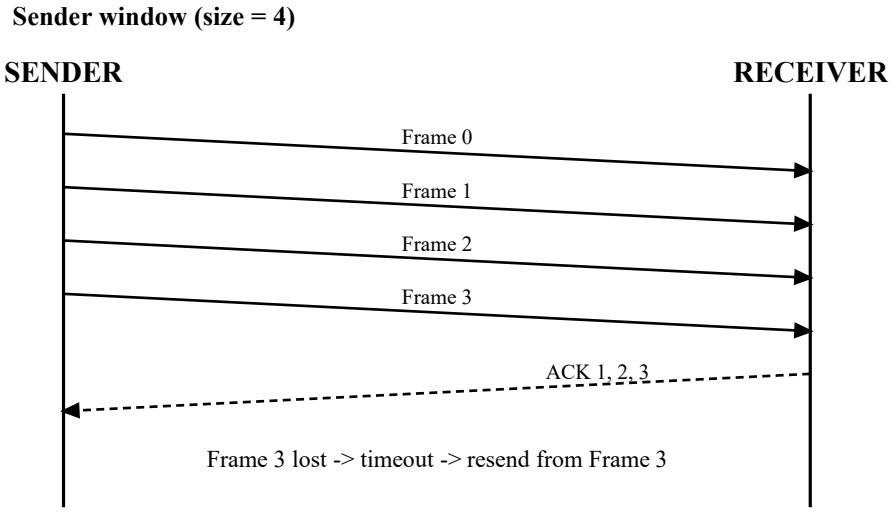



Fig 2: Frame and ACK exchange between sender and receiver

PROGRAM:

```
# Sliding window protocol (Go-Back-N) simulation
TOTAL, WINDOW = 8, 4 LOST = {3}                    # frame 3 is lost the
first time it is sent

base = nxt = 0 lost_once = set(LOST) print(f"Total frames
= {TOTAL}, Window size = {WINDOW}\n") while base < TOTAL:
while nxt < base + WINDOW and nxt < TOTAL:
        print(f"Sender   : Frame {nxt} sent
window=[{base}..{min(base+WINDOW,TOTAL)1}]")         nxt += 1     expected = base
for f in range(base, nxt):         if f in lost_once:             print(f"Network  :
Frame {f} LOST")             lost_once.discard(f)             print(f"Sender   :
Timeout for frame {f}, resending from frame {f}")             nxt = f
break         print(f"Receiver : Frame {f} received, ACK {f + 1} sent")
print(f"Sender   : ACK {f + 1} received, window slides")         base = f + 1
print("\nAll frames transmitted successfully.")
```

OUTPUT:

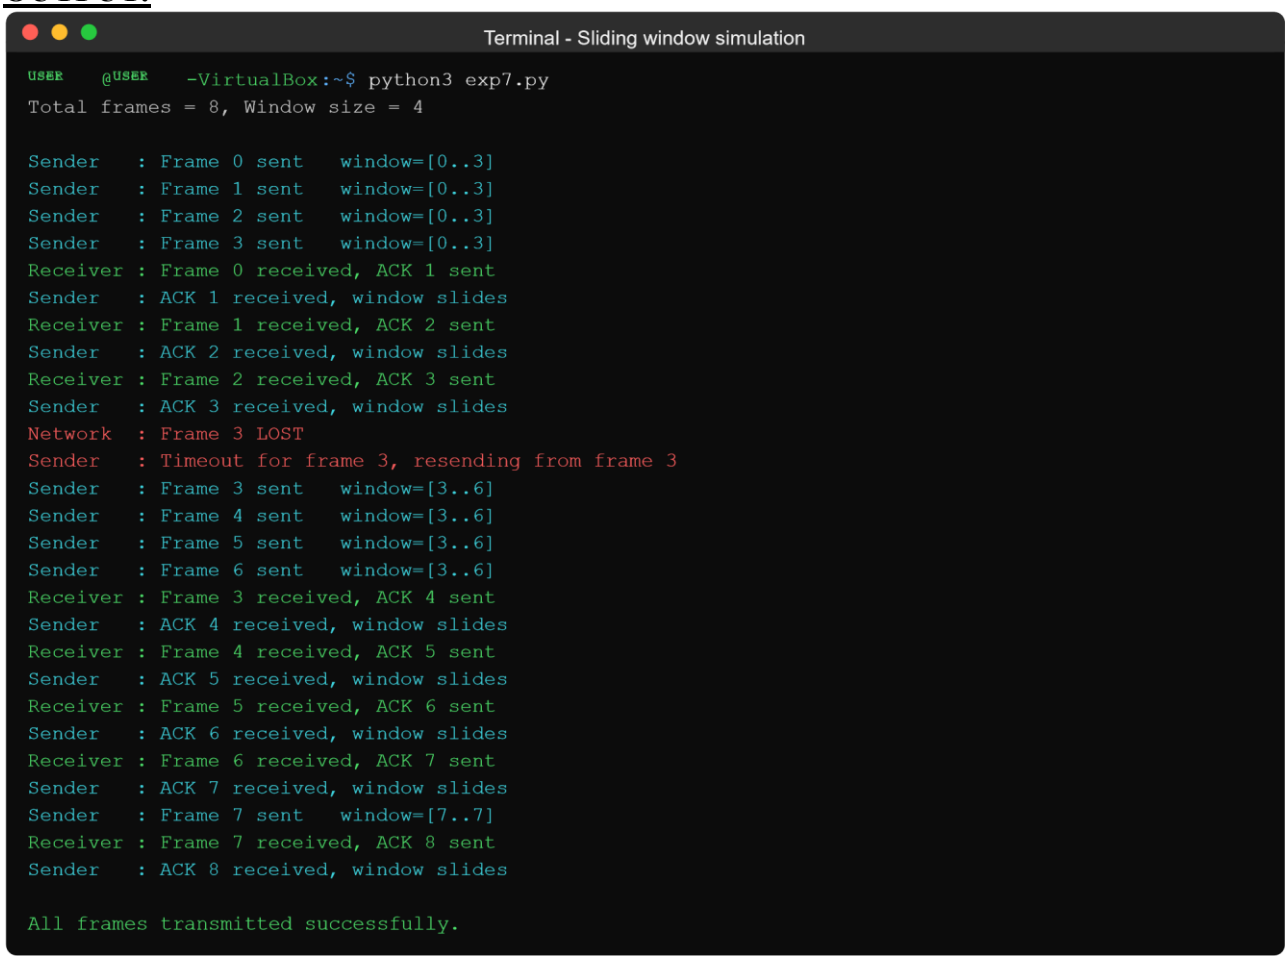
Terminal - Sliding window simulation
USER @USER -VirtualBox:~$ python3 exp7.py
Total frames = 8, Window size = 4
Sender : Frame 0 sent window=[0..3]
Sender : Frame 1 sent window=[0..3]
Sender : Frame 2 sent window=[0..3]
Sender : Frame 3 sent window=[0..3]
Receiver : Frame 0 received, ACK 1 sent
Sender : ACK 1 received, window slides
Receiver : Frame 1 received, ACK 2 sent
Sender : ACK 2 received, window slides
Receiver : Frame 2 received, ACK 3 sent
Sender : ACK 3 received, window slides
Network : Frame 3 LOST
Sender : Timeout for frame 3, resending from frame 3
Sender : Frame 3 sent window=[3..6]
Sender : Frame 4 sent window=[3..6]
Sender : Frame 5 sent window=[3..6]
Sender : Frame 6 sent window=[3..6]
Receiver : Frame 3 received, ACK 4 sent
Sender : ACK 4 received, window slides
Receiver : Frame 4 received, ACK 5 sent
Sender : ACK 5 received, window slides
Receiver : Frame 5 received, ACK 6 sent
Sender : ACK 6 received, window slides
Receiver : Frame 6 received, ACK 7 sent
Sender : ACK 7 received, window slides
Sender : Frame 7 sent window=[7..7]
Receiver : Frame 7 received, ACK 8 sent
Sender : ACK 8 received, window slides
All frames transmitted successfully.

RESULT:

Thus the sliding window protocol was implemented and the transmission of 8 frames from the sender to the receiver was simulated successfully. The lost frame 3 was retransmitted after the timeout and all frames were delivered in order.