Vidit Gupta

Group - 5

1 -

```
<!DOCTYPE html>
<html lang="en">
<head>
	<meta charset="UTF-8">
	<title></title>
</head>
<body>
<script type="text/javascript"
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js">
</script>

<script>
	$(document).ready(console.log("Hello World!"));
</script>
</body>
</html>
```

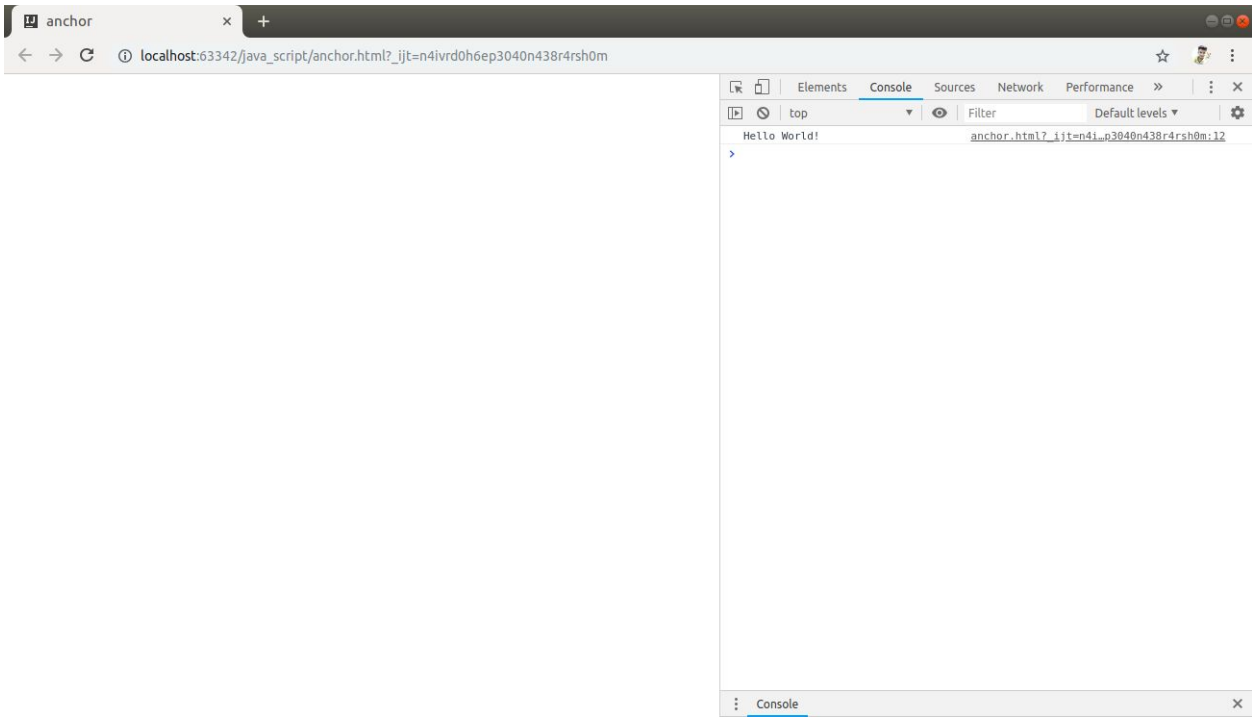

2 -

```
<!DOCTYPE html>
<html lang="en">
<head>
	<meta charset="UTF-8">
	<style>
	.load{BACKGROUND-COLOR: red;}
	#TEST{FLOAT:right;}
	</style>
	<title>anchor</title>
</head>
<body>
<script type="text/javascript"
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js">
</script>
<DIV ID="TEST">Title</DIV>
<br/>
<p class="load">jQuery</p>
<script>
	$(document).ready($("#TEST").addClass("load"));
</script>
</body>
</html>
```

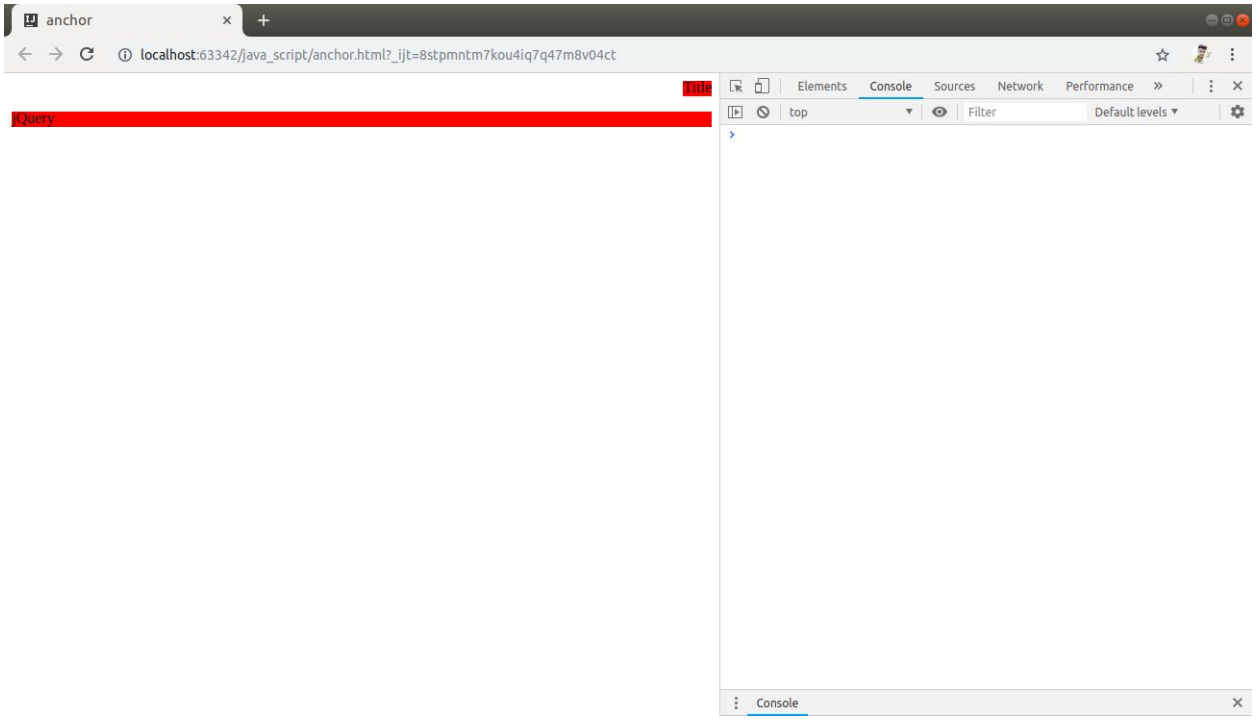

3 -

```
<!DOCTYPE html>
<html lang="en">
<head>
	<meta charset="UTF-8">
	<style>
	.load{font-family: cursive;}
	.new{font-family: Gargi;}
	.tothenew{font-family: Likhan;}
	</style>
	<title>anchor</title>
</head>
<body>
<script type="text/javascript"
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js">
</script>
<DIV class="new">Title</DIV>
<br/>
<div class="load">jQuery</div>
<br/>
<div class="tothenew">Session</div>
<script>
	$(document).ready($("[class $=new]").css('background-color',"yellow")) ;
</script>
```

```
</body>
</html>
```

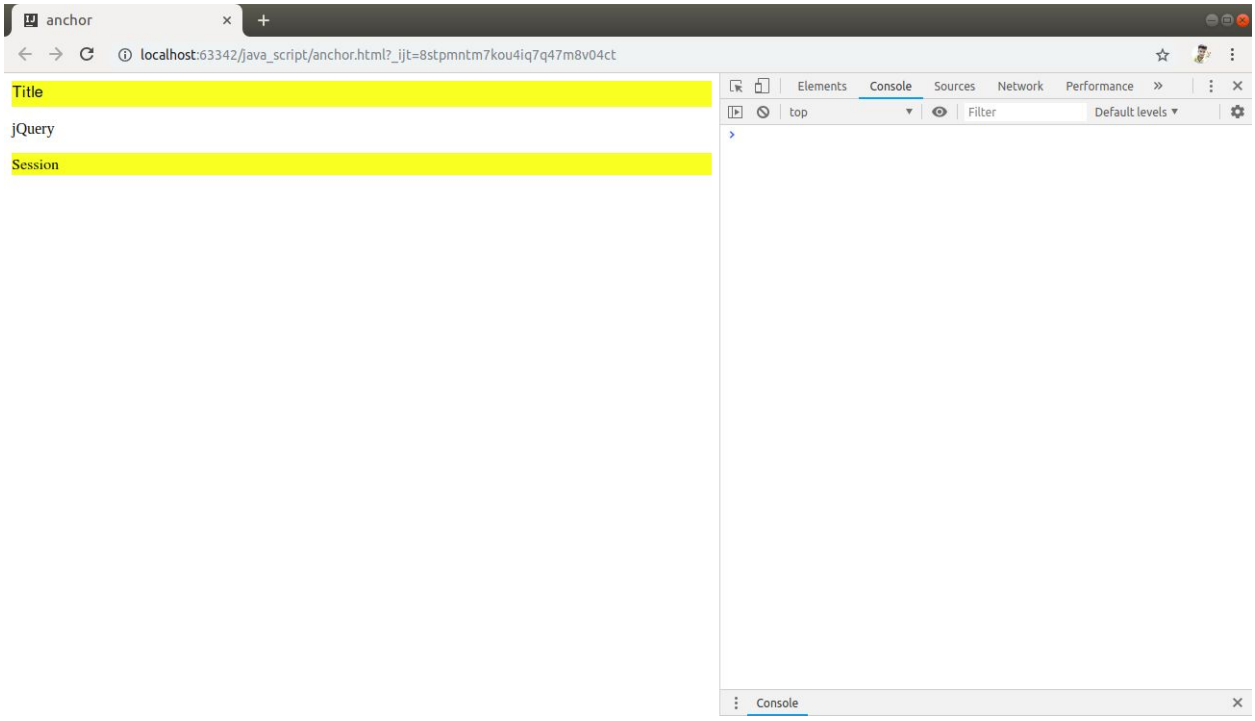

4 -

```
<!DOCTYPE html>
<html lang="en">
<head>
        <meta charset="UTF-8">

        <title></title>
</head>
<body>
<script type="text/javascript"
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js">
</script>
<p></p>
        <input type="button" name="Submit" value="SUBMIT"/>
<p></p>
<script>
        $(document).ready($("input[type=button]").attr("disabled", "disabled")) ;
```

```
</script>
</body>
</html>
```

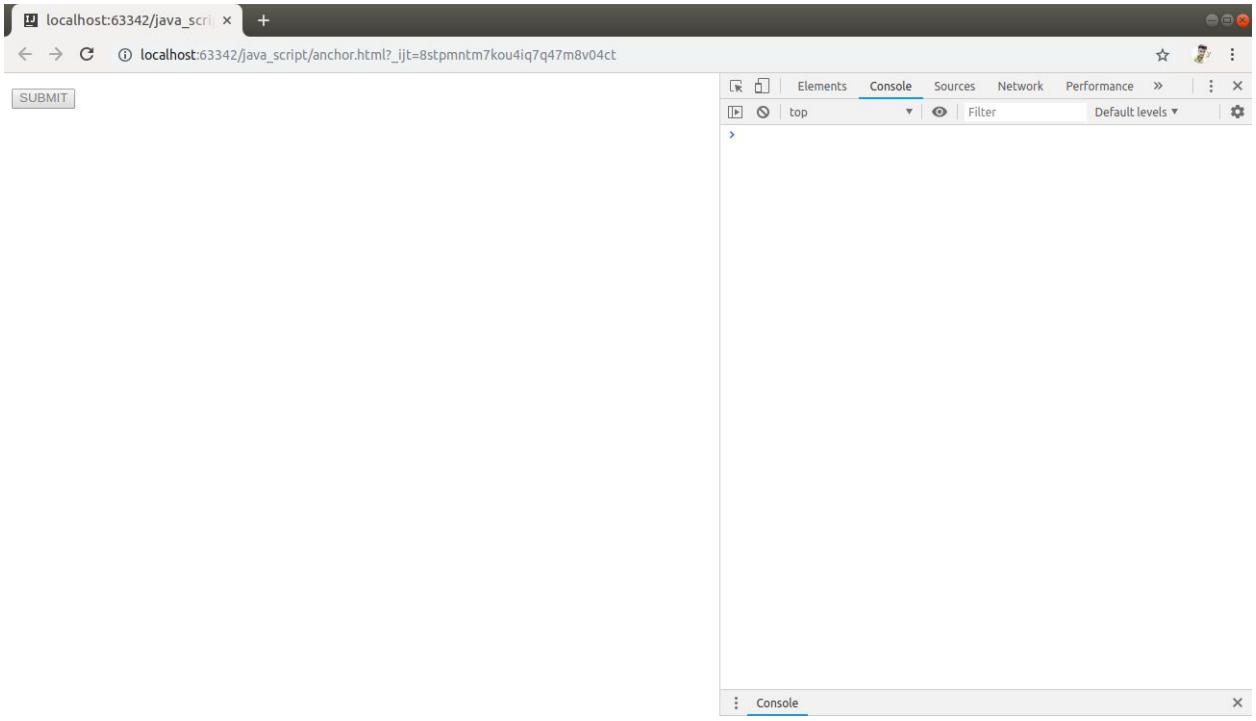

5 -

```
<!DOCTYPE html>
<html lang="en">
<head>
	<meta charset="UTF-8">
	<title></title>
</head>
<body>
<script type="text/javascript"
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js">
</script>
<div id="main">
	dfguh
	<div class="target"> First Line </div>

<div class="target1">
	Second Line
</div>
</div>
```

```
<script>
	$("#main").children(".target").css('font-size',"200%");
</script>
</body>
</html>
```

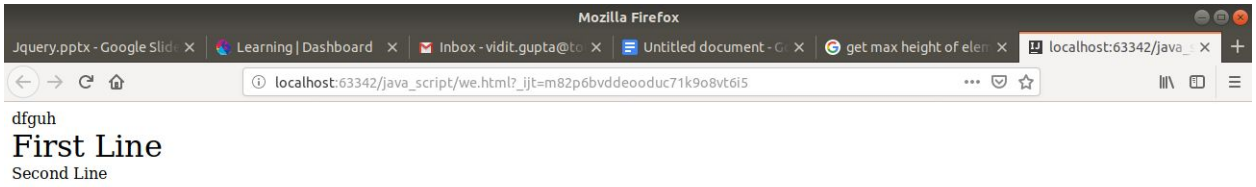

6 -

```
<!DOCTYPE html>
<html lang="en">
<head>
	<meta charset="UTF-8">
	<title></title>
</head>
<body>
<script type="text/javascript"
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js">
</script>
<div > First Line </div>
```

```
<p >
        Second Line
</p>
<script>
        var p_element = $("p").text();
        $("document").ready($("div").replaceWith(p_element));
</script>
</body>
</html>
```

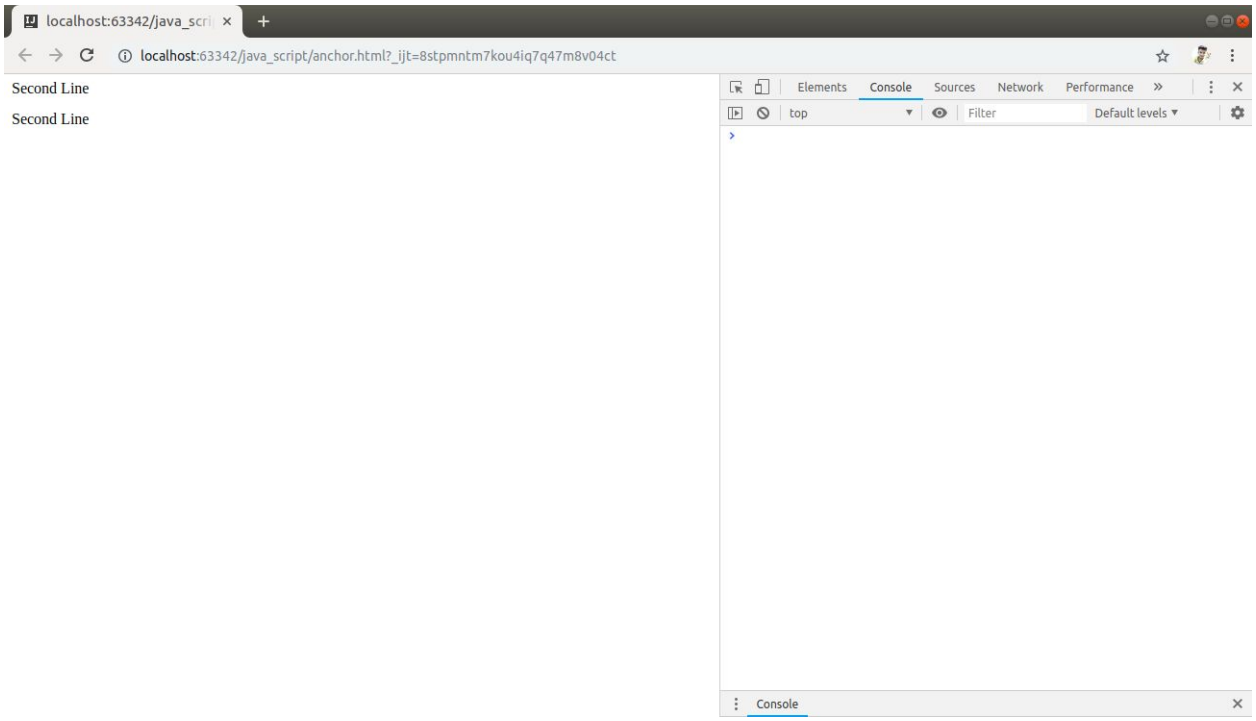

7 -

```
<!DOCTYPE html>
<html lang="en">
<head>
        <meta charset="UTF-8">
        <title></title>
</head>
<body>
<script type="text/javascript"
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js">
```

```
</script>
<button>Click me</button>
<div class="prac">Welcome</div>
<script>
$(document).ready(function(){
        $("button").click(function(){
        $("button").remove();
        $("div.prac").append("<p class='add'>First Element</p><button
class='btn1'>AddElement</button>");
        });
        });
$(document).on("click", "button.btn1", function() {
        $("button.btn1").remove();
        $("p.add").append("<p>Second Element</p><button
class='btn2'>AddElement</button>");
});
$(document).on("click", "button.btn2", function() {
        $("button.btn2").remove();
        $("p.add").append("<p>Third Element</p>");
});
</script>
</body>
</html>
```

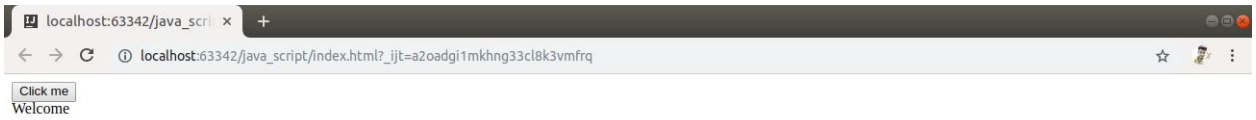

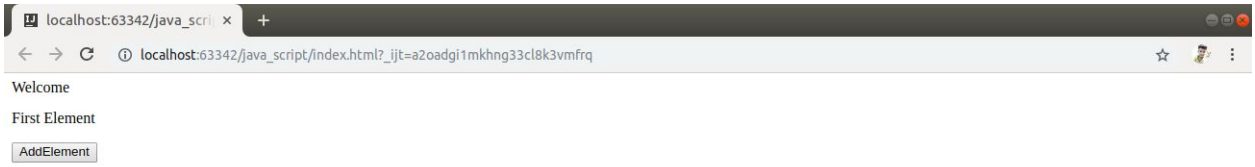
localhost:63342/java_scri
localhost:63342/java_script/index.html?_ijt=a2oadgi1mkhng33cl8k3vmfrq
Welcome
First Element
AddElement

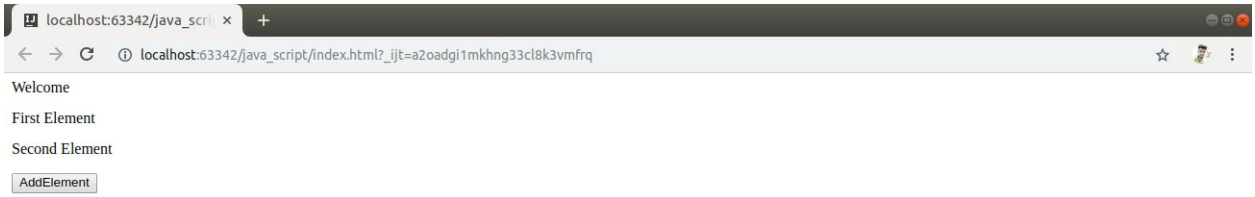
localhost:63342/java_scri
localhost:63342/java_script/index.html?_ijt=a2oadgi1mkhng33cl8k3vmfrq
Welcome
First Element
Second Element
AddElement

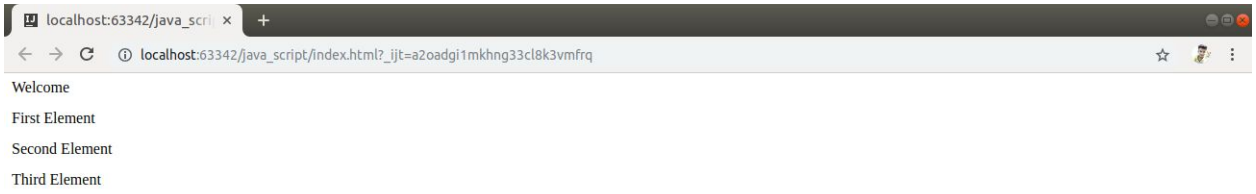

8 -

```
<!DOCTYPE html>
<html lang="en">
<head>
        <meta charset="UTF-8">
        <title></title>
</head>
<body>
<script type="text/javascript"
src="https://ajax.googleapis.com/ajax/libs/jquery/3.1.1/jquery.min.js">
</script>
<p >
        Click Here
</p>
<script>
        $("p").on("click", function(){
        alert("The paragraph was clicked.");
        });
</script>
</body>
</html>
```

9 -

```
<!DOCTYPE html>
<html lang="en">
<head>
	<meta charset="UTF-8">
	<title>JQuery Practice</title>
	<script src="https://code.jquery.com/jquery-1.10.2.js"></script>
</head>
<body>
<div>
	<ul>
	<li class="drop"><a href="#">Link</a></li>
	<ul class="dropdown">
	<li><a href="#" class="link1">Hello</a> </li>
	<li><a href="#" class="link2">World</a> </li>
	</ul>
	</ul>
</div>
<div class="add">hi!</div>
<script>
	$(document).ready(function() {
```

```
        $(".link1").click(function () {
        var value=$(".link1").text();
        $("div.add").append(value);

        });
        $(".link2").click(function () {
        var value=$(".link2").text();
        $("div.add").append(value);
        });
        });
</script>
</body>
</html>
```

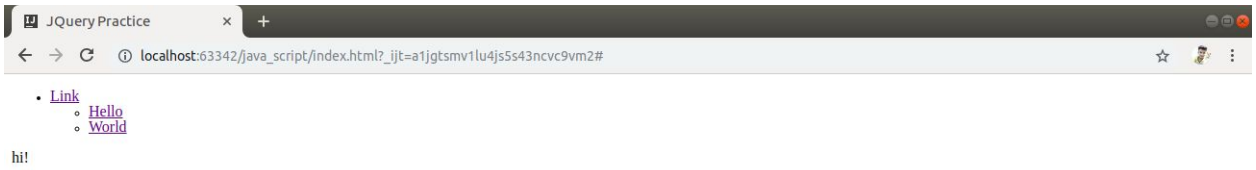

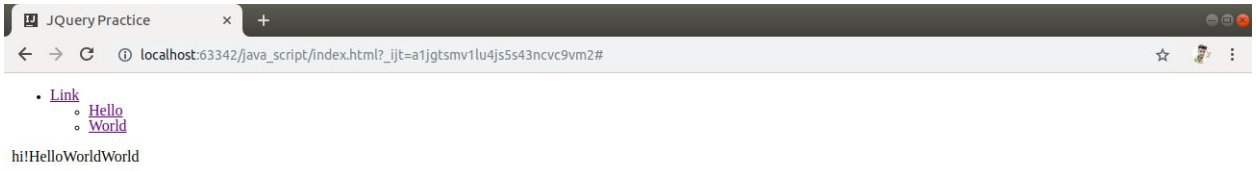


```
10.<!DOCTYPE html>
<html>
<head>
<meta name="viewport" content="width=device-width, initial-scale=1">
<style>
.dropbtn {
background-color: #4CAF50;
color: white;
padding: 16px;
font-size: 16px;
border: none;
}

.dropdown {
position: relative;
display: inline-block;
}

.dropdown-content {
display: none;
position: absolute;
background-color: #f1f1f1;
min-width: 160px;
box-shadow: 0px 8px 16px 0px rgba(0,0,0,0.2);
```

```
z-index: 1;
}

.dropdown-content a {
color: black;
padding: 12px 16px;
text-decoration: none;
display: block;
}

.dropdown-content a:hover {background-color: blue;}

.dropdown:hover .dropdown-content {display: block;}

.dropdown:hover .dropbtn {background-color: #3e8e41;}
</style>
</head>
<body>

<h2>Hoverable Dropdown</h2>
<p>hover mouse</p>

<div class="dropdown">
<button class="dropbtn">Dropdown</button>
<div class="dropdown-content">
<a href="#">File 1</a>
<a href="#">Edit 2</a>
<a href="#">Save 3</a>
<a href="#">Exit 4</a>
</div>
</div>

</body>
</html>
```

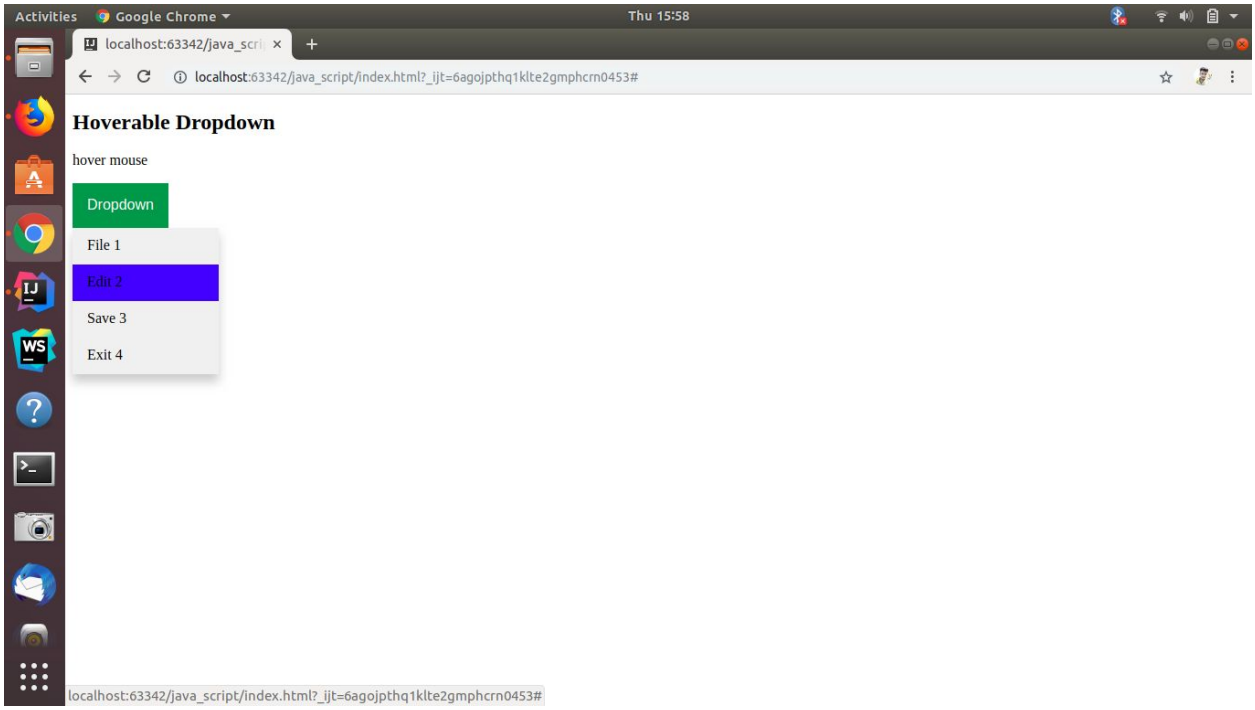

11 -

```
<!DOCTYPE html>
<html lang="en">
<head>
	<meta charset="UTF-8">

	<title>JQuery Practice</title>
	<script src="https://code.jquery.com/jquery-1.10.2.js"></script>
</head>
<body>
<div><a href="www.google.com" class="link1"> GOOGLE </a></div>
<script>
	$(document).ready(function() {
	$(".link1").click(function (e) {
	e.preventDefault();
	});
	});
</script>
</body>
</html>
```

12 -

```
<!DOCTYPE html>
<html lang="en">
<head>
	<meta charset="UTF-8">
	<title>JQuery Practice</title>
	<script src="https://code.jquery.com/jquery-1.10.2.js"></script>
</head>
<body>
<div>
	<button id="parentclick">parent button</button>
	<div>
	<ul>
	<li><button class="childclick">child li</button></li>
	<li><button class="childclick">child li</button></li>
	<li><button class="childclick">child li</button></li>
	<li><button class="childclick">child li</button></li>
	</ul>
	</div>
</div>
<script>
	$("#parentclick").click(function () {
	alert("Hello World!!!");
	});

	$(".childclick").click(function () {
	$("#parentclick").prop("disabled",true);
	});
</script>
</body>
</html>
```

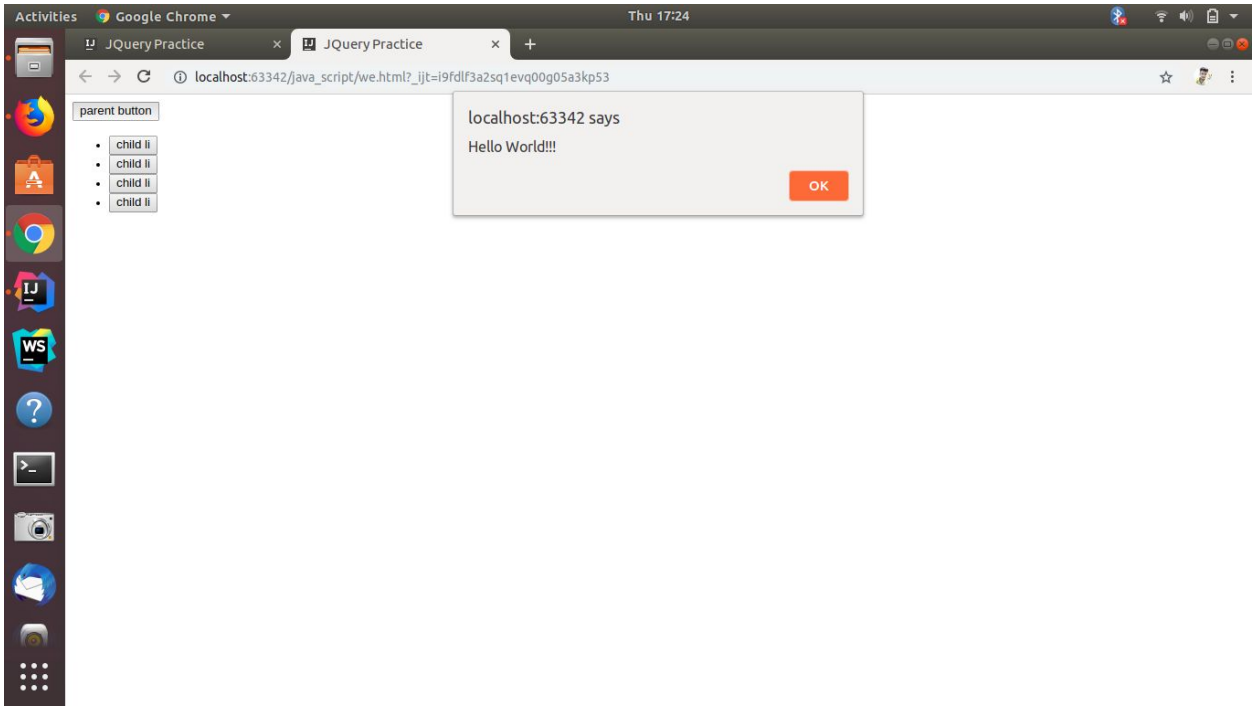
Activities
Google Chrome
Thu 17:24
JQuery Practice
JQuery Practice
localhost:63342/java_script/we.html?_ijt=i9fdlf3a2sq1evq00g05a3kp53
parent button
child li
child li
child li
child li
localhost:63342 says
Hello World!!!
OK

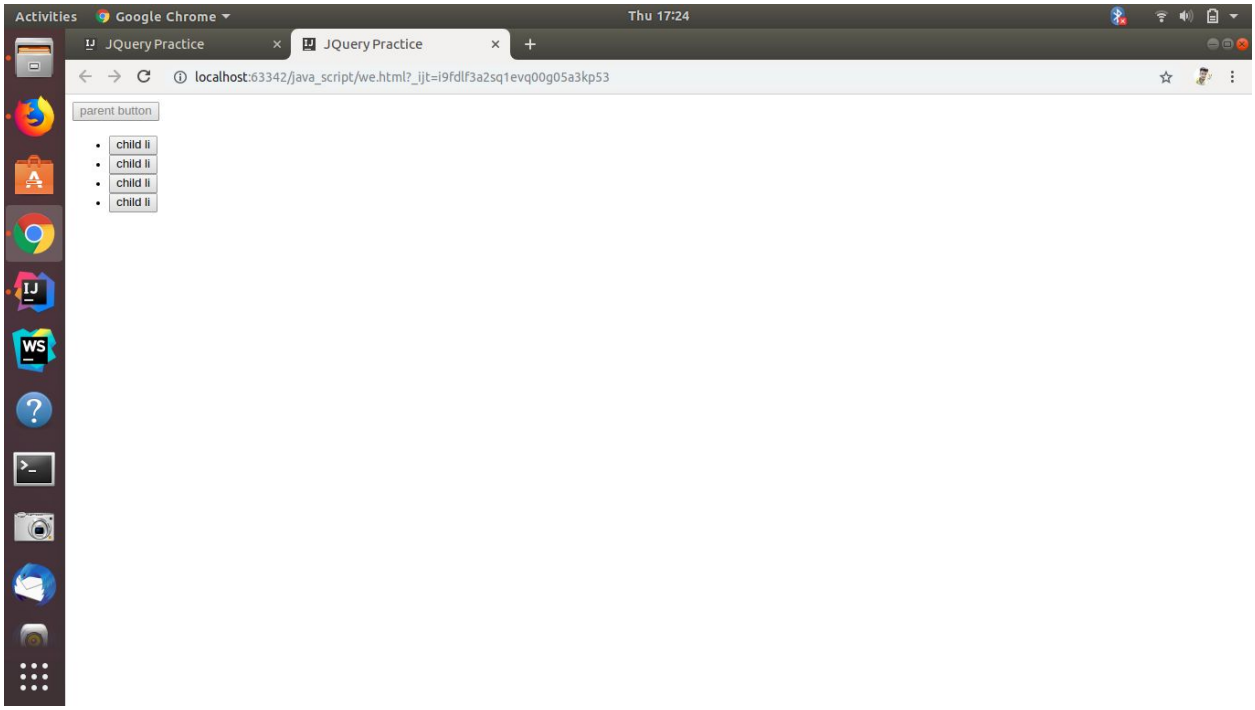
Activities
Google Chrome
Thu 17:24
JQuery Practice
JQuery Practice
localhost:63342/java_script/we.html?_ijt=i9fdlf3a2sq1evq00g05a3kp53
parent button
child li
child li
child li
child li

13 -

```
<!DOCTYPE html>
<html lang="en">
<head>
	<meta charset="UTF-8">
	<title>JQuery Practice</title>

	<script src="https://code.jquery.com/jquery-1.10.2.js"></script>
</head>
<body>
<div class="div1" style="height: 100px">Hello World</div>
<div class="div1" style="height: 50px">Welcome Again</div>
<script>
	var max=-1;
	$(".div1").each(function() {
	var h= $(this).height();
	max= h > max ? h:max;
	});
	console.log(max);
</script>
</body>
</html>
```

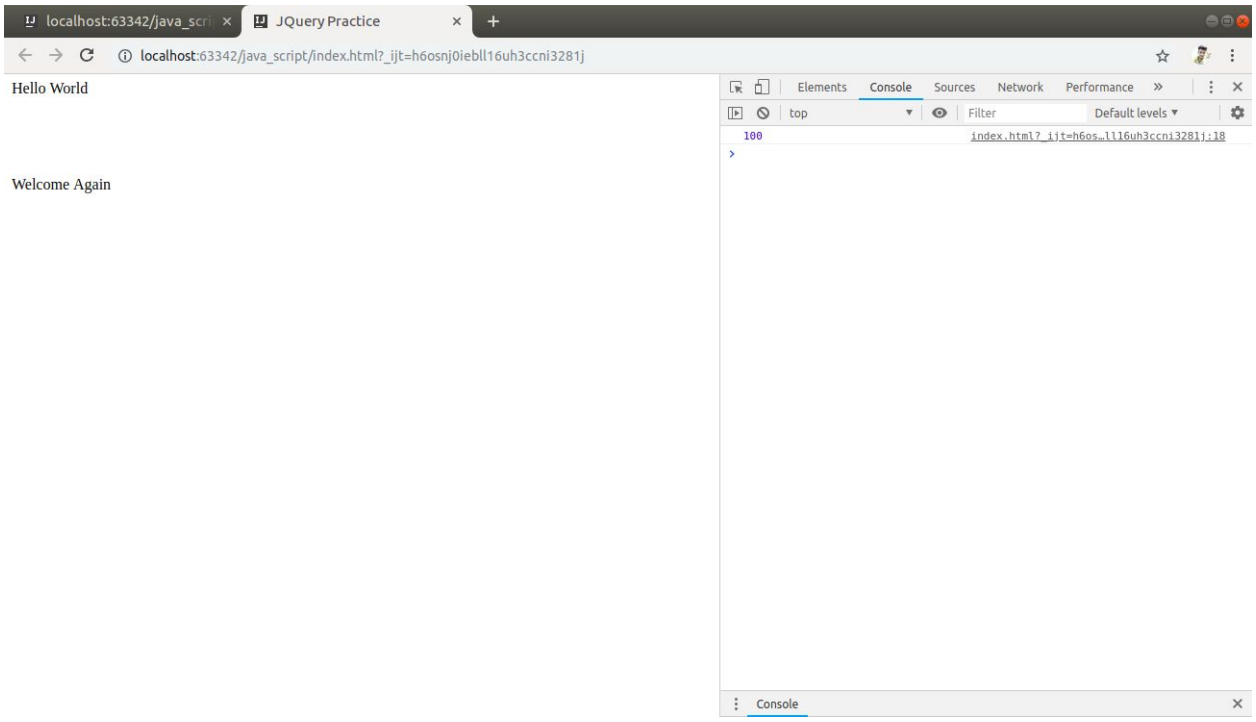

14 -

```
<!DOCTYPE html>
<html lang="en">
<head>
	<meta charset="UTF-8">
	<title>JQuery Practice</title>
	<script src="https://code.jquery.com/jquery-1.10.2.js"></script>
</head>
<body>
<div class="table1">
	<table>
	<tr>
	<td>11</td>
	<td>02</td>
	<td>33</td>
	</tr>
	<tr>
	<td>04</td>
	<td>45</td>
	<td>06</td>
	</tr>
	<tr>
	<td>77</td>
	<td>08</td>
	<td>19</td>
	</tr>
	<tr>
	<td>10</td>
	<td>01</td>
	<td>22</td>
	</tr>
	<tr>
	<td>03</td>
	<td>04</td>
	<td>15</td>
	</tr>
	</table>
</div>
<script>
	$(document).ready(function(){
	$("tr td").each(function () {
	if(parseInt($(this).text())>10)
```

```
                $(this).css( "color", "red" );
        })});
</script>
</body>
</html>
```

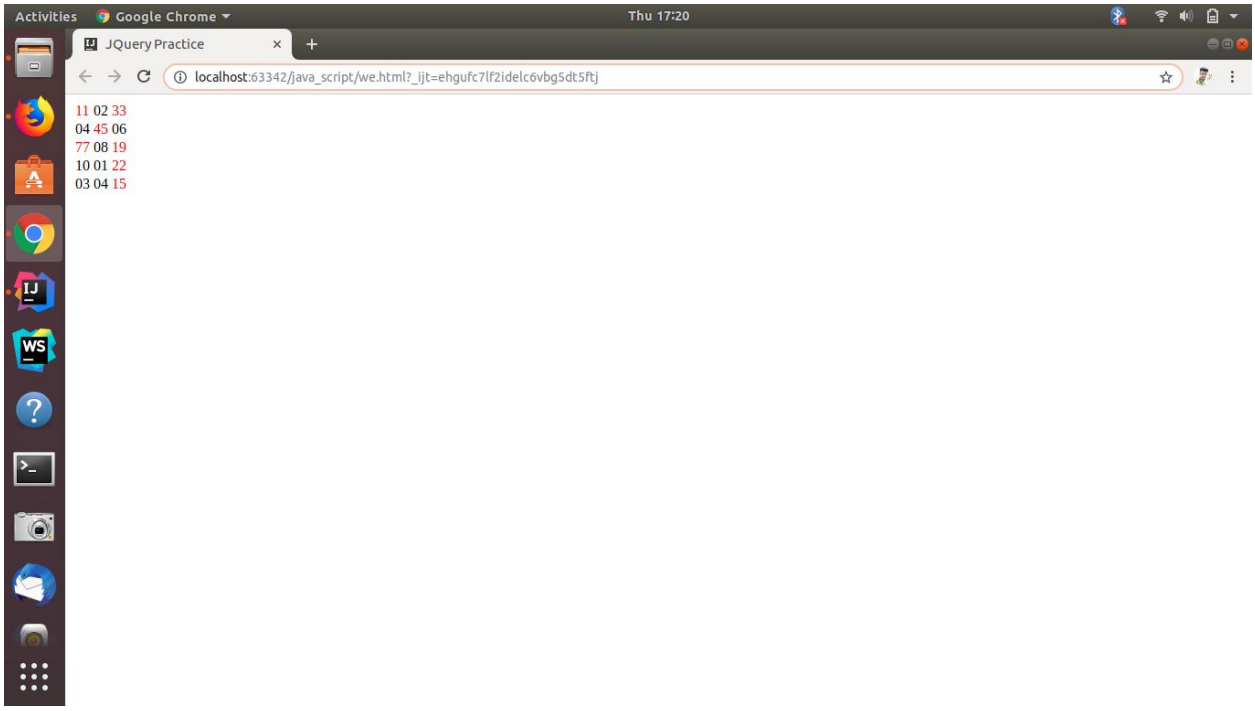

15 -

```
<!DOCTYPE html>
<html>
<head>
        <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.3.1/jquery.min.js"></script>
</head>
<body>
<div id="url"></div>
<script>
        $.ajax({
        url:"https://jsonplaceholder.typicode.com/posts",
        method:"GET"
        }).done(function (resp){
        $("#url").text(JSON.stringify(resp));
        })
</script>
</body>
</html>
```