


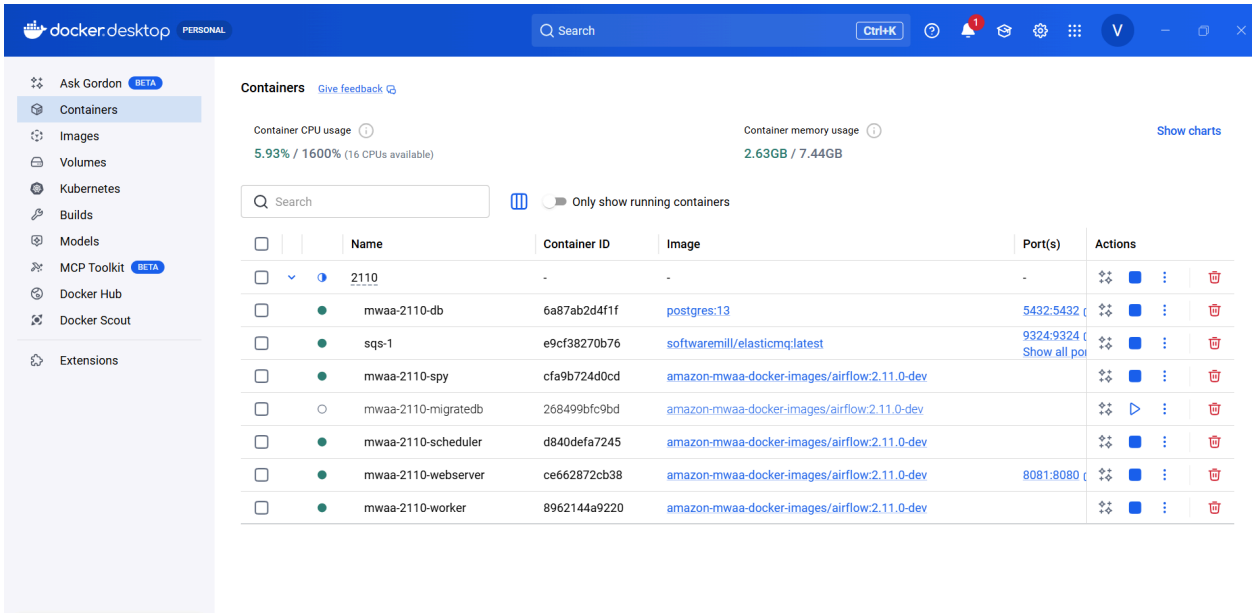


## Docker Compose was used to run the MWAA environment:

docker-compose -f docker-compose.yaml up

This spun up **7 containers** together:

| Container | Image | Purpose |
|---|---|---|
| `mwaa-2110-db` | `postgres:13` | Airflow metadata database |
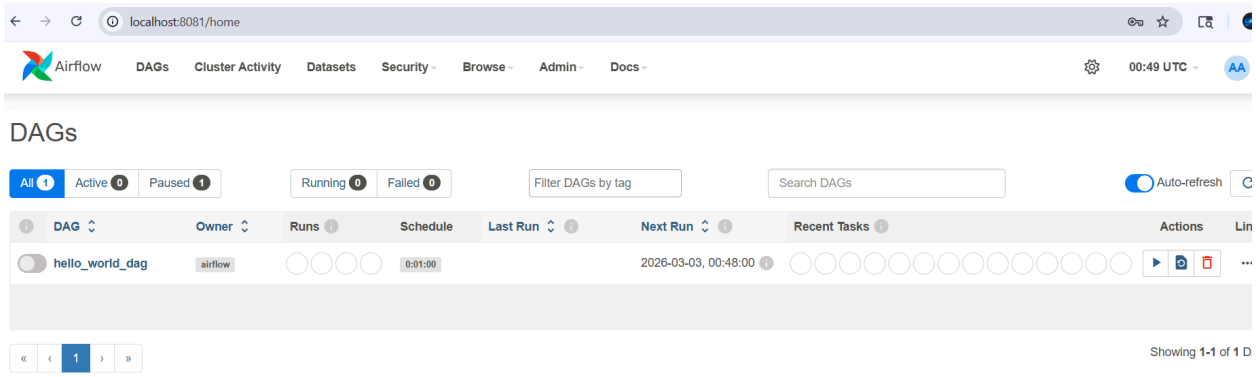
| | | |
|---|---|---|
| `sqs-1` | `softwaremill/elasticmq` | Local SQS mock |
| `mwaa-2110-spy` | `airflow:2.11.0-dev` | Monitoring |
| `mwaa-2110-migratedb` | `airflow:2.11.0-dev` | DB migration (runs once) |
| `mwaa-2110-scheduler` | `airflow:2.11.0-dev` | Airflow scheduler |
| `mwaa-2110-webserver` | `airflow:2.11.0-dev` | Airflow UI on port 8081 |
| `mwaa-2110-worker` | `airflow:2.11.0-dev` | Airflow worker |

## Docker (plain) was used to build the images:

docker build -t amazon-mwaa-docker-images/airflow:2.11.0-base -f Dockerfiles/Dockerfile.base .
docker build -t amazon-mwaa-docker-images/airflow:2.11.0-dev -f Dockerfiles/Dockerfile-dev .
docker build -t mwaa-local:2.11 -f Dockerfiles/Dockerfile .

**Summary:**

- `docker build` → created the images
- `docker-compose` → ran all the services together
- `docker push` → uploaded images to GitHub Container Registry