# UE-context lifecycle state machine
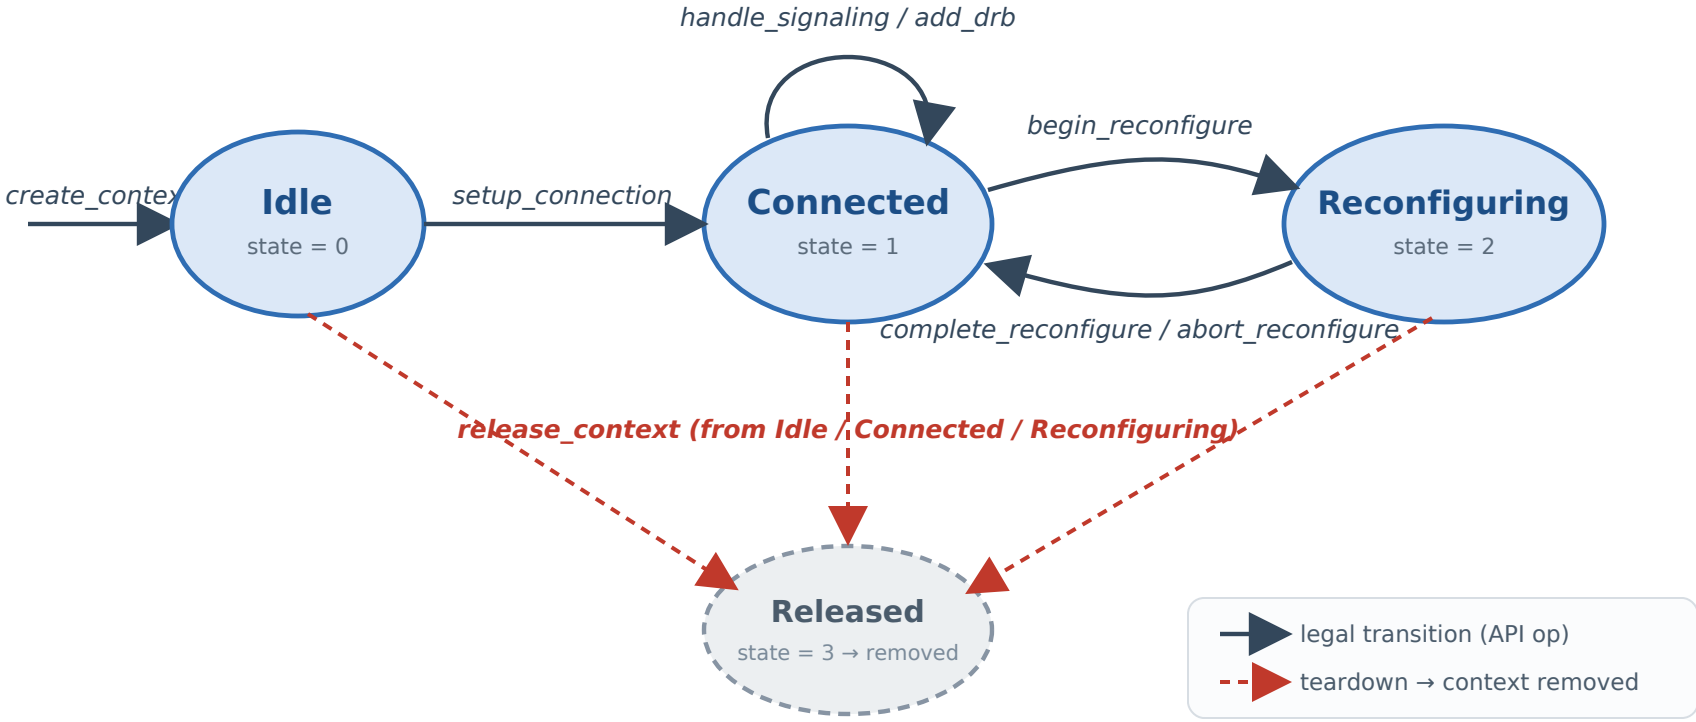
th implementations encode this identically; an op illegal for the current state returns OpError::InvalidState and leaves state unchang