# C++ → Rust FFI migration seam (RQ4)

A C++ host drives an unmodified Rust core across a thin C ABI, and all unsafe is confined to the seam crate

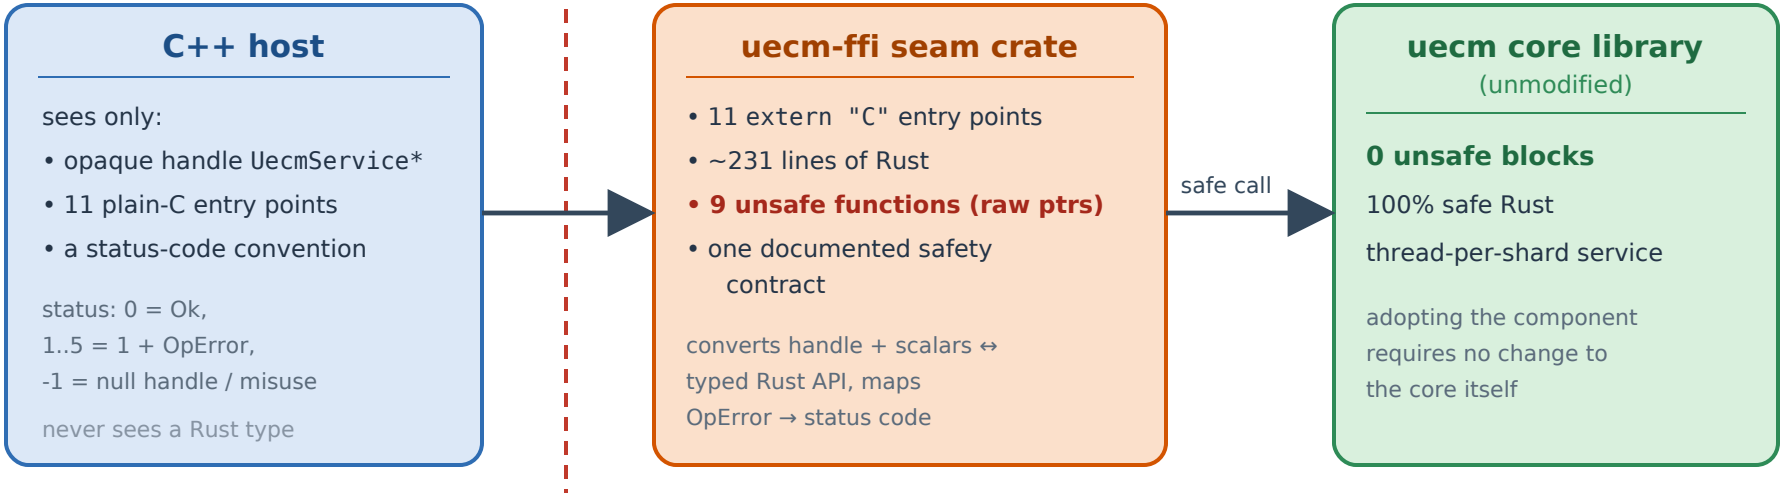


**Per-call cost: the crossing is negligible next to the operation it invokes**

FFI crossing (do-nothing extern "C"): **2.54 ns**

signaling op round-trip: **12.7 µs** (≈ 4 orders of magnitude larger)