UE context data model (spec §4)

Fixed field widths so memory footprint and copy cost are comparable across C++ and Rust

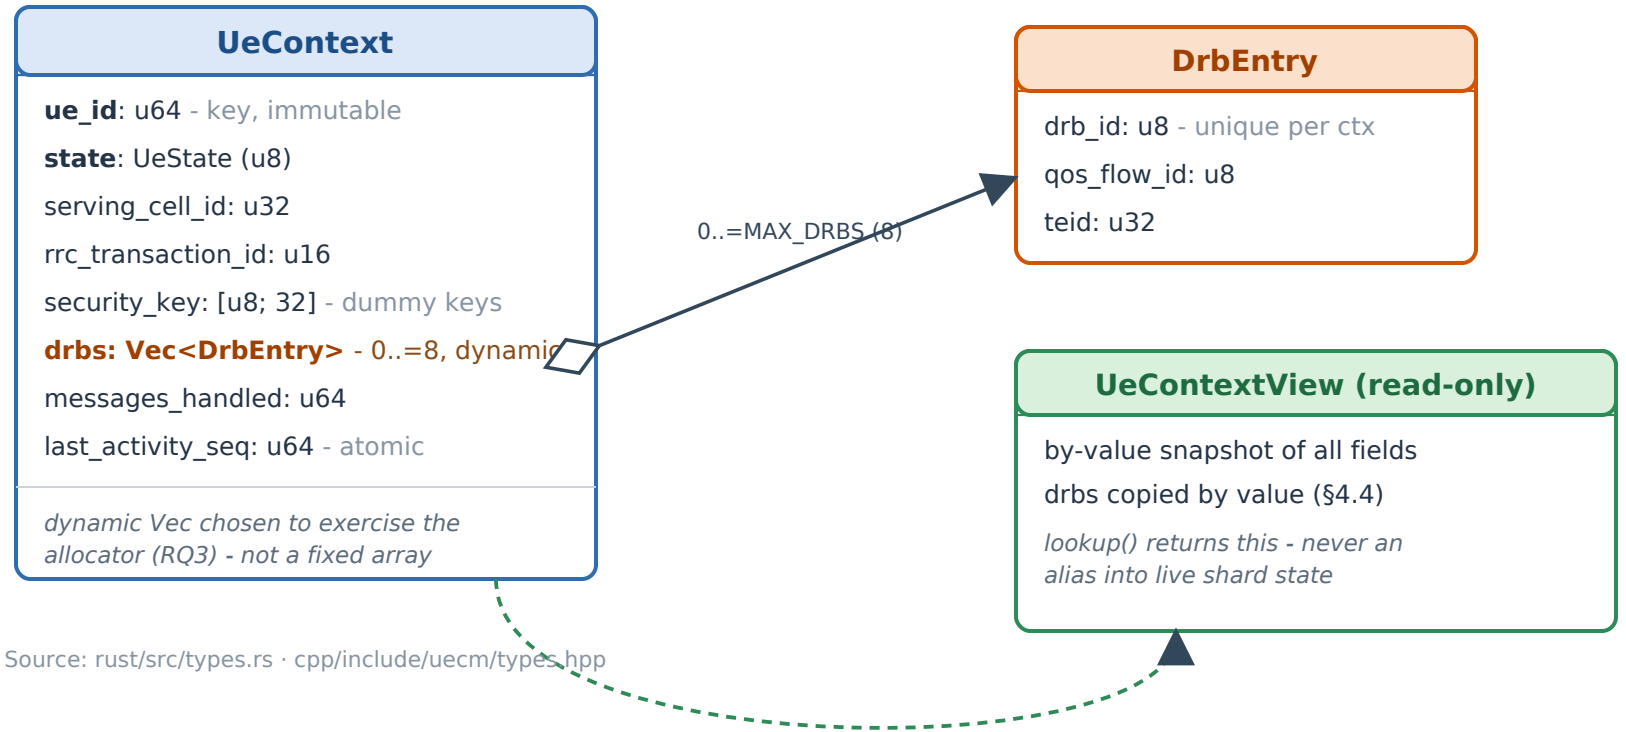

Source: rust/src/types.rs · cpp/include/uecm/types.hpp

lookup(ue_id) → copies out an immutable UeContextView (preserves shared-nothing)

CreateParams { serving_cell_id, security_key[32] } · SignalingMsg { kind, payload_len, payload[64] } → SignalingAck { accepted, new_messages_handled }