# Controlled fault-injection method (RQ2)
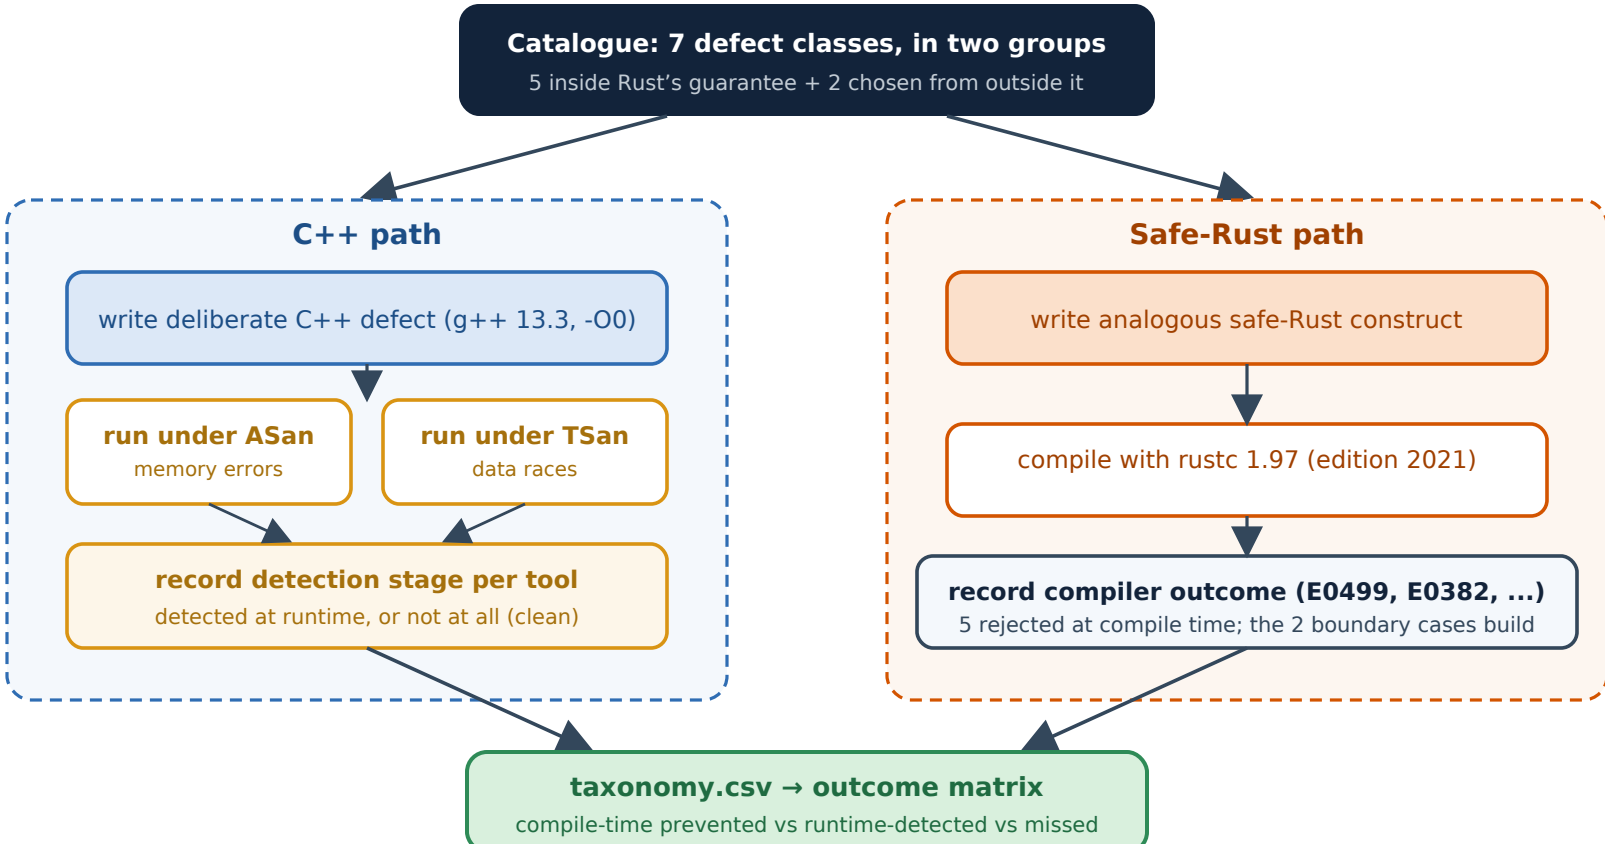
The independent variable is only the language; the injected fault is held fixed, so the outcome is attributable to the language