C++ → Rust FFI migration seam (RQ4)

A C++ host drives an unmodified Rust core across a thin C ABI; all unsafe is confined to the seam crate

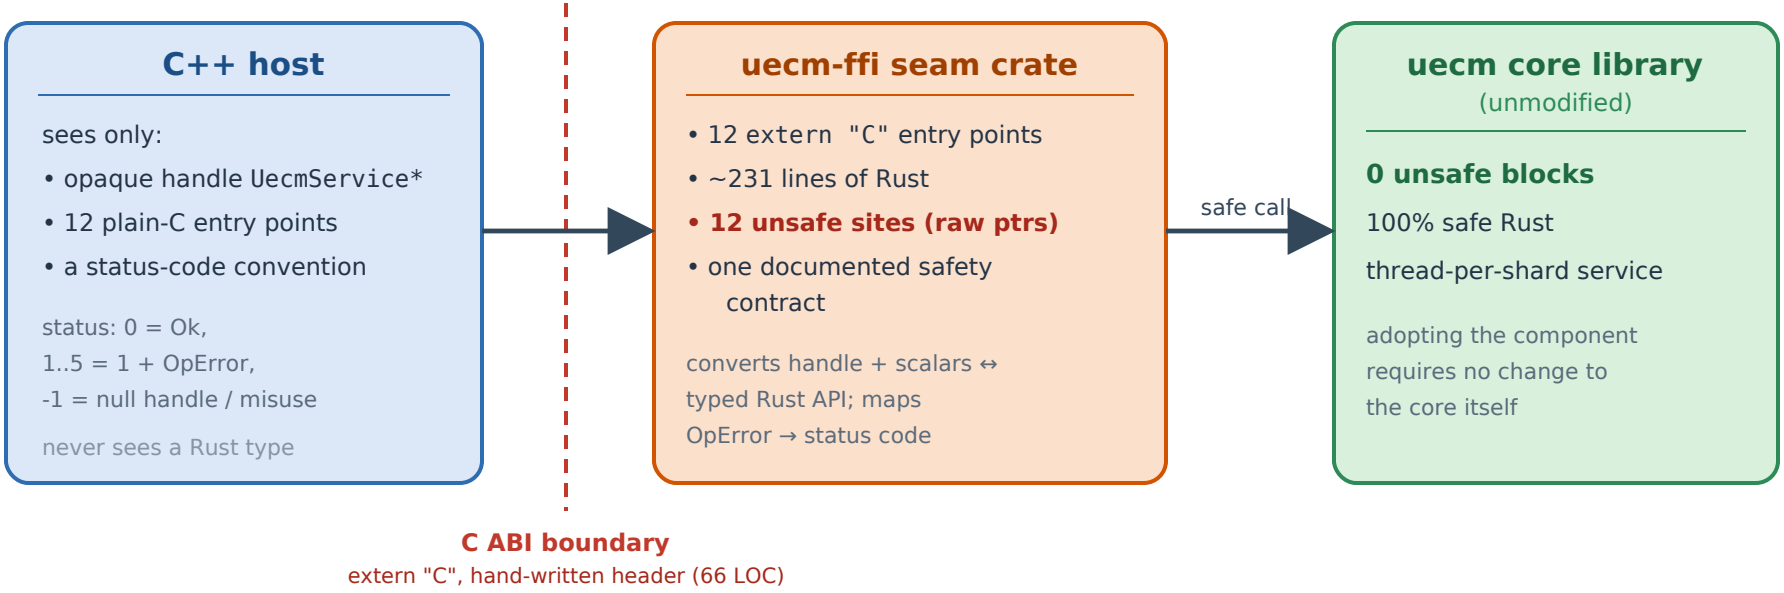

Per-call cost: the crossing is negligible next to the operation it invokes

FFI crossing (do-nothing extern "C"): **0.637 ns**

signaling op round-trip: **82 375 ns** (≈ 5 orders of magnitude larger)