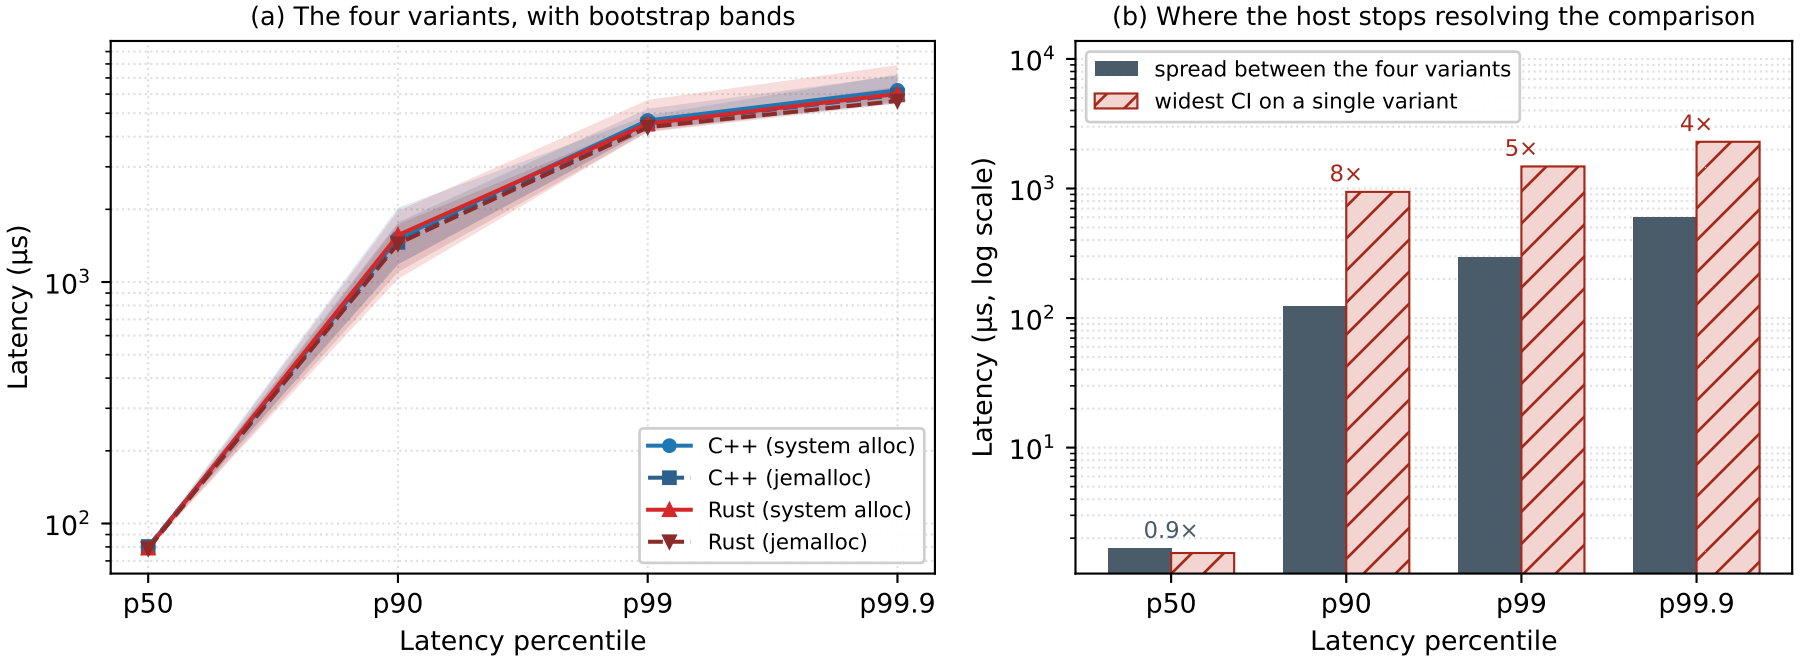
(a) The four variants, with bootstrap bands
Latency (µs)
10^3
10^2
p50
p90
p99
p99.9
Latency percentile
C++ (system alloc)
C++ (jemalloc)
Rust (system alloc)
Rust (jemalloc)
(b) Where the host stops resolving the comparison
Latency (µs, log scale)
10^4
10^3
10^2
10^1
spread between the four variants
widest CI on a single variant
0.9×
8×
5×
4×
p50
p90
p99
p99.9
Latency percentile