# C++ → Rust FFI migration seam (RQ4)

A C++ host drives an unmodified Rust core across a thin C ABI, and all unsafe is confined to the seam crate

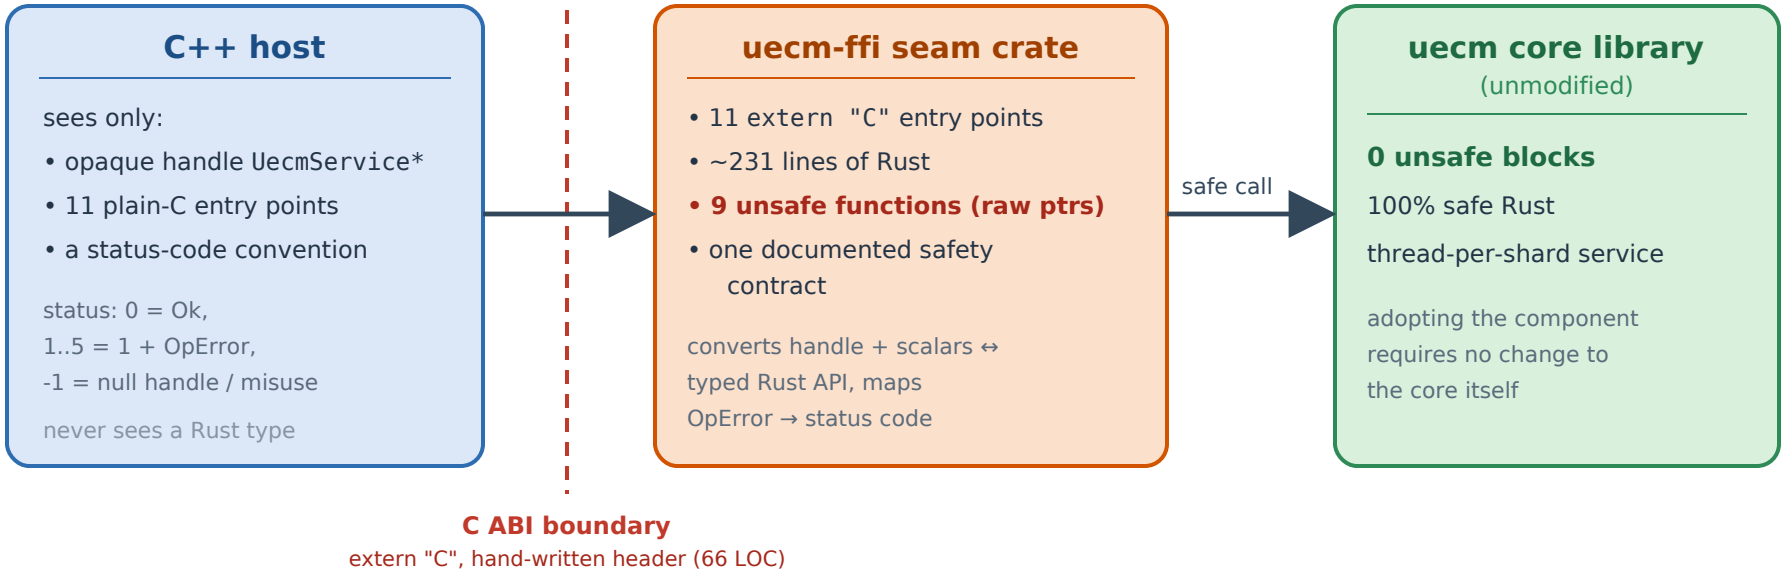


**Per-operation cost: the same signalling operation, called natively and through the seam**

The paired difference between the two is not resolved. The do-nothing crossing bounds itself and not the operation. Figures in the caption.