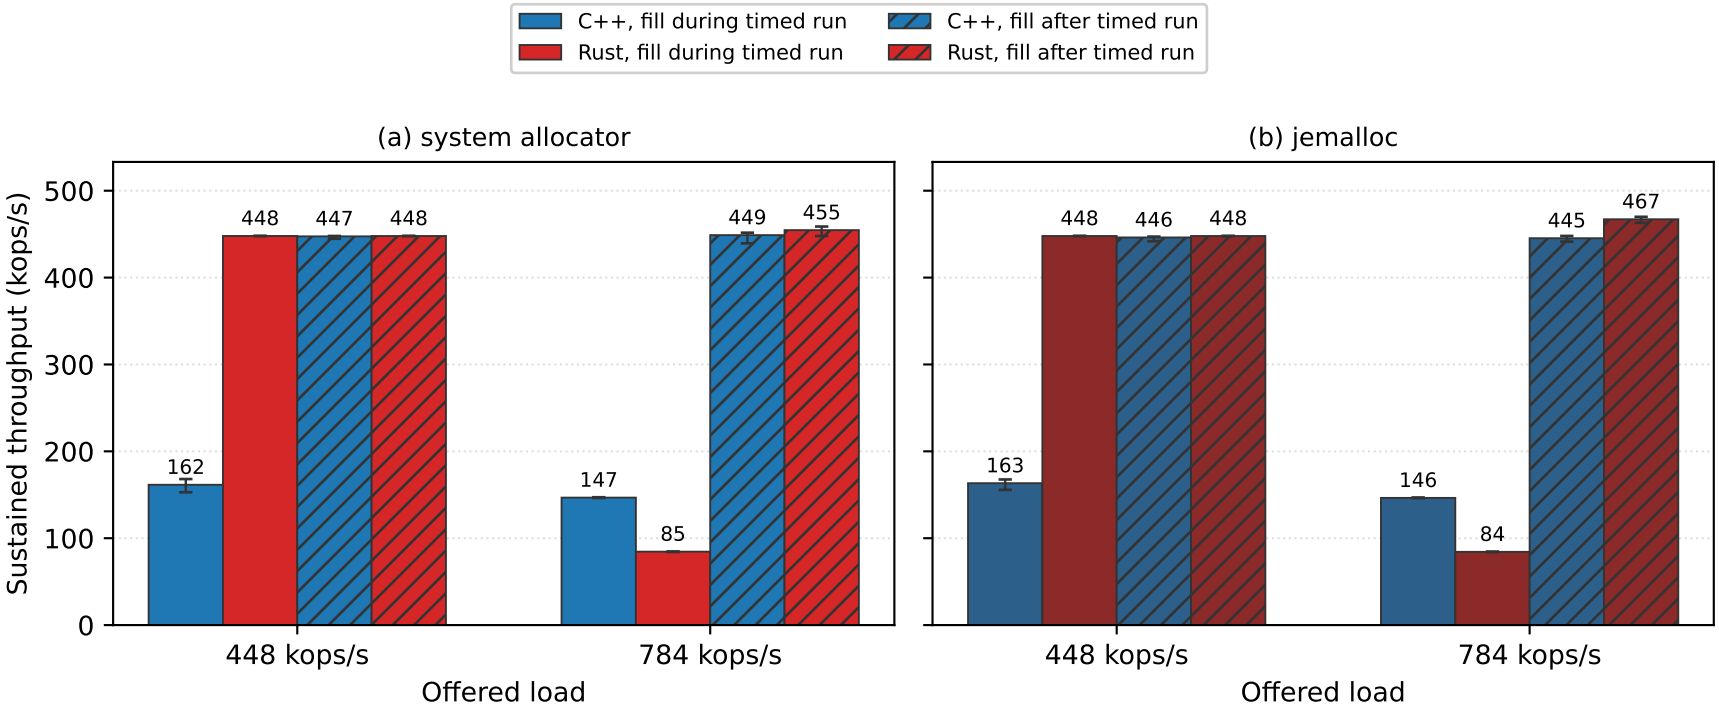
C++, fill during timed run
Rust, fill during timed run
C++, fill after timed run
Rust, fill after timed run
(a) system allocator
(b) jemalloc
Sustained throughput (kops/s)
0
100
200
300
400
500
162
448
447
448
147
85
449
455
163
448
446
448
146
84
445
467
448 kops/s
784 kops/s
Offered load