

CONFIDENTIAL

C Programming Basic – week 1

Array, String, Pointer, and File

Instructor: Thanh-Chung Dao
(chungdt@soict.hust.edu.vn)

Slides by Cao Tuan Dung


1

Some Rules to be Followed

- Attendance is mandatory.
- Regular assignments should be done fully in the lab class.
- If you face any problems catching up, draw the attention of one of the teachers.

2

2

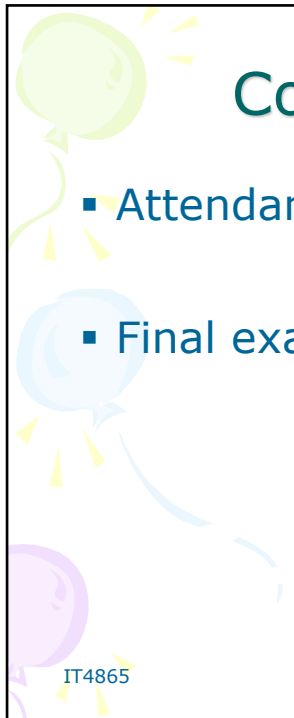

Course Evaluation


- Attendance + exercises: 30%
- Final examination: 70%

IT4865

Week 1: Introduction

3

3



Introduction

- C Programming practice in UNIX environment.
- Programming topics related to [Data Structures and Algorithms]
- Compiler: gcc
- Editor: Emacs, K-Developer.

4

A decorative graphic on the left side of the slide featuring three balloons in green, blue, and purple, each with a yellow sunburst-like pattern behind it.

gcc syntax

- Parameter:

- Wall : turn on all alerts

- c: make object file

- o: name of output file

- g: debug information

- l: library

```
gcc hello.c -o runhello
```

```
./runhello
```

5

A decorative graphic on the left side of the slide featuring three balloons in green, blue, and purple, each with a yellow sunburst-like pattern behind it.

This week: Basic Data Structures and Algorithms

- Topic:

- Array, String, Pointer Review

- Character based File operations in UNIX

- Programming Exercises

6

Array


- A block of many variables of the same type
- Array can be declared for any type
 - E.g. `int A[10]` is an array of 10 integers.
- Examples:
 - list of students' marks
 - series of numbers entered by user
 - vectors
 - matrices

7

Arrays in Memory

- Sequence of variables of specified type
- The array variable itself holds the address in memory of beginning of sequence
- Example:

```
double S[10];
```



- The k-th element of array A is specified by `A[k-1]` **(0-based)**

8



Example - reverse

```
#include <stdio.h>

int main(void)
{
    int i, A[10];

    printf("please enter 10 numbers:\n");
    for(i=0; i<10; i++)
        scanf("%d", &A[i]);

    printf("numbers in reversed order:\n");
    for(i=9; i>=0; i--)
        printf("%d\n", A[i]);

    return 0;
}
```

9



Exercise 1.1

- Write a program that gets an input line from the user (ends with '\n') and displays the number of times each letter appears in it.

The output for the input line: "hello, world!"

The letter 'd' appears 1 time(s).
The letter 'e' appears 1 time(s).
The letter 'h' appears 1 time(s).
The letter 'l' appears 3 time(s).
The letter 'o' appears 2 time(s).
The letter 'r' appears 1 time(s).
The letter 'w' appears 1 time(s).

Assume all inputs are lower-case!

10


Exercise 1.2

- Implement a function that accepts two integer arrays and returns 1 if they are equal, 0 otherwise
- Write a program that accepts two arrays of integers from the user and checks for equality

11

Strings

- An array of characters
- Used to store text
- Another way to initialize:
`char str[] = "Hello world";`

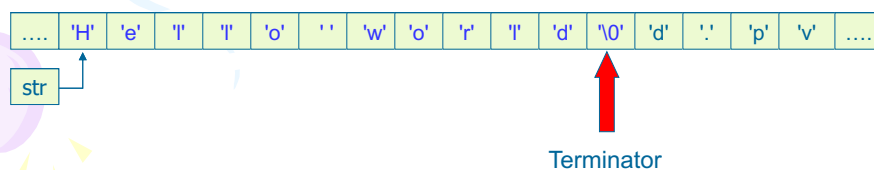

12



String

- In order to hold a string of N characters we need an array of length $N + 1$
- So the previous initialization is equivalent to

```
char str[] = {'H', 'e', 'l', 'l', 'o', ' ',  
             'w', 'o', 'r', 'l', 'd', '\\0'};
```

13



String and character related function

- `getchar()`
 - `c = getchar()`
- `scanf`
 - `scanf("%s", str);`
- `gets()`
 - `gets(str);`

14



String and character related function

- `strlen(const char s[])`
returns the length of s
- `strcmp(const char s1[],
 const char s2[])`
compares s1 with s2
- `strcpy(char s1[],
 const char s2[])`
copies to contents of s2 to s1

15



Exercise 1.3

- write a function that:
 - gets a string and two chars
 - the functions scans the string and replaces every occurrence of the first char with the second one.
- write a program to test the above function
 - the program should read a string from the user (no spaces) and two characters, then call the function with the input, and print the result.
- example
 - input: "papa", 'p', 'm'
 - output: "mama"

16

Pointer - Declaration


```
type *variable_name;
```

- A pointer is declared by adding a * before the variable name.
- Pointer is a variable that contains an address in memory.
- The address should be the address of a variable or an array that we defined.

17

Pointers

- Here ptr is said to *point* to the address of variable c

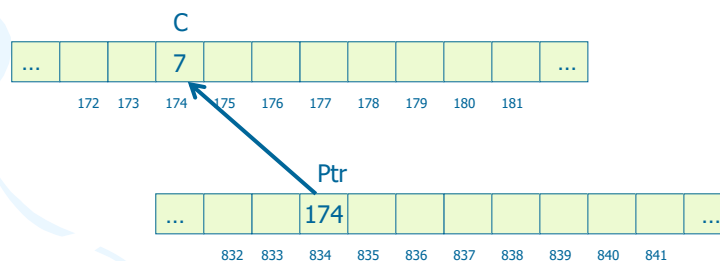

18



Referencing and Dereferencing

```
int n;  
int *iptr; /* Declare P as a pointer to int */  
n = 7;  
iptr = &n;  
  
printf("%d", *iptr); /* Prints out '7' */  
*iptr = 177;  
printf("%d", n); /* Prints out '177' */  
iptr = 177; /* This is unadvisable!! */
```

19



Exercises 1.4

Write a function that accepts a double parameter and returns its integer and fraction parts.

Write a program that accepts a number from the user and prints out its integer and fraction parts, using this function.

20



Swap two integers

```
void swap(int *a, int *b){  
    int tg;  
    tg=*a; *a=*b;*b=tg;  
}  
main(){  
    int a =3, b=4;  
    swap(&a,&b);  
    printf("%3d%3d",a,b);  
}
```

21



Exercise 1.5

- Write a function with the prototype:

```
void replace_char(char *str,  
                 char c1,  
                 char c2) ;
```
- It replaces each appearance of `c1` by `c2` in the string `str`.
Do not use the `[]` operator!
- Demonstrate your function with a program that uses it

22



Command line arguments

- Command line arguments are arguments for the `main` function
 - Recall that `main` is basically a function
 - It can receive arguments like other functions
 - The 'calling function' in this case is the operating system, or another program

23



'main' prototype

```
int main(int argc, char* argv[])
```

- When we want `main` to accept command line arguments, we must define it like this
 - `argc` holds the number of arguments that were entered by the caller
 - `argv` is an array of pointers to `char` – an array of strings – holding the text values of the arguments
- The first argument is always the program's name

24


'main' prototype

```
int main(int argc, char* argv[])
```

command : ./test.out text 178

argc : 3

argv :

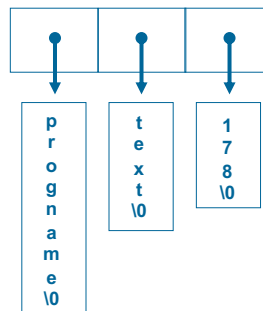

25

Exercise 1.6

- Write a program that accepts two numbers as command line arguments, representing a rectangle's height and width (as floating-point numbers).
- The program should display the rectangle's area and perimeter

26

A decorative graphic on the left side of the slide featuring three balloons: a green one at the top, a blue one in the middle, and a purple one at the bottom. Each balloon has a string and small yellow triangular flags.

File Handling

- **C communicates with files using a new datatype called a file pointer.**
- **File pointer:**
 - references a disk file.
 - used by a stream to conduct the operation of the I/O functions.
- **FILE *fptr;**

27

A decorative graphic on the left side of the slide featuring three balloons: a green one at the top, a blue one in the middle, and a purple one at the bottom. Each balloon has a string and small yellow triangular flags.

4 major operations

- Open the file
- Read from a file → program
- Write to a file: Program → file
- Close the file.

28



Opening a file

- `fopen()` function.
- `FILE *fopen(const char *filename, const char *mode);`

```
FILE *fptr;  
if ((fptr = fopen("test.txt", "r")) ==  
    NULL) {  
    printf("Cannot open test.txt file.\n");  
    exit(1);  
}
```

29



Opening a file

- **filename:** name of the file.
 - It can be a string literal: `"data.txt"`
 - It may contain the full path of the file:
`"/root/hedspi/CProgrammingBasic/Lab1/data.txt"`
 - It may be a character array that contains the file name:
`char file_name[] = "junk.txt";`
- **NOTE:** *If the file path is not specified, the file is located in the same folder as the C program.*

30



Mode for text file

mode	Description
"r"	opens an existing text file for reading.
"w"	creates a text file for writing.
"a"	opens an existing text file for appending.
"r+"	opens an existing text file for reading or writing.
"w+"	creates a text file for reading or writing.
"a+"	opens or create an existing text file for appending.

31



Mode for binary file

mode	Description
"rb"	opens an existing binary file for reading.
"wb"	creates a binary file for writing.
"ab"	opens an existing binary file for appending.
"r+b"	opens an existing binary file for reading or writing.
"w+b"	creates a binary file for reading or writing.
"a+b"	opens or create an existing binary file for appending.

32



Closing a file

- The fclose command can be used to disconnect a file pointer from a file.
- `int fclose(FILE *stream);`

33



Example: File Open and Close

```
1: /* Opening and closing a file */
2: #include <stdio.h>
3:
4: enum {SUCCESS, FAIL};
5:
6: main(void)
7: {
8:     FILE *fptr;
9:     char filename[] = "haiku.txt";
10:    int reval = SUCCESS;
11:
12:    if ((fptr = fopen(filename, "r")) == NULL){
13:        printf("Cannot open %s.\n", filename);
14:        reval = FAIL;
15:    } else {
16:        printf("The value of fptr: 0x%p\n", fptr);
17:        printf("Ready to close the file.");
18:        fclose(fptr);
19:    }
20:
21:    return reval;
22: }
```

34

A decorative graphic on the left side of the slide featuring three balloons in green, blue, and purple, with yellow streamers and small yellow triangles.

Reading and Writing Disk Files

- In C, you can perform I/O operations in the following ways:
 - Read or write one character at a time.
 - Read or write one line of text (that is, one character line) at a time.
 - Read or write one block of characters at a time.

35

A decorative graphic on the left side of the slide featuring three balloons in green, blue, and purple, with yellow streamers and small yellow triangles.

Character based file operations in UNIX

- **Read or write one character at a time.**
- Character input and output
 - `fgetc()` and `fputc()`
- `int fgetc(FILE *stream);`
- `int fputc(int c , FILE *stream);`

36



Exercise 1.7

- Create a text file name lab1.txt with the content as you want.
- Write a program to read from a text file one character at a time, then write it to a new file with the name lab1w.txt

37



Exercise 1.8

- Write a program to read sentences from a specified file one character at a time.
- Each capital letter is converted into a lower-case letter, and each lower-case letter is converted into a capital letter. The new sentence is then written into another file.
- Note that you must output numbers, the signs as they are.

38

Read or write one line at a time.

- Two functions: `fgets()` and `fputs()`
- `char *fgets(char *s, int n, FILE *stream);`
 - `s` references an array that is used to store characters
 - `n` specifies the maximum number of array elements.
- `fgets()` function can read up to `n-1` characters, and can append a null character after the last character fetched, until a newline or an EOF is encountered.

39

Read or write one line at a time.

- `int fputs(const char *s, FILE *stream);`
- `s`: array that contains the characters to be written to a file
- return value
 - 0 for success
 - non zero in case of fail.

40

A decorative graphic on the left side of the slide featuring three balloons in green, blue, and purple, each with a yellow starburst effect.

Exercise 1.9

- Redo the exercise 1.7 but the program will read and write one character line at a time.

41

A decorative graphic on the left side of the slide featuring three balloons in green, blue, and purple, each with a yellow starburst effect.

Read and write formatted text

- `int fscanf(FILE *stream, const char *format, ...);`
 - This function works like `scanf` except that it read from a file stream.
- `int fprintf(FILE *stream, const char *format, ...);`
 - The only difference between `fprintf` and `printf` is that `fprintf` can redirect output to a particular stream.

42



Exercise 1.10

Write a program to read two or more lines into an array of character strings one by one from a specified file and find the length of each line. You must write the length of each line and character string in the file.

For example, one line in an input file

The quick brown fox jumps over the lazy dog.

should be output as follows.

44 The quick brown fox jumps over the lazy dog.


43



Exercise 1.11

- Write a program to read a text file created with emacs. Put a line number to the head of the line and output the contents of the file to the standard output. A text file name can be specified as the argument to the program.
- For example, the following content of a text file
This is sample file.
Hello!
- is output as follows.
1 This is sample file.
2 Hello!

44

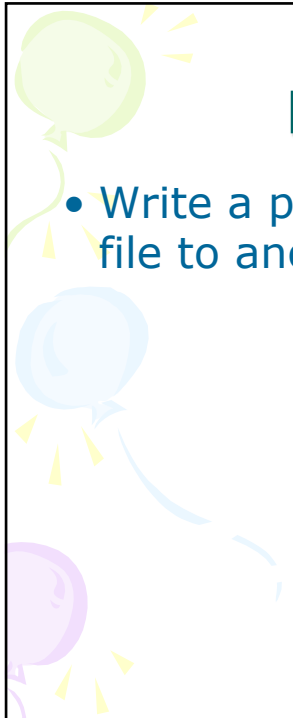

Exercise 1.12

- Write a program that copy one text file to another.