

The AutoDoc system architecture is designed to interact with two primary actors, distinguished by their authorization status. The first actor is the Guest, representing an unauthenticated visitor to the application. The primary role of the Guest is limited to interacting with the authentication interfaces to either register a new account or log into an existing one, thereby obtaining a secure session token. The second actor is the Authenticated User. Once successfully identified by the system, this actor is granted comprehensive access to the application's core functionalities, encompassing personal document storage, complex machine learning conversions, and various PDF utility operations. The AutoDoc system architecture is designed to interact with two primary

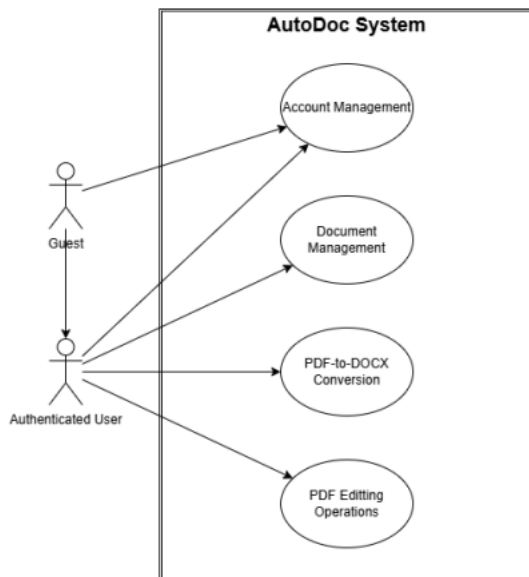


Figure 2.1: General Use case diagram

actors, distinguished by their authorization status. The first actor is the Guest, representing an unauthenticated visitor to the application. The primary role of the Guest is limited to interacting with the authentication interfaces to either register a new account or log into an existing one, thereby obtaining a secure session token.

The second actor is the Authenticated User. Once successfully identified by the system, this actor is granted comprehensive access to the application's core functionalities, encompassing personal document storage, complex machine learning conversions, and various PDF utility operations. The AutoDoc

system architecture is designed to interact with two primary actors, distinguished by their authorization status. The first actor is the Guest, representing an unauthenticated visitor to the application. The primary role of the Guest is limited to interacting with the authentication interfaces to either register a new account or log into an existing one, thereby obtaining a secure session token. The second actor is the Authenticated User. Once successfully identified by the system, this actor is granted comprehensive access to the application's core functionalities, encompassing personal document storage, complex machine learning conversions, and various PDF utility operations. The AutoDoc system architecture is designed to interact with two primary actors, distinguished by their authorization status. The first actor is the Guest, representing an unauthenticated visitor to the application. The primary role of the Guest is limited to interacting with the authentication interfaces to either register a new account or log into an existing one, thereby obtaining a secure session token. The second actor is the Authenticated User.

Once successfully identified by the system, this actor is granted comprehensive access to the application's core functionalities, encompassing personal document storage, complex machine learning conversions, and various PDF utility operations.