

Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)


▲ 0–49 50–89 90–100

METRICS

Expand view

First Contentful Paint
0.3 s


▲ Largest Contentful Paint
2.6 s

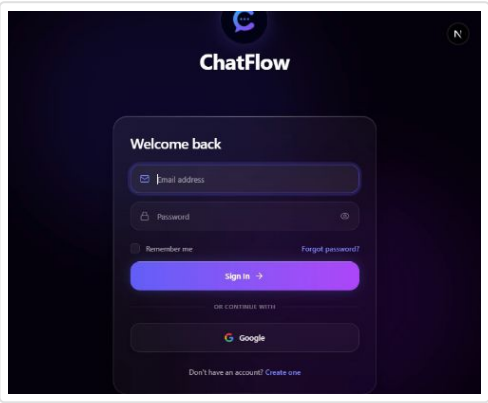

▲ Total Blocking Time
500 ms

Cumulative Layout Shift
0

Speed Index
1.8 s

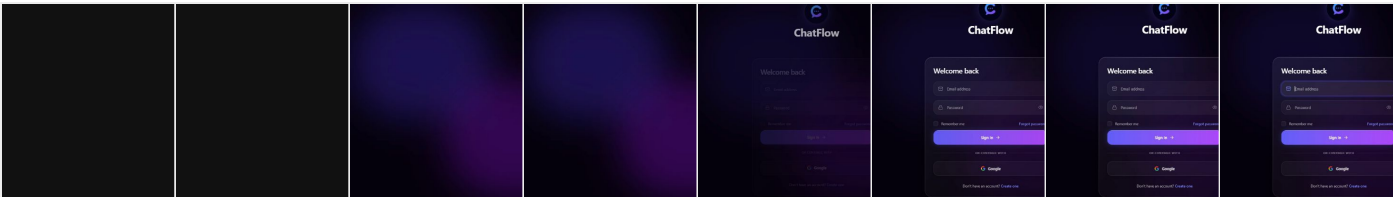

Show audits relevant to: All FCP LCP TBT CLS

INSIGHTS

▲ Legacy JavaScript — Est savings of 8 KiB

Polyfills and transforms enable older browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile [Baseline](#) features, unless you know you must support older browsers. [Learn why most sites can deploy ES6+ code without transpiling](#) FCP LCP Unscored

URL

Wasted bytes

localhost	1st Party	7.9 KiB
...chunks/00ir_next_dist_167i5fa._js (localhost)		7.9 KiB
00ir_next_dist_167i5fa._js:36		Array.prototype.at
00ir_next_dist_167i5fa._js:16		Array.prototype.flat
00ir_next_dist_167i5fa._js:18		Array.prototype.flatMap
00ir_next_dist_167i5fa._js:32		Object.fromEntries
00ir_next_dist_167i5fa._js:39		Object.hasOwn

URL	Wasted bytes
00ir_next_dist_167i5fa._js:10	String.prototype.trimEnd
00ir_next_dist_167i5fa._js:10	String.prototype.trimStart

▲ INP breakdown

^

Start investigating [how to improve INP](#) by looking at the longest subpart. Unscored

Subpart	Duration
Input delay	0 ms
Processing duration	100 ms
Presentation delay	140 ms

```
form.space-y-3.5 > div.flex > div.relative > input.w-full
<input type="email" placeholder="Email address" class="w-full h-full bg-white/[0.03] hover:bg-white/[0.05]
focus:bg-white/[0.07] ..." name="email">
```

▲ LCP breakdown

^

Each [subpart has specific improvement strategies](#). Ideally, most of the LCP time should be spent on loading the resources, not within delays. LCP Unscored

Subpart	Duration
Time to first byte	360 ms
Element render delay	3,370 ms

```
<h1 class="text-3xl sm:text-4xl font-bold text-white tracking-tight">
```

▲ Network dependency tree



[Avoid chaining critical requests](#) by reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. LCP Unscored

Maximum critical path latency: **703 ms**

Initial Navigation

/login (localhost) - **630 ms**, 8.77 KiB

...chunks/%5Broot-of...%5D__0uhv46b._.css (localhost) - **703 ms**, 12.10 KiB

Preconnected origins

[preconnect](#) hints help the browser establish a connection earlier in the page load, saving time when the first request for that origin is made. The following are the origins that the page preconnected to.

no origins were preconnected

Preconnect candidates

Add [preconnect](#) hints to your most important origins, but try to use no more than 4.

No additional origins are good candidates for preconnecting

Improve image delivery — Est savings of 912 KiB



Reducing the download time of images can improve the perceived load time of the page and LCP. [Learn more about optimizing image size](#) FCP LCP Unscored

URL	Resource Size	Est Savings
localhost 1st Party	912.6 KiB	911.6 KiB
Logo <code></code> /logo.png (localhost)	912.6 KiB	911.6 KiB
Using a modern image format (WebP, AVIF) or increasing the image compression could improve this image's download size.		656.6 KiB
This image file is larger than it needs to be (1254x1254) for its displayed dimensions (78x78). Use responsive images to reduce the image download size.		909.1 KiB

Render-blocking requests — Est savings of 10 ms

Requests are blocking the page's initial render, which may delay LCP. [Deferring or inlining](#) can move these network requests out of the critical path. FCP LCP Unscored

URL	Transfer Size	Duration
localhost 1st Party	12.1 KiB	80 ms
...chunks/%5Broot-of-...%5D__0uhv46b_.css (localhost)	12.1 KiB	80 ms

3rd parties



3rd party code can significantly impact load performance. [Reduce and defer loading of 3rd party code](#) to prioritize your page's content. Unscored

3rd party	Transfer size	Main thread time
jcokkipkhhgiakinbnnplhkdbjbgcgpe	0 KiB	21 ms
chrome-extension://jcokkipkhhgiakinbnnplhkdbjbgcgpe/js/contentscript.js	0 KiB	16 ms
chrome-extension://jcokkipkhhgiakinbnnplhkdbjbgcgpe/js/vapi-client.js	0 KiB	3 ms
chrome-extension://jcokkipkhhgiakinbnnplhkdbjbgcgpe/js/vapi.js	0 KiB	3 ms

These insights are also available in the Chrome DevTools Performance Panel - [record a trace](#) to view more detailed information.

DIAGNOSTICS

▲ Reduce JavaScript execution time — 1.3 s



Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) TBT Unscored

URL	Total CPU Time	Script Evaluation	Script Parse
localhost 1st Party	1,932 ms	999 ms	307 ms
...chunks/00ir_next_dist_compiled_17h0_g7._js (localhost)	551 ms	495 ms	13 ms
/login (localhost)	483 ms	51 ms	18 ms

URL	Total CPU Time	Script Evaluation	Script Parse
...chunks/00ir_next_dist_compiled_react-dom_0e0i02g_.js (localhost)	305 ms	180 ms	68 ms
...chunks/00ir_motion-dom_dist_es_06affzj_.js (localhost)	239 ms	103 ms	36 ms
...chunks/00ir_next_dist_compiled_next-devtools_index_1rch5f.js (localhost)	138 ms	69 ms	66 ms
...chunks/00ir_next_dist_client_18ea9ju_.js (localhost)	138 ms	60 ms	71 ms
...chunks/00ir_zod_v4_1wlk71y_.js (localhost)	78 ms	42 ms	36 ms
Unattributable	342 ms	8 ms	0 ms
Unattributable	342 ms	8 ms	0 ms

▲ Minimize main-thread work — 2.5 s

^

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) TBT Unscored

Category	Time Spent
Script Evaluation	1,036 ms
Other	629 ms
Script Parsing & Compilation	449 ms

Category	Time Spent
Style & Layout	242 ms
Rendering	53 ms
Parse HTML & CSS	42 ms
Garbage Collection	5 ms

▲ Minify JavaScript — Est savings of 257 KiB



Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript.](#) FCP LCP
Unscored

URL	Transfer Size	Est Savings
localhost 1st Party	773.8 KiB	249.0 KiB
...chunks/00ir_next_dist_client_18ea9ju._js (localhost)	149.5 KiB	66.2 KiB
...chunks/00ir_next_dist_compiled_react-dom_0e0i02g._js (localhost)	179.7 KiB	48.6 KiB
...chunks/00ir_1952ob6._js (localhost)	106.5 KiB	34.7 KiB
...chunks/00ir_motion-dom_dist_es_06affzj._js (localhost)	90.8 KiB	20.1 KiB
...chunks/00ir_next_dist_167i5fa._js (localhost)	45.2 KiB	15.0 KiB

URL	Transfer Size	Est Savings
...chunks/00ir_next_dist_compiled_17h0_g7._js (localhost)	27.8 KiB	11.8 KiB
...chunks/turbopack...._js (localhost)	21.9 KiB	11.1 KiB
...chunks/00ir_zod_v4_1wlk71y._js (localhost)	52.4 KiB	11.0 KiB
...chunks/00ir_next_dist_compiled_react-server-dom-turbopack_1....js (localhost)	31.1 KiB	10.6 KiB
...chunks/00ir_react-hook-form_dist_index_esm_mjs_0jv4tb7._js (localhost)	25.7 KiB	9.5 KiB
...chunks/00ir_framer-motion_dist_es_121n88-._js (localhost)	34.9 KiB	7.4 KiB
...chunks/Desktop_chatflow_client_1v-_uvz._js (localhost)	8.3 KiB	3.1 KiB
Unattributable	14.8 KiB	7.7 KiB
chrome-extension://jcokkipkhghiakinbnnplhkdbjbjbgcgpe/js/contentscript.js	14.8 KiB	7.7 KiB

▲ Reduce unused JavaScript — Est savings of 429 KiB



Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity.
[Learn how to reduce unused JavaScript.](#) FCP LCP Unscored

URL	Transfer Size	Est Savings
localhost 1st Party	836.9 KiB	429.4 KiB

URL	Transfer Size	Est Savings
...chunks/00ir_next_dist_compiled_next-devtools_index_1r-ch5f.js (localhost)	212.9 KiB	134.6 KiB
...chunks/00ir_next_dist_client_18ea9ju._js (localhost)	149.4 KiB	78.0 KiB
...chunks/00ir_next_dist_compiled_react-dom_0e0i02g._js (localhost)	179.7 KiB	63.4 KiB
...chunks/00ir_1952ob6._js (localhost)	106.5 KiB	59.6 KiB
...chunks/00ir_zod_v4_1wlk71y._js (localhost)	52.4 KiB	37.7 KiB
...chunks/00ir_motion-dom_dist_es_06affzj._js (localhost)	90.8 KiB	31.0 KiB
...chunks/00ir_next_dist_167i5fa._js (localhost)	45.2 KiB	25.3 KiB

▲ Page prevented back/forward cache restoration — 1 failure reason ^

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache](#) Unscored

Failure reason	Failure type
Pages with WebSocket cannot enter back/forward cache. /chat (localhost)	Pending browser support

Minify CSS — Est savings of 2 KiB ^

Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS.](#) FCP LCP Unscored

URL	Transfer Size	Est Savings
localhost 1st Party	12.1 KiB	2.5 KiB
...chunks/%5Broot-of...%5D__0uhv46b_.css (localhost)	12.1 KiB	2.5 KiB

○ Avoid long main-thread tasks — 9 long tasks found



Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks](#) TBT Unscored

URL	Start Time	Duration
localhost 1st Party		910 ms
...chunks/00ir_next_dist_compiled_17h0_g7_.js (localhost)	2,115 ms	305 ms
...chunks/00ir_next_dist_compiled_react-dom_0e0i02g_.js (localhost)	1,701 ms	201 ms
...chunks/00ir_zod_v4_1wlk71y_.js (localhost)	1,988 ms	78 ms
/login (localhost)	274 ms	74 ms
...chunks/00ir_next_dist_client_18ea9ju_.js (localhost)	1,463 ms	72 ms
...chunks/00ir_next_dist_compiled_next-devtools_index_1r-ch5f.js (localhost)	1,634 ms	67 ms

URL	Start Time	Duration
/login (localhost)	433 ms	60 ms
/login (localhost)	348 ms	53 ms
Unattributable		52 ms
Unattributable	222 ms	52 ms

User Timing marks and measures — 19 user timings

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#) Unscored

Name	Type	Start Time	Duration
Preloads	Measure	79.40 ms	0.29 ms
RootLayout	Measure	82.62 ms	3.01 ms
NotFound	Measure	84.87 ms	0.76 ms
HTTPAccessErrorFallback	Measure	85.16 ms	0.47 ms
NotFound	Measure	88.31 ms	0.62 ms
HTTPAccessErrorFallback	Measure	88.55 ms	0.37 ms
Next.MetadataOutlet	Measure	95.52 ms	6.42 ms

Name	Type	Start Time	Duration
NonIndex	Measure	103.40 ms	0.03 ms
ViewportWrapper	Measure	103.70 ms	25.79 ms
Next.Viewport	Measure	104.16 ms	25.34 ms
MetadataWrapper	Measure	105.76 ms	29.07 ms
Next.Metadata	Measure	107.14 ms	27.69 ms
Cascading Update	Measure	2,247.40 ms	140.30 ms
ForwardRef(motion.button)	Measure	2,434.70 ms	12.10 ms
ForwardRef(motion.button)	Measure	2,447.20 ms	8.00 ms
Mount	Measure	2,457.30 ms	2.60 ms
Update	Measure	2,631.40 ms	1.70 ms
ForwardRef(motion.button)	Measure	2,649.20 ms	1.60 ms
ForwardRef(motion.button)	Measure	2,650.80 ms	1.60 ms

○ Avoid non-composited animations — 2 animated elements found



Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) CLS
Unscored

Element	Name
div.flex > div.relative > div.absolute > svg.lucide <svg xmlns="http://www.w3.org/2000/svg" width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" class="lucide lucide-mail h-4 w-4 transition-colors duration-300 text-white/40 gr..." aria-hidden="true">	
Unsupported CSS Property: color	color
form.space-y-3.5 > div.flex > div.relative > input.w-full <input type="email" placeholder="Email address" class="w-full h-full bg-white/[0.03] hover:bg-white/[0.05] focus:bg-white/[0.07] ..." name="email">	
Unsupported CSS Property: border-left-color	border-left-color
Unsupported CSS Property: border-right-color	border-right-color
Unsupported CSS Property: outline-color	outline-color
Unsupported CSS Property: border-top-color	border-top-color
Unsupported CSS Property: outline-width	outline-width
Unsupported CSS Property: border-bottom-color	border-bottom-color
Unsupported CSS Property: box-shadow	box-shadow
Unsupported CSS Property: background-color	background-color

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (13)

Hide

Use efficient cache lifetimes	^
A long cache lifetime can speed up repeat visits to your page. Learn more about caching. FCP LCP Unscored	
Layout shift culprits	^
Layout shifts occur when elements move absent any user interaction. Investigate the causes of layout shifts , such as elements being added, removed, or their fonts changing as the page loads. CLS Unscored	
Document request latency	^
Your first network request is the most important. Reduce its latency by avoiding redirects, ensuring a fast server response, and enabling text compression. FCP LCP Unscored	
Avoids redirects	
Server responds quickly (observed 333 ms)	
Applies text compression	
Optimize DOM size	^
A large DOM can increase the duration of style calculations and layout reflows, impacting page responsiveness. A large DOM will also increase memory usage. Learn how to avoid an excessive DOM size. Unscored	

Statistic	Element	Value
Total elements		152

Statistic	Element	Value
DOM depth	stop	13
Most children	nextjs-portal	16
Duplicated JavaScript		^
Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP Unscored		
Font display		^
Consider setting font-display to swap or optional to ensure text is consistently visible. swap can be further optimized to mitigate layout shifts with font metric overrides . Unscored		
Forced reflow		^
A forced reflow occurs when JavaScript queries geometric properties (such as offsetWidth) after styles have been invalidated by a change to the DOM state. This can result in poor performance. Learn more about forced reflows and possible mitigations. Unscored		
☐ LCP request discovery		^
Optimize LCP by making the LCP image discoverable from the HTML immediately, and avoiding lazy-loading Unscored		
Modern HTTP		^
HTTP/2 and HTTP/3 offer many benefits over HTTP/1.1, such as multiplexing. Learn more about using modern HTTP . FCP LCP Unscored		

Optimize viewport for mobile



Tap interactions may be [delayed by up to 300 ms](#) if the viewport is not optimized for mobile. Unscored

meta

```
<meta name="viewport" content="width=device-width, initial-scale=1">
```

Reduce unused CSS



Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS.](#) FCP LCP Unscored

Avoids enormous network payloads — Total size was 2,003 KiB



Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes.](#) Unscored

URL	Transfer Size
localhost 1st Party	1,835.2 KiB
/logo.png (localhost)	912.9 KiB
...chunks/00ir_next_dist_compiled_next-devtools_index_1r-ch5f.js (localhost)	213.3 KiB
...chunks/00ir_next_dist_compiled_react-dom_0e0i02g._js (localhost)	180.0 KiB
...chunks/00ir_next_dist_client_18ea9ju._js (localhost)	149.8 KiB

URL	Transfer Size
...chunks/00ir_1952ob6._js (localhost)	106.9 KiB
...chunks/00ir_motion-dom_dist_es_06affzj._js (localhost)	91.2 KiB
...chunks/00ir_zod_v4_1wlk71y._js (localhost)	52.8 KiB
...media/83afe278b6a6bb3c-s.p.2bn3s6zvc0dyp.woff2 (localhost)	47.6 KiB
...chunks/00ir_next_dist_167i5fa._js (localhost)	45.5 KiB
...chunks/00ir_framer-motion_dist_es_121n88-._js (localhost)	35.3 KiB

Image elements have explicit [width](#) and [height](#)



Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions](#) CLS Unscored



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

NAMES AND LABELS

▲ Buttons do not have an accessible name



When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn how to make buttons more accessible.](#)

Failing Elements
button.absolute.inset-y-0.right-0.pr-4.flex.items-center.text-white/40.hover:text-white.transition-colors

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

○ Interactive controls are keyboard focusable



Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable.](#) Unscored

○ Interactive elements indicate their purpose and state



Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#) Unscored

○ The page has a logical tab order



Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical](#)

[tab ordering.](#) Unscored

- ☐ Visual order on the page follows DOM order ^

DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering.](#) Unscored

- ☐ User focus is not accidentally trapped in a region ^

A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps.](#) Unscored

- ☐ The user's focus is directed to new content added to the page ^

If new content, such as a dialog, is added to the page, the user's focus is directed to it. [Learn how to direct focus to new content.](#) Unscored

- ☐ HTML5 landmark elements are used to improve navigation ^

Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. [Learn more about landmark elements.](#) Unscored

- ☐ Offscreen content is hidden from assistive technology ^

Offscreen content is hidden with display: none or aria-hidden=true. [Learn how to properly hide offscreen content.](#) Unscored

- ☐ Custom controls have associated labels ^

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more about custom controls and labels.](#) Unscored

○ Custom controls have ARIA roles



Custom interactive controls have appropriate ARIA roles. [Learn how to add roles to custom controls.](#) Unscored

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review](#).

PASSED AUDITS (23)

Hide

[aria-*] attributes match their roles



Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. [Learn how to match ARIA attributes to their roles.](#)

[aria-hidden="true"] is not present on the document <body>



Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. [Learn how aria-hidden affects the document body.](#)

[role]s have all required [aria-*] attributes



Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more about roles and required attributes.](#)

[role] values are valid



ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more about valid ARIA roles.](#)

[aria-*] attributes have valid values



Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. [Learn more about valid values for ARIA attributes.](#)

[aria-*] attributes are valid and not misspelled



Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more about valid ARIA attributes.](#)

Image elements have [alt] attributes



Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

Form elements have associated labels



Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#)

[user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5.



Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more about the viewport meta tag.](#)

ARIA attributes are used as specified for the element's role



Some ARIA attributes are only allowed on an element under certain conditions. [Learn more about conditional ARIA attributes.](#)

`[aria-hidden="true"]` elements do not contain focusable descendents



Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. [Learn how aria-hidden affects focusable elements.](#)

Elements use only permitted ARIA attributes



Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. [Learn more about prohibited ARIA roles.](#)

Background and foreground colors have a sufficient contrast ratio



Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast.](#)

Document has a `<title>` element



The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

`<html>` element has a `[lang]` attribute



If a page doesn't specify a `lang` attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. [Learn more about the `lang` attribute.](#)

`<html>` element has a valid value for its `[lang]` attribute



Specifying a valid [BCP 47 language](#) helps screen readers announce text properly. [Learn how to use the `lang` attribute.](#)

Links are distinguishable without relying on color.



Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. [Learn how to make links distinguishable.](#)

Links have a discernible name



Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn how to make links accessible.](#)

No element has a `[tabindex]` value greater than 0



A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the `tabindex` attribute.](#)

Touch targets have sufficient size and spacing.



Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. [Learn more about touch targets.](#)

Heading elements appear in a sequentially-descending order



Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. [Learn more about heading order.](#)

Document has a main landmark.



One main landmark helps screen reader users navigate a web page. [Learn more about landmarks.](#)

Deprecated ARIA roles were not used



Deprecated ARIA roles may not be processed correctly by assistive technology. [Learn more about deprecated ARIA roles.](#)

NOT APPLICABLE (39)	Hide
☐ [accesskey] values are unique ^	
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys. Unscored	
☐ button, link, and menuitem elements have accessible names ^	
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible. Unscored	
☐ Elements with role="dialog" or role="alertdialog" have accessible names. ^	
ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible. Unscored	
☐ ARIA input fields have accessible names ^	
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels. Unscored	
☐ ARIA meter elements have accessible names ^	
When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name meter elements. Unscored	

☐ ARIA `progressbar` elements have accessible names



When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements.](#) Unscored

☐ Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children.



Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements.](#) Unscored

☐ `[role]`s are contained by their required parent element



Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element.](#) Unscored

☐ Elements with the `role=text` attribute do not have focusable descendents.



Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. [Learn more about the role=text attribute.](#) Unscored

☐ ARIA toggle fields have accessible names



When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields.](#) Unscored

☐ ARIA `tooltip` elements have accessible names



When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name tooltip elements.](#) Unscored

☐ ARIA `treeitem` elements have accessible names ^

When a `treeitem` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about labeling `treeitem` elements.](#) Unscored

☐ The page contains a heading, skip link, or landmark region ^

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more about bypass blocks.](#) Unscored

☐ `<d1>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements. ^

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn how to structure definition lists correctly.](#) Unscored

☐ Definition list items are wrapped in `<d1>` elements ^

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<d1>` element to ensure that screen readers can properly announce them. [Learn how to structure definition lists correctly.](#) Unscored

☐ ARIA IDs are unique ^

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. [Learn how to fix duplicate ARIA IDs.](#) Unscored

☐ No form fields have multiple labels ^

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. [Learn how to use form labels.](#) Unscored

- ☐ `<frame>` or `<iframe>` elements have a title



Screen reader users rely on frame titles to describe the contents of frames. [Learn more about frame titles.](#) Unscored

- ☐ `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute.



If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#) Unscored

- ☐ Input buttons have discernible text.



Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. [Learn more about input buttons.](#) Unscored

- ☐ `<input type="image">` elements have `[alt]` text



When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text.](#) Unscored

- ☐ Lists contain only `<li>` elements and script supporting elements (`<script>` and `<template>`).



Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more about proper list structure.](#) Unscored

- ☐ List items (`<li>`) are contained within `<ul>`, `<ol>` or `<menu>` parent elements



Screen readers require list items (`<li>`) to be contained within a parent `<ul>`, `<ol>` or `<menu>` to be announced properly. [Learn more about proper list structure.](#) Unscored

- ☐ The document does not use `<meta http-equiv="refresh">` ^

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag.](#) Unscored

- ☐ `<object>` elements have alternate text ^

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for object elements.](#) Unscored

- ☐ Select elements have associated label elements. ^

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#) Unscored

- ☐ Skip links are focusable. ^

Including a skip link can help users skip to the main content to save time. [Learn more about skip links.](#) Unscored

- ☐ Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table. ^

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#) Unscored

- ☐ `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe. ^

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#) Unscored

☐ [\[lang\]](#) attributes have a valid value ^

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#) Unscored

☐ `<video>` elements contain a `<track>` element with `[kind="captions"]` ^

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#) Unscored

☐ `autocomplete` attributes are used correctly ^

The autocomplete attribute values must be valid and correctly applied for screen readers to function correctly. [Learn more about valid autocomplete values.](#) Unscored

☐ Elements with `role="none"` or `role="presentation"` do not have conflicts ^

There are certain cases where the semantic role of an element with `role="none"` or `role="presentation"` does not resolve to none or presentation. To ensure the element remains removed from the accessibility tree, you should not add any global ARIA attributes to the element or make it focusable. [Learn more about presentation role conflict.](#) Unscored

☐ SVG elements with an `img` role have an accessible text alternative ^

Ensures SVG elements with an `img`, `graphics-document` or `graphics-symbol` role have an accessible text alternative. [Learn more about SVG alt text.](#) Unscored

☐ Tables have different content in the summary attribute and `<caption>`. ^

The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. [Learn more about summary and caption.](#) Unscored

- ☐ All heading elements contain content. ^

A heading with no content or inaccessible text prevent screen reader users from accessing information on the page's structure. [Learn more about headings.](#) Unscored

- ☐ Uses ARIA roles only on compatible elements ^

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. [Learn more about ARIA roles.](#) Unscored

- ☐ Image elements do not have `[alt]` attributes that are redundant text. ^

Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. [Learn more about the alt attribute.](#) Unscored

- ☐ Identical links have the same purpose. ^

Links with the same destination should have the same description, to help users understand the link's purpose and decide whether to follow it. [Learn more about identical links.](#) Unscored



Best Practices

TRUST AND SAFETY

○ Ensure CSP is effective against XSS attacks



A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#) Unscored

Description	Directive	Severity
No CSP found in enforcement mode		High

○ Use a strong HSTS policy



Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. [Learn more about using a strong HSTS policy.](#) Unscored

Description	Directive	Severity
No HSTS header found		High

○ Ensure proper origin isolation with COOP



The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. [Learn more about deploying the COOP header.](#) Unscored

Description	Directive	Severity
No COOP header found		High

Mitigate clickjacking with XFO or CSP



The X-Frame-Options (XFO) header or the frame-ancestors directive in the Content-Security-Policy (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. [Learn more about mitigating clickjacking.](#) Unscored

Description	Severity
No frame control policy found	High

Mitigate DOM-based XSS with Trusted Types



The require-trusted-types-for directive in the Content-Security-Policy (CSP) header instructs user agents to control the data passed to DOM XSS sink functions. [Learn more about mitigating DOM-based XSS with Trusted Types.](#) Unscored

Description	Severity
No `Content-Security-Policy` header with Trusted Types directive found	High

BROWSER COMPATIBILITY

Baseline Features



Lists web features used on the page and their Baseline status as of 2026-05-01. [Learn more about Baseline.](#) Unscored

Web-features	Baseline Status	Source
localhost 1st Party		
page-visibility-state	Limited Availability	login:1
long-animation-frames	Limited Availability	login:1
layout-instability	Limited Availability	login:1
requestidlecallback	Limited Availability	login:1
font-metric-overrides	Limited Availability	login:-1
beforeunload	Limited Availability	00ir_next_dist_167i5fa_.js:3099
ua-client-hints	Limited Availability	00ir_next_dist_compi...dex_1r-ch5f.js:3826
background-clip-text	Limited Availability	00ir_next_dist_compi...dex_1r-ch5f.js:1841
fetch-priority	Newly Available (2024-10-29)	login:-1
relative-color	Newly Available (2024-09-16)	login:-1
registered-custom-properties	Newly Available (2024-07-09)	login:-1

Web-features	Baseline Status	Source
gradient-interpolation	Newly Available (2024-06-11)	login:-1
backdrop-filter	Newly Available (2024-09-16)	login:-1
url-canparse	Newly Available (2023-12-07)	00ir_next_dist_client_18ea9ju._js:13344
scrollend	Newly Available (2025-12-12)	00ir_next_dist_compi...dex_1r-ch5f.js:1841
nesting	Newly Available (2023-12-11)	00ir_next_dist_compi...dex_1r-ch5f.js:1841
masks	Newly Available (2023-12-07)	00ir_next_dist_compi...dex_1r-ch5f.js:1841
has	Newly Available (2023-12-19)	00ir_next_dist_compi...dex_1r-ch5f.js:1841
nullish-coalescing	Widely Available (2020-09-16)	login:1
aborting	Widely Available (2019-03-25)	login:1
cascade-layers	Widely Available (2022-03-14)	login:-1

Web-features	Baseline Status	Source
lab	Widely Available (2023-05-09)	login:-1
file-selector-button	Widely Available (2021-04-26)	login:-1
where	Widely Available (2021-01-21)	login:-1
is	Widely Available (2021-01-21)	login:-1
contain-intrinsic-size	Widely Available (2023-09-18)	login:-1
color-mix	Widely Available (2023-05-09)	login:-1
not	Widely Available (2021-01-21)	login:-1
color-scheme	Widely Available (2022-02-03)	login:15
oklab	Widely Available (2023-05-09)	login:-1
logical-properties	Widely Available (2021-09-20)	login:-1

Web-features	Baseline Status	Source
appearance	Widely Available (2022-03-14)	login:-1
clip-path	Widely Available (2021-01-21)	login:-1
flexbox	Widely Available (2015-09-30)	login:-1
logical-assignments	Widely Available (2020-09-16)	login:1
weak-references	Widely Available (2021-04-26)	00ir_next_dist_compi...k_17h_wp._.js:2739
intersection-observer	Widely Available (2019-03-25)	00ir_next_dist_client_18ea9ju._.js:5038
focus-visible	Widely Available (2022-03-14)	00ir_next_dist_compi...dex_1r-ch5f.js:1841
outline	Widely Available (2023-03-27)	00ir_next_dist_compi...dex_1r-ch5f.js:1841
individual-transforms	Widely Available (2022-08-05)	00ir_next_dist_compi...dex_1r-ch5f.js:1841
text-indent	Widely Available (2015-07-29)	login:-1

Web-features	Baseline Status	Source
aspect-ratio	Widely Available (2021-09-20)	login:-1
scroll-snap	Widely Available (2020-01-15)	00ir_next_dist_compi...dex_1r-ch5f.js:1841
will-change	Widely Available (2020-01-15)	00ir_next_dist_compi...dex_1r-ch5f.js:1841
aria-attribute-reflection	Widely Available (2023-10-24)	00ir_next_dist_client_18ea9ju...js:11969
web-animations	Widely Available (2020-09-16)	00ir_motion-dom_dist...s_06affzj...js:1918
Unattributable		
request-animation-frame	Widely Available (2015-07-29)	contentscript.js:201

GENERAL

▲ Missing source maps for large first-party JavaScript



Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps.](#) Unscored

URL	Map URL
localhost 1st Party	
...chunks/00ir_next_dist_compiled_react-dom_0e0i02g._js (localhost) Large JavaScript file is missing a source map Error: Map has no `mappings` field	...chunks/00ir_next_dist_compiled_react-dom_0e0i02g._js.map (localhost)
...chunks/00ir_next_dist_compiled_next-devtools_index_1r-ch5f.js (localhost) Large JavaScript file is missing a source map Error: Map has no `mappings` field	...chunks/00ir_next_dist_compiled_next-devtools_index_1r-ch5f....map (localhost)
...chunks/00ir_next_dist_client_18ea9ju._js (localhost) Large JavaScript file is missing a source map Error: Map has no `mappings` field	...chunks/00ir_next_dist_client_18ea9ju._js.map (localhost)
...chunks/00ir_motion-dom_dist_es_06affzj._js (localhost) Large JavaScript file is missing a source map Error: Map has no `mappings` field	...chunks/00ir_motion-dom_dist_es_06affzj._js.map (localhost)
...chunks/00ir_1952ob6._js (localhost) Large JavaScript file is missing a source map Error: Map has no `mappings` field	...chunks/00ir_1952ob6._js.map (localhost)

URL	Map URL
...chunks/turbopack....js (localhost) Error: Map has no `mappings` field	... chunks/Desktop_chatflow_client_1_gxpow._js.map (local host)
...chunks/Desktop_chatflow_client_1v-_uvz._js (localhost) Error: Map has no `mappings` field	...chunks/Desktop_chatflow_client_1v-_uvz._js.map (localhost)
...chunks/Desktop_chatflow_client_0dty6nu._js (localhost) Error: Map has no `mappings` field	... chunks/Desktop_chatflow_client_0dty6nu._js.map (local host)
...chunks/00ir_zod_v4_1wlk71y._js (localhost) Error: Map has no `mappings` field	...chunks/00ir_zod_v4_1wlk71y._js.map (localhost)
...chunks/00ir_react-hook-form_dist_index_esm_mjs_0jv4tb7._js (localhost) Error: Map has no `mappings` field	...chunks/00ir_react-hook-form_dist_index_esm_mjs_0jv4tb7._js.map (localhost)
...chunks/00ir_next_dist_compiled_react-server-dom-turbopack_1...js (localhost) Error: Map has no `mappings` field	...chunks/00ir_next_dist_compiled_react-server-dom-turbopack....map (localhost)
...chunks/00ir_next_dist_compiled_17h0_g7._js (localhost)	... chunks/00ir_next_dist_compiled_17h0_g7._js.map (local host)

URL	Map URL
Error: Map has no `mappings` field	
...chunks/00ir_next_dist_167i5fa._.js (localhost)	...chunks/00ir_next_dist_167i5fa._.js.map (localhost)
Error: Map has no `mappings` field	
...chunks/00ir_framer-motion_dist_es_121n88-._.js (localhost)	...chunks/00ir_framer-motion_dist_es_121n88-._.js.map (localhost)
Error: Map has no `mappings` field	
...chunks/00ir_04rb-6k._.js (localhost)	...chunks/00ir_04rb-6k._.js.map (localhost)
Error: Map has no `mappings` field	
...chunks/00ir_%40swc_helpers_cjs_12rnzi3._.js (localhost)	...chunks/00ir_%40swc_helpers_cjs_12rnzi3._.js.map (localhost)
Error: Map has no `mappings` field	
...chunks/%5Bturbopack%5D_browser_dev_hmr-client_hmr-client_ts....js (localhost)	...chunks/%5Bturbopack%5D_browser_dev_hmr-client_hmr-client_ts....js.map (localhost)
Error: Map has no `mappings` field	

PASSED AUDITS (12)

Hide

Uses HTTPS



All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders

from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS](#).

Avoids deprecated APIs



Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs](#).

Avoids third-party cookies



Third-party cookies may be blocked in some contexts. [Learn more about preparing for third-party cookie restrictions](#).

Allows users to paste into input fields



Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. [Learn more about user-friendly input fields](#).

Avoids requesting the geolocation permission on page load



Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission](#).

Avoids requesting the notification permission on page load



Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting permission for notifications](#).

Displays images with correct aspect ratio



Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio](#).

Serves images with appropriate resolution	^
Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. Learn how to provide responsive images.	
Page has the HTML doctype	^
Specifying a doctype prevents the browser from switching to quirks-mode. Learn more about the doctype declaration.	
Properly defines charset	^
A character encoding declaration is required. It can be done with a <meta> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more about declaring the character encoding.	
No browser errors logged to the console	^
Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. Learn more about this errors in console diagnostic audit	
No issues in the Issues panel in Chrome Devtools	^
Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.	
NOT APPLICABLE (2)	Hide
☐ Redirects HTTP traffic to HTTPS	^

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#)

Unscored

○ Detected JavaScript libraries



All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)

Unscored



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials](#).

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

○ Structured data is valid



Run the [Structured Data Testing Tool](#) to validate structured data. [Learn more about Structured Data.](#) Unscored

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (8)

Hide

Page isn't blocked from indexing



Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives.](#)

Document has a `<title>` element



The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

Document has a meta description



Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description.](#)

Page has successful HTTP status code



Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more about HTTP status codes.](#)

Links have descriptive text



Descriptive link text helps search engines understand your content. [Learn how to make links more accessible.](#)

Links are crawlable



Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable](#)

Image elements have `[alt]` attributes



Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

Document has a valid hreflang



hreflang links tell search engines what version of a page they should list in search results for a given language or region. [Learn more about hreflang.](#)

NOT APPLICABLE (2)

Hide

○ robots.txt is valid



If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more about robots.txt.](#) Unscored

○ Document has a valid rel=canonical



Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#) Unscored

Captured at Jul 29, 2026, 11:55 PM GMT+5:30

Emulated Desktop with Lighthouse 13.3.0

Single page session

Initial page load

Custom throttling

Using Chromium 150.0.0.0 with devtools