


Aula 006 - Tipos de Dados

Atividade 01 - JavaScript

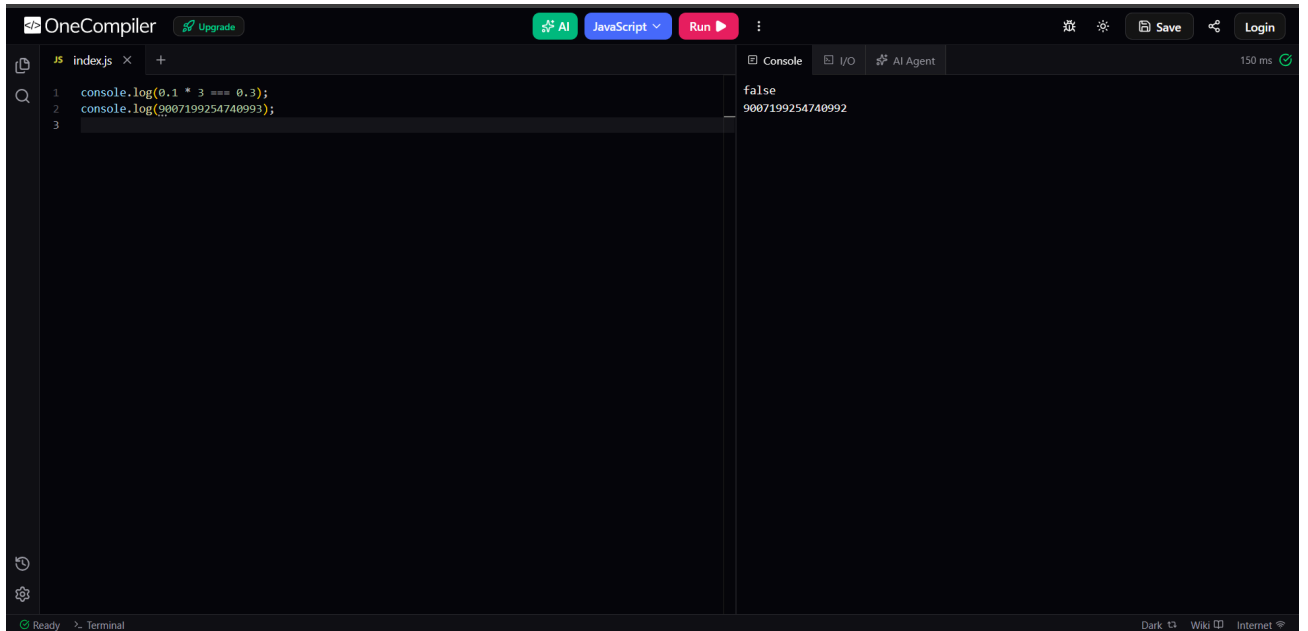

The screenshot shows the OneCompiler web interface with the JavaScript editor. The code in the editor is:


```
1 console.log(0.1 * 3 === 0.3);  
2 console.log(9007199254740992);  
3
```

The console output on the right shows the results of the execution:

```
false  
9007199254740992
```

The execution time is 150 ms. The status bar at the bottom indicates 'Ready' and 'Terminal'.

Atividade 02 - Python

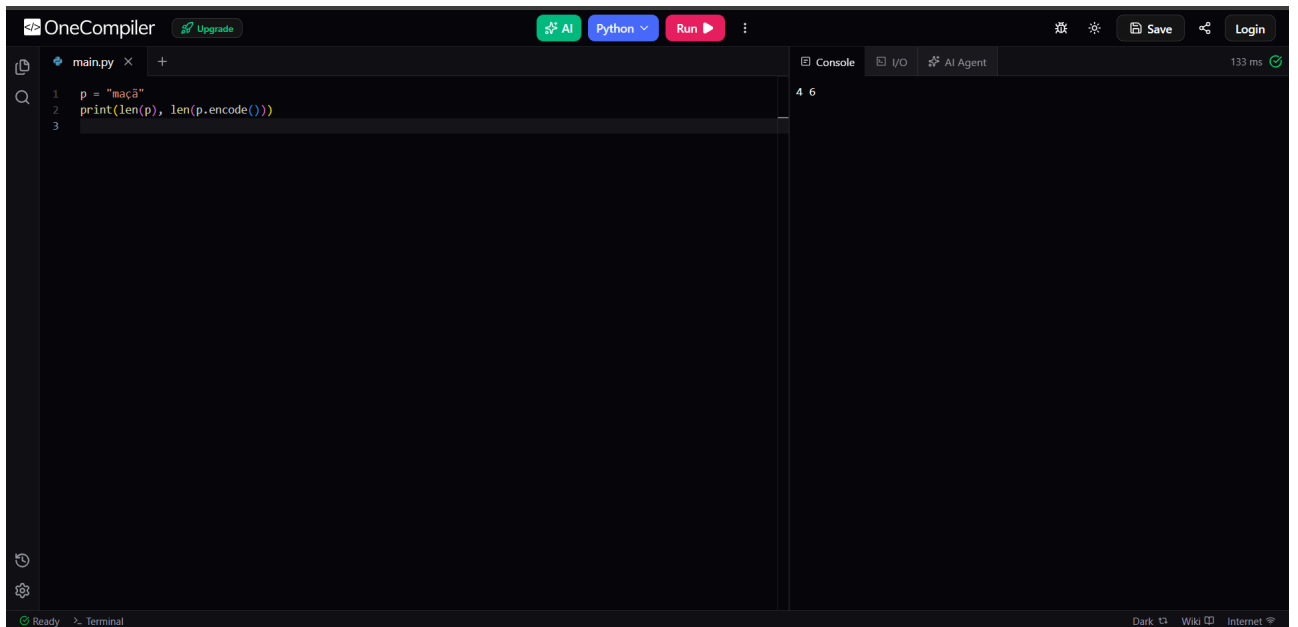

The screenshot shows the OneCompiler web interface with the Python editor. The code in the editor is:


```
1 p = "maçã"  
2 print(len(p), len(p.encode()))  
3
```

The console output on the right shows the results of the execution:

```
4 6
```

The execution time is 133 ms. The status bar at the bottom indicates 'Ready' and 'Terminal'.

Atividade 03 - Go!

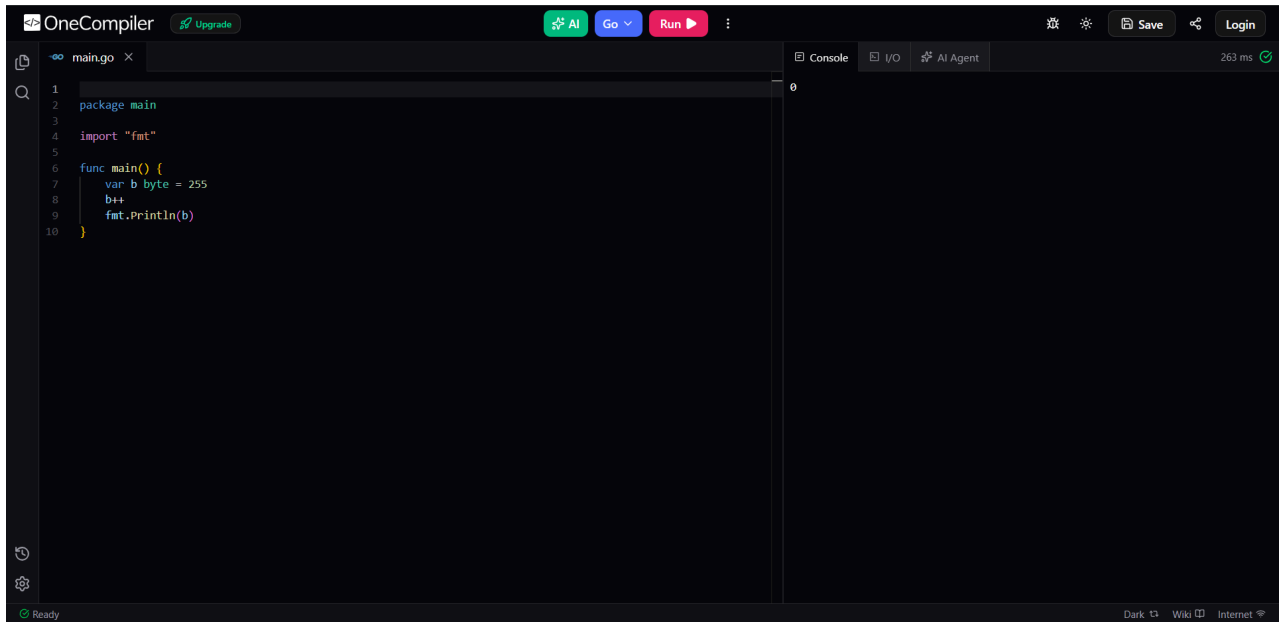


The image shows the OneCompiler web IDE interface for Go. The top bar includes the OneCompiler logo, an 'Upgrade' button, and tabs for 'AI', 'Go', and 'Run'. On the right, there are icons for settings, a 'Save' button, and a 'Login' button. The main editor area displays a Go file named 'main.go' with the following code:

```
1 package main
2
3 import "fmt"
4
5
6 func main() {
7     var b byte = 255
8     b++
9     fmt.Println(b)
10 }
```

The right sidebar contains tabs for 'Console', 'I/O', and 'AI Agent'. The 'Console' tab is active, showing the output '0'. The bottom status bar indicates 'Ready' and provides links for 'Dark', 'Wiki', and 'Internet'.

Atividade 04 - Java

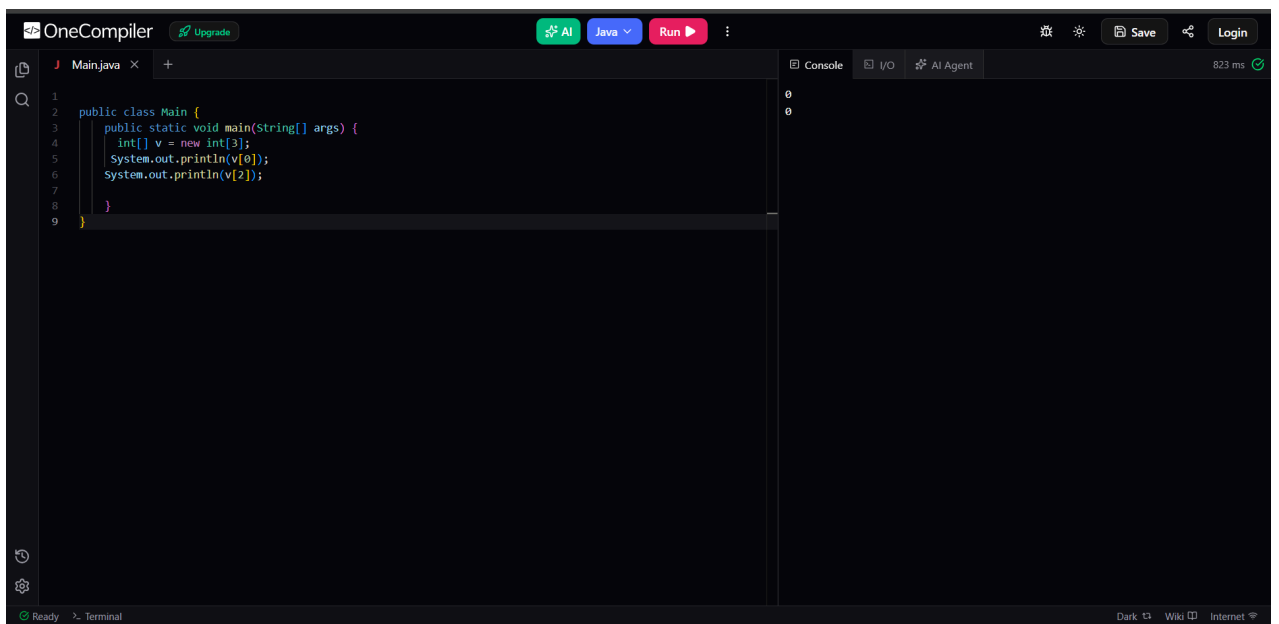

The image shows the OneCompiler web IDE interface for Java. The top bar includes the OneCompiler logo, an 'Upgrade' button, and tabs for 'AI', 'Java', and 'Run'. On the right, there are icons for settings, a 'Save' button, and a 'Login' button. The main editor area displays a Java file named 'Main.java' with the following code:

```
1 public class Main {
2     public static void main(String[] args) {
3         int[] v = new int[3];
4         System.out.println(v[0]);
5         System.out.println(v[2]);
6     }
7 }
8
9 }
```

The right sidebar contains tabs for 'Console', 'I/O', and 'AI Agent'. The 'Console' tab is active, showing the output '0' and '0'. The bottom status bar indicates 'Ready' and provides links for 'Terminal', 'Dark', 'Wiki', and 'Internet'.

Atividade 05 - Rust

The screenshot shows the OneCompiler Rust IDE. The editor displays a Rust file named `HelloWorld.rs` with the following code:

```
1 fn main() {  
2     let s = String::from("oi");  
3     let t = s;  
4     println!("{}", s, t);  
5 }  
6
```

The console on the right shows a compilation error:

```
error[E0382]: borrow of moved value: `s`  
--> HelloWorld.rs:4:19  
2 |     let s = String::from("oi");  
   |         - move occurs because `s` has type `String`, which does not  
   |         implement the `Copy` trait  
3 |     let t = s;  
   |         - value moved here  
4 |     println!("{}", s, t);  
   |                   ^ value borrowed here after move  
  
help: consider cloning the value if the performance cost is acceptable  
3 |     let t = s.clone();  
   |               +++++++  
  
error: aborting due to 1 previous error  
  
For more information about this error, try `rustc --explain E0382`.  
  
Debug this error
```

The status bar at the bottom indicates "Ready".

Atividade 07 - C

The screenshot shows the OneCompiler C IDE. The editor displays a C file named `Main.c` with the following code:

```
1 #include <stdio.h>  
2 int main(){  
3     union { int i; float f; } u;  
4     u.f = 1.0f;  
5     printf("%d\n", u.i);  
6 }
```

The console on the right shows the output of the program:

```
1065353216
```

The status bar at the bottom indicates "Ready" and "Terminal".