

OOPS ASSIGNMENT – 09

VIHAAN MITTAL – 1024150189

1.

```
#include <iostream>
```

```
#include <fstream>
```

```
using namespace std;
```

```
int main()
```

```
{
```

```
    ofstream f("NUM.TXT");
```


```
    for(int i=1;i<=200;i++)
```

```
        f<< i << " ";
```

```
    f.close();
```

```
    return 0;
```

```
}
```

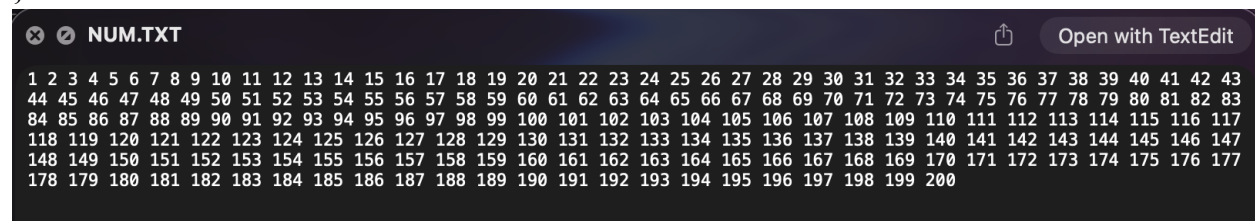

2.

```
#include <iostream>
```

```
#include <fstream>
```

```
using namespace std;
```

```

void countAlpha()
{
    ifstream f("NOTES.TXT");

    char ch;

    int c = 0;

    while(f.get(ch))
    {
        if(isalpha(ch))
            c++;
    }

    cout << c;

    f.close();
}

```

```

int main()
{
    countAlpha();

    return 0;
}

```

```

(base) vihaan@Vihaans-Macbook 3. SORTING % cd "/Users/vihaan/Desktop/DSA/3. SORTING/" && g++ trash2.cpp.cpp -o trash2.cpp && "/Users/vihaan/Desktop/DSA/3. SORTI
NG/"trash2.cpp
0%
(base) vihaan@Vihaans-Macbook 3. SORTING % 

```

3.

```

#include <iostream>

#include <fstream>

using namespace std;

```

```
int main()
{
    ifstream f1("A.txt");
    ofstream f2("B.txt");
    char ch;

    while(f1.get(ch))
        f2.put(ch);

    f1.close();
    f2.close();

    return 0;
}
```

4.

```
#include <iostream>
#include <fstream>
#include <cstring>
using namespace std;
```

```
int main()
{
    char s[100];

    cin.getline(s,100);
```

```
cout << strlen(s) << endl;
```

```
ofstream f("DATA.txt");
```

```
f << s;
```

```
f.close();
```

```
ifstream g("DATA.txt");
```

```
char ch;
```


```
while(g.get(ch))
```

```
    cout << ch;
```

```
g.close();
```

```
return 0;
```

```
}
```

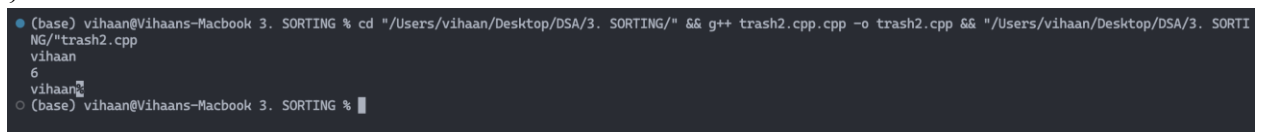

```
● (base) vihaan@Vihaans-Macbook 3. SORTING % cd "/Users/vihaan/Desktop/DSA/3. SORTING/" && g++ trash2.cpp.cpp -o trash2.cpp && "/Users/vihaan/Desktop/DSA/3. SORTI
NG/"trash2.cpp
vihaan
6
vihaan
○ (base) vihaan@Vihaans-Macbook 3. SORTING %
```

5.

```
#include <iostream>
```

```
#include <fstream>
```

```
using namespace std;
```

```
int main()
```

```
{
```

```
    fstream f("A.txt", ios::out);
```

```
    for(char ch='A'; ch<='Z'; ch++)
```

```
f << ch;  
f.close();  
  
f.open("A.txt", ios::in | ios::out);
```

```
char ch;
```

```
f.seekg(9);  
f.get(ch);  
cout << ch << endl;
```

```
f.seekp(4);  
f << 'X';
```

```
f.seekg(0,ios::end);  
cout << f.tellg() << endl;
```

```
f.seekg(-1,ios::end);  
f.get(ch);  
cout << ch << endl;
```

```
f.close();
```

```
ofstream g("data.txt");  
g << "Hello\nWorld\nFile";  
g.close();
```

```

ifstream h("data.txt");

h.seekg(10);

cout << h.tellg() << endl;

while(h.get(ch))
    cout << ch;

h.close();

return 0;
}

```



```

(base) vihaan@Vihaans-Macbook 3. SORTING % cd "/Users/vihaan/Desktop/DSA/3. SORTING/" && g++ trash2.cpp.cpp -o trash2.cpp && "/Users/vihaan/Desktop/DSA/3. SORTING/" NG/"trash2.cpp
J
26
Z
10
d
File
(base) vihaan@Vihaans-Macbook 3. SORTING %

```

6.

```

#include <iostream>

#include <fstream>

using namespace std;

int main()
{
    fstream f("test.txt", ios::out);

    char s[] = "Hello World";

    for(int i=0; s[i]!='\0'; i++)

```

```

{
    f << s[i];
    cout << f.tellp() << endl;
}

f.close();

f.open("test.txt", ios::in | ios::out);

f.seekp(6);
f << "C++";

f.close();

return 0;
}

```

```

(base) vihaan@Vihaans-Macbook 3. SORTING % cd "/Users/vihaan/Desktop/DSA/3. SORTING/" && g++ trash2.cpp.cpp -o trash2.cpp && "/Users/vihaan/Desktop/DSA/3. SORTI
NG/"trash2.cpp
1
2
3
4
5
6
7
8
9
10
11
(base) vihaan@Vihaans-Macbook 3. SORTING % 

```